
# MILITARY SPECIFICATION SHEET

## CRIMPING TOOLS, TERMINAL, HAND, WIRE TERMINATION FOR SIZE 12 SHIELDED CONTACTS (OUTER CONTACT)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the crimping tools described herein shall consist of this document and the latest issue of Specification MIL-C-22520.



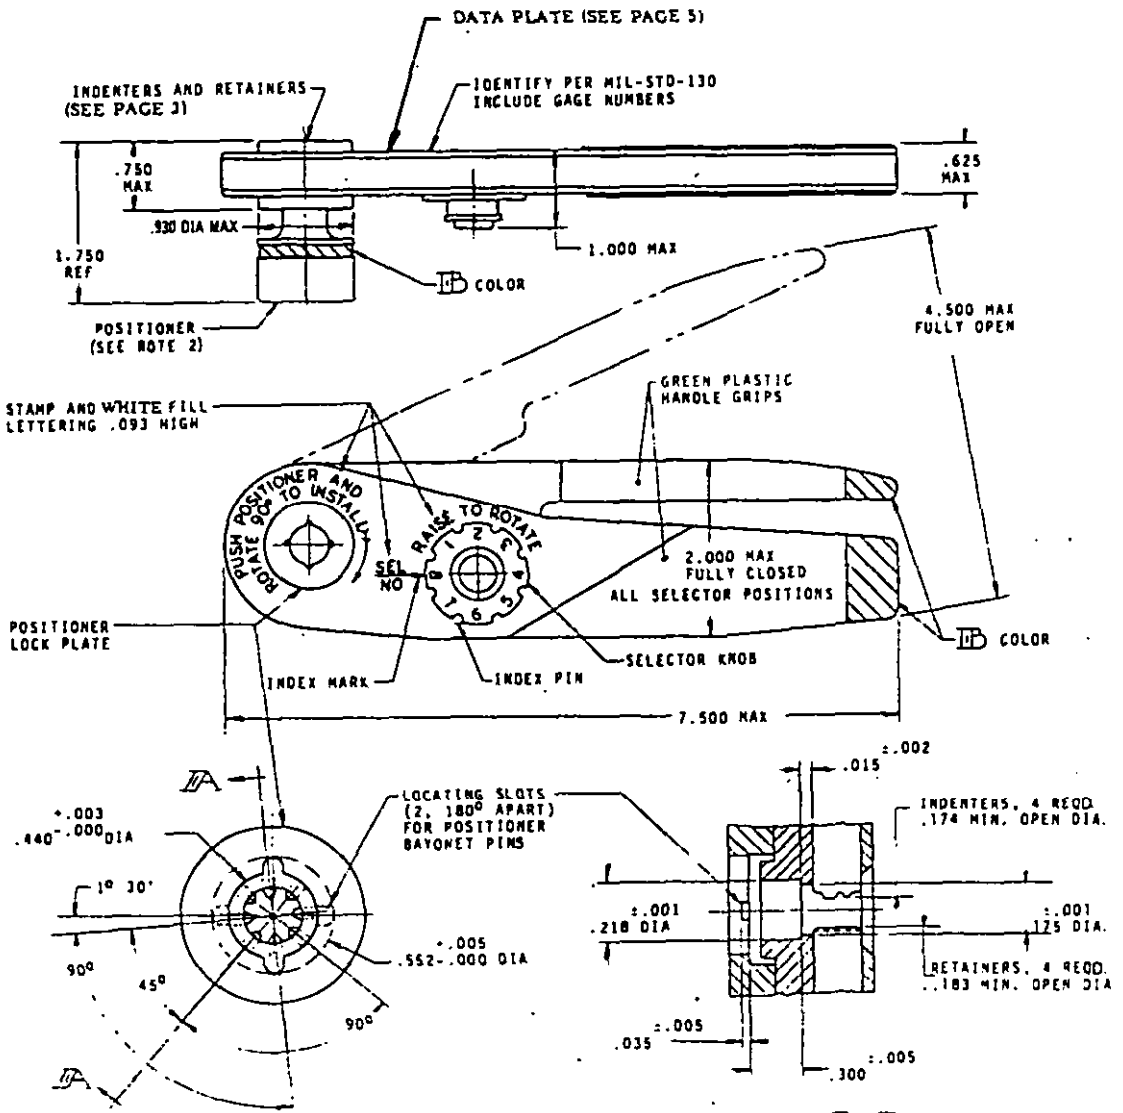


FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:47Z
Check the source to verify that this is the current version before use.

| PART NUMBER | BODY COLOR | CB COLOR | FOR INSPECTION GAGING USE | |
|---|---|---|---|---|
| | | | INDENTER | RETAINER |
| M22520/21-01 | BLUE | YELLOW | M22520/3-4 | M22520/3-7 |

NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ± .010, ANGLES ± 1/2°.
2. FOR APPLICABLE POSITIONERS SEE PAGE 4
3. RETAINERS MUST BE FULLY CLOSED BEFORE INDENTERS START THE CRIMP.


REQUIREMENTS:

1. THE FORCE REQUIRED TO MAKE SATISFACTORY CRIMPS SHALL NOT EXCEED 55 POUNDS.
2. OUTLINE CONFIGURATIONS OPTIONAL WITHIN MAXIMUM DIMENSIONS SHOWN.
3. THE POSITIONER LOCK PLATE SHALL PROVIDE POSITIVE DETENT FOR BAYONET LOCK PINS.
4. THE WEIGHT OF THE BASIC TOOL SHALL NOT EXCEED 1.0 LB.




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:47Z
Check the source to verify that this is the current version before use.


## INDENTERS

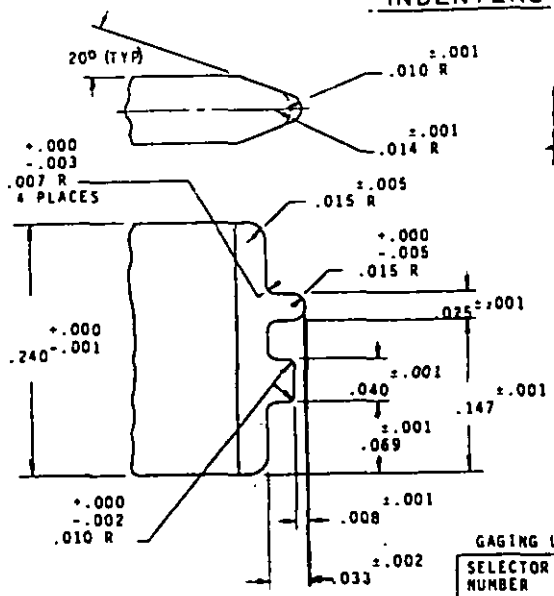


BREAK ALL SHARP EDGES AROUND INDENTER TIP .002-.004

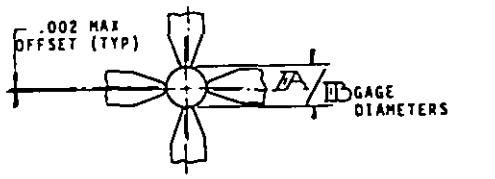


INDENTER LOCATIONS WITH TOOL IN FULLY CLOSED POSITION ( RETAINERS OMITTED FOR CLARITY)






OPPOSITE AND ADJACENT INDENTER CLOSURE

GAGING LIMITS OF INDENTERS


| SELECTOR NUMBER | INSPECTION GAGE | |
|---|---|---|
| | A ±.0001 GO DIA | B ±.0001 NO GO DIA |
| 1 | .064 | .067 |
| 2 | .067 | .070 |
| 3 | .070 | .073 |
| 4 | .073 | .076 |
| 5 | .077 | .080 |
| 6 | .081 | .084 |
| 7 | .085 | .088 |
| 8 | .090 | .093 |

## RETAINERS

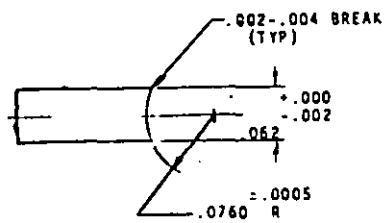

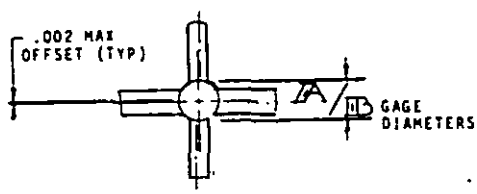




RETAINER LOCATIONS WITH TOOL IN FULLY CLOSED POSITION (INDENTERS OMITTED FOR CLARITY)




GAGING LIMITS OF RETAINERS

| INSPECTION GAGE | |
|---|---|
| A ±.0001 GO DIA | B ±.0001 NO GO DIA |
| .148 | .151 |




OPPOSITE AND ADJACENT RETAINER CENTERLINE


NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

REQUIREMENTS:
1. MATERIAL: OIL HARDENED TOOL STEEL, HARDEN TO ROCKWELL "C" 56-58.
2. SURFACE TEXTURE SHALL BE AS SHOWN IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:47Z
Check the source to verify that this is the current version before use.

## POSITIONER

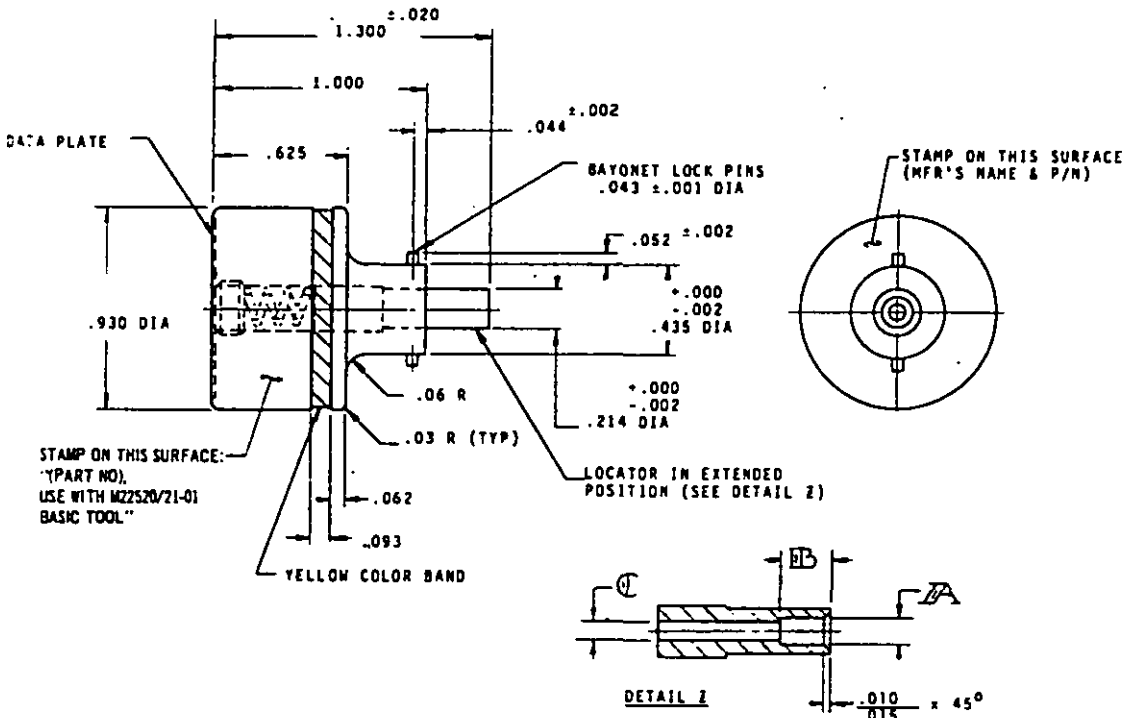


| PART NUMBER | BODY COLOR | A DIA +.002 -.000 | B DIM ±.002 | C DIA +.002 -.000 | CONTACTS ACCOMMODATED (REF) |
|---|---|---|---|---|---|
| M22520/21-02 | GREEN | .170 | .063 | .153 | M39029/19-02<br>M39029/19-03<br>OUTER PIN |
| M22520/21-03 | | .170 | .437 | .062 | M39029/21-02<br>M39029/21-03<br>OUTER SOCKET-SHORT |
| M22520/21-04 | | .170 | .767 | .062 | M39029/21-02<br>M39029/21-03<br>OUTER SOCKET-LONG |

## DATA PLATE

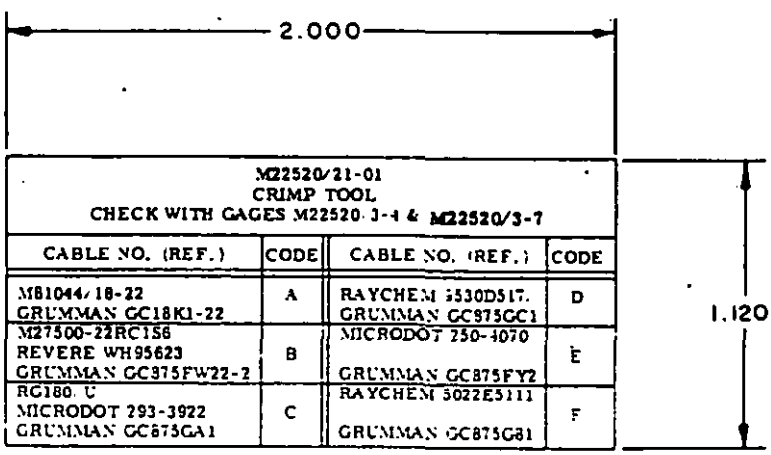



M22520/21-01
CRIMP TOOL
CHECK WITH GAGES M22520/3-4 & M22520/3-7

| CABLE NO. (REF.) | CODE | CABLE NO. (REF.) | CODE |
|---|---|---|---|
| MB1044/18-22<br>GRUMMAN GC18K1-22 | A | RAYCHEM 3530D517.<br>GRUMMAN GC875GC1 | D |
| M27500-22RC1S6<br>REVERE WH95623<br>GRUMMAN GC875FW22-2 | B | MICRODOT 250-4070<br>GRUMMAN GC875FY2 | E |
| RG180. U<br>MICRODOT 293-3922<br>GRUMMAN GC875GA1 | C | RAYCHEM 5022E5111<br>GRUMMAN GC875G81 | F |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:47Z
Check the source to verify that this is the current version before use.

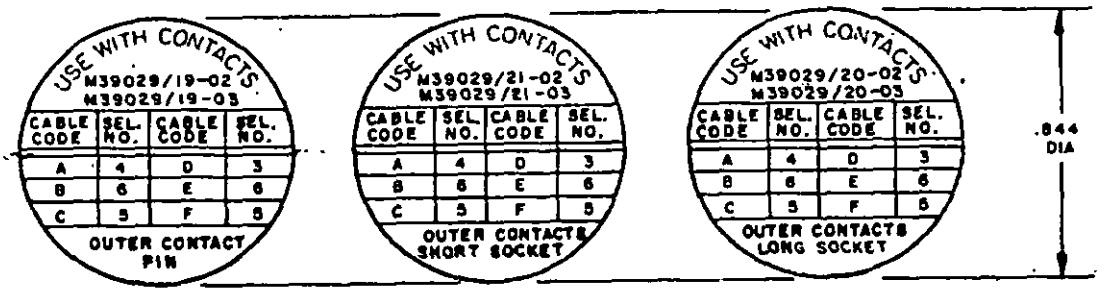


FOR M22520/21-02 POSITIONER

FOR M22520/21-03 POSITIONER

FOR M22520/21-04 POSITIONER

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES, ±1/2°.

REQUIREMENTS:
1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED SPEC NO QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED SPEC NO QQ-S-763, CLASS 304, COND A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUND.
4. BREAK ALL SHARP EDGES .005 R MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).

Custodians:
Army - EL
Navy - AS
USAF - 84

User activities:
Army - ME, AT, GL
Navy - MC
Air Force - 70

Preparing activity:
Navy - AS

Agent:
DSA - ES

Review activities:
Army - MI, MU, AV, WC
Navy - SH, EC, OS
USAF - 12, 17, 80, 82
DESC - ES

(Project No. 5120-0806)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:47Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| | |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR |
| b. ADDRESS *(Street, City, State, ZIP Code)* | ☐ USER |
| | ☐ MANUFACTURER |
| | ☐ OTHER *(Specify)*: _____ |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:47Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE:* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEFENSE LOGISTICS AGENCY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

**BUSINESS REPLY MAIL**
FIRST CLASS PERMIT NO. 4966 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

COMMANDER
DEFENSE ELECTRONICS SUPPLY CENTER
1507 WILMINGTON PIKE
DAYTON, OH 45444

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:47Z
Check the source to verify that this is the current version before use.