INCH-POUND
MIL-DTL-3661/17D
7 October 2019
SUPERSEDING
MIL-L-3661/17C
17 February 1972

DETAIL SPECIFICATION SHEET

LENSES, INDICATOR-LIGHT, STYLE LC17, CONVEX, COMPLETE-BLACKOUT, DRIPPROOF, MECHANICAL DIMMER

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3661.

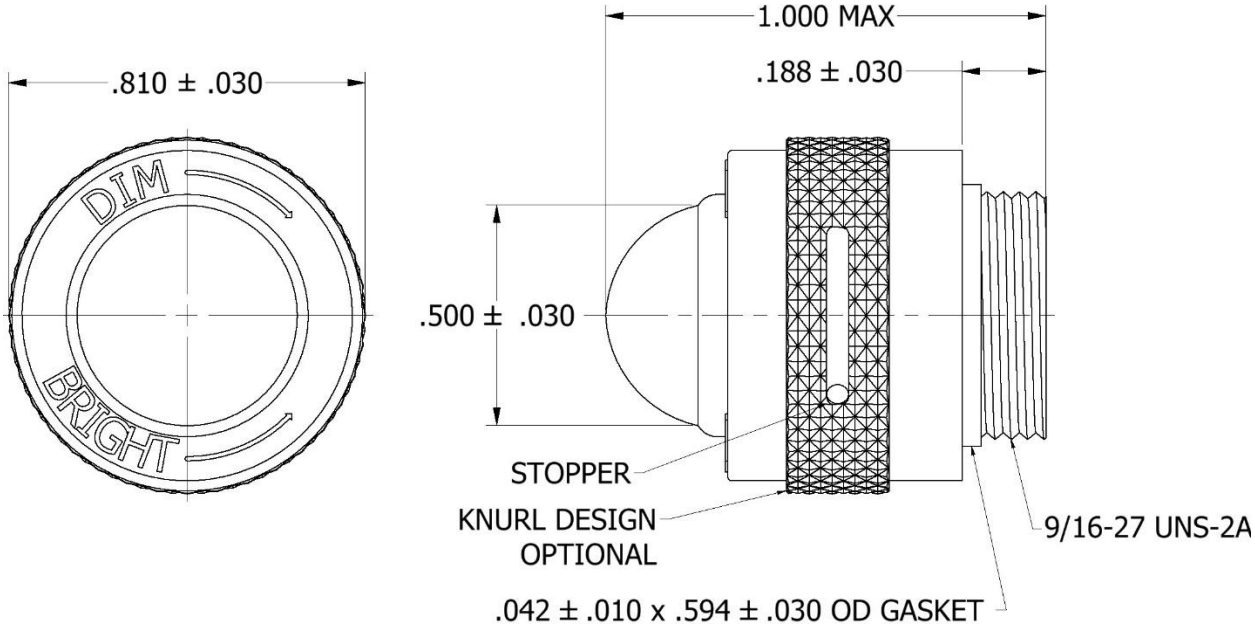


FIGURE 1. Design and construction

NOTES:

1. All dimensions are in inches. Use FED-STD-376 for determining metric equivalents.

REQUIREMENTS:

1. Design and construction: See figure 1 and table I.
2. Temperature cycling: -67 °F (-55 °C) to 257 °F (125 °C)
3. Sealing: Dripproof.
4. Dimming: At full dimming the lens shall block all visible light.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:54Z
Check the source to verify that this is the current version before use.

TABLE I. Mating, material, and properties.

Type Designation	Mating holder	Lens material	Transmittance	Lens color
LC17RN3	LH50[2], LH76/1[3], LH76/2[3], LH76/3[3]	Plastic	Non-diffusing	Red
LC17GN3[1]	LH50[2], LH76/3[3]	Plastic	Non-diffusing	Green
LC17YN3	LH50[2], LH76/1[3], LH76/2[3], LH76/3[3]	Plastic	Non-diffusing	Yellow
LC17BN3	LH50[2], LH76/3[3]	Plastic	Non-diffusing	Blue
LC17WT3[1]	LH50[2], LH76/3[3]	Plastic	Translucent	White
LC17CN3	LH50[2], LH76/1[3], LH76/2[3], LH76/3[3]	Plastic	Non-diffusing	Colorless
LC17RD3	LH50[2], LH76/1[3], LH76/2[3], LH76/3[3]	Plastic	Diffusing	Red
LC17GD3[1]	LH50[2], LH76/3[3]	Plastic	Diffusing	Green
LC17YD3	LH50[2], LH76/1[3], LH76/2[3], LH76/3[3]	Plastic	Diffusing	Yellow
LC17BD3[1]	LH50[2], LH76/3[3]	Plastic	Diffusing	Blue
LC17CD3	LH50[2], LH76/1[3], LH76/2[3], LH76/3[3]	Plastic	Diffusing	Colorless

[1] Not recommended for use with neon lamps
[2] In accordance with MIL-L-3661/2
[3] In accordance with MIL-DTL-3661/8

NOTE: Glass lenses, previously identified by symbol 1, are inactive for new design. Symbol 3 lenses with equivalent colors and transmittance shall be used as replacements.

Referenced documents. In addition to MIL-DTL-3661, this document references the following:
FED-STD-376
MIL-L-3661/2
MIL-DTL-3661/8

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army – CR
Navy – EC
Air Force – 71
DLA – GS

Preparing activity:
DLA – GS2
(Project 6210-2019-022)

Review Activities:
Army – AT, CR4, MI
Navy – AS, MC, OS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:54Z
Check the source to verify that this is the current version before use.