MILITARY SPECIFICATION SHEET

HOUSINGS, INDICATOR-LIGHT, STYLE LH76

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the indicator lights (housing) described herein shall consist of this document and the latest issue of MIL-L-3661.

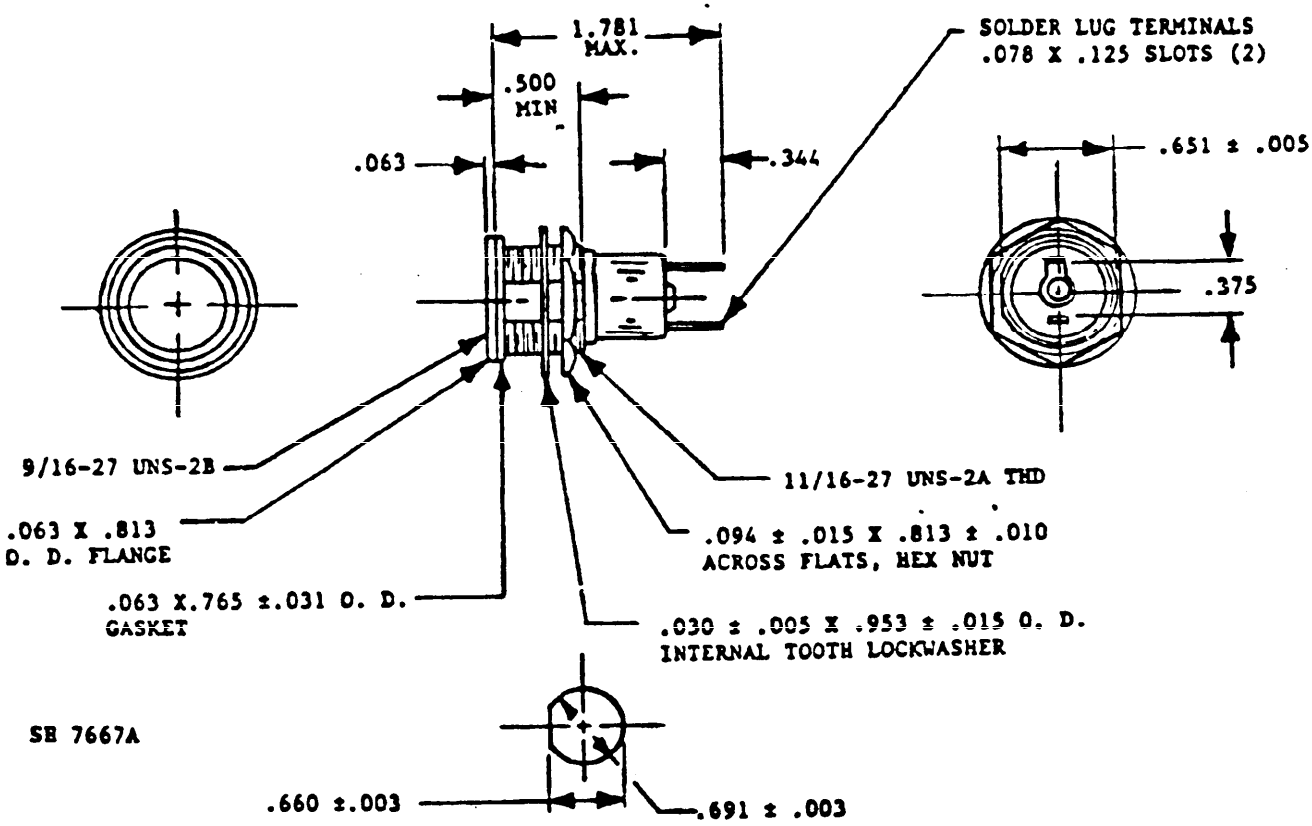


FIGURE 1. DIMENSIONS AND CONFIGURATION

(B) DENOTES CHANGES

AMSC N/A

FSC 6210

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-16T20:50Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.003	.08	.094	2.39	.688	17.46
.005	.13	.125	3.18	.691	17.55
.010	.25	.344	8.73	.765	19.43
.015	.38	.375	9.53	.813	20.65
.030	.76	.500	12.70	.953	24.21
.031	.79	.563	14.29	1.781	45.24
.063	1.59	.651	16.54		
.078	1.98	.660	16.76		

NOTES:

1. All dimensions are in inches. Unless otherwise specified, tolerances are ± 1/32 inch.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Housing and terminal design optional provided the dimensions fall within the configuration shown.

REQUIREMENTS:

1. Design and construction: See figure.
2. Terminal strength: 5 pounds.
3. Socket torque: 2 pound-inches.

QUALIFICATION INSPECTION:

Group submission:

Ⓑ Table I

Type designation	Tests MIL-L-3661	Extent of approval
LH76/1	(12 sample units) All tests of Table V	All
LH76/2 LH76/3	(2 sample units each) Group 1 of Table V (Visual and mechanical examination only)	

Source: https://assist.dla.mil -- Downloaded: 20260-16T20:50Z
Check the source to verify that this is the current version before use.

Ⓔ Table II

Type designation	Mating lens	Internal resistor	Lamp accommodation T-3 1/4 miniature bayonet base
LH76/1	LC14, LC16, LC17 and LC18	100K ohm	Neon NE-51[1]
LH76/2	LC14, LC16, LC17 and LC18	27K ohm	NEON NE-51H[1]
LH76/3	LC14, LC16, LC17 and LC18	None	Incandescent[2] M15098/10-001R (NE-51R) M15098/10-002R (NE-51HR)

[1]NE51 105V to 125V AC/DC. NE51H 100V to 125V AC.
[2]Industry number: 47 and 1815.

Custodians:
Army-ME
Navy-EC
Air Force-99

Review activities:
Army-AR,MI
Navy-AS
DLA-GS

User activities:
Army-ME
Navy-MC

Preparing activity:
Navy-EC

Agent:
DLA-GS
(Project 6210-1012)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:50Z
Check the source to verify that this is the current version before use.