INCH-POUND

MIL-DTL-3661/9C
19 April 2019

SUPERSEEDING
MIL-L-3661/9B
31 August 1989

DETAIL SPECIFICATION SHEET

HOUSINGS, INDICATOR-LIGHT, STYLE LH77

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3661.

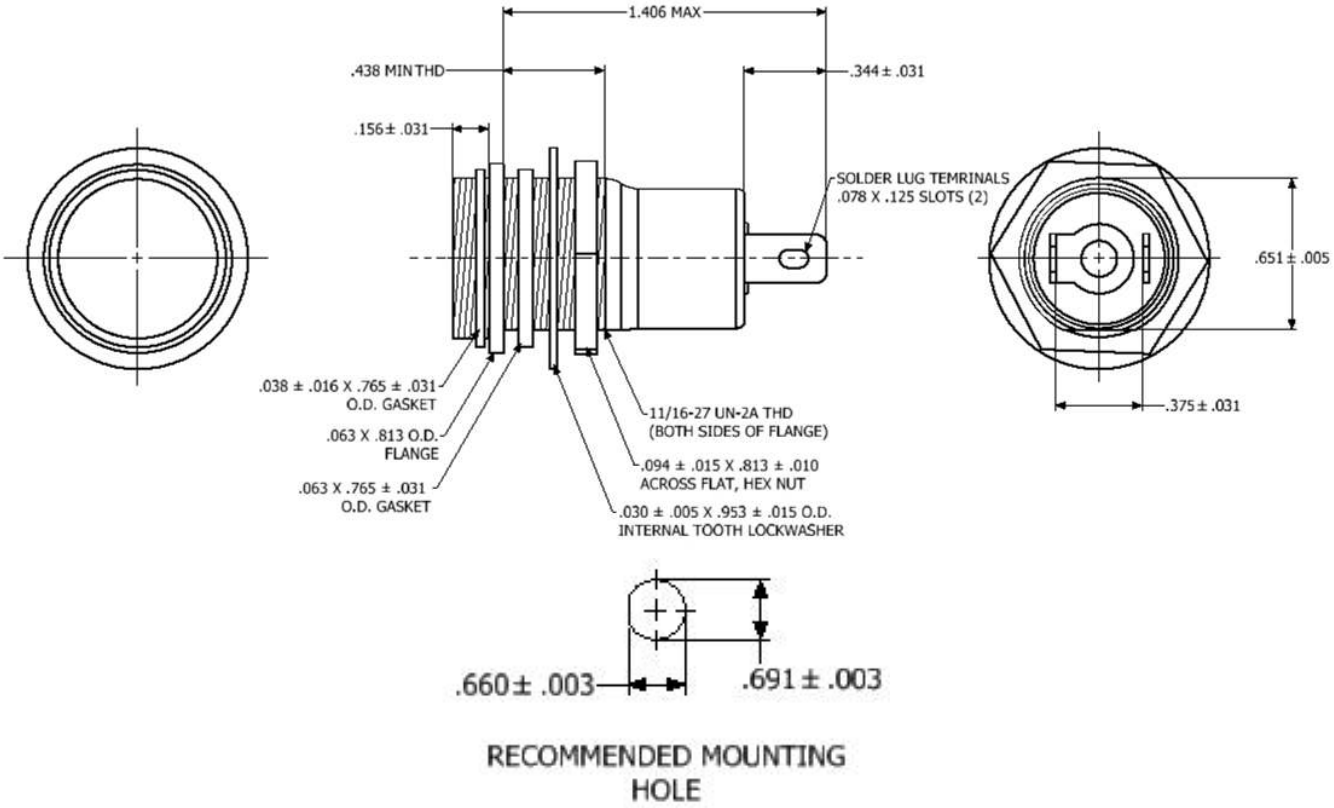


FIGURE 1. Dimensions and configuration.

INCHES	MM	INCHES	MM	INCHES	MM
.003	.08	.063	1.59	.651	16.54
.005	.13	.078	1.98	.660	16.76
.010	.25	.094	2.39	.688	17.46
.015	.38	.125	3.18	.691	17.55
.016	.41	.156	3.97	.765	19.43
.030	.76	.344	8.73	.813	20.64
.031	.79	.375	9.53	.953	24.21
.038	.97	.438	11.11	1.406	35.72

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:51Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches. Unless otherwise specified, tolerances are ± .031 inch.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Housing and terminal design optional provided the dimensions fall within the configuration shown.

REQUIREMENTS:

1. Design and construction: See figure 1.
2. Terminal strength: 5 pounds.
3. Socket shell torque: 2 pound-inches.

FIRST ARTICLE TESTING:

TABLE I. First article testing.

Type designation	Tests MIL-DTL-3661	Extent of approval
LH77/1	(12 sample units) All tests of Table IV	All
LH77/2 LH77/3	(2 sample units each) Group 1 of Table IV (Visual and mechanical examination only)	

TABLE II. Housings.

Type designation	Mating lens	Internal resistor	Lamp accommodation T-3 1/4 miniature bayonet base
LH77/1	LC19[1], LC20[2]	100K ohm	Neon M15098/10-001[5] (NE-51[3])
LH77/2	LC19[1], LC20[2]	27K ohm	Neon M15098/10-002[5] (NE-51H[3])
LH77/3	LC19[1], LC20[2]	None	Incandescent[4] M15098/10-001R[5] (NE-51R) M15098/10-002R[5] (NE-51HR)

[1] In accordance with MIL-L-3661/19.
[2] In accordance with MIL-L-3661/20.
[3] NE51 105V – 125V AC/DC. NE51H 100V-125V AC.
[4] Industry number 47 and 1815.
[5] In accordance with MIL-DTL-15098.

Referenced documents. In addition to MIL-DTL-3661, this document references the following:
MIL-L-3661/19
MIL-L-3661/20
MIL-DTL-15098

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:51Z
Check the source to verify that this is the current version before use.

Custodians:
Army – CR
Navy – AS
DLA – GS2

Preparing activity:
DLA – GS2
(Project 6210-2019-014)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:51Z
Check the source to verify that this is the current version before use.

Appendix: 3D Model is for reference only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:51Z
Check the source to verify that this is the current version before use.