
THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-25531

FORM APPROVED
OMB NO. 0704-0188

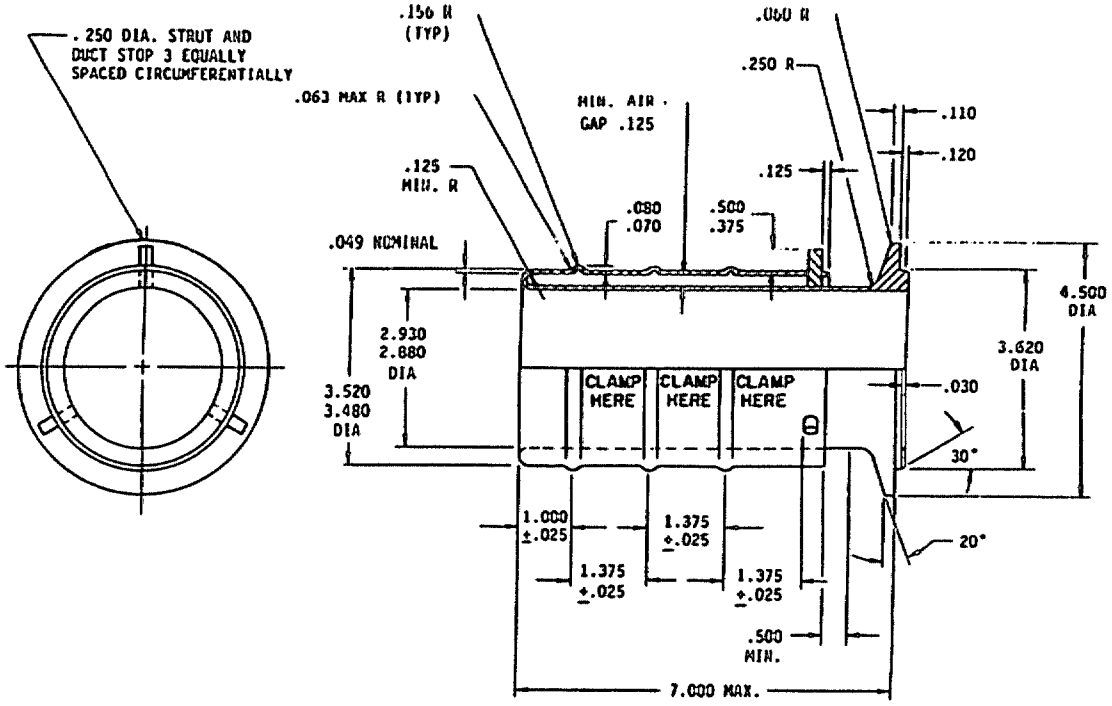

REQUIREMENTS:

1. MATERIAL: CORROSION RESISTANT STEEL (18-8), AISI TYPE 321, IN ACCORDANCE WITH SPECIFICATION MIL-S-6721. PASSIVATE PER QQ-P-35 AFTER MACHINING.
2. FINISH: ALL EXPOSED SURFACE ROUGHNESS SHALL BE 125 MICRODINCHES Ro MAXIMUM PER ANSI/ASME B46.1.
3. POROSITY TEST: FINISHED CONNECTOR SHALL NOT LEAK WHEN SUBJECTED TO 100 PSI AIR PRESSURE AND SUBMERGED IN WATER FOR 3 MINUTES.

NOTES:

1. REMOVE BURRS AND BREAK SHARP EDGES TO .003 - .015 R.
2. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .010, ANGLES ± 0°30'.
3. UNLESS OTHERWISE SPECIFIED, ALL MACHINED FILLETS TO BE .020 R.
4. CONNECTOR FLANGE MATES WITH ONE END OF MIL-C-25531 COUPLING.
5. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
6. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
7. REVISION LETTERS ARE NOT USED TO DENOTE CHANGES DUE TO THE EXTENSIVENESS OF THE CHANGES.

PREPARING ACTIVITY: NAVY — AS CUSTODIANS: ARMY — AV NAVY — AS AIR FORCE — 99 DLA — REVIEW: AIR FORCE - 82, DLA-CS USER: ARMY - AV PROJECT NUMBER: 4730-1188	MILITARY SPECIFICATION SHEET TITLE CONNECTOR, PNEUMATIC STARTER, DUCT-FLANGED, MALE	SPECIFICATION SHEET NUMBER MS17833 20 JUN 91 REV E SUPERSEDING MS17833D 4 APR 83 AMSC — N/A FSC 4730
DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.		PAGE 1 OF 1

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:10Z
Check the source to verify that this is the current version before use.