FED. SUP CLASS
4730

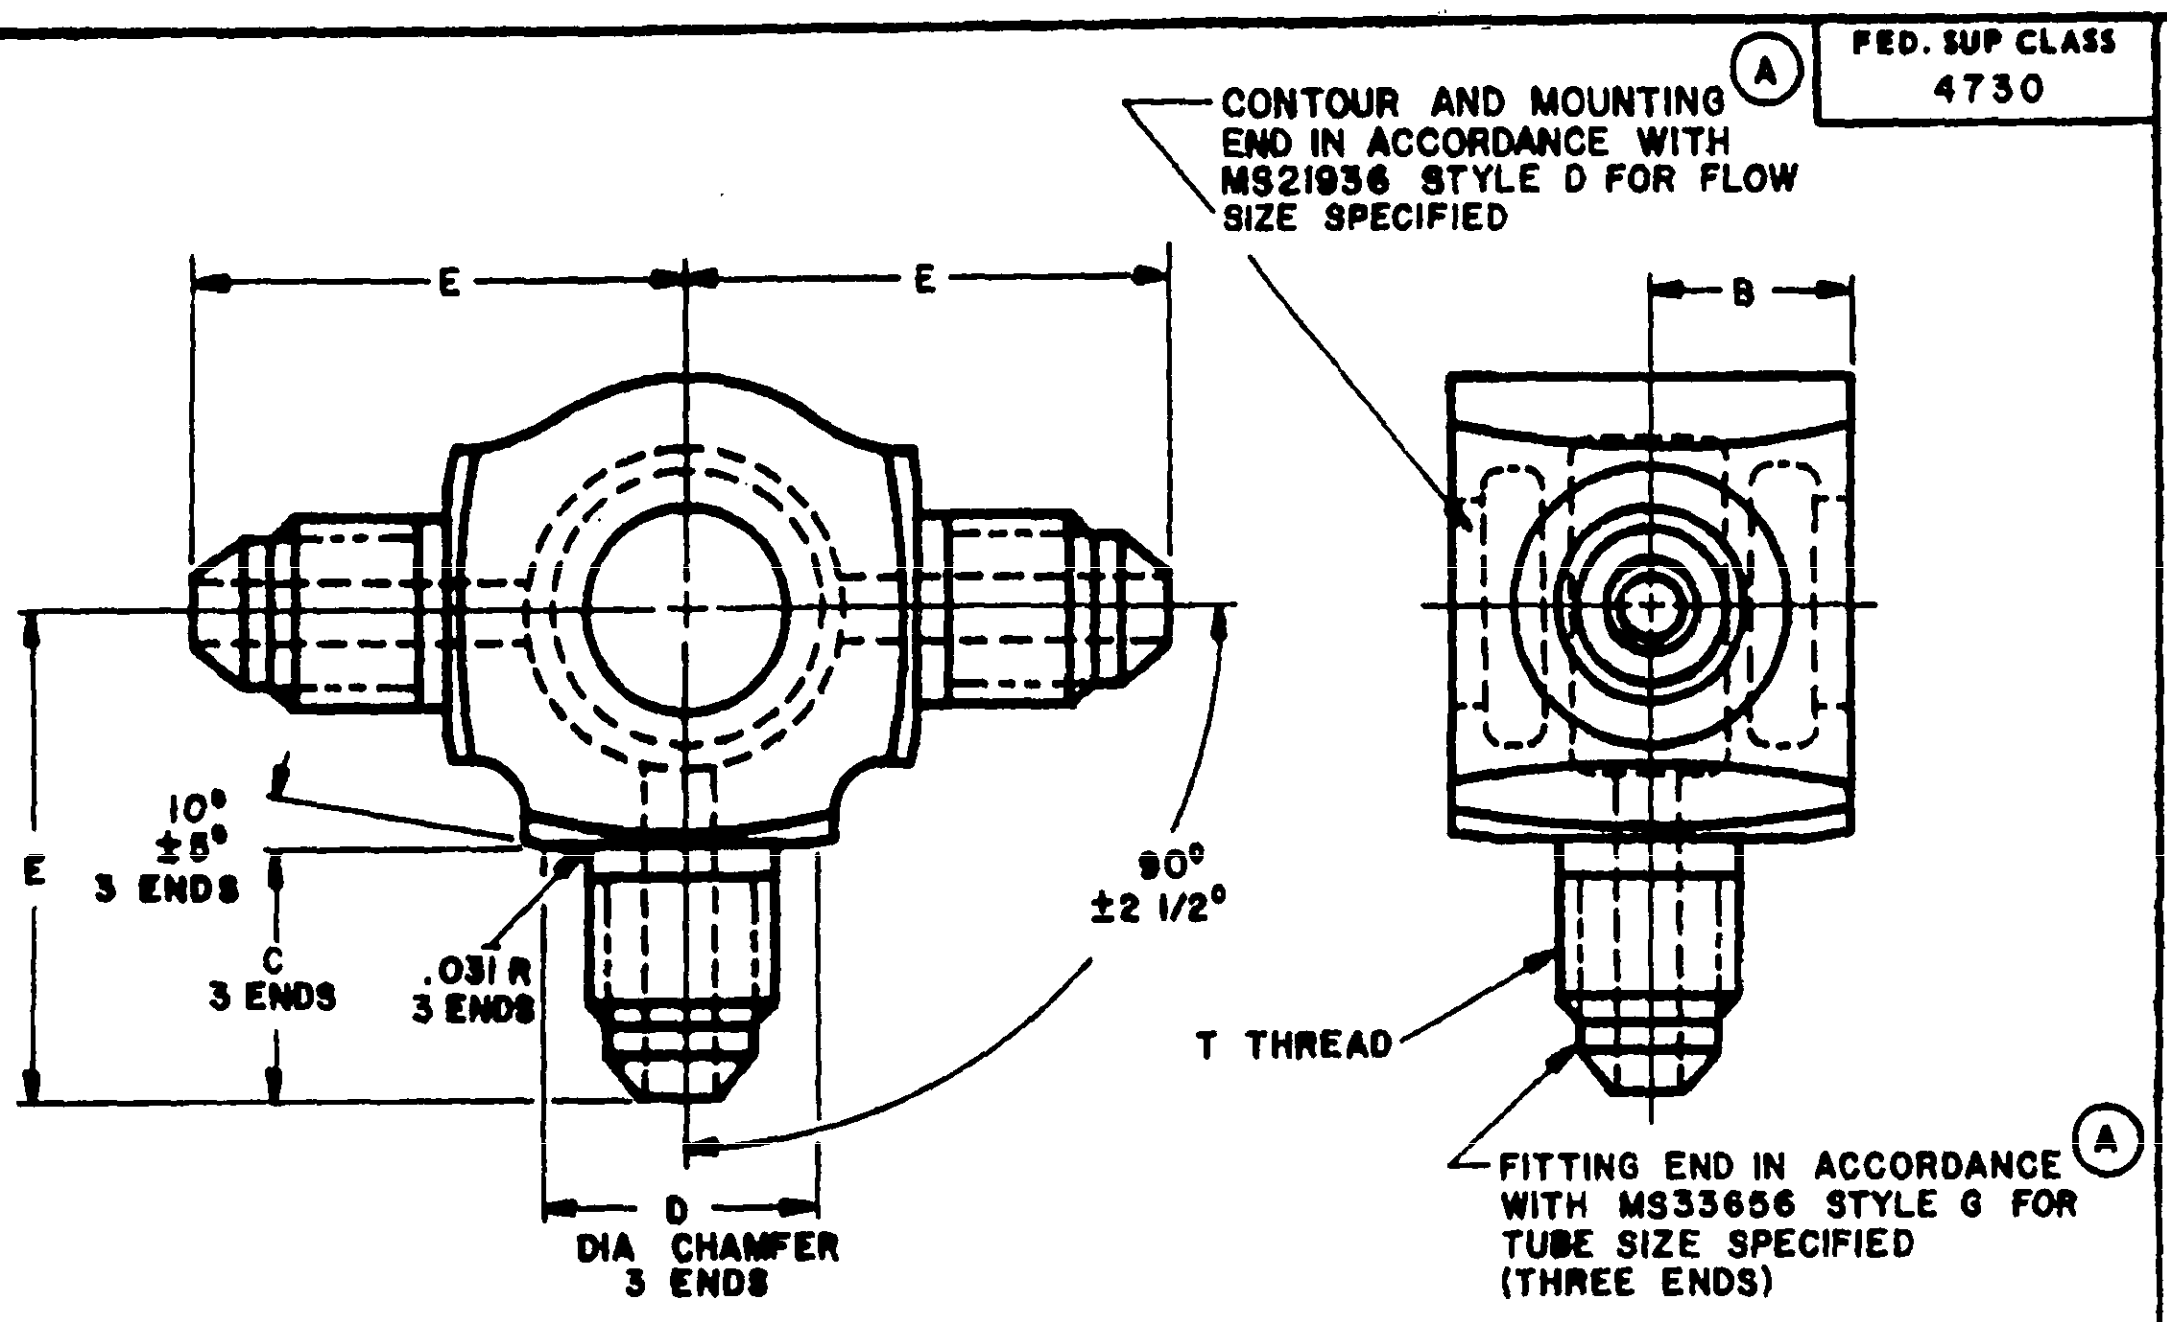
Ⓐ CONTOUR AND MOUNTING END IN ACCORDANCE WITH MS21936 STYLE D FOR FLOW SIZE SPECIFIED
E
E
B
10° ±5° 3 ENDS
E
C 3 ENDS
.031 R 3 ENDS
90° ±2 1/2°
T THREAD
D
DIA CHAMFER 3 ENDS
FITTING END IN ACCORDANCE WITH MS33656 STYLE G FOR TUBE SIZE SPECIFIED (THREE ENDS) Ⓐ

| LOW FLOW SIZE<br>MS PART NUMBER | TUBE OD | THREAD T (REF) | B | C | D | E |
|---|---|---|---|---|---|---|
| MS 21956 - 3L | 3/16 | 3/8-24<br>UNF - 3A | .500 | .640 | .710 | 1.109 |
| MS 21956 - 4L | 1/4 | 7/16-20<br>UNF - 3A | .500 | .625 | .710 | 1.187 |
| MS 21956 - 5L | 5/16 | 1/2-20<br>UNF - 3A | .500 | .625 | .710 | 1.187 |
| MS 21956 - 6L | 3/8 | 9/16-18<br>UNF - 3A | .500 | .640 | .710 | 1.203 |

| HIGH FLOW SIZE<br>MS PART NUMBER | TUBE OD | THREAD T (REF) | B | C | D | E |
|---|---|---|---|---|---|---|
| MS 21956 - 4H | 1/4 | 7/16-20<br>UNF - 3A | .594 | .625 | .710 | 1.438 |
| MS 21956 - 5H | 5/16 | 1/2-20<br>UNF - 3A | .594 | .625 | .710 | 1.438 |
| MS 21956 - 6H | 3/8 | 9/16-18<br>UNF - 3A | .594 | .648 | .710 | 1.460 |
| MS 21956 - 8H | 1/2 | 3/4-16<br>UNF - 3A | .594 | .750 | .750 | 1.562 |

Ⓐ **MATERIAL:** EXTRUSION 24S ALUMINUM ALLOY SPECIFICATION QQ-A-200/3 TEMPER T4 OR TEMPER T4 *ARTIFICIALLY* AGED. FORGING 14S ALUMINUM ALLOY SPECIFICATION QQ-A-367 *COMPOSITION* 5 TEMPER T6.

**FINISH:** SEE PROCUREMENT SPECIFICATION.

ALL MACHINED SURFACES FINISHED TO 250 R.M.S. MAX. EXCEPT AS NOTED.
FITTINGS SHALL BE FREE FROM ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED, UNDER USAGE.
DIMENSIONS IN INCHES: UNLESS OTHERWISE SPECIFIED. TOLERANCES: DECIMALS ± .010, ANGLES ± 1/2°.
INSTALL PER MS 21981

Ⓐ FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

User activities:

Review activities: ARMY-MI
DSA-CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. [illegible] application and the [illegible] made from this document.

APPROVED 15 FEB 1965 REVISED Ⓐ 30 SEP 75

| | | |
|---|---|---|
| P.A. USAF-82<br>Other Cust<br>NAVY – AS<br>ARMY – MI | TITLE<br>BODY- CLUSTER FITTING THREE WAY - FLARE | MILITARY STANDARD<br>MS21956 |
| PROCUREMENT SPECIFICATION<br>MIL-F-5509 | SUPERSEDES: | SHEET 1 OF 1 |

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE