[INCH-POUND]
A-A-55475A
March 14, 2001
SUPERSEDING
A-A-55475
September 17, 1993


COMMERCIAL ITEM DESCRIPTION

FUSEHOLDER, EXTRACTOR POST

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for an extractor post fuseholder. Fuseholders covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see 7.1).



3. SALIENT CHARACTERISTICS.

3.1 Interface and physical dimensions. Fuseholders supplied to this CID shall be as specified herein (see figure 1).

3.2. Ampere rating. The ampere rating shall be as specified in table I.

3.3 Voltage rating. The voltage rating shall be 32 V dc.

3.4 Fuseholder configuration. AA55475-001 through AA55475-006 are assembled and include lead wire contacts, a wire loop and a fuse. AA55475-007 through AA55475-018 are unassembled and include lead wire contacts only (no fuse or lead wire included). AA55475-019 is assembled and includes lead wire contacts, a wire loop and three springs to accommodate all fuses indicated in table I.


3.5 Marking. Fuseholders supplied to this CID shall be marked with the manufacturer's standard commercial PIN and the UL listing mark.

Beneficial comments recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be addressed to: Defense Supply Center, Columbus, ATTN: DSCC-VAT, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-0548, or facsimile (FAX) (614) 692-6939.

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

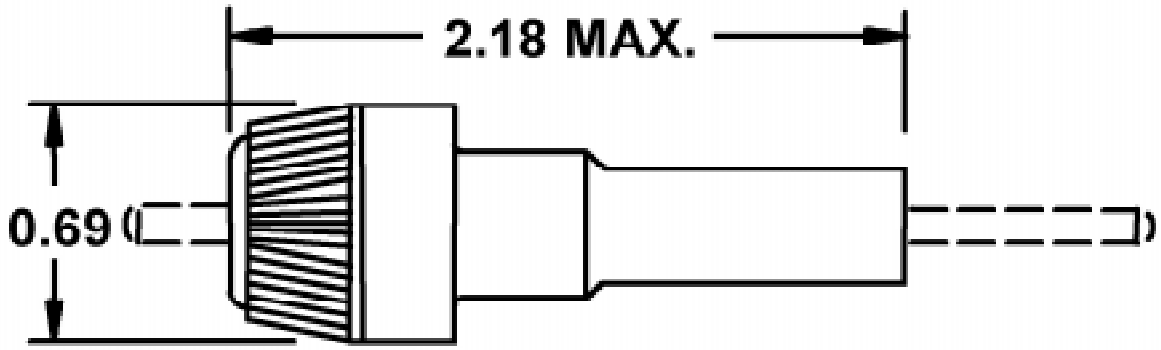

Inches	mm
0.69	17.52
2.18	55.58

NOTES:

1. Dimensions are in inches.
2. Tolerance is ±.005 inch (0.13 mm), unless otherwise specified.

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I. Characteristics.

CID PIN AA55475-	Ampere rating	Wire loop size		Wire contact size (AWG)	Fuse accommodation (CID PIN)	Fuse installed (Y-yes, N-no)
		length inch (mm)	gauge (AWG)			
001	4	19 (482.6)	14	N/A	AA55476-001	Y
002	6	19 (482.6)	14	N/A	AA55476-002	Y
003	7.5	19 (482.6)	14	N/A	AA55476-003	Y
004	9	19 (482.6)	14	N/A	AA55476-004	Y
005	14	19 (482.6)	14	N/A	AA55476-005	Y
006	20	19 (482.6)	14	N/A	AA55476-006	Y
007	4	N/A	N/A	18 - 20	AA55476-001	N
008	6	N/A	N/A	18 - 20	AA55476-002	N
009	7.5	N/A	N/A	18 - 20	AA55476-003	N
010	9	N/A	N/A	18 - 20	AA55476-004	N
011	14	N/A	N/A	18 - 20	AA55476-005	N
012	20	N/A	N/A	18 - 20	AA55476-006	N
013	4	N/A	N/A	14	AA55476-001	N
014	6	N/A	N/A	14	AA55476-002	N
015	7.5	N/A	N/A	14	AA55476-003	N
016	9	N/A	N/A	14	AA55476-004	N
017	14	N/A	N/A	14	AA55476-005	N
018	20	N/A	N/A	14	AA55476-006	N
019	4 - 20	8 (203.2) min 15 (381) max	14	N/A	AA55476-001 through -006	N

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

5.2 Market acceptance. The following market acceptance criteria are necessary to document the quality of the product to be provided under this CID:

a. The company producing the item must have been producing a product meeting the requirements of this CID for at least 2 years.

b. The company must have sold 1,000 units meeting this CID in the commercial marketplace over the past 2 years.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

7.2 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these fuseholders to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

7.3 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and CID PIN.

b. Product conformance provisions.

c. Packaging requirements.

7.4 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
71400	Cooper Bussmann, Incorporated P. O. Box 14460 St. Louis, MO 63178-4460 Phone number: (636) 394-2877 Facsimile number: (800) 544-2570 E-mail: fusebox@buss.com Uniform Resource Locator (URL): www.bussmann.com
75915	Littelfuse Incorporated 800 E. Northwest Highway Des Plaines, IL 60016-3096 Phone number (847) 824-1188 Facsimile number (847) 391-0894 E-mail: electronics@littelfuse.com URL: www.littelfuse.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

7.5 Part number (P/N) supersession data. This CID supersedes the following manufacturers' P/N's as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

TABLE II. P/N supersession data.

CID dash number AA55475-	MFR's CAGE 71400	MFR's CAGE 75915
	MFR's P/N 1/	MFR's P/N 1/
001	HRF	155004A
002	HRG	155006A
003	HRE	15507.5A
004	HRH	155009A
005	HRI	155014A
006	HRJ	155020A
007	HAF-A	N/A
008	HAG-A	N/A
009	HDH-A	N/A
010	HDH-A	N/A
011	HDI-A	N/A
012	HDJ-A	N/A
013	HAF-B	155004U
014	HAG-B	155006U
015	HDH-B	155007.5U
016	HDH-B	155009U
017	HDI-B	155014U
018	HDJ-B	155020U
019	HRK	155145

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown.

7.6 Government users. To acquire information on obtaining these fuseholders from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-CSBB, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-7625.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

7.6.1 National stock number (NSN). The following is a list of NSN's assigned which correspond to this CID. The list is for information only and may not be indicative of all possible NSN's associated with the CID. For up to date information on assigned NSN's, please contact the aforementioned DSCC office (See 7.6).

TABLE III. NSN's.

Dash number (see table I) AA55475-	NSN	Dash number (see table I) AA55475-	NSN
001	N/A	011	N/A
002	N/A	012	5920-01-255-4282
003	5920-01-252-0193	013	N/A
004	5920-00-242-2706	014	N/A
005	N/A	015	N/A
006	N/A	016	N/A
007	N/A	017	N/A
008	N/A	018	N/A
009	N/A	019	5920-01-396-1989
010	N/A		N/A

MILITARY INTERESTS:

Custodians:
Navy - EC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA-CC

Project 5920-0684

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.