
FED. SUP CLASS
5975

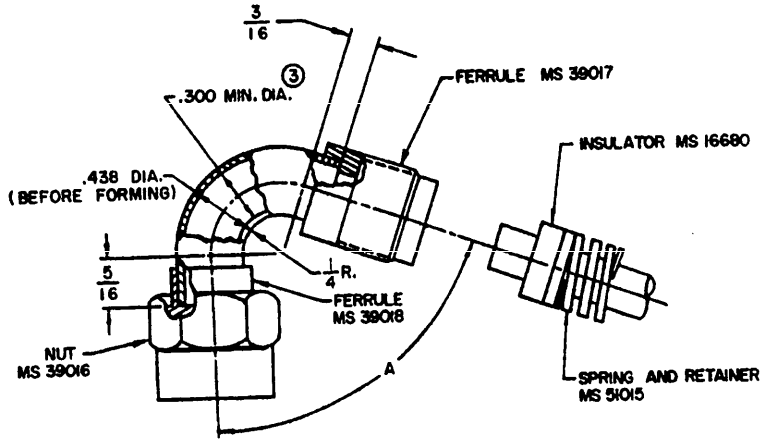

TYPE	ANGLE A	FORMER DASH NO.
A	70°	-1
B	90°	-2

NOTES:

(B) 1. ELBOW SHALL BE BRASS, TUBE, SEAMLESS, TYPE D, GRADE 1, TEMPER-ANNEALED, PER WW-T-791.

2. FERRULES SHALL BE BRAZED ON TO THE TUBING IN ACCORDANCE WITH SPECIFICATION MIL-B-7883.

3. ELBOW ASSEMBLY SHALL FREELY PASS A .300 MINIMUM DIAMETER STEEL BALL.

4. ASSEMBLY SHALL BE FREE OF BURS, INTERNAL OBSTRUCTIONS, AND SHARP EDGES. TUBE ENDS MAY BE SLIGHTLY FLARED TO ASSURE SMOOTH AND CONTINUOUS JOINT WITH FERRULES.

5. ELBOW ASSEMBLY SHALL BE CADMIUM PLATED AFTER BRAZING IN ACCORDANCE WITH CLASS 1 OF SPECIFICATION QQ-P-416.

6. DIMENSIONS ARE IN INCHES. TOLERANCES ARE: ±1/64 ON FRACTIONS: ±.005 ON DECIMALS: ±5° ON ANGLES.

7. REFERENCED DOCUMENT SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

8. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

THIS IS A DESIGN STANDARD AND IS NOT TO BE USED AS A PART NUMBER

APPROVED 25 APRIL 1958 REVISED (A) 12 JANUARY 1968 (B) 22 APRIL 1974

REVIEW ACTIVITIES: ARMY-EL
USER ACTIVITIES: ARMY- ME; NAVY- YD

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.-ARMY-AT Other Cust AF-80 (B)	TITLE ELBOW, ELECTRICAL CONDUIT: WITH INSULATOR, SPARK PLUG CABLE (OTHER THAN AIRCRAFT)	MILITARY STANDARD MS 39015
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:44Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:44Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
MS39015

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:44Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY

DEFENSE SUPPLY AGENCY
OFFICIAL BUSINESS

Commander
US Army Tank-Automotive Command
ATTN: AMSTA-RSEM
Warren, Michigan 48090

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:44Z
Check the source to verify that this is the current version before use.