INCH-POUND

MIL-DTL-43719/4A
6 APRIL 2009
SUPERSEDING
MIL-M-43719/4
31 March 1981

DETAIL SPECIFICATION SHEET

MARKING MATERIALS AND MARKERS, ADHESIVE, ELASTOMERIC, PIGMENTED; HAZARDOUS MATERIAL SYMBOLS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-43719.

REQUIREMENTS:

Material. Material for the basic marker (figure 1) shall conform to type I, class 3, color white of ASTM D4956.

Colors. Colors shall conform to the following (see table I of MIL-DTL-43719):

Color name	Color number
Red	11105
Light yellow	13655
Orange yellow	13538
Light blue	15102
Insignia blue	15044
Jet black	17038

Design. The design of the basic marker shall be as shown in figure 1. The size and dimensions of the basic marker shall be as shown in figure 2.

Specific hazard symbols and numerals. Specific hazard symbols and numerals shall be mounted on a translucent transfer sheet in accordance with 3.2.2 of MIL-DTL-43719.

Specific hazard symbols. Specific hazard symbols are as follows: ACID, ALK, COR, OXY, ~~W~~

The heights of the letters shall be one-half the height of the corresponding numerals for the specified size marker. The color of the letters shall be black. In all other respects, they shall conform to MIL-DTL-43719/3.

Numerals. Numerals are as follows: 0, 1, 2, 3, and 4

Numerals shall conform to MIL-DTL-43719/1. The color of the numerals shall be black or white as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:09Z
Check the source to verify that this is the current version before use.

Adhesion. Adhesion shall conform to type I, class 2 of MIL-DTL-43719.

QUALITY ASSURANCE PROVISIONS:

Reflectivity. Reflectivity shall be determined in accordance with ASTM D4956.

PACKAGING

Markers or marker sets shall be packaged as follows:

Basic markers. Basic markers of one size only shall be furnished in unit packs of 100 each.

Marker sets. Marker sets shall be furnished in unit packs containing 10 each of the appropriate size numerals, specific hazard symbols and basic markers.

Intended use. Hazardous material symbol markers described herein are for use in connection with the National Fire Protection Association Standard (NFPA) 704M.

Ordering data. Procurement documents should specify the following in addition to the ordering data listed in the general specification:

(a) Size of basic marker, numerals and specific hazard symbols required.
(b) If black or white numerals are required.
(c) If basic markers only are required.
(d) If marker sets are required.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:09Z
Check the source to verify that this is the current version before use.

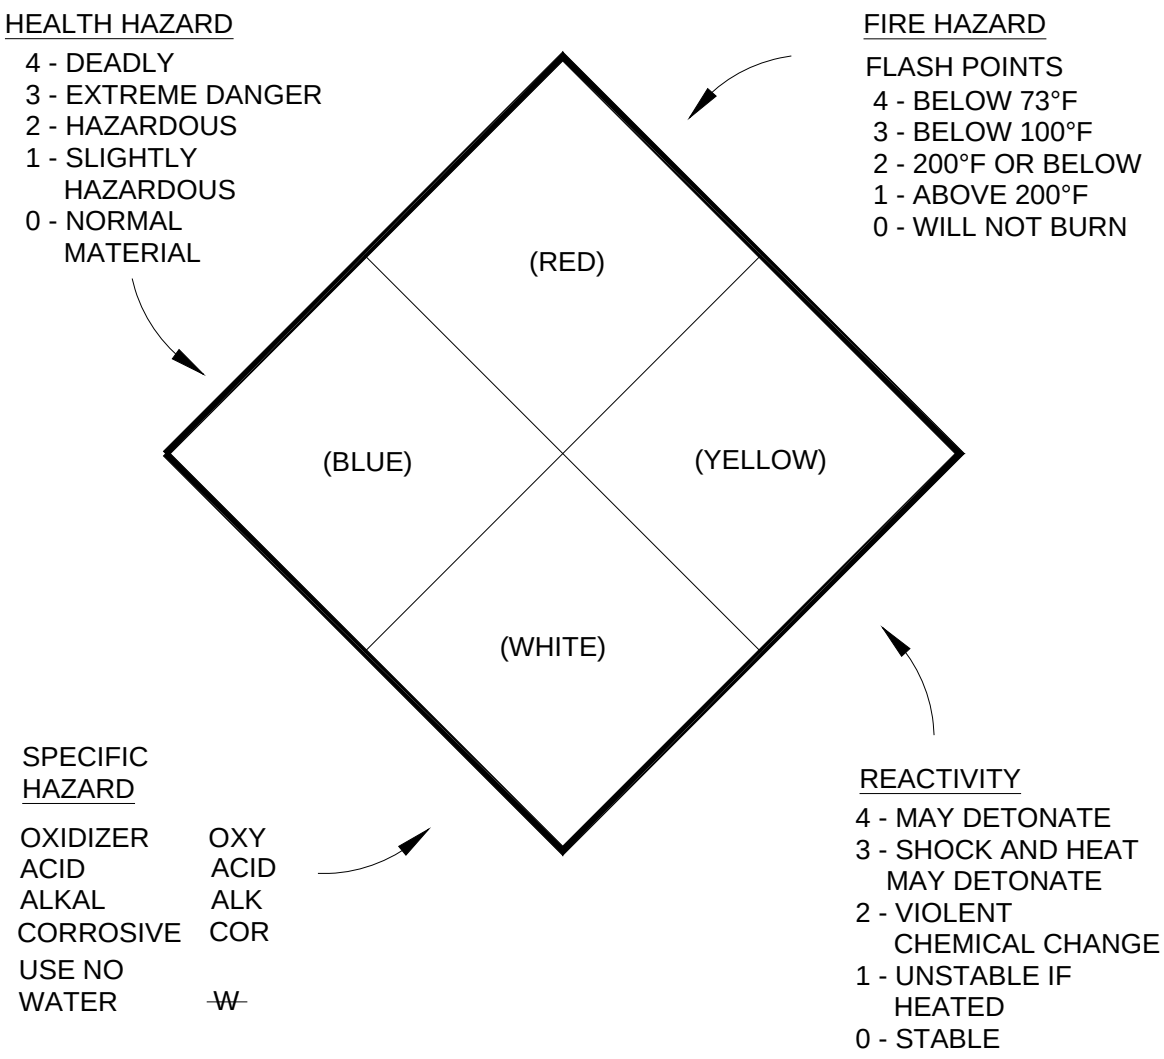

Figure 1. Basic marker.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:09Z
Check the source to verify that this is the current version before use.

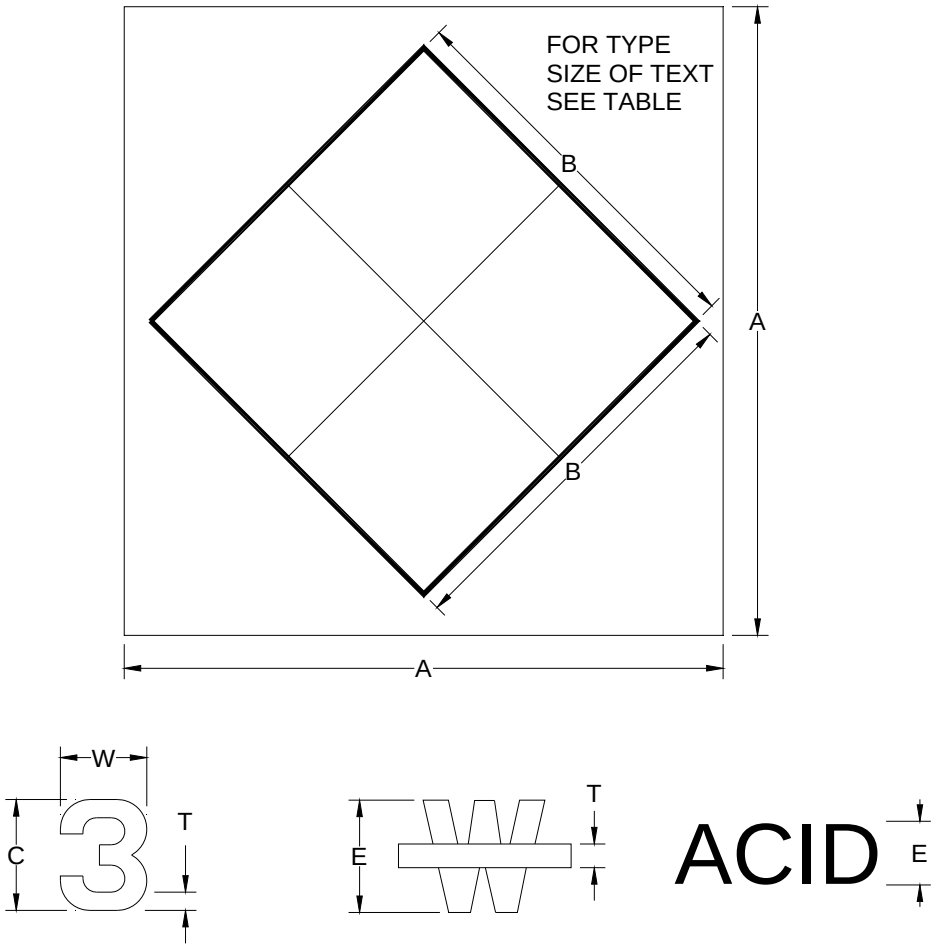

SIZE	A	B	C	E	W	T	BORDER (WHERE REQD)	TYPE SIZE POINTS	
								MIN	MAX
3	4	2.500	.750	.375	.625	.156	.016	7	8
4	4	2.500	1.000	.500	.750	.156	.016	7	8
6	6	3.750	1.500	.750	1.000	.219	.016	10	12
8	8	5.000	2.000	1.000	1.500	.312	.031	14	16
12	12	7.500	3.000	1.500	2.125	.469	.062	20	24

Figure 2. Dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:09Z
Check the source to verify that this is the current version before use.

Custodians:
Army – GL
Navy – SA
Air Force – 99

Preparing activity
DLA – IS
(Project 7690-2009-005)

Review activities:
Army – AT, AV, CR, MD
Navy – MC
Air Force – 84

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:09Z
Check the source to verify that this is the current version before use.