INCH-POUND
MIL-DTL-1183/1A
w/AMENDMENT 1
20 August 2019
SUPERSEDING
MIL-DTL-1183/1A
20 December 2016

# DETAIL SPECIFICATION SHEET

## FITTINGS, PIPE, CAST BRONZE, SILVER-BRAZING; BEND, PIPE, RETURN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-1183.

REQUIREMENTS:

1. Close pattern bend type. Close pattern bends (see figure 1) shall be Type A (streamlined interior) except for ¾- and 1¼-inch nominal pipe sizes, which shall be Type B (interior not streamlined).

2. Open pattern bend type. Open pattern bends (see figure 2) shall be Type A (streamlined interior) except for 1½- and 2-inch nominal pipe sizes, which shall be Type B (interior not streamlined).

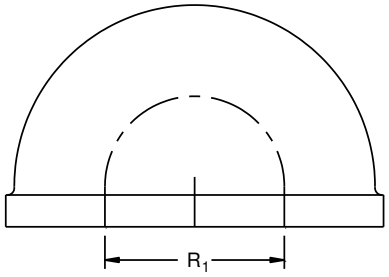



FIGURE 1. Close pattern.

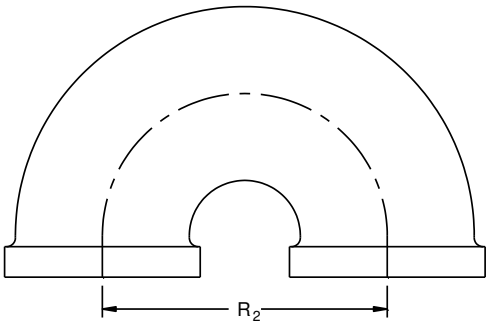



FIGURE 2. Open pattern.



DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:47Z
Check the source to verify that this is the current version before use.

3. Center-to-center dimensions. The center-to-center dimensions for close pattern and open pattern bends are specified in table I.

TABLE I. Center-to-center dimensions, inches.

| Nominal pipe size | $R_1$ | $R_2$ |
|---|---|---|
| | Center-to-center, close pattern | Center-to-center, open pattern |
| ½ | 1.00 | 1.50 |
| ¾ | 1.25 | 2.00 |
| 1 | 1.50 | 2.50 |
| 1¼ | 1.88 | 3.00 |
| 1½ | 2.19 | 3.50 |
| 2 | 2.63 | 4.00 |

4. Specification sheet part number. The specification sheet part number is a definitive part number that is formed by combining the military specification sheet code number (M1183/1 for MIL-DTL-1183/1) with a dash after it; the pipe size, type, and pattern code number; the brazing ring groove and code letter; and an optional dash and lead-free fitting identifier. Return bends covered by this specification sheet shall be designated in the following form (see 6.2.b of MIL-DTL-1183):

**M1183/1 – XX X - PW**

Specification sheet code number

Pipe size, type, and pattern code number (see requirement 5 herein)

Brazing ring groove and brazing ring code letter (see requirement 6 herein)

Lead-free fitting identifier (optional) (see 3.2 of MIL-DTL-1183)

5. Pipe size, type, and pattern. The nominal pipe size, interior contour type, and pattern of bends are identified by two digits (see table II).

TABLE II. Code number to pipe size, type, and pattern.

| Type A | | Type B | | Nominal pipe size (inches) |
|---|---|---|---|---|
| Close | Open | Close | Open | |
| 01 | 02 | -- | -- | ½ |
| -- | 03 | 04 | -- | ¾ |
| 05 | 06 | -- | -- | 1 |
| -- | 07 | 08 | -- | 1¼ |
| 09 | -- | -- | 10 | 1½ |
| 11 | -- | -- | 12 | 2 |

6. Brazing ring groove with brazing ring. Face fed (no groove), grooved without brazing ring, grooved with brazing ring inserted in groove, grooved with brazing ring(s) separately packaged and attached to the bend, or grooved with brazing ring(s) separately packaged and shipped with but not attached to the bend socket ends are identified by a single letter (see table III).



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:47Z
Check the source to verify that this is the current version before use.

TABLE III. Code letter to socket condition.

| Code letter | Condition of socket |
|---|---|
| N | No groove (face fed) |
| G 1/ | Grooved (no brazing ring) |
| R 1/ | Grooved with brazing ring inserted |
| A 2/ | Grooved with brazing ring separately packaged or attached |
| S 1/ 2/ | Grooved with brazing ring separately packaged or shipped with |

NOTES:

1/ No National Stock Number (NSN) shall be established or exist in the Federal Supply System for bend with the code letter of G, R, or S.

2/ When the socket condition code letter is A or S, the brazing rings are not to be inserted in the grooves but packaged separately. For condition code letter A, the packaged brazing ring shall be either included within each individual bend package or physically attached to the bend. For condition code letter S, the brazing ring shall be included within each individual bend package.

AMENDMENT NOTATIONS. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

## CONCLUDING MATERIAL

Custodians:
Army – CR4
Navy – SH

Preparing activity:
Navy – SH
(Project 4730-2019-021)

Review activity:
DLA – CC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:47Z
Check the source to verify that this is the current version before use.