
MILITARY SPECIFICATION SHEET

FITTINGS, PIPE, CAST BRONZE, SILVER-BRAZING; CAP, PIPE


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the caps described herein shall consist of this document and the latest issue of MIL-F-1183.

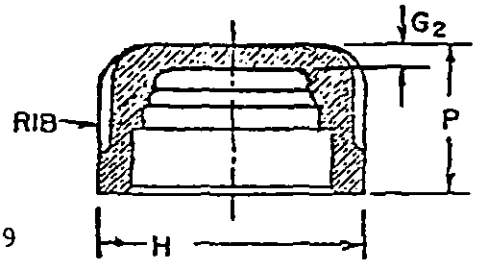

SH 12159

FIGURE 1. Flat cap (without recess).

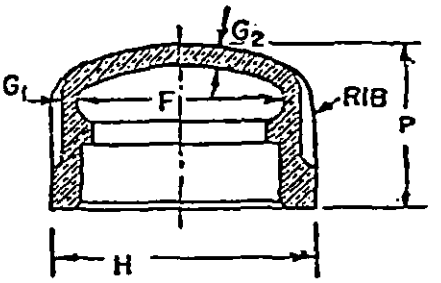

SH 12160

FIGURE 2. Crowned cap (with recess).

TABLE I. Cap dimensions.

Nominal pipe size	F Inside diameter of fittings (maximum)	G_1 Metal thickness of sides (minimum)	G_2 Metal thickness of top (minimum)	H Band diameter (minimum)	P (Reference) Height 1/	Thickness of ribs (minimum)
Inches	Inches	Inch	Inch	Inches	Inches	Inch
1/4	0.58	0.08	0.10	0.81	0.59	0.08
3/8	.72	.09	.11	1.00	.64	.09
1/2	.90	.09	.12	1.17	.76	.09
3/4	1.11	.10	.13	1.42	.84	.10
1	1.39	.11	.15	1.72	.99	.11
1-1/4	1.73	.12	.17	2.10	1.10	.12
1-1/2	1.97	.13	.19	2.28	1.15	.13
2	2.45	.15	.22	2.92	1.32	.15
2-1/2	2.98	.17	.25	3.49	1.70	.17
3	3.60	.19	.29	4.20	1.80	.19
3-1/2	4.10	.20	.32	4.75	1.90	.20
4	4.60	.22	.36	5.31	2.08	.22
5	5.66	.30	.45	6.29	2.32	.30
6	6.72	.34	.55	7.42	2.50	.34
8	8.725	.40	.60	9.425	3.00	.50
10	10.850	.48	.70	11.70	3.50	.50
12	12.85	.575	.80	13.84	4.00	.50

1/ Height dimension of sizes 1/4 through 2 inches do not include allowance for draft or crown of top.

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:48Z
Check the source to verify that this is the current version before use.

1. Cap type. Caps shall be type B (interior not streamlined).

2. Cap design. Cap design may be flat top with internal recess, flat top without internal recess, crowned top with internal recess or crowned top without internal recess. For each design the side and top wall thicknesses shall be not less than that given in table I for the required nominal pipe size. Caps may be furnished with or without ribs.

3. Cap dimensions. Dimensions for caps are specified in table I.

4. Military specification sheet part number. Caps covered by this specification sheet shall be designated in the following form (see 6.2(b) of MIL-F-1183).

M1183/2 - XX X

Military specification sheet code number
Nominal pipe size code number (see requirement 5 herein)
Brazing ring groove and brazing ring code letter (see requirement 6 herein)

5. Nominal pipe size. The nominal pipe size of caps is identified by two digits (see table II).

TABLE II. Code number to size.

Code number	Nominal pipe size
01	1/4
02	3/8
03	1/2
04	3/4
05	1
06	1-1/4
07	1-1/2
08	2
09	2-1/2
10	3
11	3-1/2
12	4
13	5
14	6
15	8
16	10
17	12

6. Brazing ring groove and brazing ring. Face fed (no groove), grooved without brazing ring, grooved with brazing ring inserted in groove or grooved with brazing ring(s) separately packaged and shipped with but not attached to the cap socket ends are identified by a single letter (see table III).

Source: https://assist.dla.mil -- Downloaded: 202610-16T12:48Z
Check the source to verify that this is the current version before use.

TABLE III. Code letter to socket condition.

Code letter	Condition of socket
N	No groove (face fed)
G 1/	Grooved (no brazing ring)
R 1/	Grooved with brazing ring inserted
S 2/	Grooved with brazing ring separately packaged and shipped with

1/ No National Stock Number (NSN) shall be established or exist in the Federal Supply System for cap with the code letter of G or R.

2/ When the socket condition code letter is S, the brazing ring is not to be inserted in groove but packaged separately and either included within each individual cap package.

7. Military specification part number definition. The military specification sheet part number is a definitive part number which is formed by combining the military specification sheet code number (M1183/2 for MIL-F-1183/2) with a dash after it, the nominal pipe size code number and the brazing ring groove and brazing ring code letter as specified in requirement 4.

Custodians:
Army - ME
Navy - SH
Air Force - 99

Review activity:
DLA - CS

Preparing activity:
Navy - SH

Agent:
DLA - CS

(Project 4730-0045)

Source: https://assist.dla.mil -- Downloaded: 202640-16T12:48Z
Check the source to verify that this is the current version before use.