INCH-POUND
MIL-DTL-1183/5A
w/AMENDMENT 1
20 August 2019
SUPERSEDING
MIL-DTL-1183/5A
20 December 2016

DETAIL SPECIFICATION SHEET

FITTINGS, PIPE, CAST BRONZE, SILVER-BRAZING; ELBOW, PIPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-1183.

REQUIREMENTS:

1. Elbow type. 90 degree (see figure 1), 45 degree (see figure 2), and 90 degree long turn (see figure 3) elbows shall be Type A (streamlined interior).




FIGURE 1. Elbow, 90 degree.

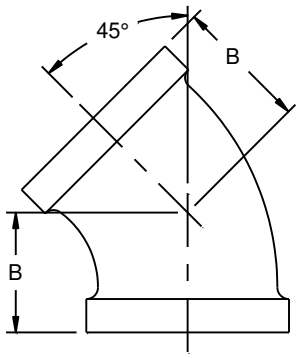


FIGURE 2. Elbow, 45 degree.




FIGURE 3. Elbow, 90 degree, long turn.

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:48Z
Check the source to verify that this is the current version before use.

2. Center-to-end dimensions. The center-to-end dimensions for 45 degree, 90 degree, and 90 degree long turn elbows shall be as specified in table I.

TABLE I. Center-to-end dimensions, inches.

Nominal pipe size	Center-to-end		
	A	B	C
¼	0.71	0.56	1.25
⅜	0.82	0.63	1.50
½	1.01	0.78	1.75
¾	1.18	0.89	2.00
1	1.43	1.06	2.31
1¼	1.69	1.22	2.75
1½	1.84	1.30	3.13
2	2.12	1.45	3.75
2½	2.70	1.95	4.50
3	3.08	2.17	5.44
3½	3.42	2.39	6.19
4	3.79	2.61	6.94
5	4.50	3.05	8.13
6	5.13	3.46	9.00
8	6.56	4.28	10.00
10	8.08	5.16	11.00
12	9.50	5.97	

3. Specification sheet part number. The specification sheet part number is a definitive part number that is formed by combining the specification sheet code number (M1183/5 for MIL-DTL-1183/5) with a dash after it, the elbow style and pipe size code number, the brazing ring groove and code letter, and an optional dash and lead-free fitting identifier. Elbows covered by this specification sheet shall be designated in the following form (see 6.2.b of MIL-DTL-1183):

M1183/5 – XX X - PW

Specification sheet code number

Elbow style and pipe size code number (see requirement 4 herein)

Brazing ring groove and brazing ring code letter (see requirement 5 herein)

Lead-free fitting identifier (optional) (see 3.2 of MIL-DTL-1183)

4. Elbow style and pipe size. The elbow style (45 degree, 90 degree, or 90 degree long turn) and nominal pipe size are identified by two digits (see table II.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:48Z
Check the source to verify that this is the current version before use.

TABLE II. Code number to style and size.

90 degree	45 degree	90 degree long turn	Nominal pipe size (inches)
01	21	41	¼
02	22	42	⅜
03	23	43	½
04	24	44	¾
05	25	45	1
06	26	46	1¼
07	27	47	1½
08	28	48	2
09	29	49	2½
10	30	50	3
11	31	51	3½
12	32	52	4
13	33	53	5
14	34	54	6
15	35	55	8
16	36	56	10
17	37		12

5. Brazing ring groove and brazing ring. Face fed (no groove), grooved without brazing ring, grooved with brazing ring inserted in groove, grooved with brazing ring(s) separately packaged and attached to the elbow, or grooved with brazing ring(s) separately packaged and shipped with but not attached to the elbow socket ends are identified by a single letter (see table III).

TABLE III. Code letter to socket condition.

Code letter	Condition of socket
N	No groove (face fed)
G 1/	Grooved (no brazing ring)
R 1/	Grooved with brazing ring inserted
A 2/	Grooved with brazing ring separately packaged and attached
S 1/ 2/	Grooved with brazing ring separately packaged and shipped with

NOTES:

1/ No National Stock Number (NSN) shall be established or exist in the Federal Supply System for elbow with the code letter of G, R, or S.

2/ When the socket condition code letter is A or S, the brazing rings are not to be inserted in the grooves, but packaged separately. For condition code letter A, the packaged brazing ring shall be either included within each individual elbow package or physically attached to the elbow. For condition code letter S, the brazing ring shall be included within each individual bend package.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:48Z
Check the source to verify that this is the current version before use.

AMENDMENT NOTATIONS. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

CONCLUDING MATERIAL

Custodians:
Army – CR4
Navy – SH

Preparing activity:
Navy – SH
(Project 4730-2019-025)

Review activity:
DLA – CC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:48Z
Check the source to verify that this is the current version before use.