INCH-POUND

MIL-DTL-32633/1
31 July 2019

DETAIL SPECIFICATION SHEET

CONNECTOR ADAPTER, PIN PLUG,
ELECTROMAGNETIC INTERFERENCE (EMI) FILTER,

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-32633.

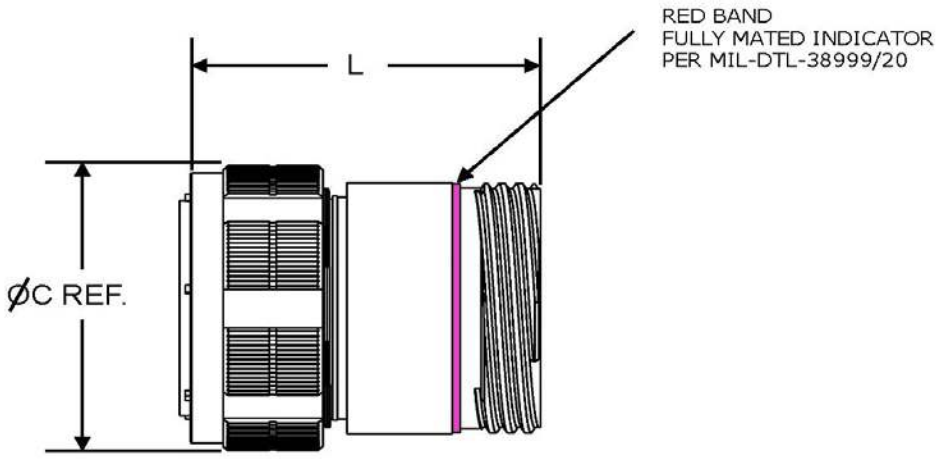


FIGURE 1. Connector adapter.

TABLE I. Dimensions.

Shell size	ØC diameter (ref) (inches)	L maximum (inches)
9	.845	2.257
11	.950	
13	1.121	
15	1.249	
17	1.386	
19	1.493	
21	1.620	
23	1.737	
25	1.864	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:17Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See Figure 1. Interface dimensions shall be in accordance with connector intermateability dimensions (series III) of MIL-DTL-38999.

2. The pin plug connector adapter shall mate with the following two mating connectors:

   D38999/20WB99SN Receptacle with wall mounting flange
   D38999/26WB99PN Plug

3. The pin plug connector adapter interface consists of two connector interfaces. The mating ends of the adapter are a mirror image insert arrangement of the mating connectors.

4. The pin plug connector adapter class, shell size, contact size, and polarization shall be compatible with the mating connectors.

5. Part or Identifying Number (PIN) (see 1.3 of MIL-DTL-32633):

   M32633/01W11-99ACN03001

6. Filter designator 03001 details. Table II defines the details of the contact and filter and filter configuration.

TABLE II. Filter 03001 designator.

Contact	Filter type	Filter characteristics	Ceramic material	Resistance to shell
01	Pi	D	X7R	
02	Pi	D	X7R	
03	Pi	D	X7R	
04	G	N/A	N/A	3 milli-ohm
05	Pi	E	C0G	
06	Pi	D	X7R	
07	Pi	E	C0G	

7. Voltage spike. Not required.

8. Lightning strike. Not required.

9. Radio frequency (RF) current. Not required.

NOTES:

1. Intended use. The pin plug connector adapters qualified to this specification sheet are intended to mate with MIL-DTL-38999, series III connectors and provide suppression of electromagnetic interference (EMI).
2. Exceptions: It is necessary to identify those specification modifications that apply to this designator. The Notes of section 6 are important and offer guidance for several performance requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:17Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
Navy - AS
Project 5935-2018-048

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19
DLA - IS
MISC - MDA

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:17Z
Check the source to verify that this is the current version before use.