
FED. SUP CLASS
6240

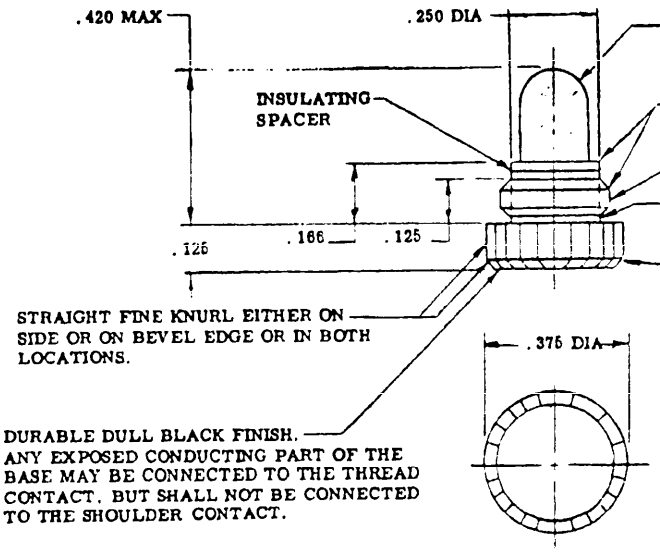

(F)

STAMP OR ENGRAVE TRADE NUMBER AND MANUFACTURER'S TRADE MARK OR ABBREVIATION OF MANUFACTURER'S NAME ON UNKNURLED PART OF LAMP BASE.

DASH NO.	FORMER DASH NO.	RATED OPERATING POTENTIAL, VOLTS	DESIGN CURRENT AMPERES	COLOR OF ENVELOPE	SPHERICAL CANDLE POWER	AVERAGE LIFE HOURS
323	--	3	.19	CLEAR	.25±25%	350
323R	R323	3	.19	RED	.04±25%	350
8623	623	28	.04	CLEAR	.25±25%	1000
8623R	R623	28	.04	RED	.04±25%	1000
8639	639	6	.22	CLEAR	.25±25%	500
9639R	R639	6	.22	RED	.04±25%	500

NOTES:

1. THREADS SHALL BE IN ACCORDANCE WITH FEDERAL HANDBOOK H-28.
2. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.015.
3. LIGHT EMITTED BY RED LAMPS SHALL CONFORM TO MIL-C-25050 FOR INSTRUMENT PANEL AND LIGHTING RED.
4. ALL CURRENT DASH NUMBERS ARE PROPERLY ASSIGNED A.S.A. NUMBERS

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(F) REVISED

APPROVED 27 MAR 57 REVISED (D) 16 APRIL 1965 (E) 21 SEP 66 (F) 12 January 1967

P.A. NAVY - AS Other Cust ARMY - ME USAF - 11	TITLE LAMPS, INCANDESCENT-T-1-1/4, KNURLED SCREW BASE	MILITARY STANDARD MS25236
PROCUREMENT SPECIFICATION MIL-I-6363	SUPERSEDES: AN3136; MS15530 (SHIPS)	SHEET 1 OF 1

DD FORM SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. W-0104 PLATE NO. 15320

USER SYMBOLS: NAVY - SH

REVIEWER SYMBOLS: ARMY - ME, NAVY - AS, USAF - 11

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 202610-23T15:06Z
Check the source to verify that this is the current version before use.