FED. SUP CLASS
9540

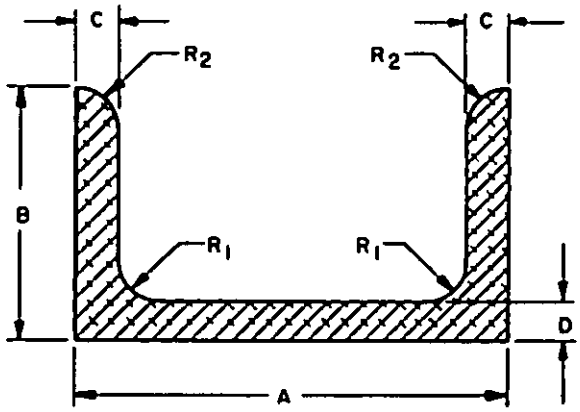


TABLE I. DASH NUMBERS.

DASH NO	A	B	C	D	R_1	R_2	TEMPER
001	.540	.250	.040	.040	.060	SQUARE	T3511
003	.540	.250	.040	.040	.060	SQUARE	T3511
005	.640	1.500	.070	.070	.125	SQUARE	T3511
007	.750	.500	.050	.050	.094	.050	T3511
009	.750	.875	.063	.063	.125	.063	T3511
011	.750	.875	.078	.078	.125	.078	T3511
013	.750	.875	.078	.078	.125	.078	T3511
015	.875	.750	.050	.050	.094	.050	O
017	.875	.750	.063	.063	.125	.063	T3511
019	.875	.750	.063	.063	.125	.063	T3511
021	.875	1.000	.078	.078	.125	.078	T3511
023	1.000	.375	.078	.078	.094	.078	T3511
025	1.000	.375	.078	.078	.094	.078	T3511
027	1.000	.625	.063	.063	.125	.063	T3511
029	1.000	.750	.063	.063	.125	.063	T3511
031	1.000	.875	.078	.078	.125	.078	T3511
033	1.000	1.500	.125	.125	.125	.125	T3511
035	1.125	.375	.078	.078	.094	.078	T3511
037	1.125	.875	.063	.063	.125	.063	T3511
039	1.125	1.375	.094	.094	.125	.094	T3511
041	1.250	1.500	.125	.125	.125	.125	T3511
043	1.375	.875	.078	.078	.125	.078	T3511
045	1.375	2.000	.156	.156	.188	.156	T3511
047	1.500	1.125	.094	.094	.125	.094	T3511
049	1.625	.625	.094	.094	.094	.094	T3511
051	1.750	.750	.078	.078	.125	.078	T3511
053	1.750	.750	.094	.094	.125	.094	T3511
055	1.750	.875	.094	.094	.125	.094	T3511

USER ACTIVITIES:
NAVY-MC,OS,SH

REVIEWER ACTIVITIES:
AIR FORCE - 84
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

APPROVED 30 April 1984 REVISED

P. A.	AS	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cost	MR 99		CHANNEL, SHAPE STYLE IV ALUMINUM ALLOY 2024	MS14366
PROCUREMENT SPECIFICATION 00-A-200		SUPERSEDES		PAGE 1 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 9540-0097

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:41Z
Check the source to verify that this is the current version before use.

USER ACTIVITIES:
NAVY - MC,OS,SH

REVIEWER ACTIVITIES:
AIR FORCE - 84
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

TABLE I. DASH NUMBERS. - CONTINUED

DASH NO	A	B	C	D	R_1	R_2	TEMPER
057	1.750	1.000	.050	.050	.090	SQUARE	T8511
059	1.750	1.000	.156	.156	.125	.156	T8511
061	2.000	1.000	.050	.050	.090	SQUARE	T3511
063	2.000	1.000	.094	.094	.125	.094	T3511
065	2.000	1.750	.188	.188	.188	.188	T3511
067	2.250	1.000	.094	.094	.125	.094	T3511
069	2.250	1.000	.094	.094	.125	.094	T8511
071	2.500	.625	.094	.094	.125	.094	T3511
073	2.500	1.000	.094	.094	.125	.094	T8511
075	3.500	.875	.125	.125	.125	.125	T3511

REQUIREMENTS:

1. MATERIAL. ALUMINUM ALLOY 2024, (UNS A92024), AS SPECIFIED IN QQ-A-200/3.
2. FORMING PROCESS. EXTRUDED (CODE E).
3. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A FORMING PROCESS CODE, PLUS A DASH NUMBER FROM TABLE I.

   EXAMPLE: MS14366E001

   - 001 — DASH NUMBER FROM TABLE I
   - E — EXTRUDED (SEE REQUIREMENT 2)
   - MS14366 — BASIC MS NUMBER

4. MARKING. ALUMINUM AND ALUMINUM ALLOYS SHALL BE MARKED WITH THE PRODUCER'S NAME OR REGISTERED TRADE MARK, THE PART NUMBER (MILITARY STANDARD (MS) NUMBER PLUS THE APPLICABLE DASH NUMBER), AND THE LOT NUMBER AND THIS MARKING SHALL BE APPLIED IN ACCORDANCE WITH FED-STD-184.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. STANDARD LENGTH OF CHANNEL IS 10 FEET MINIMUM, 12 FEET MAXIMUM.
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THE REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
4. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 30 April 1994 REVISED

P. A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cost: AS MR 99		CHANNEL, SHAPE STYLE IV ALUMINUM ALLOY 2024	MS14366
PROCUREMENT SPECIFICATION: QQ-A-200	SUPERSEDES:		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:41Z
Check the source to verify that this is the current version before use.