
FED. SUP CLASS
8475

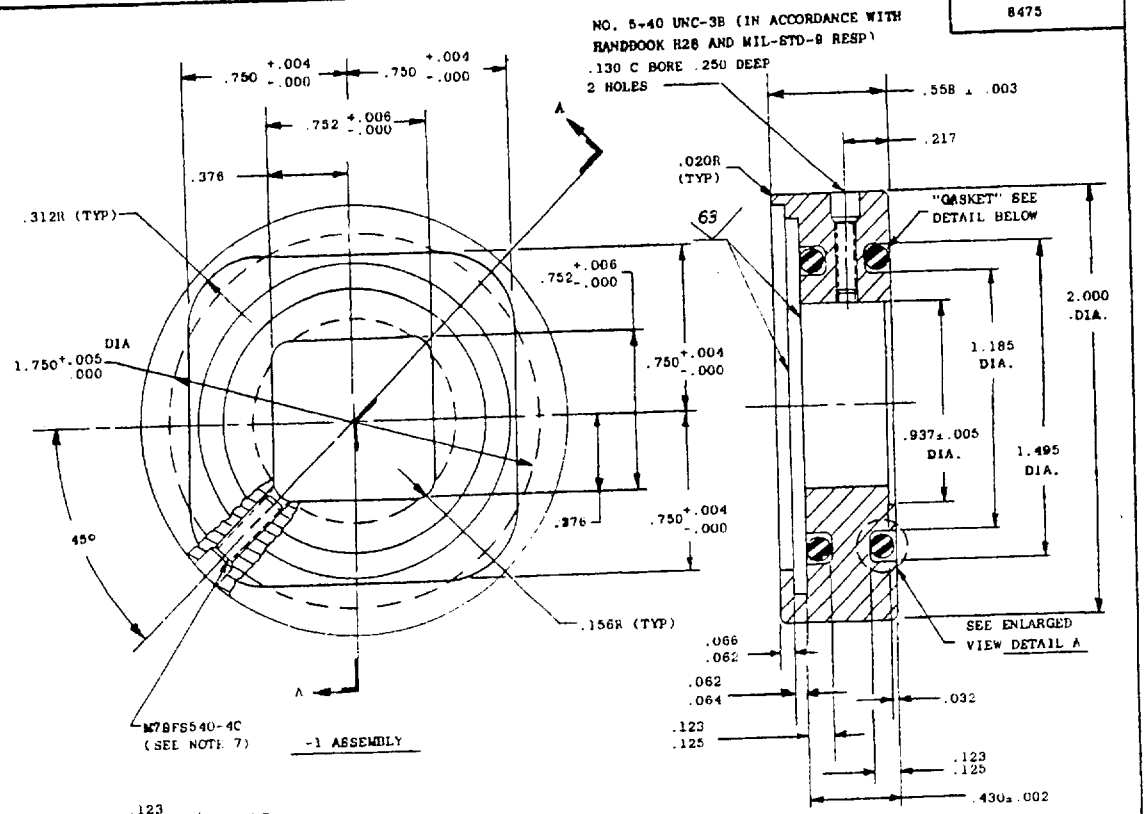

DASH NO.
-1

NOTES:

1. MATERIAL: METAL PARTS; ALUMINUM ALLOY, 2024, IN ACCORDANCE WITH QQ-A-225/6, TEMPER T4. GASKET; "O" RING, RUBBER IN ACCORDANCE WITH MIL-R-6855, CL 2, GRADE 70.
2. FINISH: ANODIZE, IN ACCORDANCE WITH MIL-A-8625, TYPE II, DYED GREEN.
3. 125/ ALL OVER EXCEPT AS NOTED. SURFACE ROUGHNESS SHALL BE IN ACCORDANCE WITH MIL-STD-10.
4. DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH MIL-STD-8.
5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.020.
6. BREAK ALL SHARP EDGES AND REMOVE ALL BURRS.
7. M7SFS540-4C IS NYLOCK INC., PART NO., NYLOCK INC., PARAMUS, NEW JERSEY, OR EQUIVALENT.
8. USAGE: INTENDED FOR USE ON THE MK 2A ANTI-G SUIT TO ADAPT THE SUIT FOR USE WITH SUMMER FLIGHT GARMENTS.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(C) DENOTES CHANGE

APPROVED 2 DECEMBER 63 REVISED (A) 27 APR 1965 (B) 3 FEB 1978 (C) 10 MAY 1978

This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY - AS Other Cust	TITLE ADAPTER, ANTI-G SUIT	MILITARY STANDARD MS17966(AS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

PLATE NO 14938

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO. 8475-N156

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:11Z
Check the source to verify that this is the current version before use.