PROJ No 5120-N694

FED. SUP CLASS
5120

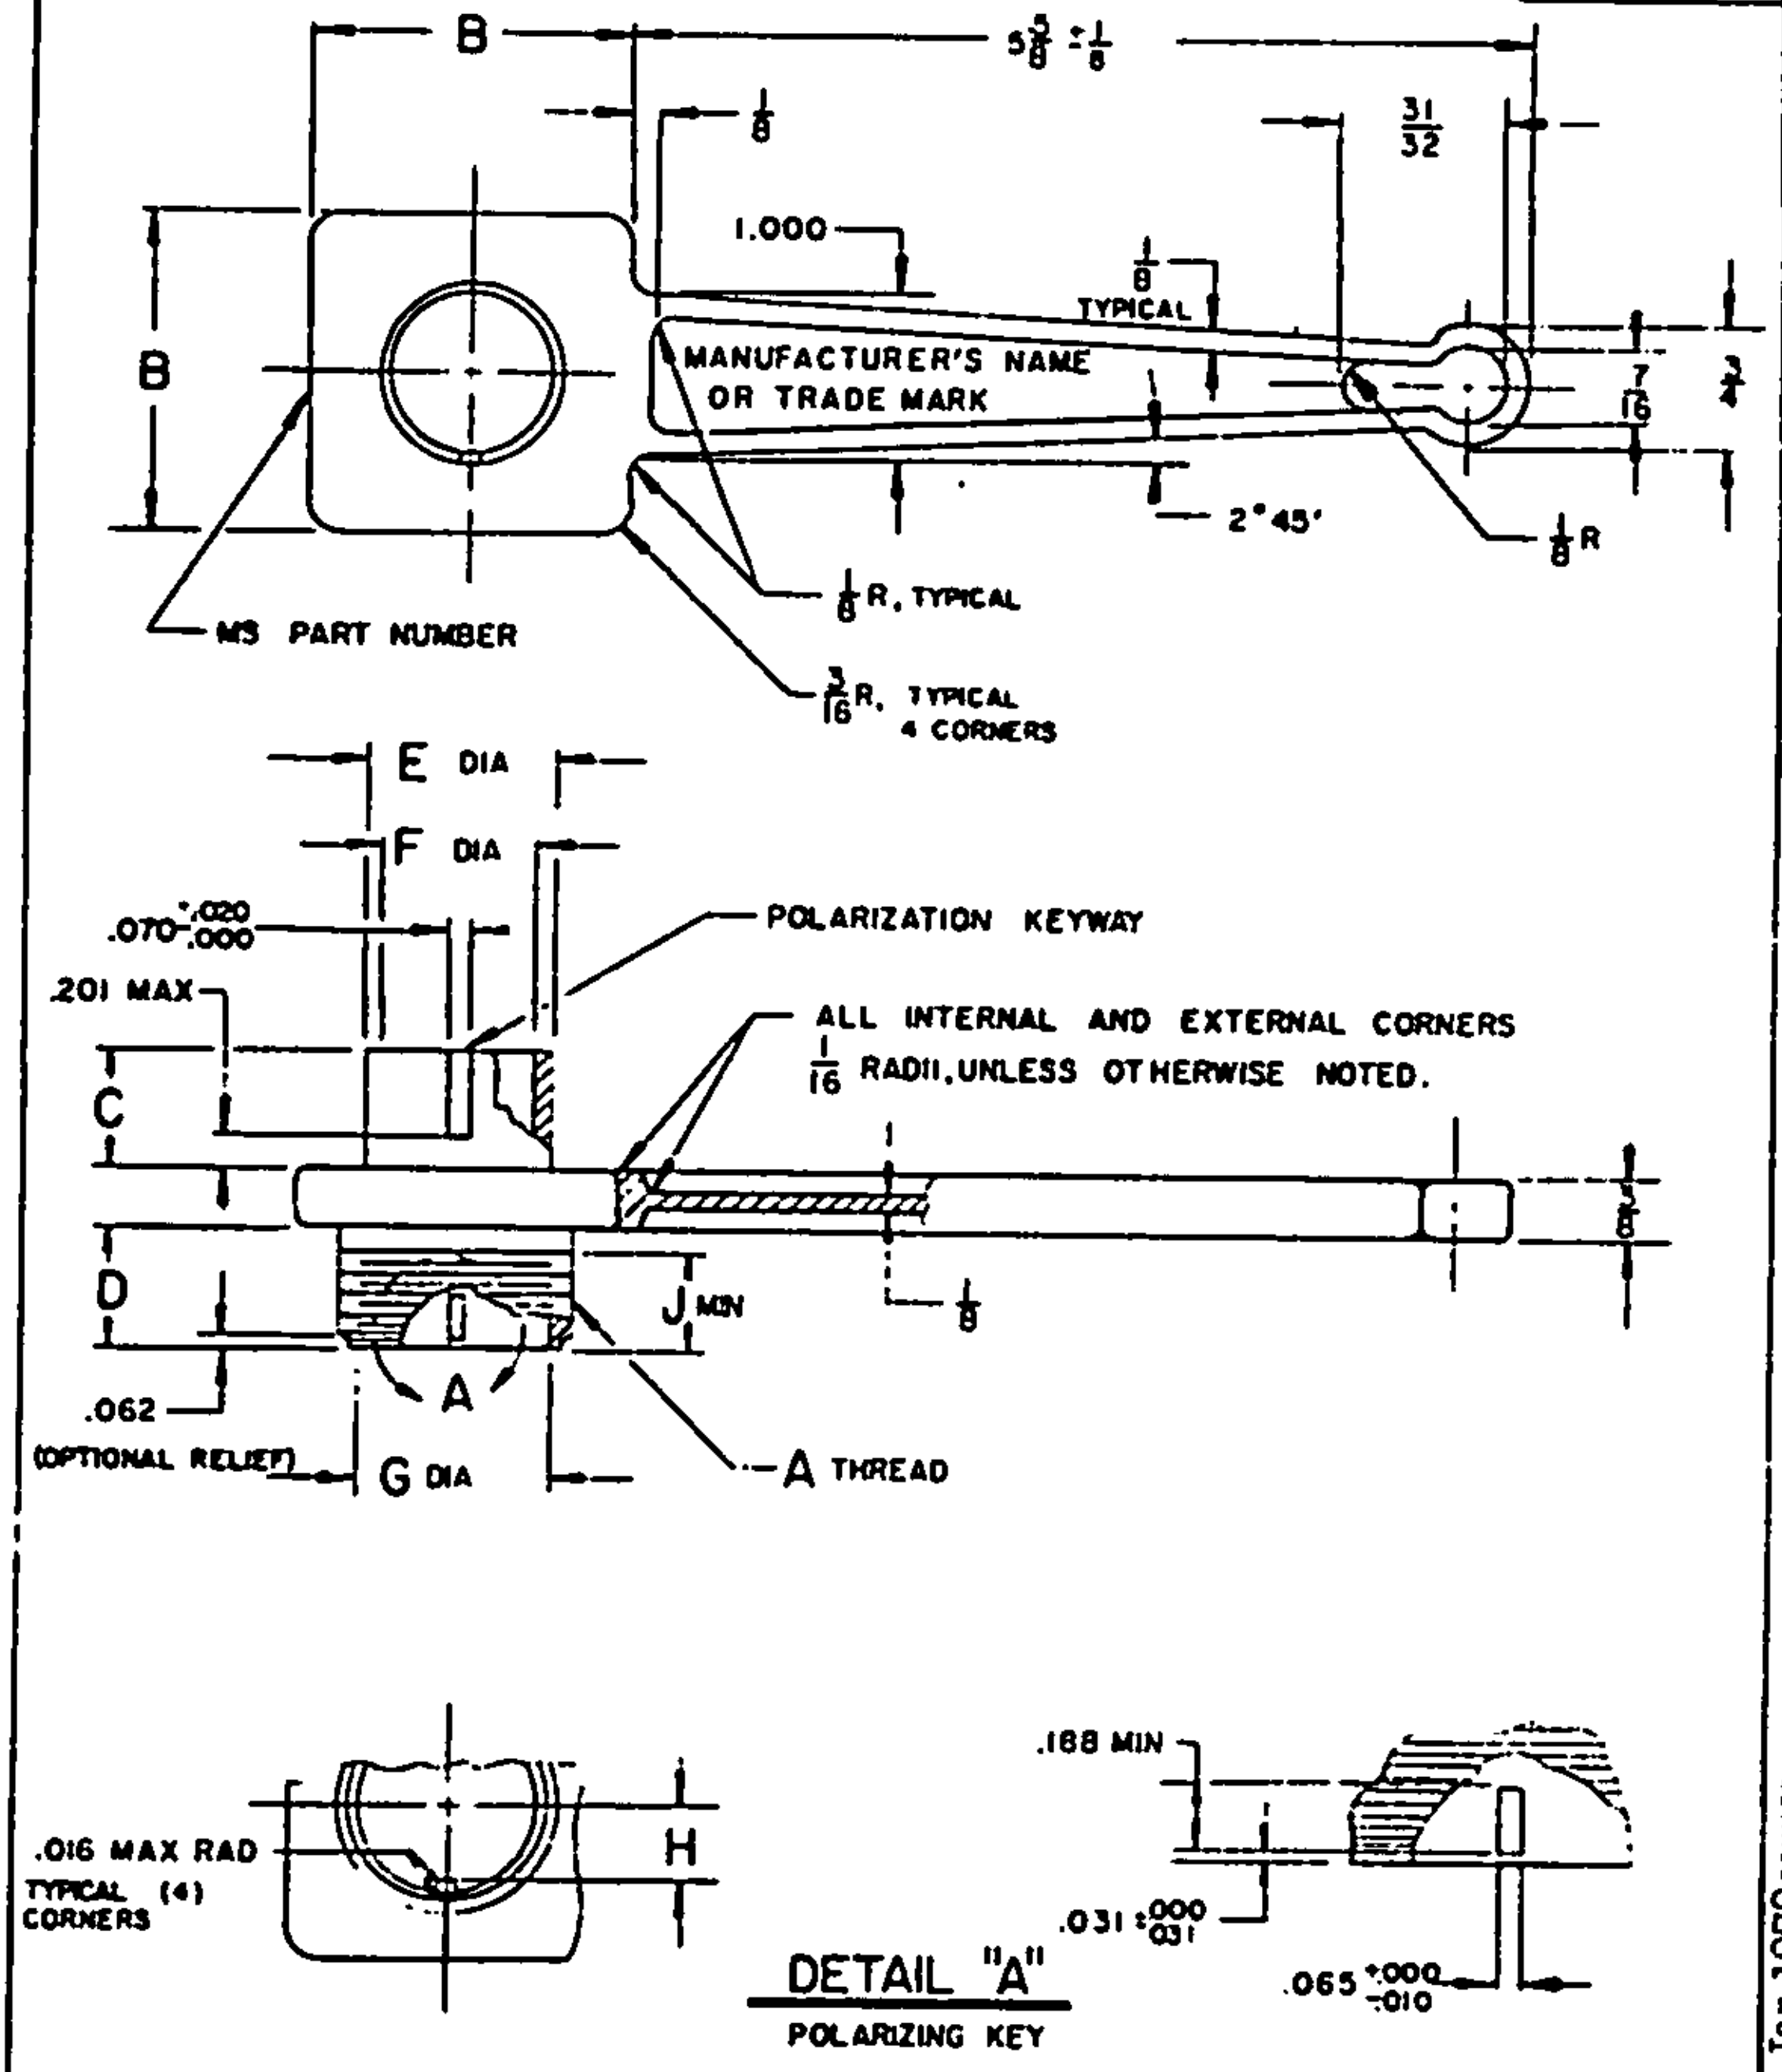

DETAIL "A"

POLARIZING KEY

APPROVED 21 Jan. 1970 REVISED

This military standard is approved by the Department of the Navy and is mandatory for use by that Department; all other military activities are requested to employ this standard where suitable

P.A. NAVY - AS Other Cust	TITLE TOOL, CONNECTOR ASSEMBLY; FOR MIL-C-5015 CONNECTORS	MILITARY STANDARD MS 3480(NAVY)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 66 672-1 (Limited coordination)

PREVIOUS EDITION OF THIS FORM ARE OBSOLETE.

PLATE NO. 17706

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

This military standard is approved by the Department of the Navy and is mandatory for use by that Department. All other military activities are requested to employ this standard where suitable.

PROJ No 5120-N694

FED. SUP CLASS
5120

DASH NUMBER	CONNECTOR SHELL SIZE	A THREAD CLASS 2A	B ±.060	C APPROX	D APPROX	E DIA -.000 +.015	F DIA MIN	G DIA -.015 +.000	H -.016 +.000	J MIN
-08	8S	1/2-28 UNEF	1.250	.718	.687	.365	.252	.370	.130	.375
-10	10S,10SL	5/8-24				.440	.323	.448	.165	
-12	12,12S	3/4-20				.555	.450	.557	.224	.625
-14	14,14S	7/8-20				.675	.526	.682	.263	
-16	16,16S	1 - 20	2.000	.921	.750	.805	.651	.807	.325	
-18	18	1 1/8-18				.930	.776	.932	.385	
-20	20	1 1/4-18				1.050	.932	1.058	.463	
-22	22	1 3/8-18				1.175	1.026	1.182	.510	
-24	24	1 1/2-18 UNEF				1.300	1.151	1.307	.573	
-28	28	1 3/4-18 UNS	2.750			1.520	1.370	1.526	.683	
-32	32	2 - 18 UNS				1.770	1.620	1.776	.808	
-36	36	2 1/4-16 UN				1.980	1.838	1.905	.915	
-40	40	2 1/2-16 UN				2.220	2.058	2.245	1.023	

REQUIREMENTS:

1. TOOLS ARE FOR USE WITH CONNECTORS CONFORMING TO MIL-C-5015.
2. PART NUMBER SHALL INCLUDE: MS PART NUMBER AND DASH NUMBER AS SHOWN IN THE EXAMPLE BELOW,

MS 3480-28
MS NUMBER —— DASH NUMBER

NOTES:

1. MATERIAL: a. SHELL: STEEL: STANDARD QUALITY.
   b. HANDLE: DIE CAST ALUMINUM ALLOY PER QQ-A-591.
2. FINISH: NICKEL PLATE PER QQ-N-290.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. ALL DIMENSIONS ARE INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS $\pm\frac{1}{16}$.
   DECIMALS ±.016.
5. THREADS SHALL BE IN ACCORDANCE WITH HANDBOOK H28.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

APPROVED 27. Jan 1970 REVISED

P.A. NAVY-AS
Other Cust

TITLE
TOOL, CONNECTOR ASSEMBLY; FOR
MIL-C-5015 CONNECTORS

·MILITARY STANDARD
MS 3480 (NAVY)

PROCUREMENT SPECIFICATION
NONE

SUPERSEDES:

SHEET 2

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1970-393-094/S-4406

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.