
FED SUP CLASS 5340

(K)

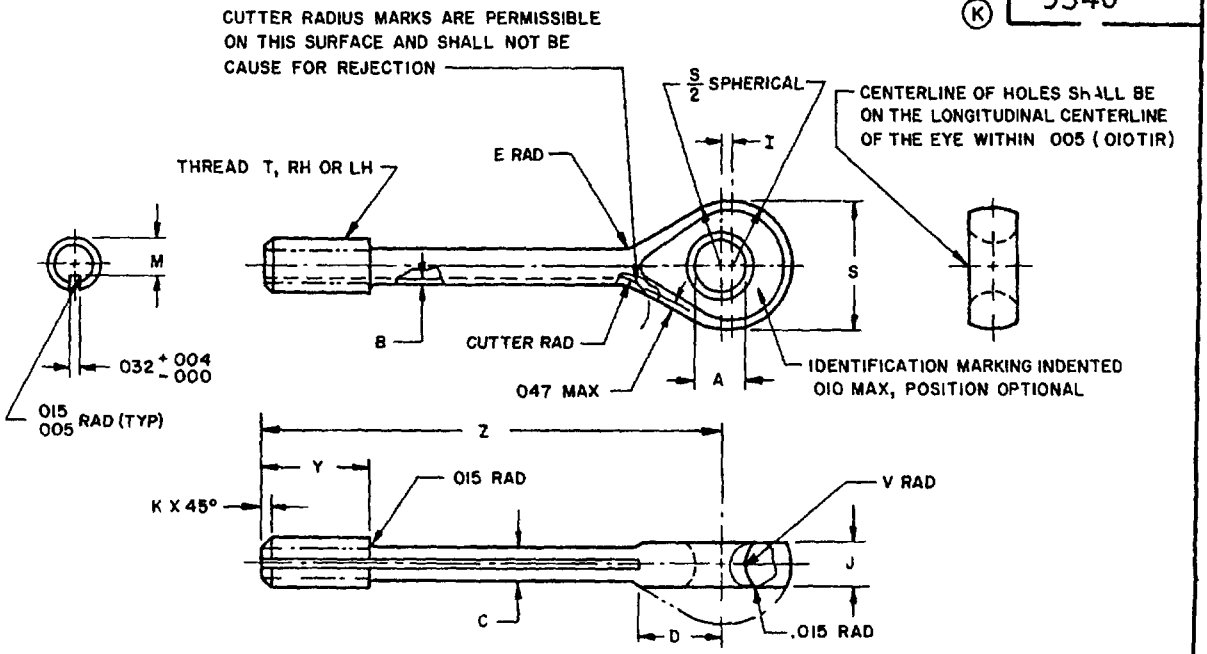

DASH NO DIRECTION OF THREAD		WIRE ROPE DIA REF	MIN BREAKING STRENGTH LB	THREAD T UNF-3A	A +.010 -.000 DIA	B MAX	C +.006 -.000 DIA	D ±.031	E ±.031 RAD	I +.010 -.000	J ±.005	K +.000 -.010	M		S DIA	V ±.016 RAD	Y ±.047	Z +.031 .015
RH	LH												MAX	MIN				
-2RS	-2LS	1/16	800	6-40	.188	.0096	.094	.325	.125	.031	.125	.031	.1139	.1094	.375	.094	.375	1.500
-2RL	-2LL																	2.375
-3RS	-3LS	3/32	1600	10-32	.219	.0077	.133	.416	.156		.188		.1638	.1568	.500	.172	.500	1.625
-3RL	-3LL																	2.500
-5RS	-5LS	5/32	3200	1/4-28	.281	.0103	.189	.512	.219	.047	.219		.2224	.2152	.625	.203	.625	1.750
-5RL	-5LL																	2.625
-6RS	-6LS	3/16	4600	5/16-24	.313	.0064	.243	.527	.250		.281	.047	.2830	.2754	.688	.250	.750	1.875
-6RL	-6LL																	2.750
-8RL	-8LL	1/4	8000	3/8-24	.375	.0057	.306	.678	.281	.063	.328		.3454	.3378	.875	.375	.875	2.875
-9RL	-9LL	9/32	12500	7/16-20	.469	.0056	.362	.831	.359	.078	.375		.4052	.3972	1.063	.453	1.000	3.375
-10RL	-10LL	5/16	17500	1/2-20	.563	.0058	.425	.900	.406		.469	.063	.4678	.4597	1.188	.500		3.625

(a) DASH NUMBERS -4 AND -7 ADD. THESE PART INACTIVE FOR NEW DESIGN.

MATERIAL STEEL, CARBON OR ALLOY IN ACCORDANCE WITH PROCUREMENT SPECIFICATION
PROTECTIVE TREATMENT CADMIUM PLATE, QQ-P-416, TYPE II, CLASS 3.
THREAD DATA THREADS IN ACCORDANCE WITH MIL-S-7742.
REMOVE ALL BURRS AND SHARP EDGES.
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010

FIRST LETTER FOLLOWING DASH NUMBER INDICATES DIRECTION OF THREAD (LEFT OR RIGHT HAND); SECOND LETTER FOLLOWING DASH NUMBER INDICATES LENGTH (SHORT OR LONG).
EXAMPLE OF PART NUMBER MS21255-2LS = EYE, TURNBUCKLE, NO. 6-40, LEFT HAND THREAD, SHORT.

MS21255 ITEMS CAN REPLACE AN170 ITEMS OF LIKE THREAD SIZE AND MATERIAL (SEE SHEET 2)

MS21255 ITEMS ARE INTERCHANGEABLE WITH THE NAS647 ITEMS OF LIKE THREAD SIZE AND MATERIAL

NOTE USE -5 PARTS WITH 1/8 INCH DIAMETER WIRE ROPE, MINIMUM BREAKING STRENGTH 2200 POUNDS.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

FOR CHANGES SEE SHEETS 1 AND 2

APPROVED 1 NOV 61 REVISED (K) 3 NOV 82

User activities
Review activities DSC-IS

THIS MILITARY STANDARD IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

P.A. USAF - 82 (K)
Other Cust
NAVY - AS
ARMY - AV
Air Force - 99

PROCUREMENT SPECIFICATION
MIL-T-8878

TITLE
Connector, Rod End, Turnbuckle, Clip Locking

SUPERSEDES
AN170, NAS647 (SEE NOTES)

MILITARY STANDARD
MS21255

SHEET 1 OF 2

DD FORM 672-1 (Coordinated) Previous editions of this form are obsolete

Source: https://assist.dla.mil - Downloaded: 2026-03-23T14:29Z
Check the source to verify that this is the current version before use.

FED SUP CLASS 5340

(K)

INTERCHANGEABILITY TABLE

THE PARTS COVERED BY DASH NUMBERS SHOWN ON ANI70 ARE CANCELLED AFTER 25 NOVEMBER 1963. USE THE DASH NUMBERS GIVEN IN THE PRECEEDING SHEET. THE CANCELLED PARTS CANNOT REPLACE THE NEW PARTS AND SHOULD BE USED UNTIL EXISTING STOCK IS DEPLETED. USE ONLY THE MS21255 PARTS FOR DESIGN AND REPLACEMENT. REPLACEMENT SHALL BE IN ACCORDANCE WITH THIS TABLE.

PART NUMBERS	
CANCELLED	NEW
ANI70	MS21255
DASH NUMBER	DASH NUMBER
5	NO REPLACEMENT
8	2
16	3
22	4 (a)
32	5
46	6
61	7 (a)
80	8
125	9
175	10

(a) DASH NUMBER 5 AND 8 CHANGE TO 4 AND 7.

DASH 4 AND 7 ARE INACTIVE FOR NEW DESIGN, AND ARE TO BE USED ONLY FOR REPLACEMENT OF THE OLD CANCELLED ANI70 SUPERSEDED PARTS.

APPROVED 25 NOV 63 REVISED (K) FOR CHANGES SEE SHEETS 1 AND 2 3 NOV 82

Review activities: DSC-IS

THIS MILITARY STANDARD IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

P.A. USAF- 82 (K) Other Cust NAVY-AS ARMY-AV Air Force-99	TITLE Connector, Rod End, Turnbuckle, Clip Locking	MILITARY STANDARD MS21255
PROCUREMENT SPECIFICATION MIL-T-8878	SUPERSEDES ANI70, NAS647	SHEET 2 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:29Z
Check the source to verify that this is the current version before use.

*U.S. GOVERNMENT PRINTING OFFICE 1982 — 605-013/5691