
USER ACTIVITIES: ARMY - MD
AIR FORCE - 03
DLA - DP

REVIEWER ACTIVITIES: DLA - DM

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

FED. SUP CLASS
6640

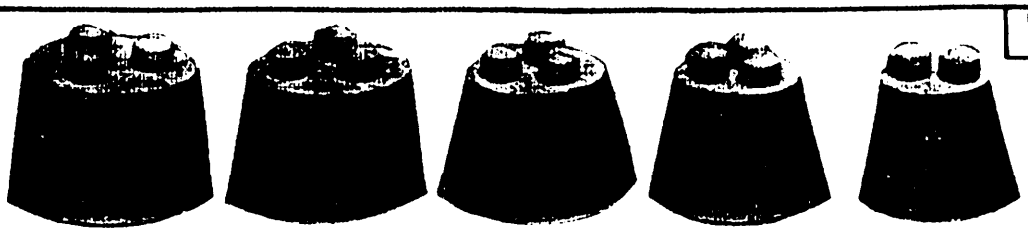

PART NUMBER	NOMINAL DIMENSIONAL DATA, mm TOP DIAMETER	BOTTOM DIAMETER	LENGTH	HOLE DIAMETER	MAX HOLES	SIZE NO.
MS36444-1	24	18	25	5	2	3
MS36444-2	26	20	25	5	2	4
MS36444-3	27	23	25	5	3	5
MS36444-4	32	26	25	5	3	6
MS36444-5	37	30	25	5	3	7
MS36444-6	41	33	25	5	3	8
MS36444-7	45	37	25	5	3	9
MS36444-8	50	42	25	5	3	10

The stoppers covered by the following part numbers in MS36367, and MS36369 are canceled after 17 Aug 1970. Use only the superseding stoppers for design and engineering. Replacement shall be in accordance with this table.

CROSS REFERENCE OF PART NUMBERS

CANCELED	SUPERSEDED BY
MS36367-4	MS36444-2
MS36367-5	MS36444-3
MS36367-6	MS36444-3
MS36367-7	MS36444-4
MS36367-8	MS36444-4
MS36367-9	MS36444-5
MS36367-10	MS36444-6
MS36367-11	MS36444-7
MS36369-5	MS36444-1
MS36369-6	MS36444-2
MS36369-7	MS36444-3
MS36369-8	MS36444-4
MS36369-9	MS36444-6
MS36369-10	MS36444-8

Ⓐ MATERIAL: Laboratory grade, white, resilient natural rubber.

Ⓐ DESIGN: Construction shall be in accordance with paragraph 3.2 of Military Specification MIL-S-36662.

MS36444-1 and MS36444-2 shall be provided with two perforations with twist-off seals, for use as a solid stopper, or upon removal of the seals, as a one- or two-hole stopper.

MS36444-3 through MS36444-8 shall be provided with three perforations with twist-off seals, for use as a solid stopper, or upon removal of the seals, as a one-, two-, or three-hole stopper.

Ⓐ NOTES:

1. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements as specified herein.
2. In the event of a conflict between the text of this standard and the reference cited herein, the text of this standard shall take precedence.
3. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.
4. FSCMs: 59728, 67664

APPROVED 17 AUG 1970 REVISED Ⓐ 26 JAN 1988

P.A	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust EA MS 99		STOPPER, BOTTLE combination solid or perforated	MS 36444
PROCUREMENT SPECIFICATION MIL-S-36662	SUPERSEDES:		SHEET 1 OF 1

DD FORM 672-1 COORDINATED

PROJECT NUMBER 6640-1474-2
REVISION

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:40Z
Check the source to verify that this is the current version before use.