
FED. SUP CLASS
5935

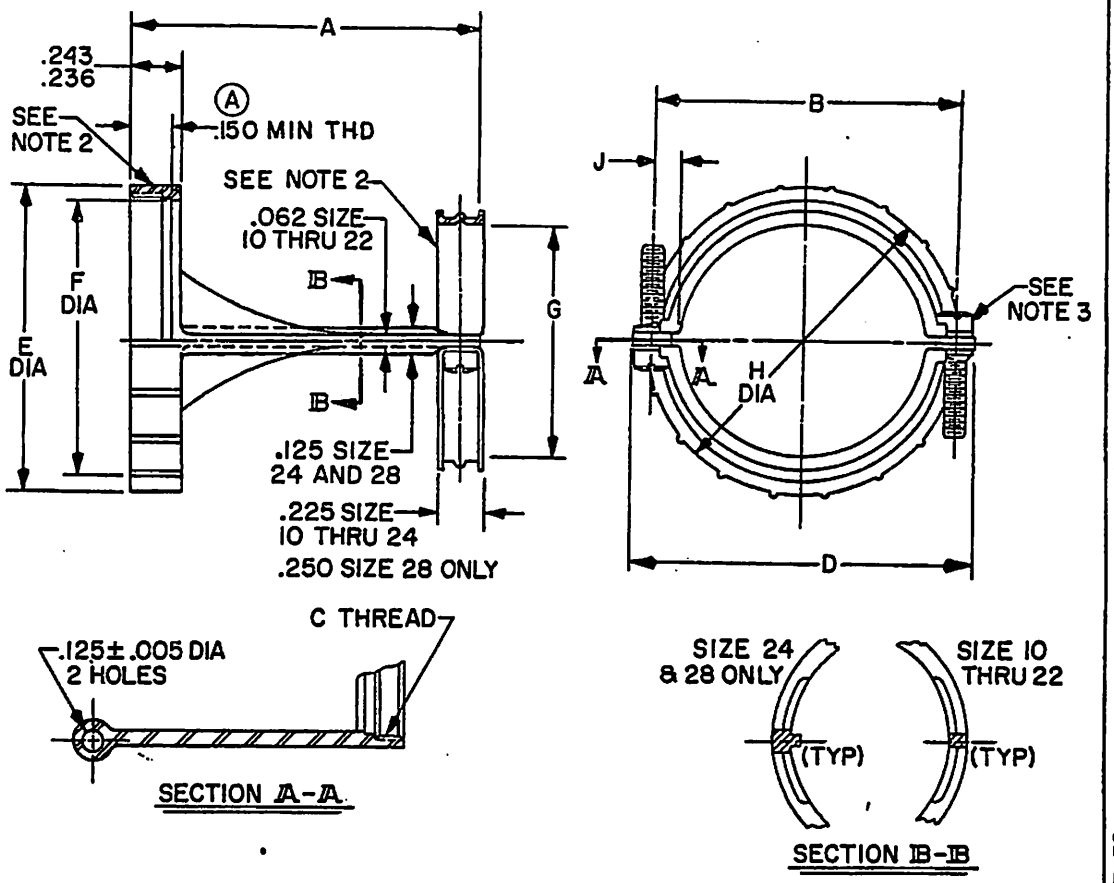

Military part number	Shell size	A ±.015	B ±.010	C nom. -36NS-2B	D ±.015	E ±.010	F ±.010	G ±.015	H ±.015	J ±.010	Weight (lbs) ±5%
MS27658-12	12	1.070	.677	.7334	.863	.788	.643	.435	.768	.094	.015
MS27658-14	14	1.170	.748	.8032	.934	.862	.717	.504	.842	.094	.017
MS27658-16	16	1.270	.923	.9302	1.109	.989	.844	.686	.969	.115	.018
MS27658-18	18	1.370	1.039	1.0362	1.225	1.095	.950	.794	1.075	.115	.019
MS27658-22	22	1.570	1.298	1.2862	1.484	1.345	1.200	1.038	1.325	.126	.025
MS27658-24	24	1.670	1.427	1.4111	1.613	1.595	1.329	1.162	1.575	.128	.044
MS27658-28	28	1.870	1.658	1.6611	1.844	1.845	1.579	1.412	1.825	.126	.072

Ⓐ

NOTES:
1. All dimensions are in inches and are after plating.
2. Material: Cable clamp - passivated stainless steel.
   Clamp sector - passivated 300 series stainless steel.
3. Screw: No. 4-40 fillister head machine, stainless steel.
4. Referenced documents shall be of the issue in effect on date of invitation for bid.
5. For design feature purposes this standard takes precedence over procurement documents referenced herein.

APPROVED 15 Nov 71 REVISED Ⓐ 12 MAR 73

P.A. AF-17 Other Cust	International Interest	TITLE LONG SUPPORT, CABLE, ELECTRICAL CONNECTOR (FOR CLASS E AND K CONNECTORS)	MILITARY STANDARD MS27658(USAF)
Procurement Specification MIL-C-26500		SUPERSEDES:	SHEET 1

DD FORM 1 SEP 63 672 (LIMITED COORDINATION)

This standard has been approved by Department of the AF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 202610-23T16:47Z
Check the source to verify that this is the current version before use.