
USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FED. SUP CLASS
2320

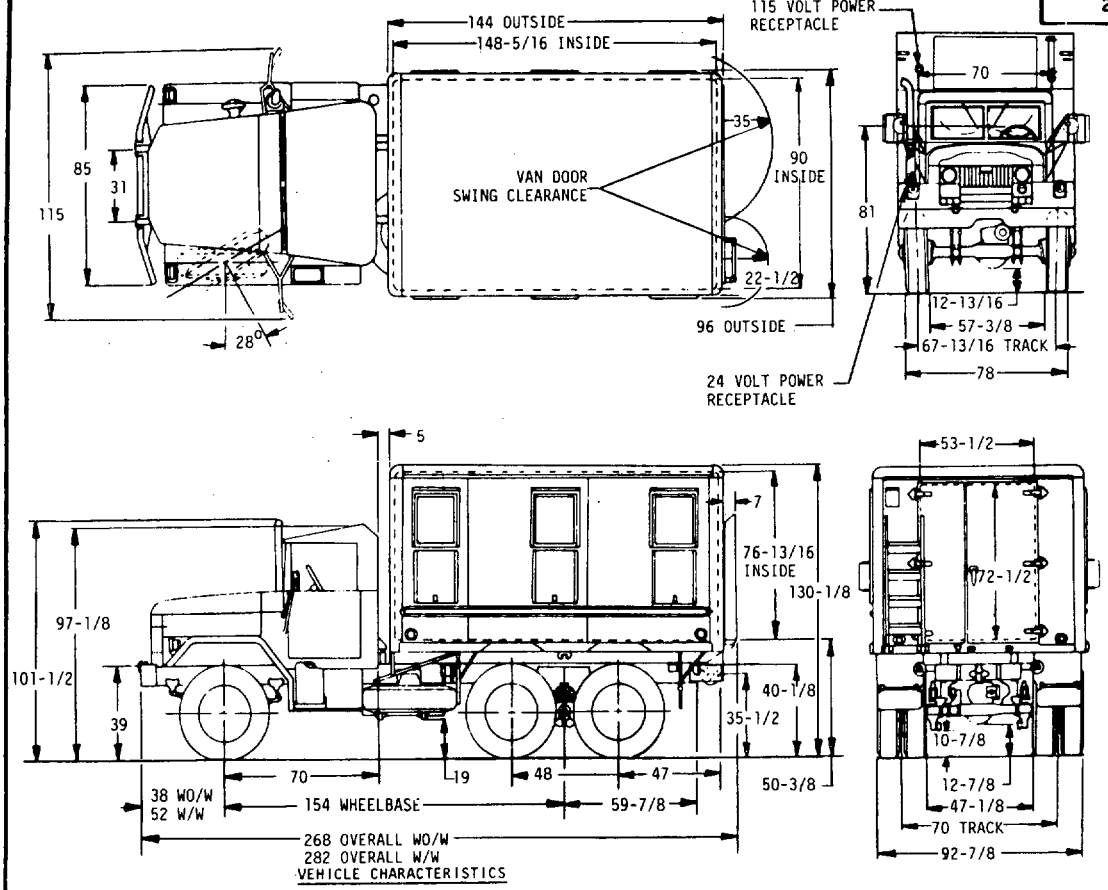

VEHICLE CHARACTERISTICS

	W/O	W/W
CURB WEIGHT FULLY EQUIPPED		
LESS PAYLOAD & CREW:		
FRONT	6,220 LBS	6,875 LBS
REAR BOGIE	10,540 LBS	10,405 LBS
TOTAL	16,760 LBS	17,280 LBS
(ADD 400 LBS FOR 2 MAN CREW W/EQUIPMENT)		
PAYLOAD:	5,000 LBS	5,000 LBS
GROSS WEIGHT, FULLY EQUIPPED WITH PAYLOAD, LESS CREW:		
FRONT	6,380 LBS	7,035 LBS
REAR BOGIE	15,380 LBS	15,245 LBS
TOTAL	21,760 LBS	22,280 LBS
TOWED LOAD ALLOWANCE:	6,000 LBS	6,000 LBS
MAXIMUM VERTICAL LOAD ON PINTLE:	600 LBS	600 LBS
SHIPPING DIMENSIONS:		
CUBIC FEET	1,937	2,039
SQUARE FEET	179	188
CENTER OF GRAVITY: (AT CURB WEIGHT)		
ABOVE GROUND	51-5/16	51
REAR OF CENTERLINE OF FRONT AXLE	96-13/16	92-11/16
CENTER OF GRAVITY: (W/PAYLOAD)		
REAR OF CENTERLINE OF FRONT AXLE	108-13/16	105-3/8

PERFORMANCE:
AT GROSS WEIGHT W/O TOWED LOAD
MAXIMUM SPEED 56 MPH
MAXIMUM GRADE 60%
CRUISING RANGE (W/DIESEL FUEL) 300 MILES
AT GROSS WEIGHT W/TOWED LOAD
MAXIMUM SPEED 45 MPH
MAXIMUM GRADE 45%
CRUISING RANGE (W/DIESEL FUEL) 275 MILES

BODY: 10897103
FURNISHED WITH WORK BENCHES, STORAGE CABINETS, STOOLS, 115-VOLT POWER EXTERNALLY SUPPLIED, 24/115-VOLT LIGHTING SYSTEM, AND THE FOLLOWING EQUIPMENT: ELECTRIC POWER CABLE ASSEMBLIES, GROUND ROD W/CABLE, 25 FT EXTENSION CORDS W/LIGHT, AIR HOSE, AIR BLOW GUN, GRINDER W/ABRASIVE WIRE AND BUFFING WHEELS, BENCH VISE, FIRST-AID KIT, SAFETY CAN, AND DRILL SETS.

ON-VEHICLE EQUIPMENT: (OVE)
BASIC ISSUE ITEMS 12300877
ADDITIONAL AUTHORIZATION LIST ITEMS 12300998

ACCESSORY/SUPPLEMENTAL KITS: 12300812

BRIDGE CLASSIFICATION:	W/O	W/W
EMPTY	7	7
WITH PAYLOAD	10	10

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

MS PART NO.	ENGINEERING DWG NO.	
MS52184-1	8736588	WITH WINCH
MS52184-2	8736600	LESS WINCH

APPROVED 3 MAY 85 REVISED

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TRUCK VAN SHOP 2-1/2 TON 6X6 M185A3	MILITARY STANDARD MS52184(AT)
PROCUREMENT SPECIFICATION MIL-T-46780	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22Z
Check the source to verify that this is the current version before use.