A-A-542
October 1, 1979

COMMERCIAL ITEM DESCRIPTION

HEAD, RIVET PULLING


The General Services Administration has authorized the use of this commercial item description.

This commercial item description covers rivet pulling heads assigned National Stock Number (NSN's) as listed below.

Salient characteristics:

Functionally and mechanically compatible for use with all Cherry Rivet Division Hydro-Shift Riveters for pulling 2000 series Cherrylock blind rivets in dimensions listed below, conforming to NAS 1400 and NAS 1740.

Marked in a permanent and legible manner with manufacturer's name or identifying symbol and part number.

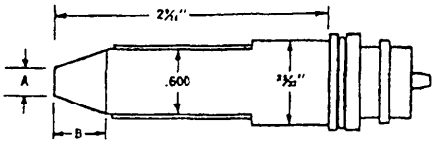

NSN	Pulling head Tip Dia. (A) (maximum)	Tapered nose dimension Taper Lg (B) (maximum)	Blind rivet Size	Blind rivet Shape head
5130-00-083-6625	0.208 inch	0.341 inch	1/8 inch	Countersunk
5130-00-083-6626	0.250 inch	0.359 inch	1/8 inch	Universal
5130-00-083-6627	0.269 inch	0.352 inch	5/32 inch	Countersunk
5130-00-083-6628	0.313 inch	0.377 inch	5/32 inch	Universal
5130-00-083-6634	0.458 inch	0.398 inch	1/4 inch	Countersunk
5130-00-083-6635	0.500 inch	0.452 inch	1/4 inch	Universal

Workmanship. The pulling head shall be free from rust, burrs, and/or other imperfections which may affect appearance, usability, or durability.

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices and is the same product as the product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Recovered materials. The manufacturer shall utilize recovered materials to the maximum extent practicable.

Preservation, packaging, packing, and marking. The pulling heads shall be preserved, packaged, and packed in accordance with normal commercial practice to assure acceptance by common carrier and provide product protection against loss and damage during multiple shipment, handling, and storage. The shipping container shall be in compliance with National Motor Freight Classification and Uniform Freight Classification. Shipping containers shall be marked as specified in the contract or order.

FSC 5130

GSA DC-01000506

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:08Z
Check the source to verify that this is the current version before use.