A-A-547D
January 8, 1988
SUPERSEDING
A-A-547C
April 1, 1983

COMMERCIAL ITEM DESCRIPTION

CLAMP, HAND SCREW

The General Services Administration has authorized the use of this commercial item description in lieu of Type IV, Federal Specification GGG-C-406.

This description establishes requirements for hand screws used for holding work in a fixed position.

Salient characteristics:


Jaw. Shall be of hard maple or suitable hardwood/properly seasoned in a manner to preclude warping and shall be smoothly finished. Two cylindrical steel bearings shall be assembled in holes provided in each jaw. Each bearing shall have a transverse hole threaded to receive the spindle. The holes in the jaw through which the spindle screws pass shall be slotted longitudinally. Each jaw shall be dipped in oil or coated with a material which will prevent the absorption of moisture. The wood shall be seasoned to show not more than 12 percent moisture content.

Handle. Hardwood/substantial metal ferrules. Size and shaped for comfortable and adequate grip for the hand. Handle shall be smoothly finished and provided with a protective coating which shall prevent the absorption of moisture.

Screws (spindles). Steel, and shall have right-hand threads at one end and left-hand threads at the other. The threads shall conform to FED-STD-H28 and shall provide a class 2 or 3 fit with the threaded holes in the bearings. The right-hand rotation of the screws shall cause the faces of the jaws to come into contact. One end of each screw shall be provided with a handle securely attached to the screw.

Finish. All surfaces of the hand screws shall have a smooth finish with all edges rounded or beveled and shall be thoroughly cleaned and free of all foreign matter, fins, scale, flux, or any other imperfection.

Illustration. The hand screws shall be similar to the illustration shown below.

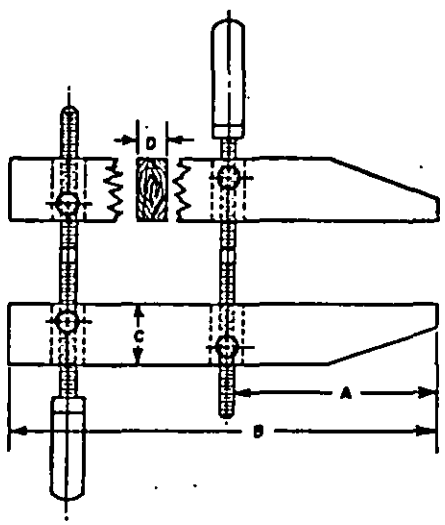

DISTRIBUTION STATEMENT A. Approved for Public Release; Distribution is Unlimited.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.

National Stock Number	Nominal size of clamp (opening between jaw) minimum	minimum overall jaw length	Reach (end of jaw to middle of screw + 1/4)
	Inches	Inches	Inches
5120-00-222-1531	2	4	2
5120-00-222-1532	3	6	3
5120-00-222-1533	4-1/2	8	4
5120-00-222-1534	6	10	5
5120-00-222-1535	8-1/2	12	6
5120-00-222-1536	10	14	7
5120-00-222-1539	12	16	8

Identification marking. Each hand screw shall be etched or stamped in a permanent and legible manner with the manufacturer's name or identifying symbol, part number and country of origin.

Workmanship. The hand screws shall be free of any defects that can adversely affect their operation, serviceability, or life expectancy.

QUALITY ASSURANCE PROVISIONS

Examination of the end item for defects in dimensions, finish, markings, and workmanship. Sampling shall be in accordance with MIL-STD-105 at inspection level II with an acceptable quality level (AQL) of 2.5.

Sampling for tests. Sampling for tests shall be in accordance with MIL-STD-105 at inspection level S-3 with an Acceptable Quality Level (AQL) of 4.0.

Tests. The manufacturer shall furnish certification that the jaws of the hand screws are made of material as specified. The jaws shall be subjected to a moisture content test utilizing an electrical moisture meter to determine conformance. The moisture content shall be determined in accordance with instructions furnished by the manufacturer of the electrical moisture meter. The electrical moisture meter shall not be used on jaws that are surface-wet or that have been color-strained. In determining the moisture content of the jaws, the reading on the electrical moisture meter shall be taken when the meter electrodes are driven to the center of the jaw or handle being tested.

Regulatory requirement. In accordance with the section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Notes:

The issue of referenced documents in effect on the date of invitation for bid or request for proposals shall be used to determine compliance with the stated requirements. Sources for obtaining referenced documents may be determined by contacting the Contracting Officer.

Military Standards are available from the Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120.

MILITARY INTERESTS:

Military Coordinating Activity
Army - GL

Custodians:
Army - GL
Air Force - 99

Review Activities:
Air Force - 84

PREPARING ACTIVITY

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.