

FED SUP CLASS
5995

USER ACTIVITIES:

REVIEWER ACTIVITIES:

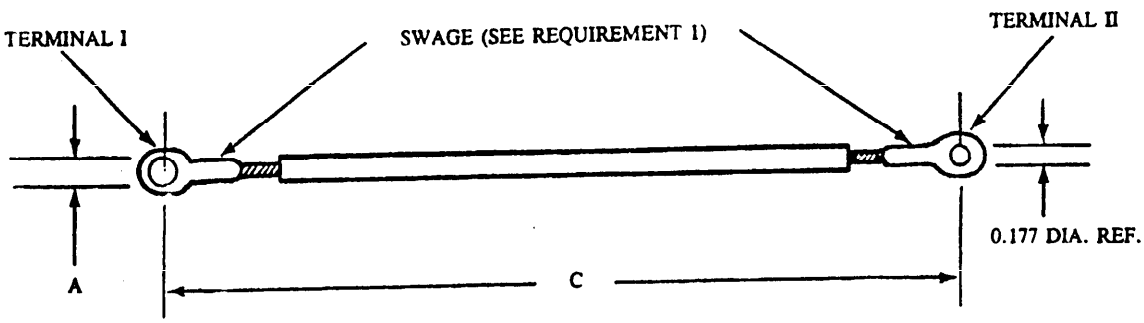

CABLE IS 7 STRANDED
CORROSION RESISTANT STEEL,
NYLON JACKETED

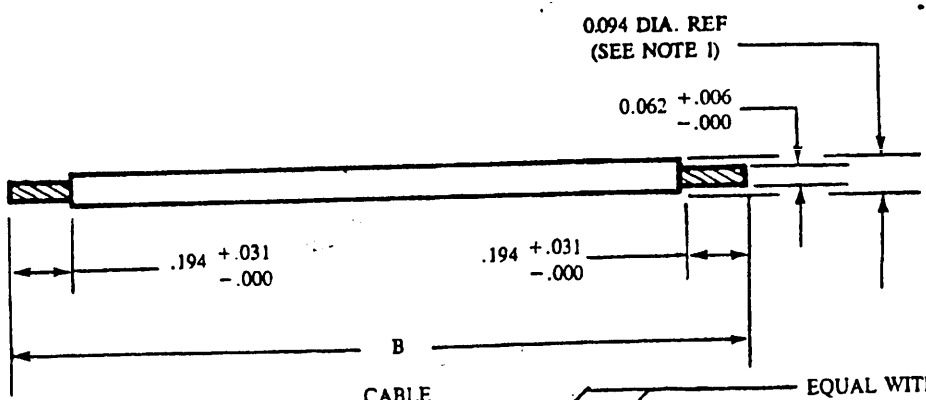

TERMINAL, SWAGE TYPE

ENTIRE STANDARD REVISED

P.A. OS Other cust	International interest	Title WIRE ROPE ASSEMBLY, SINGLE LEG	MILITARY STANDARD MS17351(OS)
PROCUREMENT SPECIFICATION MIL-C-22992	SUPERSEDES MS17352 and MS17353		PAGE 1 OF 2

5995-N126

APPROVED 20 OCT 1961
REVISED (A) 1 FEB 1983 (B) 31 OCT 1988

This military standard is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

Dash no.	A Terminal I ID (+0.004) (−0.002)	B Cable Length (± 0.062)	C Assembly Length (±0.125)
−1	0.141	4.392	5.0
−2	0.141	5.392	6.0
−3	0.177	4.392	5.0
−4	0.177	5.392	6.0
−5	0.209	5.235	6.0
−6	0.141	10.392	11.0
−7	0.209	6.235	7.0
−8	0.141	9.392	10.0

REQUIREMENT:

1. Swaged joints shall withstand a minimum pull of 100 pounds.

NOTES:

1. For design features purposes, this standard takes precedence over procurement documents referenced herein.

2. Referenced documents shall be of the issue in effect on date of invitations for bid.

3. All dimensions are in inches.

4. Part Number: The MS part number is the MS number plus the dash number. Example:
MS17351-1
T (dash number)

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

APPROVED 20 OCT 1961 REVISED (B) For changes see pages 1 and 2

P.A. OS Other cust	International Interest	Title: WIRE ROPE ASSEMBLY, SINGLE LEG	MILITARY STANDARD MS17351(OS)
PROCUREMENT SPECIFICATION MIL-C-22992	SUPERSEDES MS17352 and MS17353		PAGE 2 OF 2

5995-N126

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.