
THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-7905

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

FORM APPROVED
OMB NO. 0704-0188

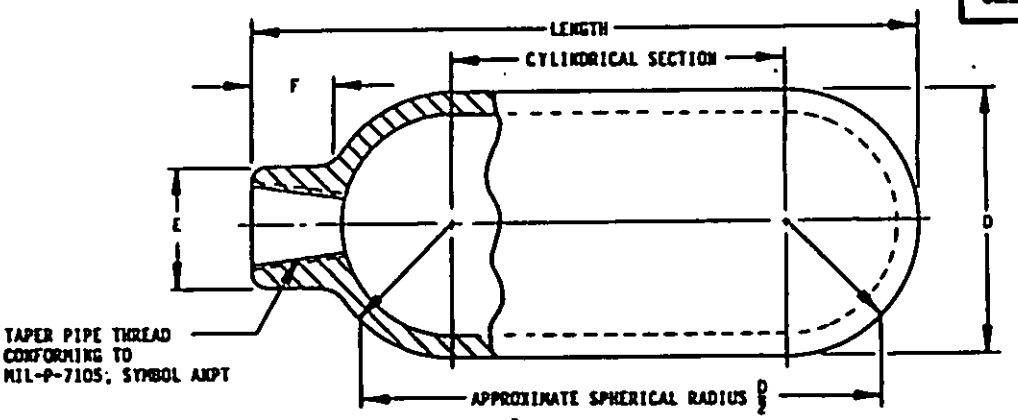

TYPE A - INTERNAL THREAD

NOMINAL CAPACITY CODE	INTERNAL VOLUME CU. IN. MIN	WEIGHT POUNDS MAX (a)	DIMENSIONS (a) (b) (c)								
			LENGTH		D DIA		AXPT	E DIA		F	
0014	14.6	1.79	5.953	±.031	.2.376	±.020	1/2	1.109	+.031	.594	±.031
0022	22	1.65	10.875	±.125	1.891	±.031	3/8	.875	±.016	.375	MIN
022A			7.875		2.375	±.062					±.031
022B			10.250		1.891	±.031					
0025	25	1.87	7.875		2.375	±.062					
0030	30	2.57	10.50								
(R) 0050	50	2.00	12.625		2.50						
0053	53	3.85	11.375		2.938						
0057	57	4.25	9.250		3.703		1/2	1.156		.562	
0096	96	5.90	13.375								
0147	147	8.18	18.875								
0205	205	10.24	14.000		5.344	±.078	1	1.719		.750	
205A		10.17	24.250	±.250	3.703	±.125	1/2	1.156		.562	
0295	295	14.25	18.500	±.125	5.344	±.078	1	1.719		.750	MIN
0386	386	21.00	15.375		6.922						
0500	500	26.00	19.125		6.750						
0514	514	26.50	19.250		6.922						
0646	646	31.90	23.500		6.938						
0853	853	35.02	26.750	±.250	7.344	±.125					
0978	978	41.80	30.000								
1220	1220	55.96	25.750		9.219						
1430	1430	67.57	29.875								
2040	2040	91.85	40.500								

(a) FOR WRAPPED CYLINDERS, THE WEIGHT AND DIAMETER SPECIFIED IS WITHOUT WIRE WRAPPING.
(b) INCREASE IN CYLINDER DIAMETER, DUE TO WIRE WRAPPING SHALL NOT EXCEED 0.225 INCH.
(c) DIMENSIONS IN INCHES.

CLASS DEFINITION: CLASS (1) 1800 POUNDS PER SQUARE INCH (RATED PRESSURE)
CLASS (2) 2100 POUNDS PER SQUARE INCH (RATED PRESSURE)

(R) DENOTES CHANGE

PREPARING ACTIVITY: NAVY — AS
CUSTODIANS: ARMY — AT NAVY —
AIR FORCE — 99 DLA —
REVIEW: NAVY - SH USAF - 71
USER:
PROJECT NUMBER: 1660-0621

MILITARY SPECIFICATION SHEET

TITLE

CYLINDERS; STEEL; COMPRESSED GAS; NON-SHATTERABLE; SEAMLESS; 1800 PSI, AND 2100 PSI

SPECIFICATION SHEET NUMBER MS26545 29 NOV 91 REV R

SUPERSEDING MS26545 P 31 AUG 90


AMSC — N/A FSC 1660

Source: https://assist.dla.mil -- Downloaded: 2026-10-28T15:12Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT
A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

NOTES:

1. EXAMPLE OF PART NUMBER: MS26545A1X0025W

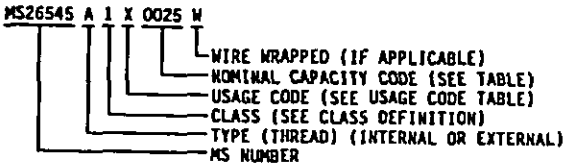


USAGE CODE		
CODE	GAS USAGE	EXTERNAL FINISH COLOR PER FED-STD-595
X	OXYGEN	14187 (GREEN)
A	AIR	17038 (BLACK)
C	CO_2	16473 (GRAY)
D	CO_2 OR HALON (FIRE EXT)	11105 (RED)
U	NONE	PRIMARY COAT ONLY


2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN; THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THIS ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

Source: https://assist.dla.mil -- Downloaded: 202640-23T15:12Z
Check the source to verify that this is the current version before use.

FORM APPROVED
OMB NO. 0704-0188

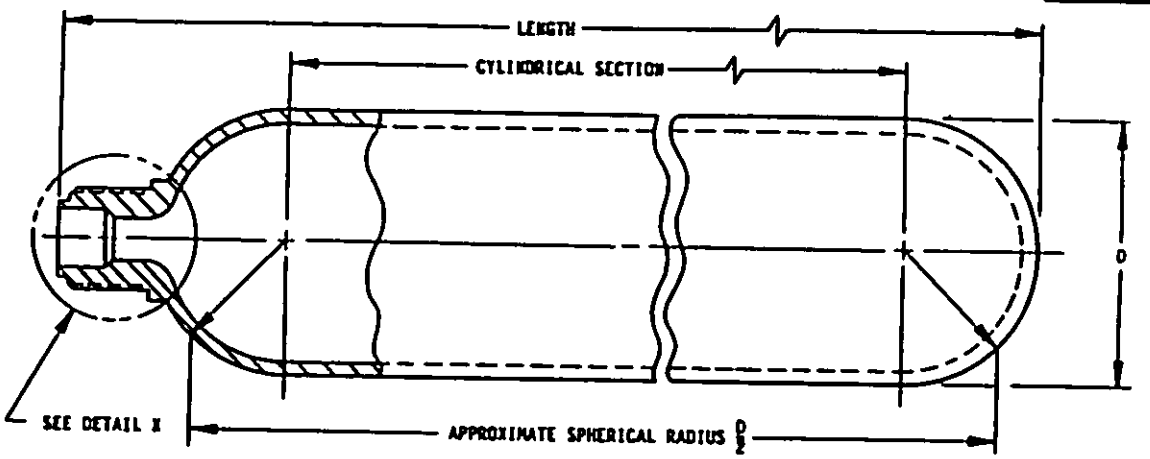

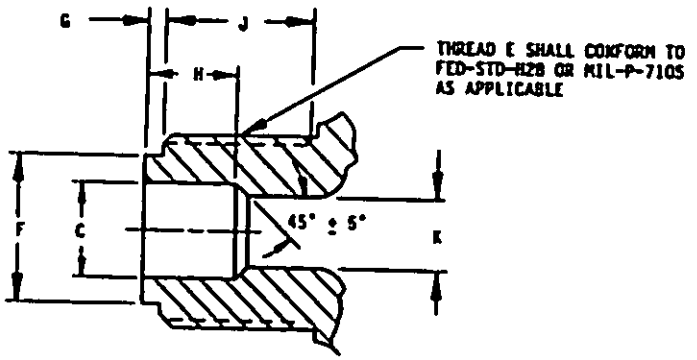

DETAIL X

TYPE B - EXTERNAL THREAD

NOMINAL CAPACITY CODE	INTERNAL VOLUME CU. IN. MIN	WEIGHT POUNDS MAX (a)	DIMENSIONS (a) (b) (c) LENGTH		C ±.005	D DIA		E	F ±.005	G ±.016	H ±.016	J MIN FULL THD	K HOLE SIZE +.010 -.000
0020	20.4	1.25	9.250	±.125	.438	2.000	±.062	3/8-18 NPSM-2A	.573	.062	.188	1/2	.375
0021	21	0.75											
0022	22	1.65	8.062			2.375		5/8-18 UNF-3A	.550				
0025	25.7	2.10	11.500			2.000		3/8-18 NPSM-2A	.573				
025A	25	1.70	8.562			2.375		5/8-18 UNF-3A	.550				
0030	30.6	2.57	10.500			2.406		3/8-18 NPSM-2A	.573				
0057	57	4.25	9.562		.660	3.703		1-1/8-12 UNF-3A	.940	.109	.562	3/4	.516
0096	96	5.90	13.688										
0147	147	8.18	19.188										
0205	205	10.24	14.188			5.344	±.078						
205A		10.17	24.938	±.250		3.703	±.125						
0386	386	21.00	15.375	±.125		6.922	±.078						
0415	415	17.90	24.688	±.250		5.344							

PREPARING ACTIVITY: NAVY — AS
CUSTODIANS: ARMY — AT NAVY —
AIR FORCE — 99 DLA —
REVIEW: NAVY - SH USAF - 71
USER:
PROJECT NUMBER: 1660-0621

MILITARY SPECIFICATION SHEET

TITLE

CYLINDERS; STEEL; COMPRESSED GAS; NON-SHATTERABLE; SEAMLESS; 1800 PSI, AND 2100 PSI

SPECIFICATION SHEET NUMBER
MS26545 29 NOV 91
REV R


SUPERSEDING
MS26545 P 31 AUG 90


AMSC — N/A FSC 1660

Source: https://assist.dla.mil -- Downloaded: 20260123115:122
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT
A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

FORM APPROVED
OMB NO. 0704-0188

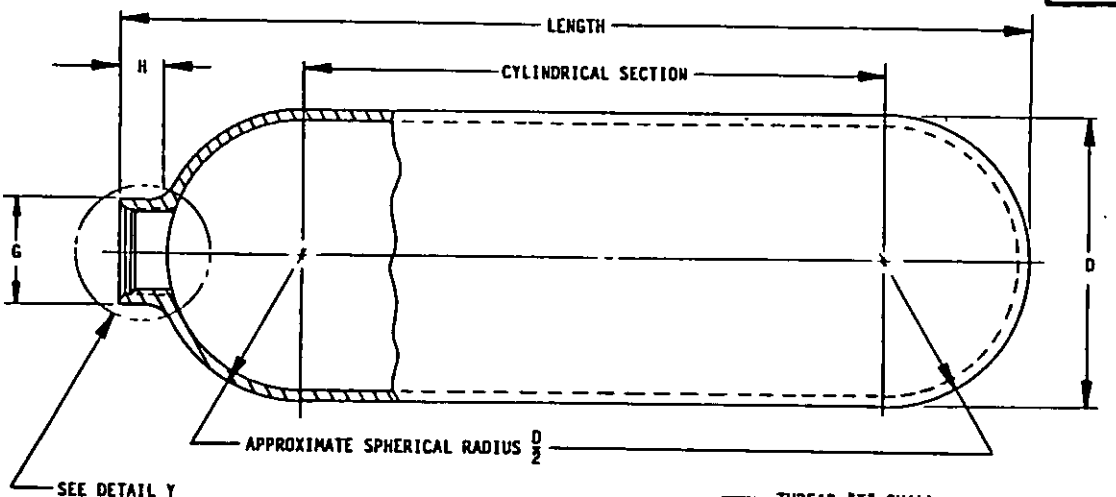

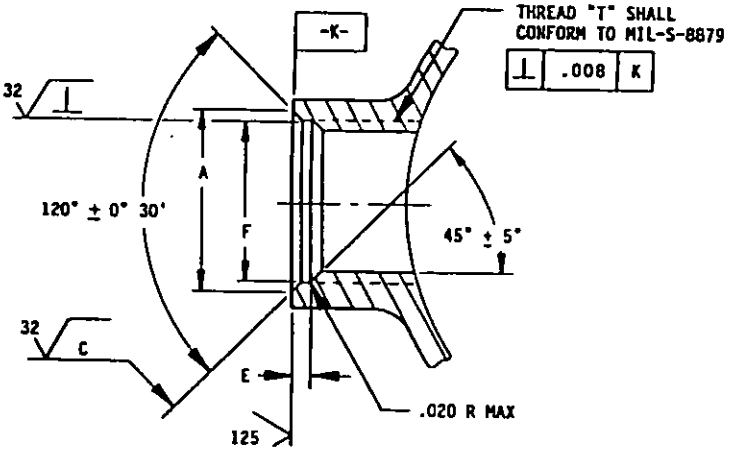

DETAIL Y

TYPE C - INTERNAL THREAD

NOMINAL CAPACITY CODE	INTERNAL VOLUME CU. IN. MIN	WEIGHT POUNDS MAX (a)	LENGTH		A DIA +.015 -.000	D DIA		E +.015 -.000	F DIA +.005 -.000	G DIA ±.030	H ±.030	T THREAD
0144	144	9	11.000	±.500	1.800	5.340	±.078	.125	1.648	2.000	.750	1.6250-12 UNJ-3B
0204	204	12	13.875	+.125 -.250		5.344						
0288	288	14	17.875	±.125								

PREPARING ACTIVITY: NAVY — AS
CUSTODIANS: ARMY — AY NAVY —
AIR FORCE — 99 DLA —
REVIEW: NAVY - SH USAF - 71
USER:
PROJECT NUMBER: 1660-0621

MILITARY SPECIFICATION SHEET

TITLE

CYLINDERS; STEEL; COMPRESSED GAS; NON-SHATTERABLE; SEAMLESS; 1800 PSI, AND 2100 PSI

SPECIFICATION SHEET NUMBER
MS26545 29 NOV 91 REV R

SUPERSEDING
MS26545 P 31 AUG 90

AMSC — N/A FSC 1660

DISTRIBUTION STATEMENT
A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:12Z
Check the source to verify that this is the current version before use.