


FED SUP CLASS
5935

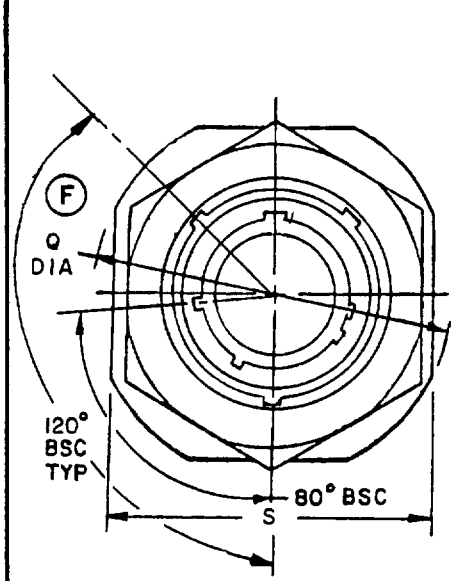

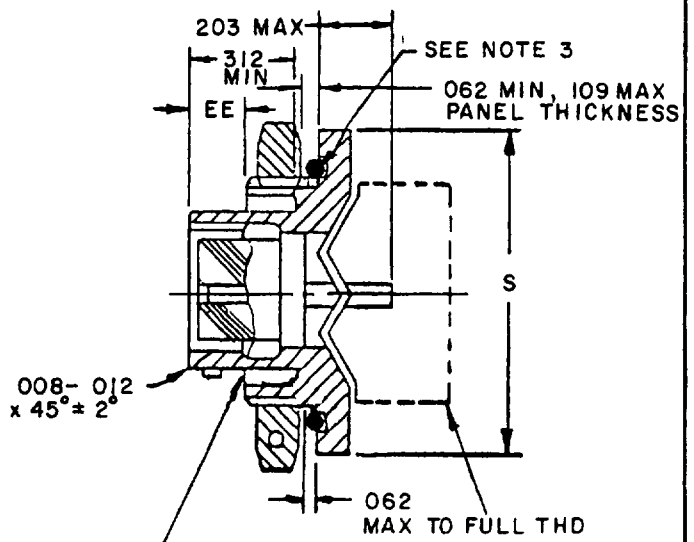

STYLE S

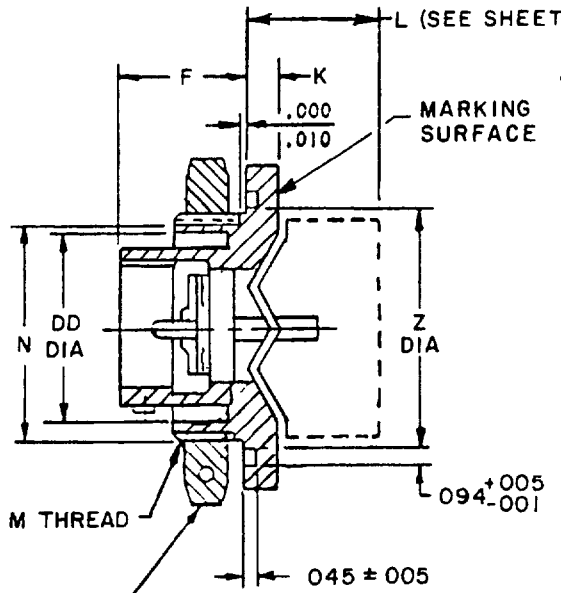

STYLE P

FOR DETAILS OF CONNECTOR FRONT AND REAR END CONFIGURATION SEE PROCUREMENT SPECIFICATION

CLASS E AND T & P 1/ 2/

EXAMPLE OF PART NUMBER

MS27474 T 12 C 98 P A

MS NO	CLASS	SHELL SIZE	FINISH (COLOR)	INSERT ARR NUMBER	STYLE (P OR S)	POLARIZATION NO LETTER REQUIRED FOR NORMAL

(F) FOR CHANGES SEE SHEETS 1 & 2

APPROVED 8 SEP 66 REVISED (E) 13 AUG 74 (F) 2 JAN 1976

PA AF-85 Other Cust ARMY-EL NAVY-AS	International interest	TITLE CONNECTOR, RECEPTACLE, ELECTRICAL, JAM NUT MOUNTING, CRIMP TYPE, BAYONET COUPLING, SERIES II	MILITARY STANDARD MS27474
Procurement Specification MIL-C-38999		SUPERSEDES: MS27474 (USAF)	SHEET 1 OF 2

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-2005-15

Reviewer activities
Army - MI, MU
Navy - EC, MC, OS
Air Force - 11, 15, 17, 80
DSA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

1/ Class E inactive for new design

Ⓕ 2/ Class P inactive for new design for Air Force.

FED SUP CLASS 5935

Ⓕ

SHELL SIZE	F ± 005	K + 011 - 010	M THREAD (PLATED) CLASS 2A	N + 001 - 006 FLAT	Q ± 016 DIA	S ± 016	Z + 006 - 005 DIA	DD +010 -000 DIA	EE + 005 - 000	RECOMMENDED PACKING ("O" RING) 7
8	438	094	875-20 UNEF	817	1 375	1 250	965	678	140	MS9021-022
10			1.000-20 UNEF	941	1 500	1 375	1 090	780		-024
12			1 125-18 UNEF	1 065	1 625	1 500	1 215	963		-026
14			1 250-18 UNEF	1 190	1 750	1 625	1 340	1 088		-028
16			1 375-18 UNEF	1 320	1 938	1 781	1 477	1 222		-029
18			1 500-18 UNEF	1 440	2 016	1 890	1 602	1 333		-030
20	464		1 625-18 UNEF	1 565	2 141	2 016	1 727	1 458	166	-031
22			1 750-18 UNS	1 690	2 265	2 140	1 852	1 583		-032
24			1 875-16 UN	1 815	2 390	2 265	1 977	1 708		-034

Ⓕ

NUT MS27512 DASH NO	SHELL SIZE	LE MAX LENGTH	LT MAX LENGTH	LP MAX LENGTH
-8	8	516	344	.578
-10	10			
-12	12			
-14	14			
-16	16			
-18	18			
-20	20	484	312	.547
-22	22			
-24	24		375	.516

INCHES	MM
001	03
005	13
006	15
007	18
008	20
010	25
011	28
012	30
016	41
045	1 14
062	1 57
094	2 39
109	2 77
139	3 53
140	3 56
166	4 22
203	5 16
223	5 66
312	7 92
.344	8 74
375	9 53
438	11 13

INCHES	MM
464	11 79
484	12 29
516	13 11
547	13.89
.578	14.68
678	17 22
780	19 81
817	20 75
875	22 23
941	23 90
963	24 46
965	24 51
1 000	25 40
1 065	27 05
1.008	27 64
1 090	27.69
1 125	28 58
1 190	30 23
1 215	30 86
1 222	31 04
1 250	31 75
1 320	33 53
1 333	33 86
1 340	34 04
1 375	34 95
1 440	36 58

INCHES	MM
1 458	37 03
1 477	37 52
1 500	38 10
1 565	39 75
1 583	40 21
1 602	40 69
1 625	41 28
1 690	42 93
1 708	43 38
1 727	43 87
1 750	44 45
1 781	45.24
1 815	46 10
1 852	47 04
1 875	47 63
1 890	48 00
1 977	50 22
2 016	51.21
2 140	54 36
2 265	57 53
2 390	60 71

NOTES

1 Dimensions are in inches
2 Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm
3 Jam nut mounting receptacles shall be provided with an "O" ring
4 Sides of groove may have 5° max taper
Ⓕ 5. For main keyway and keyway positions, see MIL-C-38999.
6 Diameters M, Q and Z shall be concentric within .015 T I R
7 Recommended packing is for dimensions only, material is optional
8 For design feature purposes this standard takes precedence over documents referenced herein
9 Referenced documents shall be of the issue in effect on date of invitation for bid

APPROVED 8 SEP 66 REVISED Ⓔ 13 AUG 74 Ⓕ FOR CHANGES SEE SHEETS 1 & 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document

Reviewer activities Army - MI MU Navy - EC, MC, OS Air Force - 11, 15, 17, 80 DSA - ES

P.A AF-85	International Interest	TITLE CONNECTOR, RECEPTACLE, ELECTRICAL, JAM NUT MOUNTING, CRIMP TYPE, BAYONET COUPLING, SERIES II	MILITARY STANDARD
Other Cust ARMY-EL NAVY-AS			MS27474
Procurement Specification MIL-C-38999		SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.