INCH-POUND

MIL-C-44340A
30 September 1993
SUPERSEDING
MIL-C-44340(GL)
29 June 1988

MILITARY SPECIFICATION

CAN, TRAY PACK

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for a ribbed body and ribbed lid tinplated steel tray pack can.

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications, standards and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.1)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army Soldier Systems Command, Natick Research, Development, and Engineering Center, ATTN: SSCNC-WRE, Natick, MA 01760-5018 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8110

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-22T01:34Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

PPP-B-636 - Boxes, Shipping, Fiberboard

STANDARDS

FEDERAL

FED-STD-595 - Colors Used in Government Procurements

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

U.S. DEPARTMENT OF HEALTH AND HUMAN SERVICES (HHS), U.S. FOOD AND DRUG ADMINISTRATION (FDA)

Federal Food, Drug, and Cosmetic Act and Regulations Promulgated Thereunder (21 CFR Parts 1-199)

(Copies are available from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Can materials. All materials shall conform with 21 Code of Federal Regulations (CFR), Federal Food, Drug, and Cosmetic Act, as amended, and regulations promulgated thereunder. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.1.1 Tin plate steel. The can body shall be constructed from sheets and the lid from coils of matte finish of 25/75 (0.125/0.375 pounds per base box) differentially coated electrolytic tin plate. The steel shall be of sufficient temper and harness to protect food product during shipment and storage. The base plate weight of the can body and can lids shall be 90 pounds per base box.

3.1.2 Interior can coating. The entire inside area of the can body shall be coated with an enamel coating system that shall neither affect nor be affected by the packaged product. The enamel used shall conform with the provisions of the

Source: https://assist.dla.mil -- Downloaded: 202640-22T01:34Z
Check the source to verify that this is the current version before use.

CFR, Food and Drugs, Title 21, Chapter 1, Subpart C-Food Additives, Section 175.300, Resinous and Polymeric Coatings. Scratches or fractures shall not peel or blister when in contact with the product.

3.1.3 Exterior can coatings. The can shall be coated overall on the outside with a gray aluminum-pigmented enamel within the color range of 26408 to 26493 of FED-STD-595.

3.2 Can design and fabrication. The can shall be 1001 by 1206 by 200 size can in accordance with figures 1 and 2. The can shall have a capacity of approximately 105 fluid ounces. The design of the body and lid shall be ribbed style. The curl of the lids shall be compound-lined in preparation for the double seaming operation. The seaming compound shall comply with commercial standards. The compound shall be of adequate amount and adherence and placed properly so that it forms a tight seal but will not be squeezed internally into the food. The lid and body shall be capable of achieving a double seam thereby creating a hermetic seal. The can shall be fabricated using methods that reflect good standards of workmanship and quality in the finished product.

3.2.1 Ribbed style.

3.2.1.1 Body. The body design shall be reinforced on the bottom with six longitudinal beads or ribs 0.050 ± 0.010 inches deep (see figure 1). The beads shall be 9 inches by 3/4 inch in length and width and shall be equidistant in the center panel of the bottom. The apex of the beads shall be outward. The sides shall be reinforced with beads and corner flutes. The apex of these beads shall be inward.

3.2.1.2 Lid. The lid design shall be reinforced with eight longitudinal beads 0.018 ± 0.004 inches deep (see figure 1). The beads shall be 11 inches by 3/4 inch in length and width and shall be equidistant in the center panel of the lid. The center four beads on the lid design shall be interrupted to provide a 5 inch by 5 inch flat center panel for labeling. The apex of these beads shall be outward.

3.3 Can condition. The can bodies and lids shall be clean. There shall be no dirt or stains on the cans. If the cans are coated with oil, there shall be no excessive oil present.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use their own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Certificates of compliance. The contractor shall furnish certificates of compliance for the requirements in 3.1.1, 3.1.2, and 3.1.3.

4.2 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:34Z
Check the source to verify that this is the current version before use.

4.2.2 End item visual examination. The end items shall be examined for the defects listed in table I. The lot size shall be expressed in units of can bodies or can lids, and the sample unit shall be one can body or one can lid. The inspection level shall be S-4 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 1.0.

TABLE I. End item defects

Category	Defect
Major	
101	No style specified.
102	Scratch or fracture in interior coating.
103	Peel or blister of interior coating.
104	Entire inner surface not coated.
105	Reinforcing beads not as specified.
106	Label panel not as specified (lid only).
107	Presence of dents or scratches.
108	Dirty or stained.
109	Inadequate or excessive amount of seaming compound (lid only.)
110	Seaming compound not of adequate adherence (lid only).
111	Seaming compound not properly placed (lid only).
112	Exterior can coating not as specified.

4.2.4 Packaging examination. The cans and shipping containers shall be examined for defects specified in table II. The lot size shall be expressed in shipping containers, and the sample unit shall be one filled shipping container. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 2.5 for major defects and 4.0 for minor defects.

TABLE II. Packaging defects

Category		Defect
Major	Minor	
101		Interior packing with kraft paper not as specified.
102		Number of cans or lids not as specified.
	201	Excessive oil on cans.
	202	Cans are dirty or stained.
	203	Box not snug-fitting.

5. PACKAGING

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:34Z
Check the source to verify that this is the current version before use.

5.1 Packing. Can bodies and lids shall be packed separately. Bodies shall be nested 35 per shipping container with a sheet of dry wax coated kraft paper placed between each body. The stack of bodies shall be packed in a snug-fitting fiberboard box, contracted and closed in accordance with style RSC, class domestic, grade 275 of PPP-B-636. The dimensions of the box shall be 12-3/4 inches in length 10-5/8 inches in width, and 15-3/8 inches in depth. Lids shall be nested 90 per shipping container. The stack of lids shall be packed in a snug-fitting fiberboard box, constructed and closed in accordance with Style RSC, class domestic, grade 275 of PPP-B-636. The dimensions of the box shall be 13 inches in length, 10-5.8 inches in width, and 6-1/2 inches in depth.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1).
c. Type of exterior can coating required (see 3.1.3).

6.2 Subject term (key word) listing.

Combat field feeding
Metal food container
Operational ration

6.3 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:

Army - GL
Navy - SA
Air Force - 50

Review activities:

Army - MD, QM
Navy - MC
DP - SS

Preparing activity:

Army - GL

(Project 8110-0303)

Source: https://assist.dla.mil -- Downloaded: 202610-22T01:34Z
Check the source to verify that this is the current version before use.

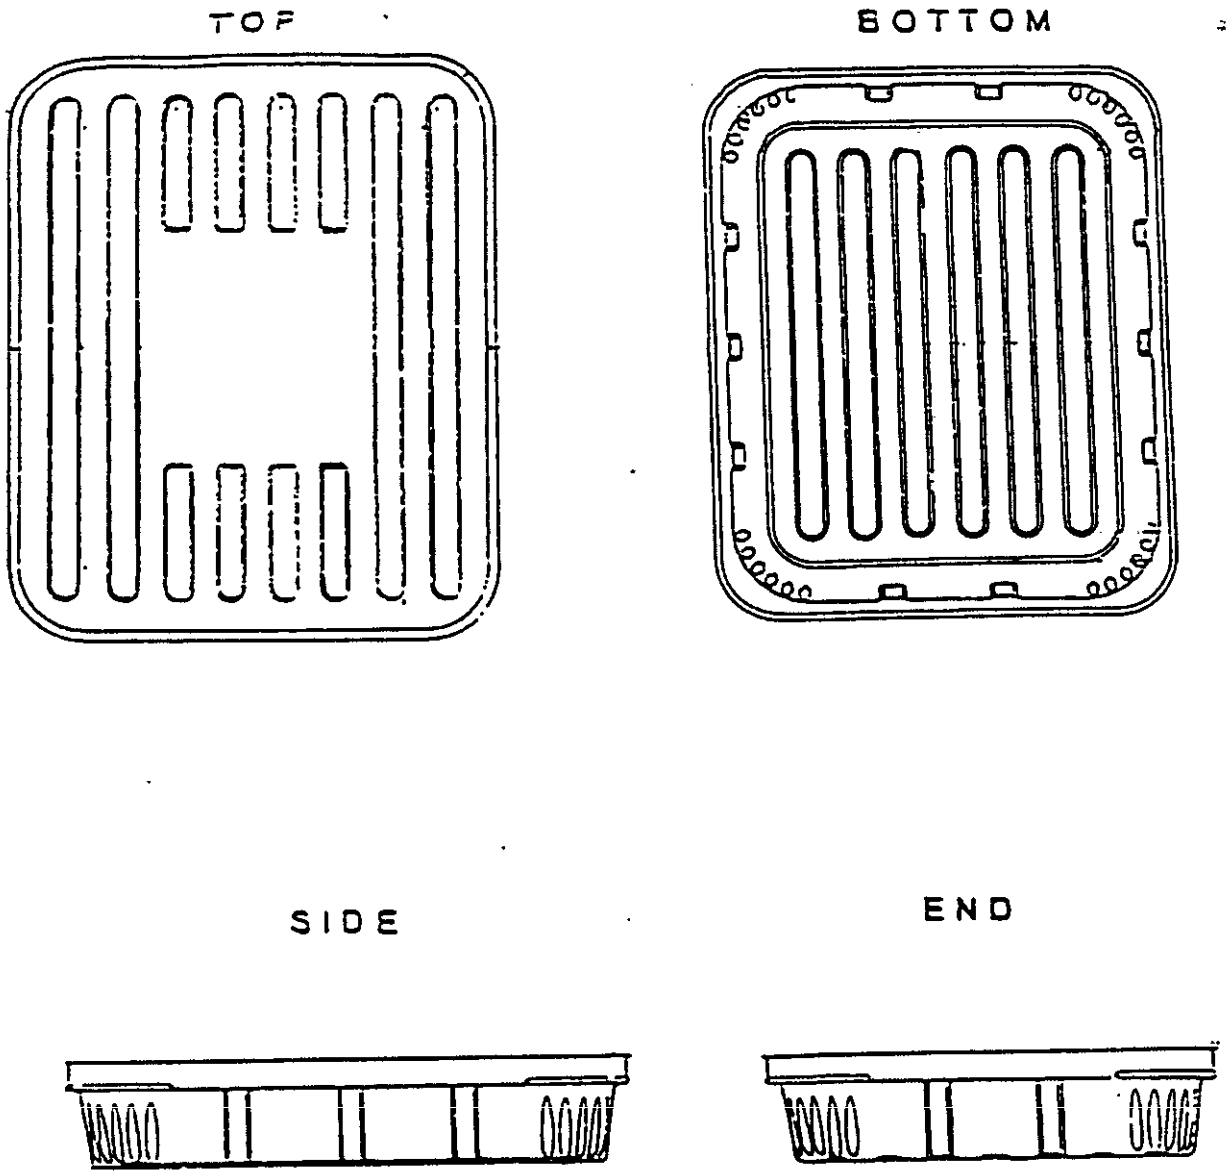


Figure 1. Tray Pack Food Container.

Source: https://assist.dla.mil -- Downloaded: 202640-22T01:34Z
Check the source to verify that this is the current version before use.

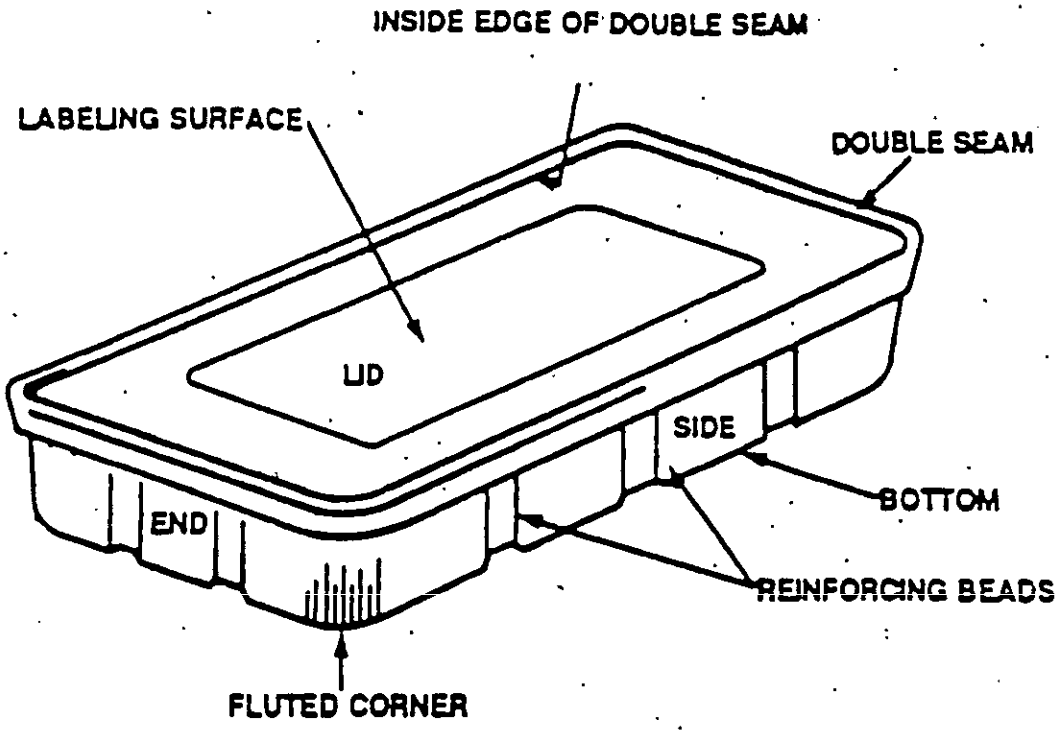


Figure 2. Tray Pack Can Nomenclature.

Source: https://assist.dla.mil -- Downloaded: 202640-22T01:34Z
Check the source to verify that this is the current version before use.