MS 9842 (ASG)

FED. SUP CLASS
5315

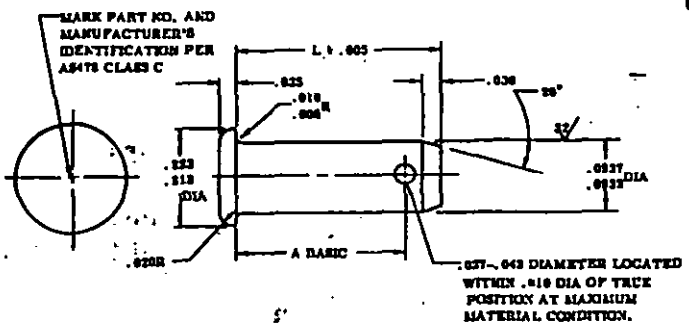

PART NO.	A	L	APPROX WEIGHT LB/100	PART NO.	A	L	APPROX WEIGHT LB/100	PART NO.	A	L	APPROX WEIGHT LB/100
				MS9842-11	.673	.730	.170	MS9842-21	1.356	1.356	.350
				MS9842-12	.736	.793	.180	MS9842-22	1.361	1.418	.310
				MS9842-13	.798	.855	.200	MS9842-23	1.424	1.481	.320
MS9842-04	.236	.293	.090	MS9842-14	.661	.918	.210				
MS9842-05	.296	.355	.100	MS9842-15	.923	.980	.220				
MS9842-06	.361	.418	.110	MS9842-16	.986	1.043	.230				
MS9842-07	.423	.480	.120	MS9842-17	1.048	1.105	.240				
MS9842-08	.486	.543	.140	MS9842-18	1.111	1.168	.260				
MS9842-09	.548	.606	.150	MS9842-19	1.173	1.230	.270				
MS9842-10	.611	.668	.160	MS9842-20	1.236	1.293	.280				

NOTES:
1. MATERIAL: AMS 6616.
2. HARDNESS: ROCKWELL C45-60.
3. FLUORESCENT PENETRANT INSPECTION PER AMS2645.
4. HEAD DIA TO BE CONCENTRIC WITH SHANK DIA WITHIN .003 FIR.
5. SURFACE TEXTURE: ASA B46.1 1962, UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES.
6. BREAK SHARP EDGES .003-.015.
7. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
8. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

P.A. USAF - 11	TITLE	MILITARY STANDARD
Other Cust NAVY - AS	PIN, STRAIGHT, HEADED .0937 DIAMETER, AMS5416	MS 9842 (ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)
ASD use only

APPROVED 29 Feb 68 REVISED

This military standard is approved by the Department of the Air Force and the Bureau of Naval Weapons and is mandatory for use by those activities. All other military activities are required to apply this standard where suitable.

Review activities: USAF - 82, 85

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:26Z
Check the source to verify that this is the current version before use.