MILITARY SPECIFICATION

# CASE, CARRYING, INSPECTION EQUIPMENT, COTTON DUCK

## 1. SCOPE

1.1 Scope.- This specification covers a canvas case of one size and type for either shoulder or hand carrying, and designed to hold equipment necessary to Coast Guard boarding officers.

## 2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards, of the issue in effect on date of invitation for bids, form a part of this specification.

SPECIFICATIONS

Federal

| | |
|---|---|
| V-T-276 | Thread, Cotton. |
| CCC-C-419 | Cloth, Cotton, Duck, Unbleached, Plied-Yarns, (Army and Numbered). |
| CCC-D-950 | Dyeing and Aftertreating Processes for Cotton Fabrics |

Military

| | |
|---|---|
| MIL-C-154 | Cloth, Cotton, Herringbone Twill. |
| JAN-C-496 | Clips, End. |
| MIL-W-530 | Webbing, Textile, Cotton, General Purpose, Natural or in Colors. |
| MIL-B-543 | Buckles, Tongueless and Web Strap. |
| MIL-T-3530 | Treatment, Mildew Resistant, for Thread and Twine. |

STANDARDS

Federal

FED-STD-No. 751 Stitches, Seams, and Stitching.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

## 3. REQUIREMENTS

3.1 Standard Sample.- In all respects not specifically covered by this specification, the finished product shall be equal to the standard sample (see 6.3).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:26Z
Check the source to verify that this is the current version before use.

3.2 Preproduction sample.- Unless otherwise specified at the time of the award of the contract or order and before production is commenced, a sample of the canvas case the manufacturer proposes to furnish shall be submitted to the contracting officer for approval. Approval of the preproduction sample by the activity concerned shall not relieve the contractor of his obligation to supply equipment conforming to this specification (see 6.2).

3.3 Materials.-

3.3.1 Cloth, Cotton Duck.- The cotton duck shall be No. 10, hard texture, conforming to Type I of Specification CCC-C-419, and shall be vat-dyed navy blue, and water-repellent and mildew-resistant treated in accordance with Type I, Class B of Specification CCC-D-950.

3.3.2 Herringbone twill.- The cotton herringbone twill used for binding shall be 3/4 inch in width conforming to Specification MIL-C-154 and shall be vat-dyed navy blue, water-repellent and mildew-resistant treated in conformance with Type I, Class B of Specification CCC-D-950.

3.3.3 Webbing, cotton.- The cotton webbing used for the closing and carrying straps shall be Type II, Class 4 vat-dyed navy blue in conformance with Specification MIL-W-530. Webbing shall be 1 inch in width.

3.3.4 Thread, cotton.- The cotton thread shall be type IB3, 4-ply ticket No. 12 of Specification V-T-276, navy blue in color and shall be mildew-resistant treated in accordance with Specification MIL-T-3530.

3.3.5 Buckles.- Buckles shall be brass, Type I, Style 2, Class I, Size 1 inch of Specification MIL-B-543.

3.3.6 End clips.- End clips shall be brass, Type I, Size 1 inch, of Specification JAN-C-496.

3.3.7 Plywood.- Plywood shall be 1/4 inch Douglas fir.

3.4 Design and dimensions.- The design and dimensions of the case shall conform to Figures 1, 2, and 3. The retainers shall be formed by sewing a 6 inch wide strip of duck to the main partition as shown in Figure I. The bottoms of the retainers shall be left open and the stitching of the partitions to the case bottom is not required. The bottom edges of the interior partitions and retainers shall be hemmed and shall reach to the depth of the case.

3.5 Construction.-

3.5.1 Carrying strap.- The carrying strap shall be sewn to the case in such a manner as to allow for a 9 inch handle for hand carrying and a 51 inch free length to form a shoulder strap. The strap shall have a buckle and end clip of the types specified in 3.3.5 and 3.3.6.

3.5.2 Closing straps.- The case shall have two closing straps of the material specified in 3.3.2. Each strap shall be of sufficient length to go completely around the case and each shall have a buckle and clip of the types specified in 3.3.5 and 3.3.6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:26Z
Check the source to verify that this is the current version before use.

3.5.3 Case bottom.- The case bottom plus the area measuring 3 inches from the bottom on both front and rear shall be of double thickness of duck of the type specified in 3.3.1. Seaming shall be type LSd-1 of Federal Standard No. 751.

3.5.4 Top.- The case top shall be reinforced with a strip of plywood 14 inches in length and 1-1/2 inches in width of the type specified in 3.3.7. The plywood strip shall be secured to the inside of the case with a strip of duck of the type specified in 3.3.1. Seaming shall be type LSd-1 of Federal Standard No. 751. The plywood strip shall have rounded ends.

3.5.5 Body.- The body of case shall be of cotton duck of the type specified in 3.3.1. Except for the side panels and the extra bottom section (see 3.4.1.3), the body of the case shall be on one piece of duck. Body and side panels shall be joined by using seam Type BSd-2 of Federal Standard No. 751, with the herringbone twill binding (see 3.3.2).

3.5.6 Stitching.- All stitching shall be Type 301 of Federal Standard No. 751 with a minimum of 8 stitches to the inch. Thread specified in 3.3.4 shall be used for all stitching. There shall be double stitching at all points of stress.

3.5.7 Seaming, hemming, and binding.- Except for those specified in 3.5.5, all other exposed duck ends shall be either bound with herringbone twill, using seam type BSa-1 of Federal Standard No. 751, hemmed 3/8 inches with seam type EFb-1 of Federal Standard No. 751, or seamed with seam type LSd-1 of Federal Standard No. 751, whichever is more practicable.

3.6 Marking.- The case cover shall have the following identification marking printed or stenciled with white indelible ink in 1 inch lettering: "U. S. COAST GUARD".

3.7 Workmanship.- The workmanship shall be first class in every respect.

4. QUALITY ASSURANCE PROVISIONS

4.1 Lot.- A lot shall consist of fifteen or less cases submitted for inspection at the same time.

4.2 Sampling, acceptance and rejection.- One sample case shall be selected at random from each lot by the Government inspector for the purpose of inspection for the following defects. If the sample is found to contain one or more defects, the balance of the cases in the lot shall be examined. Discovery of a second defective case shall be cause for rejection of the entire lot.

Defects.-

(a) Improper design or dimensions.
(b) Material, color, or treatment not as specified.
(c) Incorrect or absent seams.
(d) Type or number of stitches not as specified.
(e) No double stitching at points of stress.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:26Z
Check the source to verify that this is the current version before use.

(f) Absent or incorrect identification marking.
(g) Plywood strip missing or not rounded at ends.
(h) Extra duck thickness of bottom absent or incorrectly placed.
(i) Carrying and closing straps incorrectly placed or secured.
(j) End clips or buckles missing or weakly secured.

5. PREPARATION FOR DELIVERY

5.1 Packaging and packing.- Unless otherwise required by the contract or order, each complete case shall be individually packaged and packed in accordance with the supplier's standard practice for domestic shipment.

5.2 Marking.- Unless otherwise required by the contract or order, marking shall be in accordance with the supplier's standard practice. The marking of all containers shall include the item name, weight, contract number, F.S.N., and the supplier's name and address. The title of this specification shall constitute the item name.

6. NOTES

6.1 Intended use.- This case is intended for the carrying of equipment necessary to Coast Guard boarding officers engaged in vessel inspection duties.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Quantity required.
c. Special packing or marking requirements (See 5.1 and 5.2).
d. Federal stock number.
e. Whether or not a preproduction sample is required.

6.3 Standard sample.- A standard sample may be seen at the following location:

U. S. COAST GUARD SUPPLY CENTER
31st Street and 3rd Avenue
Brooklyn 32, New York

Notice.- When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Preparing Activity:
U. S. Coast Guard



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:26Z
Check the source to verify that this is the current version before use.

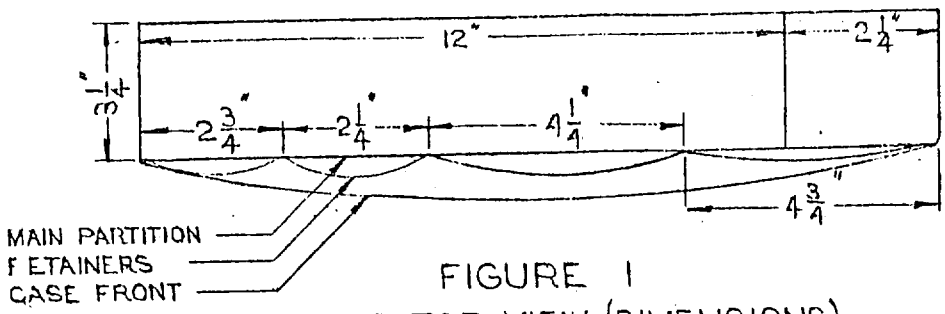



FIGURE 1
INSIDE TOP VIEW (DIMENSIONS)

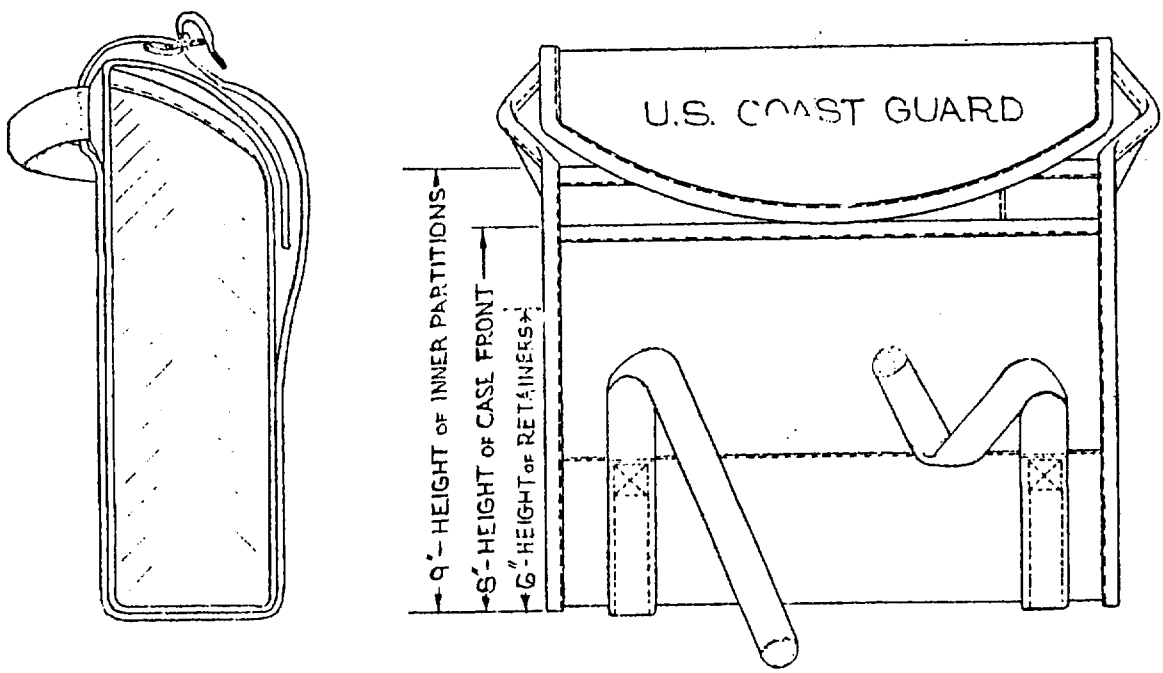



FIGURE 2
SIDE AND FRONT VIEWS (CASE SEMI-CLOSED)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:26Z
Check the source to verify that this is the current version before use.

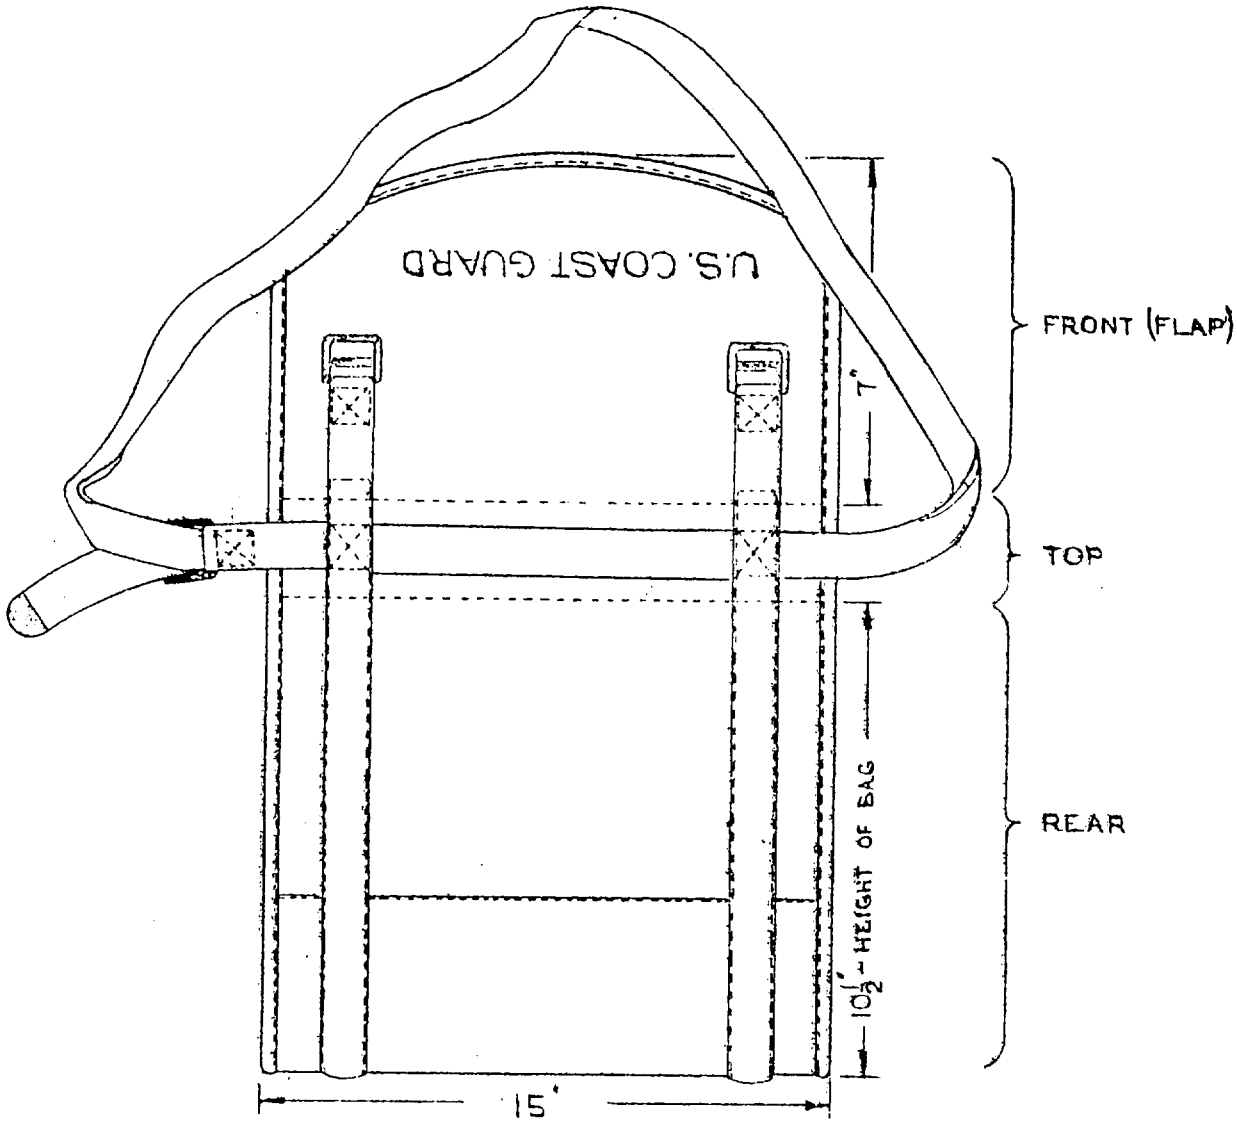



FIGURE 3
REAR VIEW (FLAP COMPLETELY OPEN)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:26Z
Check the source to verify that this is the current version before use.

# SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)*

CITY AND STATE

CONTRACT NO.

QUANTITY OF ITEMS PROCURED

DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*

DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE PLATE NO. 154

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:26Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

COMMANDANT
U.S. COAST GUARD HEADQUARTERS
STATION C-19
WASHINGTON, D.C. 20226

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:26Z
Check the source to verify that this is the current version before use.