[INCH-POUND]
A-A-59305
15 April 1999
SUPERSEDING
MS17172B (AS)
12 October 1972

COMMERCIAL ITEM DESCRIPTION

TERMINAL, STUD
THREADED DOUBLE TURRET

The General Services Administration has authorized the use of this commercial item description, for all federal agencies.

1. SCOPE. This commercial item description covers a double turret, threaded terminal stud for use on terminal boards.

2. SALIENT CHARACTERISTICS

2.1 General. The terminal stud shall be a double turret threaded type.

2.2 Material. The material shall be brass conforming to alloy C36000 of ASTM Standard B16, alloy C34200 or C35300 of ASTM Standard B121 or alloy C31400 of ASTM Standard B140. All alloys shall have a half-hard temper.

2.3 Interface. Dimensional requirements are contained in table I and figure 1. Dimensions are in inches, unless otherwise specified and should be interpreted in accordance with ASME Standard Y14.5M.

2.3.1 Threads. The stud shall be threaded in accordance with ASME Standard B1.1, unified inch screw thread UNC-2A no. 4-40.

2.4 Workmanship. All surfaces shall be smooth and free of burrs and sharp edges.

2.5 Finish. The finish shall consist of a tin plate, Type I, (0.0003 min.) per ASTM Standard B545 or Type II (0.0001 min) per ASTM Standard B339 or equivalent.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Defense Supply Center Richmond (DSCR), 8000 Jefferson Davis Highway, Richmond VA 23297-5610.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensional requirements .

Dash Number	Thickness of Mounting Board	L ±.005	Style
-05	1/16	1/8	1
-06			2
-07	5/32	3/16	1
-08			2
-09	7/32	1/4	1
-10			2
-11	9/32	3/8	2

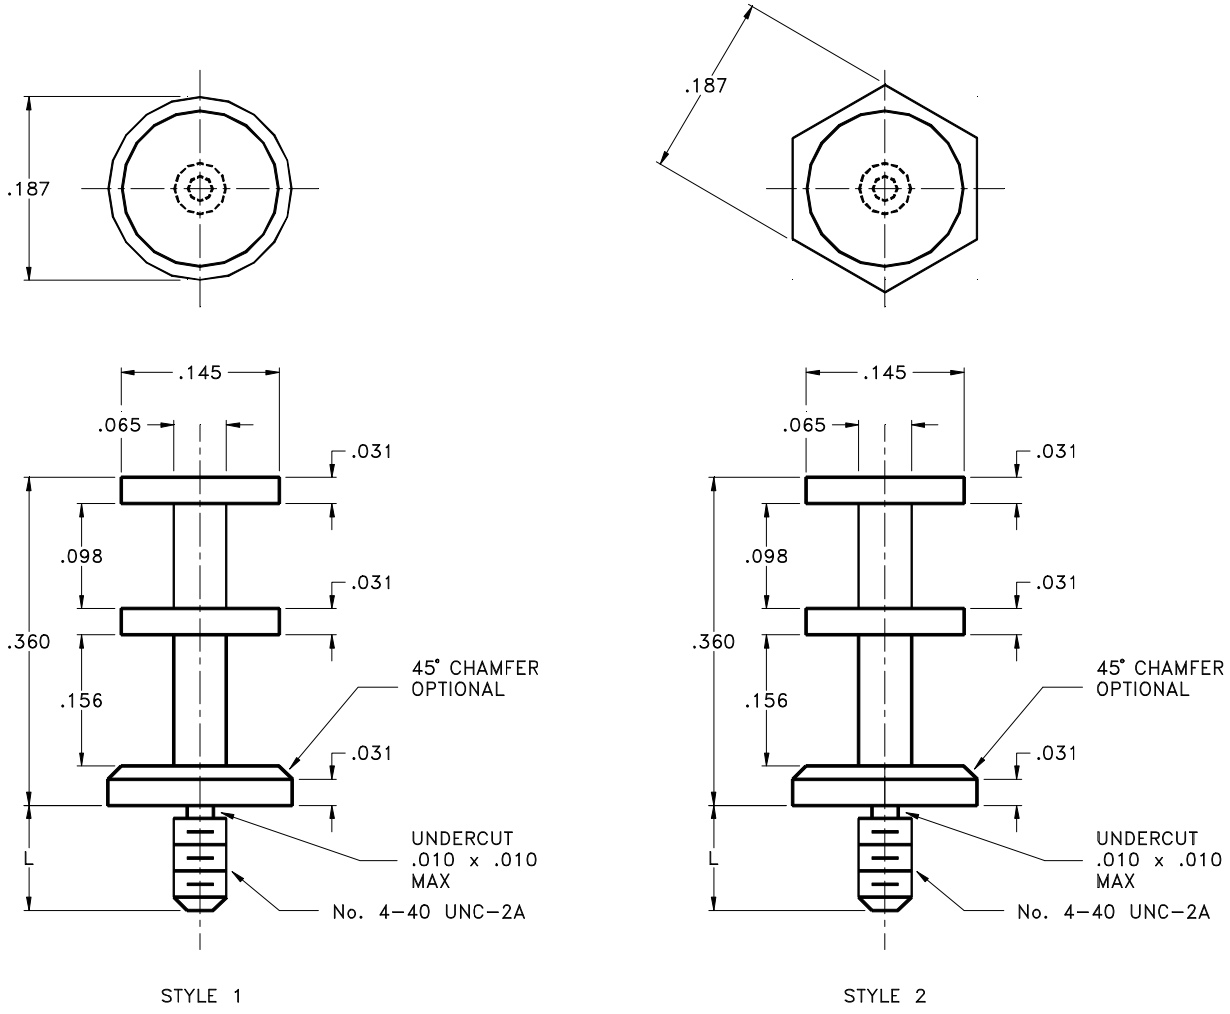

FIGURE 1. Terminal stud.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

3. REGULATORY REQUIREMENTS

There are no regulatory requirements, however, the offeror or contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4. QUALITY ASSURANCE PROVISIONS

4.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

4.2 Market acceptability. Similar items must have been sold in the commercial market or to the Government. The offeror or contractor shall certify and provide supporting documentation as to the serviceability and the long-term (5 years) availability of all necessary maintenance and logistics support parts and materials.

5. PACKAGING

Preservation, packing, and marking shall be as specified in the contract or order.

6. NOTES

6.1 Source of documents.

6.1.1 Source of government documents. Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

6.1.2 Source of non-government documents. Applicable documents are available from the following:

American Society for Testing and Materials
1916 Race Street
Philadelphia, PA 19103-1187

American Society of Mechanical Engineers
345 East 47th Street
New York, NY 10017

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

A-A-59305

Custodian:
Navy - AS

Preparing Activity:
DLA - GS

(Project 5940-1359)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.