INCH-POUND

MIL-PRF-32107/1
27 June 2002

PERFORMANCE SPECIFICATION SHEET

HOSE, AIR DUCT
STRAIGHT, ROUND

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-32107.

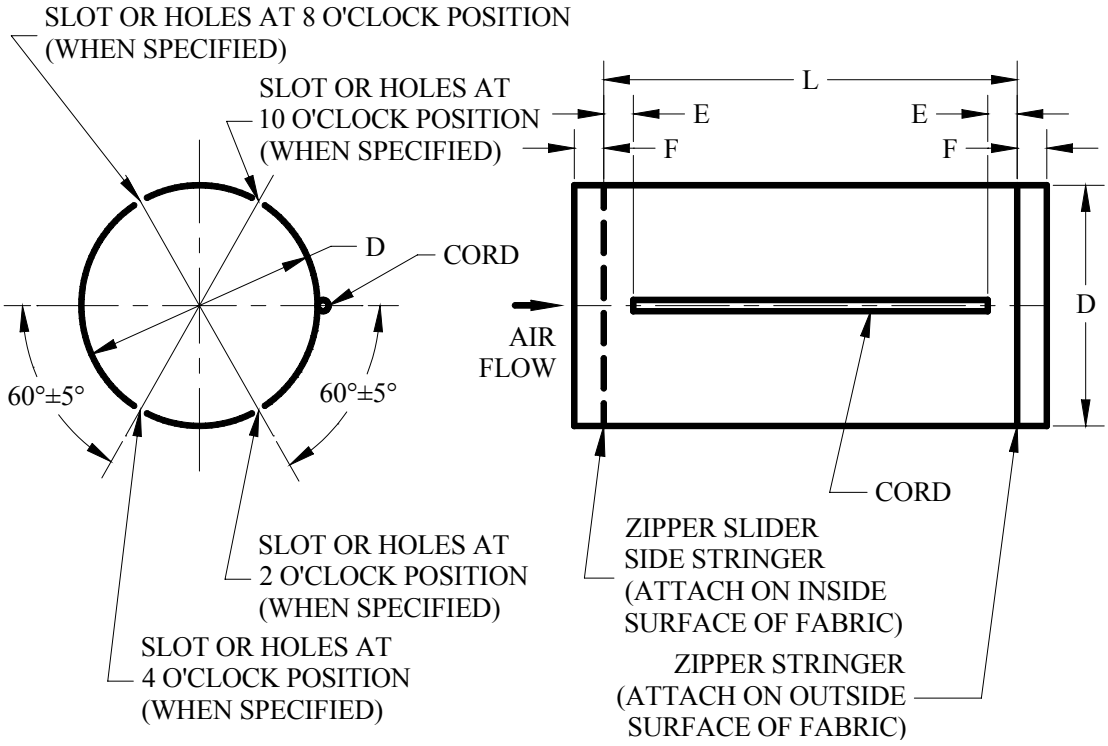


FIGURE 1. Straight, Round

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:43Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

Size	Nominal Length	D		E		F		L	
		Max	Min	Max	Min	Max	Min	Max	Min
1	4	5.125	5.00	1.00	0.75	1.50	1.00	4.25	4.00
	6							6.25	6.00
	12							12.25	12.00
	24							24.25	24.00
	36							36.25	36.00
	72							72.25	72.00
2	4	8.125	8.00	1.00	0.75	1.50	1.00	4.25	4.00
	6							6.25	6.00
	12							12.25	12.00
	24							24.25	24.00
	36							36.25	36.00
	72							72.25	72.00
3	4	10.125	10.00	1.00	0.75	1.50	1.00	4.25	4.00
	6							6.25	6.00
	12							12.25	12.00
	24							24.25	24.00
	36							36.25	36.00
	72							72.25	72.00
4	4	12.125	12.00	1.00	0.75	1.50	1.00	4.25	4.00
	6							6.25	6.00
	12							12.25	12.00
	24							24.25	24.00
	36							36.25	36.00
	72							72.25	72.00

Notes:

1. Dimensions are in inches.
2. Abbreviations: Max = Maximum; Min = Minimum.
3. The illustration is for identification purposes only and is not intended to resist designs and shapes of textile duct, which conform to the requirements and are within the envelope dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:43Z
Check the source to verify that this is the current version before use.

PIN: Consists of the letter M, the basic number of the specification sheet, and a dash number compiled from the code.

Specification sheet number _____ Dash number _____

M32107/1-	2	5	3	2	5
	Size	Length	Direction of Opening	Type of Opening	Permeability Range

PIN CODE

Size (Nominal Diameter)	Length (Inches)	Direction of Opening	Type of Opening	Permeability Range
1 – 5 Diameter	1 = 4 Long	0 = No Opening	1 = None	1 = Permeability 5
2 – 8 Diameter	2 = 6 Long	1 = 2 O'clock	2 = Slot	2 = Permeability 15
3 – 10 Diameter	3 = 12 Long	2 = 4 O'clock	3 = Holes	3 = Permeability 20
4 – 12 Diameter	4 = 24 Long	3 = 8 O'clock		4 = Permeability 25
	5 = 36 Long	4 = 10 O'clock		5 = Permeability 40
	6 = 72 Long	5 = 2 & 10 O'clock		
		6 = 4 & 8 O'clock		

REQUIREMENTS:

1. Round textile duct straight fittings shall be in accordance with Figure 1 and Table I.
2. Material: See acquisition specification.
3. Zippers: See acquisition specification.
4. Color: See acquisition specification.
5. Permeability range: See acquisition specification.
6. Openings: See acquisition specification. Openings shall not be provided on textile duct sections less than or equal to 6 inches long.

CHANGES FROM PREVIOUS ISSUE: Not applicable

Custodian:
Navy – SH

Review activities:
Navy – NP, SA
DLA – CC
CIV – 7FXE

Preparing activity:
Navy – SH
(Project 4720-0334-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:43Z
Check the source to verify that this is the current version before use.