A-A-51529A
28 June 1989
SUPERSEDING
A-A-0051529(DM)
1 APRIL 1987

COMMERCIAL ITEM DESCRIPTION

HOOK, BONE (9 Inch)

The General Services Administration has authorized the use of this commercial item description.

This commercial item description covers a bone hook suitable for pulling and holding bone fragments in place during orthopedic surgery.

Salient characteristics:

General. The bone hook shall have a blunt hook. The shaft shall be cylindrical, tapering down in diameter from the handle end to the hook end, with the hook end being flattened. The shaft shall be permanently secured to the handle. The handle shall be contoured for a comfortable grip. The handle shall have a lip on the proximal end to prevent the hand from slipping.

Material. The hook shall be fabricated from a suitable, martensitic corrosion-resistant steel in accordance with American Society foe Testing and Materials (ASTM) Designation F899.

Hardness. The hook shall have a Rockwell Hardness C scale (HRC) of 38, minimum when tested in accordance with ASTM Designations E18 or E92 whichever is applicable. Conversion of hardness values shall be tested in accordance with ASTM Designation E140.

Style and design. The hook shall be in accordance with Figure 1.

Passivation. The hook shall be properly passivated.

Finish. The hook shall have a satin finish.

AMSC N/A FSC 6515

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:57Z
Check the source to verify that this is the current version before use.

Corrosion resistance. The hook shall show no evidence of corrosion when subjected to the boil test in accordance with ASTM Designation F1089.

Identification markings. Bone hooks shall be marked "stainless". Contractor's catalog number, and blade width shall be marked on the instrument. Marking shall be done in a manner that will not impair the mechanical properties or the corrosion resistance of the instrument. In addition, marking shall be located in such a manner as not be intersect the edges of the instrument. Markings shall be located at a point of low stress.

Workmanship. The bone hook shall be free from defects which detract from its appearance or impair it serviceability.

Unit. Each (EA). One bone hook, as specified, constitutes one unit.

Quality Assurance Provisions.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Responsibility for compliance. All items must meet all requirements specified herein. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all the requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:57Z
Check the source to verify that this is the current version before use.

Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

Inspection. Inspection, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Tests. Tests shall be conducted to determine compliance with specification requirements. Where feasible, the same sample shall be used for the determination of two or more test characteristics.

Sampling for tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and as specified herein. The acceptable quality level (AQL) shall be 0.65 for an inspection level of S-2. The unit of product for test purposes shall be one bone hook.

Contractor certification. The contractor shall certify that the product offered meets the salient characteristics of this description and conforms to the producers' own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this document are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:57Z
Check the source to verify that this is the current version before use.

Regulatory requirements.

Federal Food, Drug and Cosmetic Act. If the product covered by this document has been determined by the U.S. Food and Drug Administration to be under its jurisdiction, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of the Federal Food, Drug and Cosmetic Act, as amended, and regulations promulgated thereunder. In addition, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of all other applicable Federal, State, and local statutes, ordinances, and regulations.

Recovered materials. The offeror/contractor is encouraged to use recovered material in accordance with Public Law 94-580, as amended, and as implemented by Federal Acquisition Regulation Subpart 23.4 to the maximum extent practical.

Preservation, packaging, packing, labeling, and marking. Unless otherwise specified, preservation, packaging, and packing shall be to a degree of protection to preclude damage to containers and/or contents thereof under normal shipping conditions, handling, etc., involving shipment from the supply source to the receiving activity, plus reshipment from receiving activity, and shall conform to applicable carrier's rules and regulations. Intermediate and exterior package quantities and labeling and marking shall be as specified in the contract and/or order.

NOTE: The following National Stock Number is covered by this document:

NSN	ITEM IDENTIFICATION
6515-01-107-0187	HOOK, BONE, 9 Inch

Ordering data (Intermediate/exterior package quantities and labeling and marking must be specified in the contract and/or order).

MILITARY INTERESTS:

Custodians:

Army - MD
Navy - MS
Air Force - 03

Preparing Activity:

DoD-MB

Agent:

DLA-DM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:57Z
Check the source to verify that this is the current version before use.


CIVIL AGENCY COORDINATING ACTIVITIES:

VA-OSS
PHS
FDA-MPQAS

PGC 47128

Project No. 6515-4553

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:57Z
Check the source to verify that this is the current version before use.

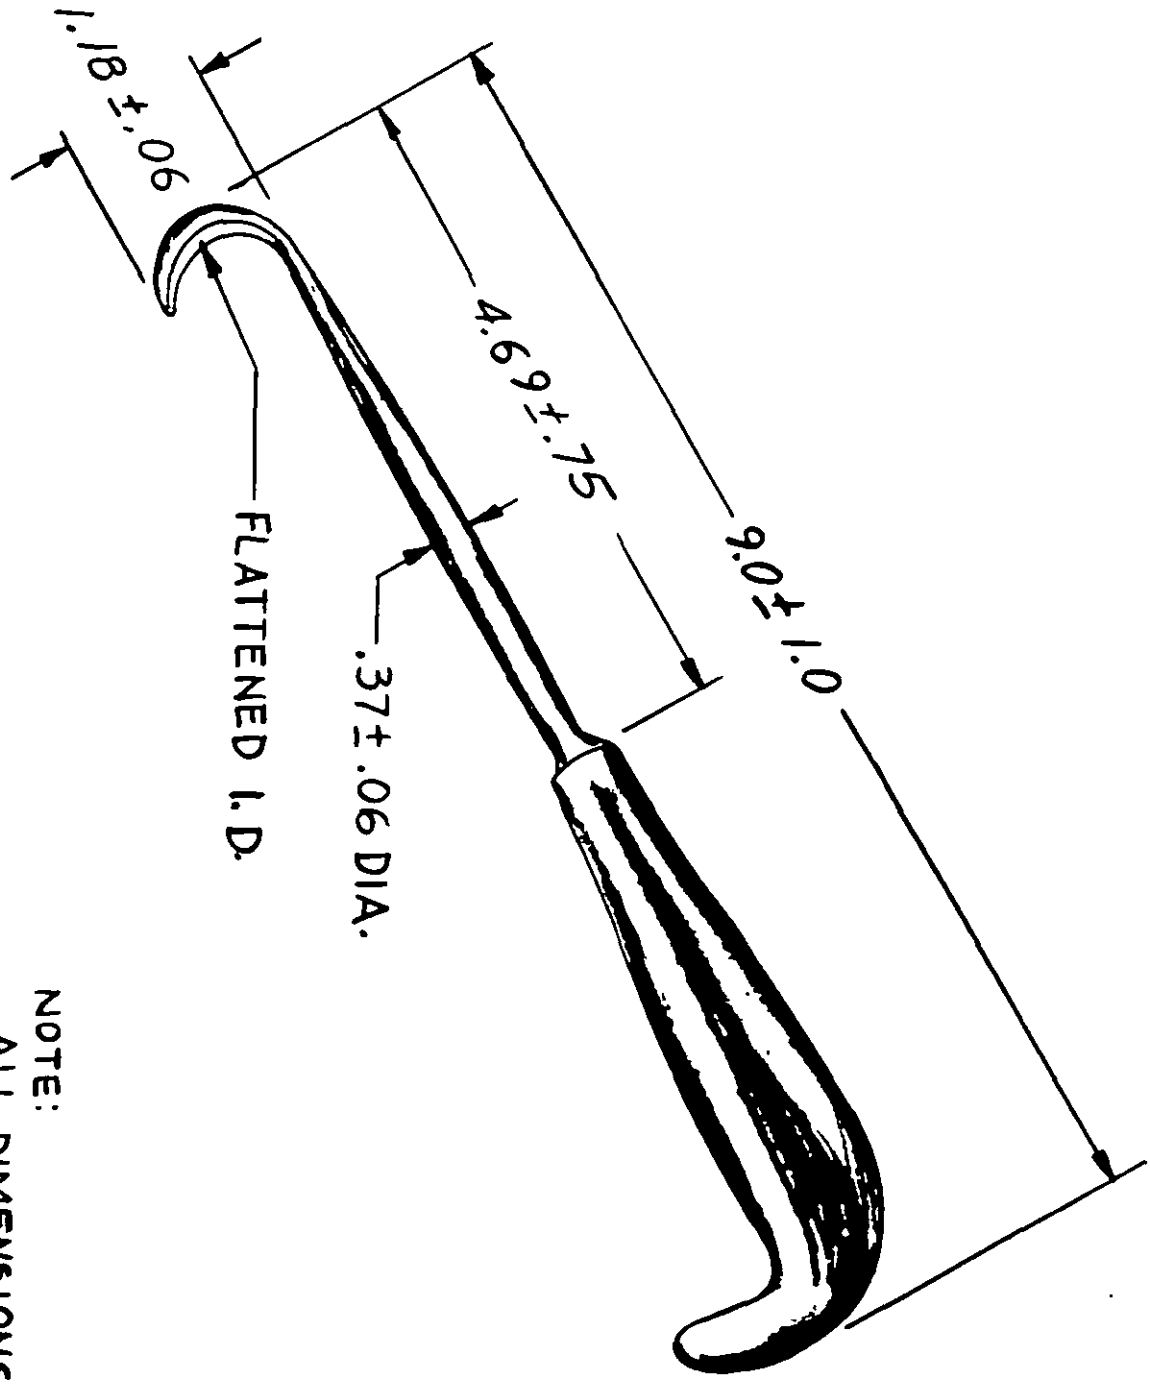

NOTE:
ALL DIMENSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED.

FIGURE 1 HOOK, BONE, 9 INCH

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:57Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
A-A-51529A	HOOK, BONE (9 Inch)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:57Z
Check the source to verify that this is the current version before use.