INCH-POUND
A-A-59326/20A
May 1, 2003
SUPERSEDING
A-A-59326/20
September 25, 1998

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

Y CONNECTION, FLANGED, TYPE XX

The General Services Administration has authorized the use of this commercial item description specification sheet, for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326A.

1. SCOPE. This specification covers a Flanged Type XX wye (Y) Connection used in conjunction with flanged cam locking type couplings.

2. CLASSIFICATION. The size of the Y Connection is identified in Table 1.

TABLE 1. Y connection dimensions.


Dash	Flange Nominal Sizes			Y Dimensions			
No.	A	B	C	D		E	
				Min	Max	Min	Max
1	6	6	6	6.12	9.00	3.50	5.00
2	4	4	4	4.25	6.00	2.25	3.50
3	3	3	3	4.00	5.00	2.12	3.00
4	2	2	2	3.00	4.00	2.00	3.00

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent by letter to: US Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-D/210, 6501 E. 11 Mile Road, Warren, MI 48397-5000.

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

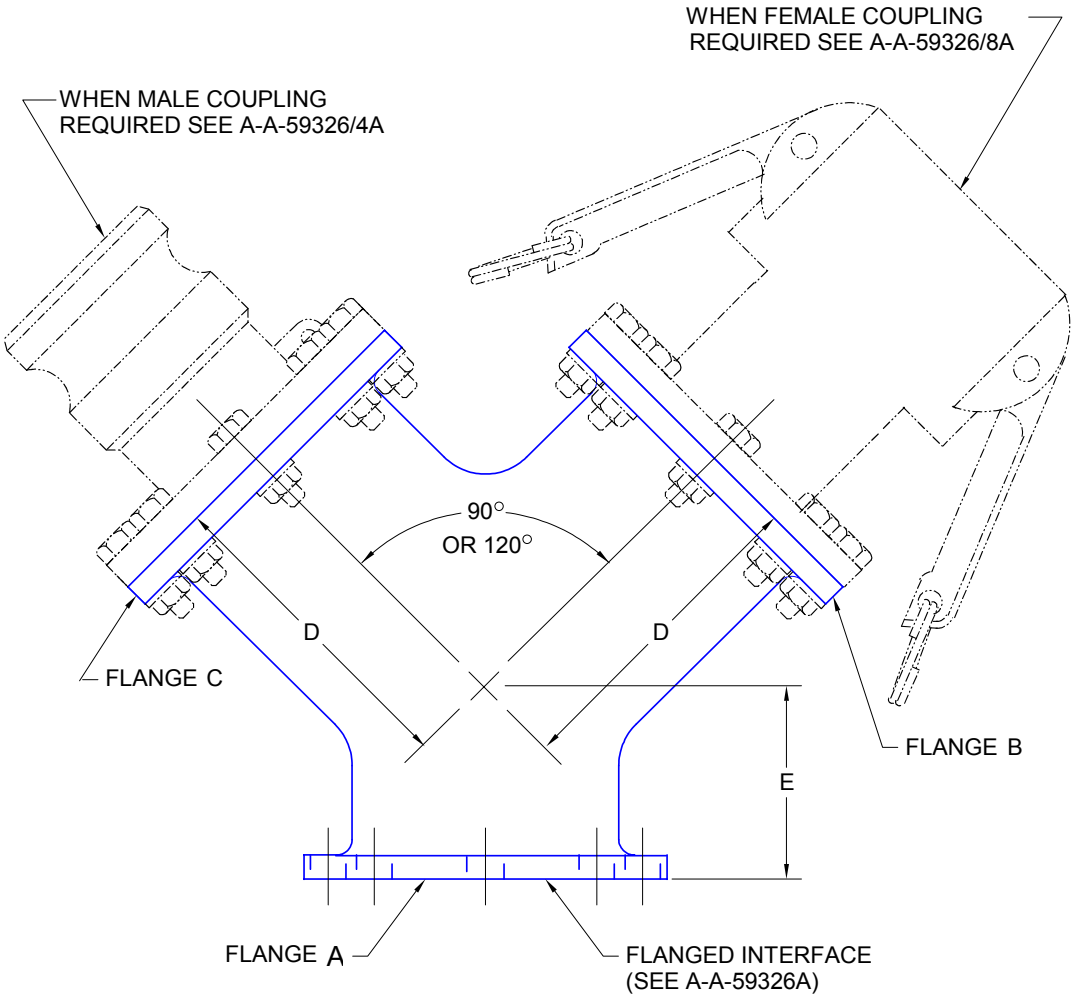

NOTES: 1. The size of the coupling shall conform to table 1.

2. Dimensions are in inches; unless otherwise specified, tolerances shall be ± .02 for 2 place, and angles ± 2°.

FIGURE 1. Y connection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS. The salient characteristics shall be as identified in A-A-59326A.

4. NOTES

4.1 Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for specification sheet A-A-59326/20A.

AA59326/20A-3-SS; /20A indicates a Flanged Type XX, Y Connection; -3 indicates a 3-inch nominal flange size; and SS indicates a stainless steel body.

Material: A - Aluminum
B - Copper Alloy (Brass or Bronze)
BA - Aluminum Bronze
SS - Stainless Steel

4.2 International standardization. Certain provisions of this specification (dimensions) are the subject of international standardization agreement (see A-A-59326A).

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force – 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FSS

Preparing Activity:
Army - AT

(Project 4730-2029-020)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.