
FED. SUP CLASS
6210

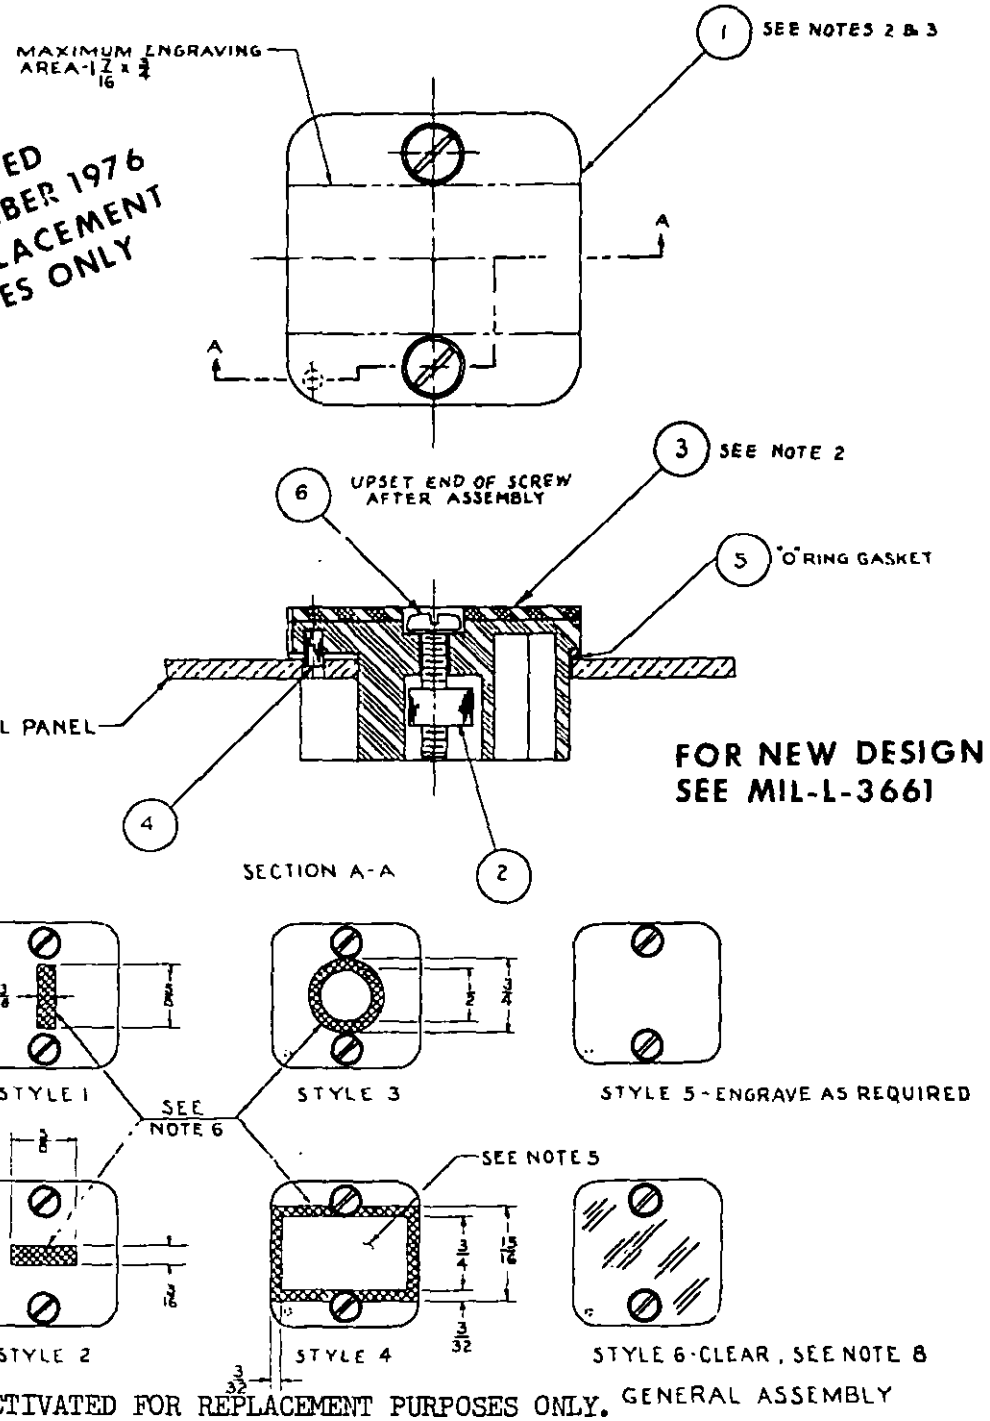

REACTIVATED 11 NOVEMBER 1976 FOR REPLACEMENT PURPOSES ONLY

FOR NEW DESIGN SEE MIL-L-3661

APPROVED 11 FEB 1960 REVISED (A) 10 SEP 1964 (B) 11 NOV 1976

(B) REACTIVATED FOR REPLACEMENT PURPOSES ONLY. GENERAL ASSEMBLY


P.A. Ships Other Cust	TITLE LENSES, INDICATOR LIGHT (INCANDESCENT) PLASTIC, FLUSH TYPE	MILITARY STANDARD MS 17140(SHIPS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES.	SHEET 1 OF 3

DD FORM 672-1 N LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the Naval Ship Engineering Center, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:04Z
Check the source to verify that this is the current version before use.

This mil[illegible]tandard is approved for use by the Naval Ship Engineering Center, [illegible]epartment of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

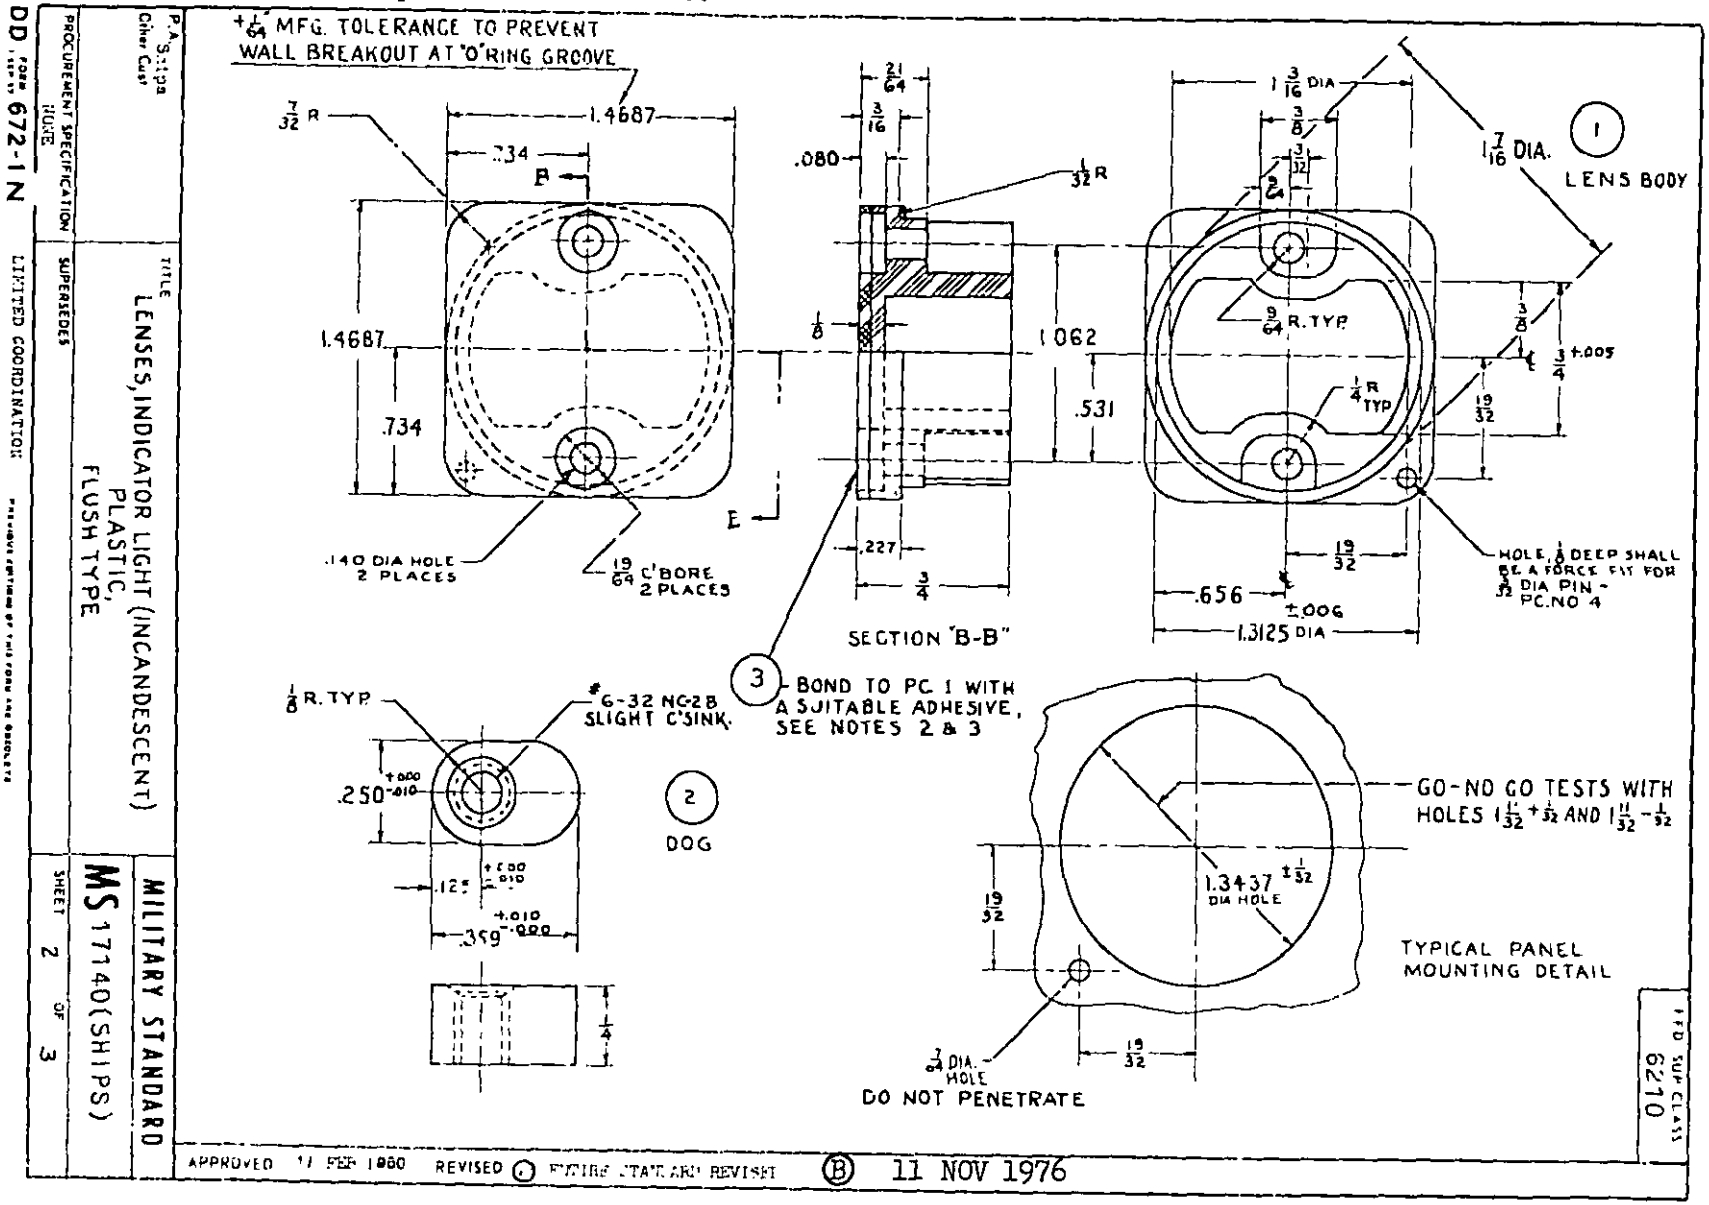

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:04Z
Check the source to verify that this is the current version before use.


FED SUP CLASS 5210

LIST OF MATERIAL

PC NO	NAME	QTY	MATERIAL	SPEC	FINISH	REMARKS
1	LENS BODY	1	ACRYLIC PLASTIC	COML	SEE NOTE	SEE NOTES 2 AND 3
2	DOG	2	POLYPENCO NYLATRON GS	THE POLYMER CORP OF PENN.		
3	LENS FACE - 1/16 THK.	AS REQ'D	ACRYLIC PLASTIC	COML.	SEE COLOR CHART	
4	PIN, 3/32 DIA x 5/16 LG	1	SST			
5	"O" RING, 1.312 I.D. x 1.438 O.D. x .062 DIA.	1	RUBBER	COML.		
6	"SEELSKREW" 6-32 x 3/4 LG.	2	AUTOMATIC OR EQUIV.	PRECISION MFG. CO, YONKERS, NY		

NOTES:
1. DETAIL AND GENERAL REQUIREMENTS SHALL COMPLY WITH THE FOLLOWING NOTES OF MIL STD MS16662-23, 24, 35, 44, 54, 66
2. LENS FACE PC. NO. 3 IS NOT USED WITH COLORS NO. 6 (WHITE) AND NO. 7 (CLEAR), MOULD AS ONE PIECE TO FULL THICKNESS.
3. FOR COLORS NO. 1 THRU NO. 5, LENS BODY PC. NO. 1 SHALL BE TRANSLUCENT WHITE, DU PONT NO. WT-05 OR EQUIVALENT
4. EXTERIOR SURFACES TO BE PAINTED WHITE .003" - .005" THICK, THEN AS SPECIFIED, PAINT GRAY OR BLACK .002" - .005" THICK.
5. ENGRAVE THIS AREA THRU THE BLACK OR GRAY SURFACE TO ALLOW THE LAYER OF WHITE PAINT TO APPEAR.
6. CROSS HATCHED AREAS ARE ENGRAVED TO EXPOSE LENS FACE COLORS.
7. LENS SHALL BE DESIGNATED BY THE NUMBER MS 17140 FOLLOWED BY THREE SUFFIX NUMBERS, AS IN THE FOLLOWING EXAMPLE:-


EXAMPLE



SUFFIX NUMBER CODE

(A) INDICATES FINISH PAINT - NO. 1 = BLACK, NO. 2 = GRAY.
(B) INDICATES STYLE - SEE STYLES, SHEET 2
(C) INDICATES PLASTIC BODY COLOR - SEE COLOR CHART.

8. FRONT FACE AND INTERIOR SURFACES OF LENS SHALL BE FURNISHED PLAIN. (PAINT LEFT OFF TO EXPOSE LENS COLOR)
9. NYLON PARTS SHALL BE DELIVERED TO THE DIMENSIONS SHOWN IN A STATE OF MOISTURE EQUILIBRIUM AT 50% RELATIVE HUMIDITY.

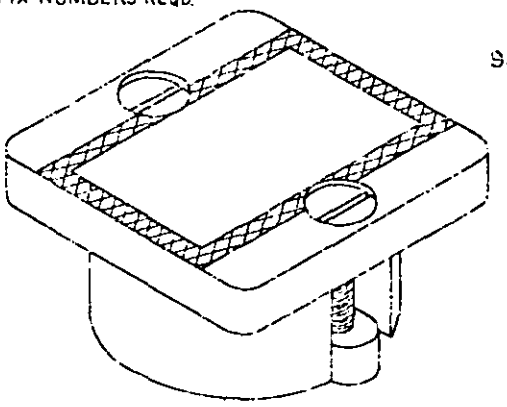

LENS FACE COLOR CHART		
1	RED	ROHM & HAAS *2444*
2	GREEN	" " *2092*
3	YELLOW	" " *2208*
4	AMBER	" " *2451*
5	BLUE	" " *2045*
6	WHITE SEE NOTE 2	DU PONT *WT-05*
7	CLEAR SEE NOTE 2	" " *NC-10*

*OR EQUIV.

DIMENSIONS ARE IN INCHES	
TOLERANCES UNLESS SPECIFIED	
DECIMAL DIMENSIONS	±.005
FRACTIONAL DIMENSIONS	± 1/64

(Project 6210-N506)

P.A. Shore Other Cust	TITLE: LENSES, INDICATOR LIGHT (INCANDESCENT) PLASTIC, FLUSH TYPE	MILITARY STANDARD MS 17140(SHIPS)
PROCUREMENT SPECIFICATION NO.	SUPERSEDES	SHEET 3 OF 3

DD FORM 1000, 672-1 N LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 11 FEB 1980 REVISED (A) EMERG. STANDARD NOTICE (B) 11 NOV 1976

This military standard is approved for use by the Naval Ship Engineering Center, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:04Z
Check the source to verify that this is the current version before use.