INCH-POUND
MS27484N
2 February 2012
SUPERSEDING
MS27484M
12 July 2002

DETAIL SPECIFICATION SHEET

# CONNECTORS, PLUG, ELECTRICAL, STRAIGHT, CRIMP TYPE, BAYONET COUPLING, EMI, SERIES II

Reactivated after 24 May 2004 and may be used for new and existing designs and acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.


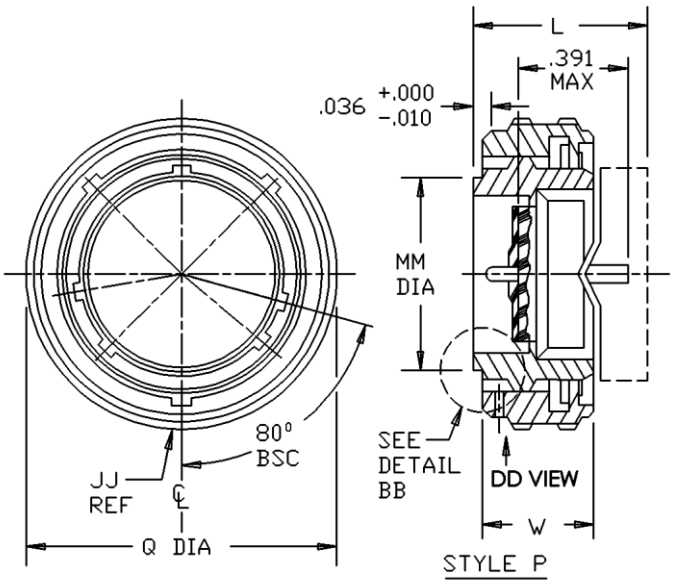



FIGURE 1. Plug, classes E, P and T.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

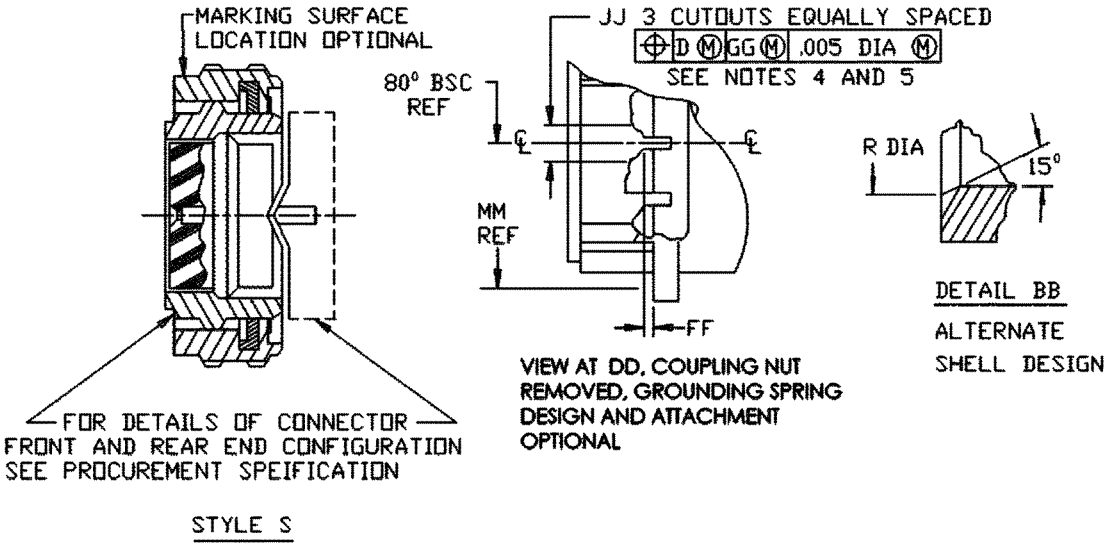


| Shell size | K max REF | Q dia max | R dia +.005 -.006 | W ±.015 | FF max | JJ min | MM dia +.007 -.004 |
|---|---|---|---|---|---|---|---|
| 8 | .155 | .750 | .316 | .547 | .036 | .109 | .456 |
| 10 | | .859 | .436 | | | | .573 |
| 12 | | 1.031 | .549 | | | | .733 |
| 14 | | 1.156 | .675 | | | | .858 |
| 16 | | 1.281 | .799 | | | | .983 |
| 18 | | 1.406 | .893 | | | | 1.108 |
| 20 | .109 | 1.531 | 1.018 | .524 | .017 | .156 | 1.228 |
| 22 | | 1.641 | 1.143 | | | | 1.353 |
| 24 | | 1.766 | 1.268 | .575 | | | 1.478 |

FIGURE 1. Plug, classes E, P and T – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

| Shell size | L (class E) max overall length | L (class T) max overall length | L (class P) max overall length |
|---|---|---|---|
| 8 | 1.016 | .766 | 1.020 |
| 10 | | | |
| 12 | | | |
| 14 | | | |
| 16 | | | |
| 18 | | | |
| 20 | | | |
| 22 | | | |
| 24 | 1.094 | .844 | 1.080 |

| Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|
| .001 | 0.03 | .316 | 8.03 | .766 | 19.46 | 1.143 | 29.03 |
| .004 | 0.10 | .391 | 9.93 | .799 | 20.29 | 1.156 | 29.36 |
| .005 | 0.13 | .436 | 11.07 | .844 | 21.44 | 1.228 | 31.19 |
| .006 | 0.15 | .456 | 11.58 | .858 | 21.79 | 1.268 | 32.21 |
| .007 | 0.18 | .524 | 13.31 | .859 | 21.82 | 1.281 | 32.54 |
| .010 | 0.25 | .547 | 13.89 | .893 | 22.68 | 1.353 | 34.37 |
| .015 | 0.38 | .549 | 13.94 | .953 | 24.21 | 1.406 | 35.71 |
| .017 | 0.43 | .573 | 14.55 | .983 | 24.97 | 1.478 | 37.54 |
| .036 | 0.91 | .575 | 14.61 | 1.018 | 25.85 | 1.531 | 38.89 |
| .109 | 2.77 | .675 | 17.15 | 1.020 | 25.91 | 1.641 | 41.68 |
| .155 | 3.94 | .733 | 18.62 | 1.031 | 26.19 | 1.766 | 44.86 |
| .156 | 3.96 | .750 | 19.05 | 1.080 | 27.43 | | |

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. For main key and key positions, see MIL-DTL-38999.
4. The gauge feature for GG shall be .004 inch (0.10 mm) larger than the MMC size at base location.
5. Design contour of cutouts optional. Cutouts to accommodate receptacle projections.

FIGURE 1. Plug, classes E, P and T – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.


Interface dimensions shall be in accordance with MIL-DTL-38999.

Mating connectors: MIL-DTL-38999/10, MS27472, MS27474, MS27475, MS27476, MS27477, MS27478, MS27479, MS27480, MS27481, MS27497, MS27499, MS27504, MS27508 and MS27513.

Procurement Specification: MIL-DTL-38999.

Insert arrangements: See MIL-STD-1560.

Part or Identifying Number (PIN) example:

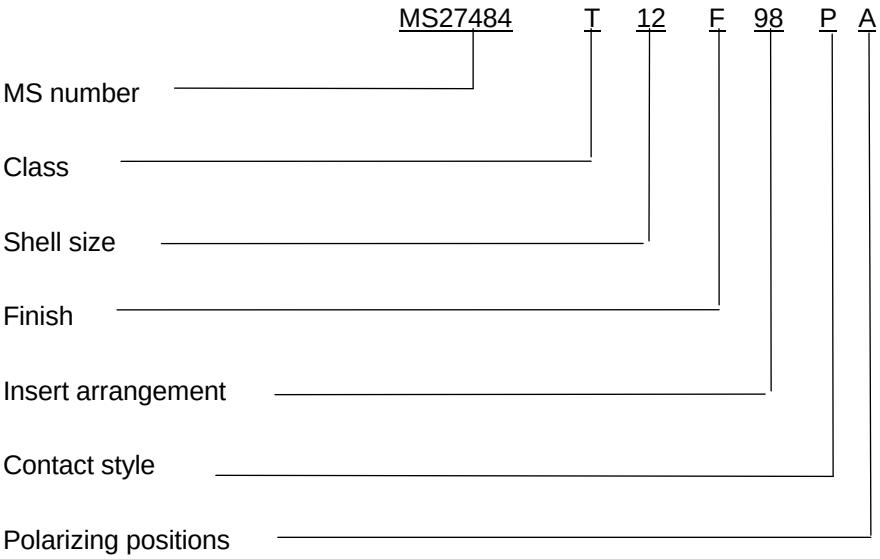


No letter is required for normal.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-DTL-38999/10
MIL-STD-1560
MS27472
MS27474
MS27475
MS27476
MS27477
MS27478
MS27479
MS27480
MS27481
MS27497
MS27499
MS27504
MS27508
MS27513



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – AS
Air Force – 85
DLA – CC

Preparing activity:
DLA – CC

(Project 5935-2012-032)

Review activities:
Army – AR, MI
Navy – EC
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.