
FED. SUP CLASS
6640

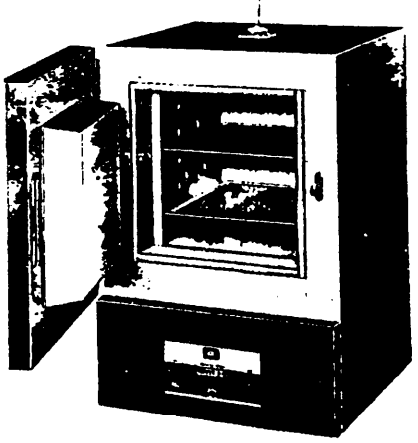

PART NUMBER	NOM INNER CHAMBER DIM CM (IN)			OPERATING TEMP-AMBIENT TO DEG C	WATTS MAX	NO. OF SHELVES
	WIDTH	DEPTH	HEIGHT			
MS36355-1 through MS36355-6	CANCELED					
MS36355-7	33 (13)	35 (14)	33 (13)	325	1400	2
MS36355-8	48 (19)	35 (14)	48 (19)	325	1900	2
MS36355-9	63 (25)	48 (19)	48 (19)	325	2800	2
MS36355-10	94 (37)	48 (19)	63 (25)	325	3700	2
MS36355-11	33 (13)	46 (18)	33 (13)	270	1200	3
MS36355-12	63 (25)	46 (18)	51 (20)	270	1900	4
MS36355-13	46 (18)	46 (18)	51 (20)	270	1800	4
MS36355-14	48 (19)	46 (18)	38 (15)	288	1900	2
MS36355-15	31 (12)	31 (12)	31 (12)	260	650	2
MS36355-16	41 (16)	35 (14)	41 (16)	260	1100	2
MS36355-17	52 (20)	41 (16)	51 (20)	260	1600	2
MS36355-18	48 (19)	46 (18)	71 (28)	260	2100	2

MATERIAL: The exterior wall shall be heavy-gauge steel, reinforced at all stress points. Interior shall be heavy gauge solid aluminum, aluminized steel, or stainless steel. The door shall have the same basic construction with swing pivot hinges, magnetic catch and heat resisting handle.

FINISH: The exterior shall be finished in durable baked enamel over a suitable primer coating.

DESIGN: Oven shall be of the gravity convection or radiant heat type, rectangularly shaped with double walled construction and equipped with one door, shelves, a thermometer, indicator light, variable thermostat control, heater power input switch(es) and heating elements.

Shelves shall be removable, adjustable, and so constructed as to allow proper air circulation throughout the inner chamber.

Cabinet shall have an intake and exhaust vent for proper ventilation and shall have an opening in the top to accommodate a graduated glass thermometer.

Insulation shall be a minimum of 76 mm thick and shall completely envelop the inner chamber of the oven, including the door.

(A) ENTIRE STANDARD REVISED

APPROVED 30 January 1978 REVISED (A) 13 OCT 1983

USER ACTIVITIES: ARMY - DM, MD
NAVY - MS

REVIEWER ACTIVITIES: ARMY - ME
NAVY - AS, YD
AIR FORCE - 82

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MS 99		OVEN, LABORATORY, RADIANT/GRAVITY CONVECTION	MS36355
Procurement Specifications NONE	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PROJECT NUMBER 6640-1206

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:00Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6640

Ovens shall be in accordance with the requirements as specified in ASTM E145.

Heating unit shall operate at 120/240 volts, 50/60 Hz, single phase, as specified at invitations for bid.

All electrical components and insulations shall conform to the standards of Underwriters Laboratories, Incorporated.

NOTES:

1. Overall dimensional limitations and color of exterior shall be specified on date of invitations for bid.
2. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.
3. Referenced documents shall be of the issue in effect on date of invitations for bid.
4. FSCM: 15486, 22527, 48619, and 95632.

USER ACTIVITIES:

REVIEWER ACTIVITIES:

REVISED

APPROVED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MS 99		OVEN, LABORATORY, RADIANT/GRAVITY CONVECTION	MS36355
Procurement Specifications NONE	SUPERSEDES:		SHEET 2 OF 2

PROJECT NUMBER 6640-1206

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:39Z
Check the source to verify that this is the current version

☆ U.S. GOVERNMENT PRINTING OFFICE: 1983 — 705-040/5844