
FED. SUP CLASS
1660

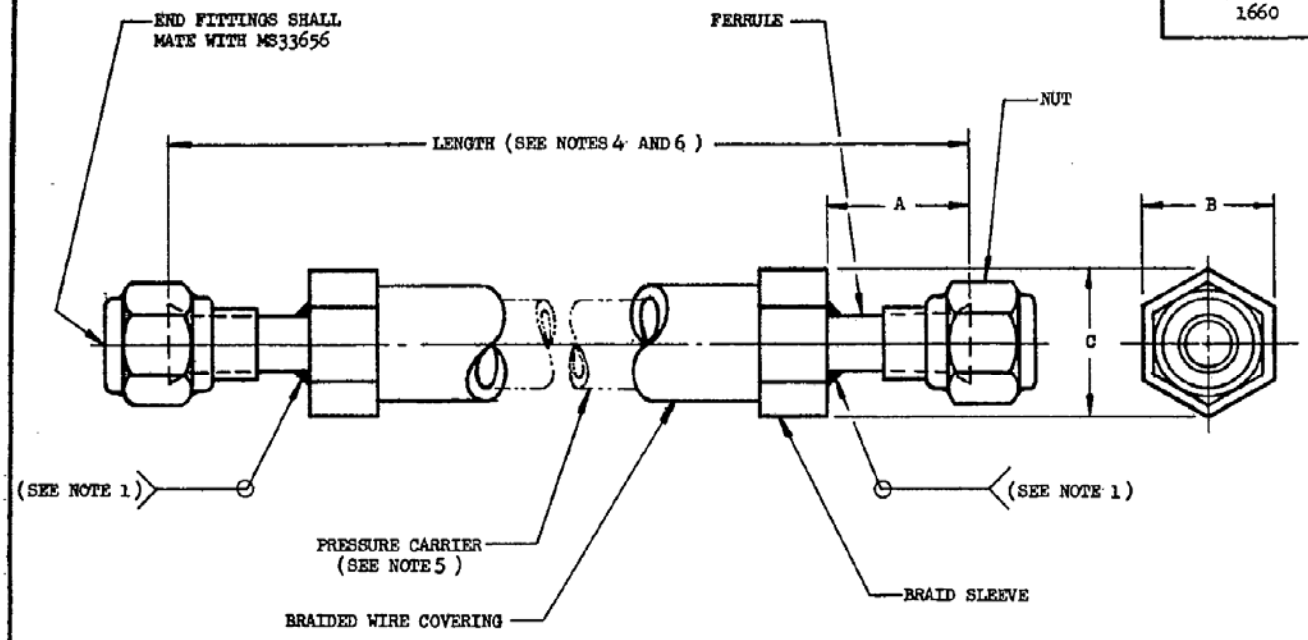

	HOSE SIZE DASH NO.	MIN ID OF PRESSURE CARRIER	MAX OD OF WIRE BRAIDED HOSE	A MAX	B MAX	C (REF)	MAX WEIGHT OF BRAIDED HOSE (LBS/FT)	MAX WEIGHT OF FITTINGS PER ASSEMBLY LBS (a)
	-4	.235	.592	.94	.6875	.794	.22	.075
(A)	-5	.282	.684	.97	.8125	.938	.26	.094
	-6	.365	.775	1.00	.9375	1.083	.30	.127
	-8	.485	.931	1.12	1.0625	1.227	.49	.148

(a) INCLUDES BRAID SLEEVE, FERRULE, AND NUT.

NOTES:

1. MATERIAL: (A) FERRULE, NUT, BRAID SLEEVE; CRES, QQ-S-763, CLASS 303, 304, OR 321.
   (B) PRESSURE CARRIER, CRES, QQ-S-764, CLASS 316 OR 321.
   (A) (C) BRAIDED WIRE COVERING, CORROSION RESISTING STEEL.
   (D) BRAZING ALLOY, SILVER, QQ-B-654.
2. BREAK ALL SHARP EDGES AND REMOVE ALL BURRS.
3. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES: ±.010.
4. TOLERANCES ON HOSE ASSEMBLY LENGTHS SHALL BE AS FOLLOWS: UP TO 10 INCHES, ±1/16; OVER 10 TO 30 INCL, ±1/8; OVER 30 TO 50 INCL, ±1/4; OVER 50 ± 3/8.
5. PRESSURE CARRIER SHALL BE OF SEAMLESS, BRAZED, OR WELDED CONSTRUCTION AND MAY BE ANNULAR OR HELICAL IN CONFIGURATION.
6. EXAMPLE OF PART NUMBER:
   THE PART NUMBER SHALL CONSIST OF THE MS NUMBER FOLLOWED BY THE HOSE SIZE DESIGNATION IN SIXTEENTHS OF AN INCH. THE FINAL ELEMENT OF THE PART NUMBER SHALL BE THE LENGTH OF THE HOSE EXPRESSED IN FOUR DIGITS. THE FIRST THREE DIGITS SHALL REPRESENT THE LENGTH OF THE HOSE IN INCHES. THE FOURTH DIGIT REPRESENTING INCREMENTS OF EIGHTS OF AN INCH.

   FOR EXAMPLE:
   MS90457-8-0164 IS A HOSE ASSEMBLY WITH A 1/2 INCH NOMINAL ID HOSE, 16-1/2 INCHES LONG.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE ON INVITATIONS FOR BID.

(A) DENOTES CHANGES

APPROVED 16 Jan 68 REVISED (A) 7 MAY 81

This standard has been approved by the NAVAL AIR SYSTEMS COMMAND Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY-AS Other Cust	TITLE HOSE ASSEMBLIES METAL, LIQUID OXYGEN	MILITARY STANDARD MS90457 (AS)
PROCUREMENT SPECIFICATION MIL-H-22343	SUPERSEDES: ACEL 3301076	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coverage of previous editions of this form are obsolete.)

PROJECT NO.1660-N435

Source: https://assist.dla.mil - Downloaded: 2026-10-23T20:37Z
Check the source to verify that this is the current version before use.