INCH-POUND


MIL-DTL-28731/36C
w/AMENDMENT 1
29 October 2018
SUPERSEDING
MIL-DTL-28731/36C
15 March 2004


DETAIL SPECIFICATION SHEET

CONNECTOR, ELECTRICAL, CONTACT FORK TYPE, WRAPPOST REMOVABLE (3.0 AMPERES)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28731.

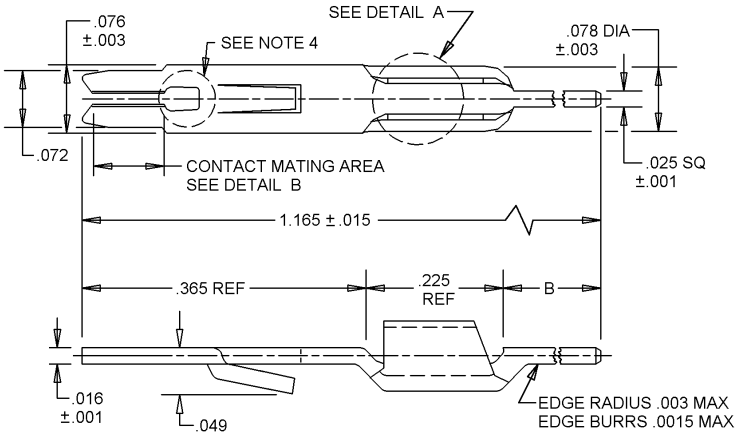

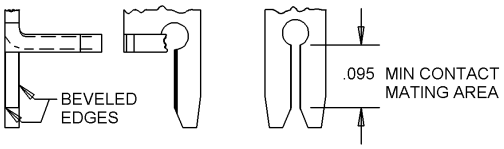

DETAIL B


Inches	mm	Inches	mm
.001	0.03	.072	1.83
.0015	0.038	.076	1.93
.003	0.08	.078	1.98
.015	0.38	.095	2.41
.016	0.41	.225	5.72
.025	0.64	.365	9.27
.049	1.24	1.165	29.59

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:02Z
Check the source to verify that this is the current version before use.

FIGURE 1. Contact, fork type, wrappost removable.

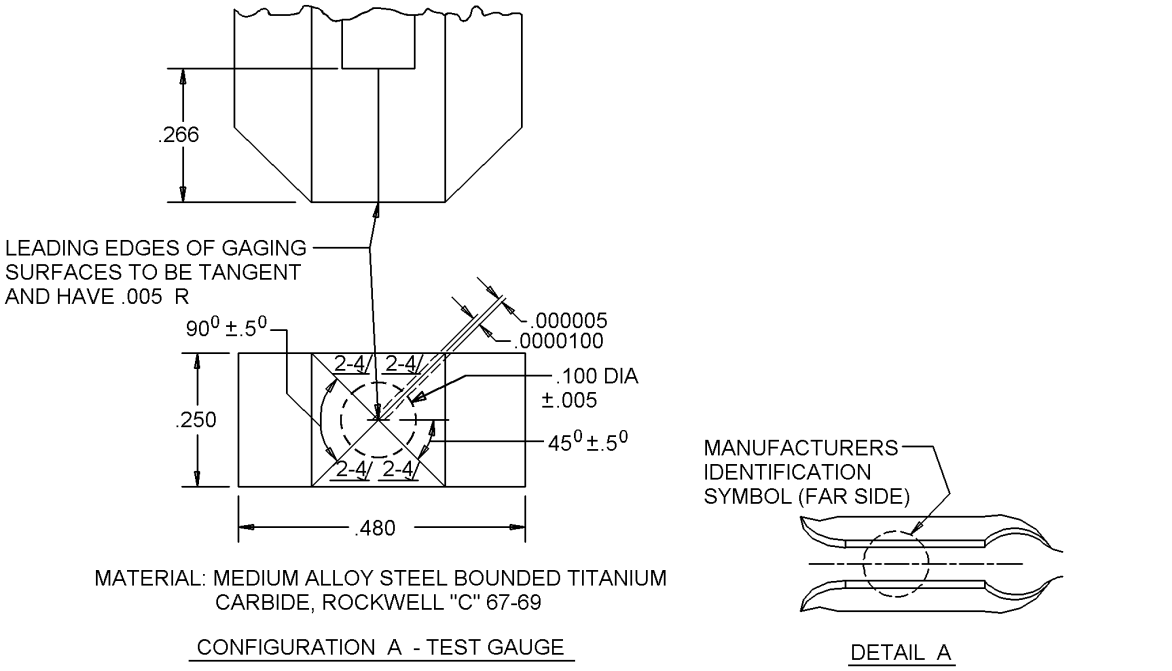

Inches	mm
.000005	0.00027
.0000100	0.000254
.005	0.13
.100	2.54
.250	6.35
.266	6.76
.480	12.19

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±. 005 (0.13 mm). All dimensions are for parts after plating.
4. Contact relief hold configuration, optional.
5. Contact insertion and removal tool, SAE-AS81969/5-01 and SAE-AS81969/4-02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:02Z
Check the source to verify that this is the current version before use.

6. The Government has a royalty-free license under the following listed patents for the benefit of manufacturers of the items either for the Government or for use in equipment to be delivered to the Government. Patent notice: Patent No. 3,248,686 owned by Elco Corporation.

FIGURE 1. Contact, fork type, wrappost removable - Continued.

REQUIREMENTS

Dimensions and configurations: See figure 1.

Application: Contacts are used with mounted connectors having fixed actuating hardware on connectors specified in MIL-DTL-28731/29 through MIL-DTL-28731/33 and MIL-DTL-28731/34. Automatic wire wrap applications are not recommended for use on contacts.

Wire size: For .025 square wrappost, wire sizes 24, 26, 28 and 30 are recommended for wrappost geometry (see MIL-DTL-28731).

Contact separating force (see configuration A):

Polished steel gage from unplated contacts: 1 ounce, minimum.
Plated gold over nickel contacts (contact to contact): 2 to 10 ounces.

Current rating: 3 amperes, 24 AWS wire.

Contact mating area: Contacts may be supplied with either overall plating or localized finish. For localized finish contacts the contact mating area shall be in accordance with detail B and MIL-DTL-28731 and the tail area (dimension B on figure 1) shall be in accordance with MIL-DTL-28731.

Part or Identifying Number (PIN): M28731/36-0001.

Identification of contact: Contacts shall be permanently imprinted with manufacturer's symbol for purpose of identifying manufacturer's product (see detail A).

Amendment Notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:02Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-28731, this document references the following:

MIL-DTL-28731/29
MIL-DTL-28731/30
MIL-DTL-28731/31
MIL-DTL-28731/32
MIL-DTL-28731/33
MIL-DTL-28731/34

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2018-151)

Review activities:
Army - AR, AT, AV, MI
Navy - AS, MC, OS
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organization and responsibilities can change, you should verify the currency of information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:02Z
Check the source to verify that this is the current version before use.