BY ORDER OF THE COMMANDER
1 ST SPECIAL OPERATIONS WING
(AFSOC)

HURLBURTFIELD INSTRUCTION 15-101

4 MARCH 2022

Weather

WEATHER SUPPORT

COMPLIANCE WITH THIS PUBLICATION IS MANDATORY

ACCESSIBILITY: Publications and forms are available on the e-publishing website at **www.e-publishing.af.mil** for downloading.

RELEASABILITY: There are no release restrictions on this publication.

OPR: 23 SOWS/WXF

Certified by: 23 SOWS/CC
(Maj Dan-Michael Coyne)
Pages: 48

This publication implements Air Force Policy Directive (AFPD) 15-1, *Weather Operations* Air Force Manual (AFMAN) 15-129, *Air and Space Weather Operations*. It implements/incorporates the requirements as stated within AFI 91-203, *Air Force Consolidated Occupational Safety Standard,* Chapter 11. It establishes the responsibilities and procedures for providing and using weather services at Hurlburt Field. It provides general information on weather services including weather observations and forecasts, weather warnings and advisories, dissemination of weather information, and reciprocal support. This publication should supplement existing base instructions and plans such as CEMP 10-2 *Hurlburt Field Comprehensive Emergency Management Plan*. This publication does not apply to Air Force Reserve Command (AFRC) Units or the Air National Guard (ANG). Refer recommended changes and questions about this publication to the Office of Primary Responsibility (OPR) using the AF Form 847, *Recommendation for Change of Publication*; route AF Form 847s from the field through Major Command (MAJCOM) publications/forms managers. The authorities to waive wing/organization level requirements in this publication are identified with a Tier ("T-0, T-1, T-2, T-3") number following the compliance statement. See AFI 33-360, Publications and Forms Management, for a description of the authorities associated with the Tier numbers. Submit requests for waivers through the chain of command to the appropriate Tier waiver approval authority, or alternately, to this requestor's commander for non-tiered compliance items. Ensure all records created as a result of processes prescribed in this publication are maintained in accordance with Air Force Instruction 33-322, Records Management and Information Governance Program, and disposed of in accordance with

the Air Force Records Disposition Schedule located in the Air Force Records Information Management System. The use of the name or mark of any specific manufacturer, commercial product, commodity or service in this publication does not imply endorsement by the AF. Compliance with the attachments in this publication is mandatory.

SUMMARY OF CHANGES

This document is substantially revised and must be completely reviewed. This revision incorporates and reflects changes in Mission Weather Element procedures and support.

Chapter 1—GENERAL INFORMATION **6**

1.1. General. 6
1.2. Designators. 6
1.3. Weather Operations. 6
1.4. Assumptions. 7
1.5. Shortfalls and Limiting Factors. 7
1.6. Duty Priorities. 7
1.7. Geographic Area of Responsibility. 7
1.8. Operating Hours and Contact Information. 7
1.9. Backup Weather Support. 8
1.10. Base Weather Station Evacuation. 8
1.11. Joint Environmental Toolkit (JET). 8
1.12. Release of Weather Information. 8

Chapter 2—AIRFIELD SERVICES ELEMENT **9**

2.1. Weather Observations. 9
2.2. Basic Weather Watch (BWW). 10
2.3. Cooperative Weather Watch. 10

Chapter 3—MISSION WEATHER ELEMENT **12**

3.1. Terminal Aerodrome Forecast (TAF). 12
3.2. Mission Execution Forecast (MEF). 12
3.3. Mission Watch. 13
3.4. Pilot-to-Metro Service (PMSV). 13
3.5. Space Weather Support. 13
3.6. Toxic Corridors. 13
3.7. Chemical Downwind Messages: 13

Chapter 4—STAFF WEATHER ELEMENT 14

4.1. Wing Staff Meeting. 14
4.2. Battle Staff. 14
4.3. Frag-break Briefing. 14
4.4. Mobility Concept Briefing. 14
4.5. Operations/Intelligence. 14
4.6. Operations/Maintenance Briefing. 14
4.7. Climatology Support. 14
4.8. Air Traffic Control Training/Orientation. 14

Chapter 5—METEOROLOGICAL WATCH 15

5.1. General. 15
5.2. The 1 SOW Command Post will: 15
5.3. Weather Watches. 15
Table 5.1. Forecasted Weather Watch Criteria and Minimum Desired Lead-Times. 16
5.4. Weather Warnings. 16
Table 5.2. Forecasted Weather Warning Criteria and Minimum Desired Lead-Times. 17
Table 5.3. Observed Weather Warning Criteria and Desired Lead Times. 17
5.5. Weather Advisories. 17
Table 5.4. Forecast Weather Advisory Criteria and Associated Desired Lead Times. 17
Table 5.5. Observed Terminal Weather Advisory Criteria and Desired Lead Times. 18
5.6. Dissemination of Watches/Warnings/Advisories. 18
5.7. Weather Warning/Watch/Advisory Text Format. 18
5.8. Severe Weather Action Procedures (SWAP). 19

Chapter 6—MISSION AND REQUIREMENTS OF SUPPORTED AGENCIES 21

6.1. General. 21
6.2. 1st Special Operations Wing. 21
6.3. 1 SOW Flying Units. 21
6.4. Air Traffic Control (ATC). 21
6.5. 1st Special Operations Civil Engineering Squadron/Readiness Flight. 21
6.6. Emergency Operations Center (EOC). 21

Chapter 7—RECIPROCAL SUPPORT 22

7.1. General. 22

7.2. 1st Special Operations Wing. 22
7.3. 1st Special Operations Group Commander. 22
7.4. 1st SOW Flying Squadrons. 22
7.5. Command Post. 22
7.6. 1 SOW Maintenance Operations Center (MOC) Senior Controller. 22
7.7. Airfield Management Operations. 23
7.8. Control Tower. 23
7.9. Safety Office. 23
7.10. Security Forces. 23
7.11. 1st Special Operations Civil Engineering Squadron. 23
7.12. 1st Special Operations Communications Squadron. 24
7.13. 1st Special Operations Support Squadron/RAWS. 24
7.14. Emergency Operations Center (EOC). 24

Chapter 8—TROPICAL WEATHER 25

8.1. General. 25
8.2. Hurricane Categories. 25
Table 8.1. Saffir/Simpson Hurricane Scale. 26
8.3. Hurricane Conditions (HURCON)/Response Phases. 26
Table 8.2. Hurricane Conditions (HURCON)/Response Phases. 26
8.4. Notification Procedures. 27
8.5. WF Responsibilities. 28
Table 8.3. Tropical Watch Criteria. 28
Table 8.4. Tropical Warning Criteria. 28

Attachment 3—LOCAL OBSERVATION CRITERIA 36

Attachment 4—TAF SPECIFICATION AND AMENDMENT CRITERIA 37

Attachment 5—EXAMPLE JET DISSEMINATION FORMATS 39

Attachment 6—WEATHER WARNING /WATCH NOTIFICATION DIAGRAM 40

Attachment 7—WEATHER WATCH/WARNING ADVISORY PRIMARY DISSEMINATION TREE 41

Attachment 8—WEATHER WATCH WARNING ADVISORY/ BACKUP DISSEMINATION TREE 42

Attachment 9—FORMAT FOR WEATHER WARNING, WATCHES, AND WEATHER ADVISORIES 43

Attachment 10—SEVERE WEATHER ACTION PROCEDURES DUTIES/RESPONSIBILITIES 45

Attachment 11—OPREP-3 REPORT FORMAT 47

Chapter 1

GENERAL INFORMATION

1.1. General.

1.1.1. This instruction establishes weather support by the 23d Special Operations Weather Squadron Weather Flight (23 SOWS/WXF) for the 1st Special Operations Wing (1 SOW) and other units assigned to Hurlburt Field, Florida. Basic concepts and procedures are outlined in Air Force and Air Force Special Operations Command directives. Weather support is directed by AFMAN 15-129 *Air and Space Weather Operations.* Please see **Attachment 1** for a glossary of abbreviations and acronyms.

1.1.2. This instruction establishes requirements and procedures for weather support, which must be coordinated at the local level to meet mission needs. It consolidates weather support requirements and procedures for peacetime operations and eliminates the need for written agreements between the weather unit and supported operations. It does not cover weather support procedures for emergency war operations or certain other special operations or procedures. These are covered in applicable plans/regulations. This publication supersedes Hurlburt Field Support Plan dated 15 Nov 2019.

1.1.3. This document is UNCLASSIFIED and does not come within the scope of directives governing the protection of information affecting national security. Although it is unclassified, it is FOR OFFICIAL USE ONLY in accordance with AFI 33-332, *Air Force Privacy Act Program.*

1.1.4. OPSEC**.** Operational security has been considered in the development of this plan. The nature of operational support identified does not violate OPSEC.

1.2. Designators. All weather products disseminated by or for Hurlburt Field will use KHRT as the ICAO location indicator. The WMO index number is 74777.

1.3. Weather Operations.

1.3.1. Operational Weather Squadrons can provide resource protection, Terminal Aerodrome Forecasts (TAFs), regional and operational-level weather products and information, meteorological watch (METWATCH), Pilot-to-Metro Service (PMSV), and limited flight weather Mission Execution Forecast (MEF) support for Air Force and Army locations within designated geographic regions for locations without a co-located weather flight.

1.3.2. The 26 OWS at Barksdale AFB, Louisiana provides regional level weather products and information to Air Force and Army units operating in the southeast CONUS. The Weather Flight at each Air Force and Army location will focus on providing tactical and operational-level weather products and information needed for mission execution and provide weather products and information to the commander of deployed forces during wartime, contingency, and exercise operations.

1.3.3. The Weather Flight Commander, 23 SOWS/WXF, is the designated Wing Weather Officer to the 1st Special Operations Wing and will coordinate all weather support required by units assigned to Hurlburt Field.

1.4. Assumptions. Adequate resources and communications will be available to execute this instruction and sufficient weather intelligence will be available from various sources on which to base weather operations and production.

1.5. Shortfalls and Limiting Factors. None.

1.6. Duty Priorities. All base weather station tasks cannot be accomplished simultaneously. Therefore, duty priorities are established to ensure tasks are accomplished in order of relative importance and publicized to avoid misunderstanding among supported agencies. Duty priorities will ensure timely response to situations under normal conditions. However, the list will not replace good judgment. The weather technician may deviate in the best interest of flight safety and/or protection of personnel or property. The weather technician will use the following priority list as a guide for accomplishing duties.

1.6.1. Perform Emergency War Order (EWO) Tasking.

1.6.2. Execute Base Weather Station Evacuation.

1.6.3. Issue/Disseminate Imminent Hazardous Weather Warnings

1.6.4. Respond to Aircraft /Ground Emergencies

1.6.5. Relay Battlestaff/EOC/JPG Recalls to Flight Leadership

1.6.6. Respond to Pilot-to-Metro-service (PMSV) Contacts

1.6.7. Perform METWATCH / Update Supervisor of Flying (SOF)

1.6.8. Initiate Severe Weather Action Plan (SWAP) procedures

1.6.9. Back-up/Augment AN/FMQ-19 Observations for Mandatory Elements

1.6.10. Disseminate Urgent PIREPs

1.6.11. Issue Weather Watches and Advisories

1.6.12. Disseminate Terminal Aerodrome Forecast (TAF)

1.6.13. Produce and Disseminate Mission Execution Forecast (MEF)

1.6.14. Provide Flight Weather Briefings / Perform MISSIONWATCH

1.6.15. Disseminate PIREPS

1.6.16. Weather Function Training

1.6.17. Accomplish Administrative Tasks

1.7. Geographic Area of Responsibility. The area of responsibility for products and services provided by the Weather Flight is the terminal area, which is the area located within a 5 nautical mile radius around the center of the Hurlburt airfield complex. The WF will also MISSIONWATCH all areas and routes in which Hurlburt flying units are conducting operations.

1.8. Operating Hours and Contact Information.

1.8.1. Staff services are available from 0700 to 1500, Monday through Friday, except federal holidays, Wing Goal Days, Family Days, or other directed down days.

1.8.2. Weather technicians are available in the Base Weather Station (BWS) to provide all services 24-hours a day, Monday – Friday; and on Saturday and Sunday when the airfield is open. A standby forecaster will be available and recalled by the 1 SOW Command Post, or as weather conditions dictate.

1.8.3. The WF can be contacted at DSN 579-7423/6527/6198 or Commercially 850-884-7423/6527/6198.

1.9. Backup Weather Support.

1.10. Base Weather Station Evacuation. If the WF is required to evacuate the BWS, the operations will relocate to the Alternate Operating Location (AOL), which is in building 90220 (Weather Warehouse located on the back side of the Education Office) until able to move back into the primary location.

1.10.1. Upon arrival at the AOL, the WF will standup operations and notify ATC, Eglin RAPCON, the Command Post, Airfield Management that they have resumed operations at the new site. All the flying squadrons in 1 SOW will be notified of the move via e-mail.

1.10.2. The weather technician will provide the following services from the alternate operations location.

1.10.2.1. Continue to issue and update MEFs (AFSOC Form 87, *AFSOC Mission Weather Briefing*, and electronic Weather Briefing Flimsy) if the capability exists. The MEF will be saved to the weather SharePoint site and, upon request, e-mailed to the aircrew.

1.10.2.2. Provide METWATCH for Hurlburt Field from the alternate work center. If necessary, an additional technician will be posted to a location that provides visibility of the airfield. This person may be co-located in the air traffic control tower if possible.

1.10.2.3. Brief aircrews and MISSIONWATCH flights. Briefings will be conducted via phone.

1.10.3. PMSV radio support will not be available from the alternate operations location. However, the Eglin AFB WF's PMSV frequency will be added to all Mission Execution Forecasts (MEF) and briefed to aircrew.

1.10.4. Timeliness and accuracy of services provided from the alternate work center may suffer somewhat due to limited communications and use of backup equipment.

1.11. Joint Environmental Toolkit (JET). JET is the primary weather data dissemination system on Hurlburt Field. All required agencies will utilize the JET web portal at all times so they automatically receive weather updates as they occur. Examples of products disseminated over JET are in **Attachment 5**. 1 SOW Command Post will also use a computer network alerting system as a secondary dissemination to get watches, warning and advisories to the base populace.

1.12. Release of Weather Information. Support to Non-Department of Defense agencies and the general public will not be provided unless authorized by the Wing Public Affairs Office.

Chapter 2

AIRFIELD SERVICES ELEMENT

2.1. Weather Observations.

2.1.1. Automated Observations. The Weather Flight uses the FMQ-19 Automatic Meteorological Station as its primary surface weather observation source. The FMQ-19 is a sophisticated set of weather instruments that measure pressure, precipitation, wind speed, wind direction, visibility, runway visual range, sky cover, cloud height, temperature, dew point and lightning. The FMQ-19 has three different operational modes: Automatic, Augmented, and Backup.

2.1.1.1. Automatic Mode. When the FMQ-19 is in Automatic Operational Mode, the system records, encodes and disseminates weather observations without human intervention.

2.1.1.2. Augmented/Supplemented Mode. Supplementing is a method of manually adding meteorological information to an automated observation that is beyond the capabilities of the AMOS to detect and/or report. The FMQ-19 will be placed in Supplemented Operational Mode during the following conditions:

2.1.1.2.1. Tornadic activity, including funnel clouds and water spouts (2 hrs prior to onset).

2.1.1.2.2. Hail 3/4 inch or greater (2 hrs prior to onset).

2.1.1.2.3. Volcanic Ash (2 hrs prior to onset).

2.1.1.2.4. Ceiling height less than or equal to 5,000 ft (during operational hours only).

2.1.1.2.5. Visibility less than or equal to 5 statute miles (during operational hours only).

2.1.1.2.6. Any weather condition that is considered operationally significant (e.g. has a significant mission impact or mission failure).

2.1.1.3. Backup Mode. The FMQ-19 will be placed in Backup Operational Mode when there is a partial system failure, or determined that specific sensors are not representative with actual conditions.

2.1.1.4. Limitations. Although the FMQ-19 is an advanced system, it does have limitations compared to human observed weather conditions. Some of the limitations of the system are its ability to determine prevailing visibility, cloud cover and ceilings. The FMQ-19 only samples cloud data directly above the sensor, and is a different type of cloud observation than the human observer's celestial dome, or entire sky, observation. There are algorithms within the software suite which uses the sensed data to compute sky coverage. The visibility sensor samples a small part of the air in the vicinity of the sensor to determine visibility. The FMQ-19 will not be able to detect reduced visibilities away from the sensor (Tower Visibility), or sector visibility.

2.1.2. Manual Observations. The Weather Flight will manually observe weather observation elements when all of the FMQ-19 in not operational. The location of the weather observing

site does not permit a 360-degree unrestricted view of the weather and is further limited by the lack of visibility markers beyond 2 statute miles. Visibilities at night are limited due to the lack of distinguishable nighttime visibility references. Specific limitations are:

2.1.2.1. Daytime:

2.1.2.1.1. Azimuth 200 degrees through 230 degrees restricted to 1/8 SM due to Eason hangar.

2.1.2.1.2. Azimuth 030 degrees through 070 degrees restricted to 5/8 SM due to high tree line.

2.1.2.1.3. No daytime markers beyond 3 SM.

2.1.2.2. Nighttime:

2.1.2.2.1. No nighttime references beyond a 1/2 SM from azimuth 150 degrees through 350 degrees.

2.1.2.2.2. No nighttime references beyond 1 SM from azimuth 360 degrees through 090 degrees.

2.1.2.2.3. No nighttime markers beyond 3 SM.

2.1.3. Dissemination. Automated Observations are taken by the FMQ-19 Automatic Meteorological Station, and disseminated locally and long-line via the JET system and identified by the heading "KHRT, (type of observation), and time (UTC)." During periods when the FMQ-19 or JET system is inoperative, observations will be relayed via telephone and/or hotlines in the following order: ATC, Eglin RAPCON, and the 1 SOW/CP. When received by telephone/hotline, these agencies will provide the caller with their initials and a read-back of the entire observation to ensure accurate reception of the information.

2.2. Basic Weather Watch (BWW). A Basic Weather Watch will be used when the FMQ-19 is in Augment or Backup mode (see **paragraph 2.1.1.2** and **paragraph 2.1.1.3**). Weather personnel normally conduct a BWW from the base weather station (BWS). Due to other duties, along with other restrictions such as a building design that does not allow a 360-degree view of the runway complex, etc., weather personnel cannot monitor the weather continuously and cannot be expected to detect and report all weather changes as they occur. In addition to taking and disseminating required observations, the BWW observing program includes minimum requirements to recheck weather conditions at intervals not to exceed 20 minutes since the last observation/recheck, to determine the need for a LOCAL or SPECI observation.

2.2.1. When a reliable source (ATC personnel, pilots, law enforcement, etc.) reports weather conditions different from the last report, weather personnel will recheck the weather and, if required, disseminate a new observation.

2.3. Cooperative Weather Watch. A Cooperative Weather Watch is the name given for the cooperation between weather personnel and control tower operators in identifying significant weather changes. The primary concern is the occurrence of previously unreported weather conditions that could affect flight safety or could be critical to the safety or efficiency of other local operations and resources. Due to the weather technician's limited view of the horizon, tower personnel will notify the weather technician of the occurrence of previously unreported weather conditions. These include prevailing visibility which meets special criteria as listed in

Attachment 2; tower prevailing visibilities less than 4 statute miles (6000 meters) when different from surface prevailing visibility; sector visibilities which differ from prevailing visibility, especially in the area where the weather technician's view of the horizon is restricted; beginning or ending of precipitation, thunderstorms, lightning, and any other significant weather. Tower personnel will relay PIREP's in accordance with **paragraph 7.8.8** The assistance provided by tower personnel will not interfere with their primary duties and does not reduce the responsibility of weather personnel to identify changes in weather conditions. When reliable sources (i.e., ATC, pilots, security forces) report weather conditions different from the last disseminated observation, the weather technician will reevaluate the weather conditions. If the FMQ-19 is in Backup or Augment mode and based on reevaluation of the different weather conditions reported and local policy, the technician will:

2.3.1. Take and disseminate a SPECI or LOCAL observation if different conditions warrant immediate dissemination, (AFMAN 15-111, *Surface Weather Observations*).

2.3.2. Include the report of the differing conditions in the next METAR, SPECI, or LOCAL observation if the different conditions alone do not warrant immediate dissemination, (AFMAN 15-111).

Chapter 3

MISSION WEATHER ELEMENT

3.1. Terminal Aerodrome Forecast (TAF).

3.1.1. The Weather Flight disseminates a TAF over JET at 1000Z, 1800Z, and 0200Z and cover a 30-hour period. Reference AFMAN 15-124 for code breakdown. When the airfield is scheduled to close, the TAF will carry a LAST NO AMDS remark with the next scheduled issue time as outlined in AFMAN 15-124 and **Attachment 4**.

3.1.2. Specification and Amendment Criteria. The TAF Specification and Amendment criteria are listed in **Attachment 4** and are specified IAW AFMAN 15-129, *Air and Space Weather Operations-Processes and Procedures,* and mutually agreed upon criteria specific to the mission needs of customers at Hurlburt Field.

3.1.3. Dissemination. The Weather Flight will disseminate the TAF over JET (or back up JET server). If JET is inoperative, forecasts will be disseminated using AFW-WEBS or by contacting another weather unit by phone. The forecast is also available via the WF webpage whenever JET is operational.

3.2. Mission Execution Forecast (MEF).

3.2.1. Weather Briefing Flimsy. The Weather Flight will use the Weather Briefing Flimsy as its primary means of producing a flight weather briefing for all scheduled flights that are within the local flying area, defined as the Florida Panhandle, the low levels routes in southern Alabama and up to southeastern Tennessee, as well as the water ranges over the Gulf of Mexico. The Flimsy is in a spreadsheet format that outlines takeoff and landing data along with range zone forecasts.

3.2.2. AFSOC Form 87. The Weather Flight will use the AFSOC Form 87 as a means of producing a flight weather briefing for all scheduled flights that are outside of the local flying area, or for missions that have unique needs that the Weather Briefing Flimsy does not cover. The AFSOC Form 87s will be pre-filled the day prior using scheduled flight data located in the daily flying schedule. If a short notice mission is requested the weather flight requires at least 2 hours advance notice: Request made inside of 2 hours advance notice will be completed as other duties allow. The AFSOC Form 87 will be completed and sent digitally sent to an official email address, and saved to the weather flights SharePoint site. All will have an electronic transmission time in the “briefing time” block. This time will be prefixed with an “E”. It is the aircrew’s responsibility to call the duty forecaster for a step brief to see if there are any changes. At this time an official brief time and forecaster’s initial will be given.

NOTE: DoD Form 175-1. Exception to the rule will be the PC-12s which may use the DD Form 175-1 due to the amount of recovery/alternate sites for their missions.

3.2.3. Local/Verbal Briefing. If an aircrew is conducting local flying, they may request a “local” weather briefing which will be given face to face at the weather station or via phone. All Local/Verbal briefings will be documented on a Local Aircrew Briefing Log. The Local/Verbal Briefing may be in the same format as the Weather Briefing Flimsy described in **paragraph 3.2.1**.

3.2.4. All 1 SOG aircraft departing/deploying from Hurlburt Field or operationally controlled (C2) by the 1 SOW will obtain weather support from the 23 SOWS/WXF Weather Flight through mission termination.

3.3. Mission Watch. The WF will conduct a continuous MISSIONWATCH of all routes and flying areas used by Hurlburt flying units during the times they are using them. During emergency situations or rapidly changing conditions, the WF will immediately notify the 1 SOW/CP to relay important weather information to airborne aircraft.

3.4. Pilot-to-Metro Service (PMSV). The WF will provide full service PMSV on the assigned UHF frequency of 335.45 MHz as well as VHF frequency of 143.725. Aircrews are highly encouraged to relay pilot reports during PMSV contacts. When the Hurlburt PMSV is inoperative, aircrews will be given the Eglin AFB PMSV frequency of 342.2 MHz.

3.5. Space Weather Support. Space weather data and forecasts for Hurlburt customers are available upon request. Information available includes space weather impacts on radio frequencies and the Global Positioning System (GPS).

3.6. Toxic Corridors. IAW AFI 10-2501, Air Force Emergency Management Program Planning and Operations, the WF will provide the 1 SOCES/CEX with weather information so they can calculate toxic corridors for chemical spills. The WF will not be responsible for producing toxic corridors.

3.7. Chemical Downwind Messages: The WF will provide Chemical Downwind Messages (CDM) upon request for disaster response, chemical/nuclear attack, and exercise purposes. Automated CDMs, as well as Effective Downwind Message (EDM), can be found at the 26 OWS homepage as well as on AFW-WEBS.

Chapter 4

STAFF WEATHER ELEMENT

4.1. Wing Staff Meeting. Upon request, the WF will present a weather briefing at the 1 SOW Commander's staff meeting. The format of the briefing will be tailored to the scenario driving the staff meeting formation.

4.2. Battle Staff. The WF will provide weather briefings to the Wing Battle Staff as necessary. The format of the briefing will be tailored to the scenario driving the Battle Staff's formation.

4.3. Frag-break Briefing. The WF will provide a briefing at the Frag-break meeting. Weather will generally be limited to a 5-day forecast for Hurlburt Field with a focus on activity taking place on the airfield for maintenance prep of aircraft and logistics prep of cargo. Additional items will be briefed as required or requested.

4.4. Mobility Concept Briefing. The WF will provide a briefing at all Mobility Concept Briefings, as necessary. The focus of this briefing will be on departure conditions, deployed area conditions and climatology. As a minimum, the briefing will include forecast conditions at Hurlburt Field for departure time, deployed area climatological conditions, and forecast conditions for destination arrival time. Other topics will be briefed as required.

4.5. Operations/Intelligence. The WF will provide weather briefings to the Wing Staff at scheduled times. The format of the briefing will be tailored to current CONUS and OCONUS operations.

4.6. Operations/Maintenance Briefing. A WF representative will provide a 3 day mission impact briefing daily to operations and maintenance group commanders.

4.7. Climatology Support. Climatological data, for worldwide locations, will be available upon request. Requests should be made at least 1 business day in advance in order to allow the WF to research and compile the data. Urgent requests will be compiled as soon as possible and in accordance with WF duty priorities (See **paragraph 1.6**).

4.8. Air Traffic Control Training/Orientation. The WF will provide certification and additional training, as required, for ATC personnel. This training will be limited to METAR code, TAF code, and visibility determination. Training and certification will be conducted Monday-Friday, between the hours of 0800-1500L, upon coordination with the WF.

Chapter 5

METEOROLOGICAL WATCH

5.1. General.

5.1.1. The WF will jointly monitor observed and forecast weather conditions and notify selected agencies when pre-established weather conditions occur or are expected to occur.

5.1.2. Desired Lead Time. Advanced warning of threatening weather conditions allows local agencies to take specific actions prior to occurrence. The desired lead-time is the minimum amount of advanced notice an agency requires prior to the onset of a particular weather phenomenon.

5.1.3. All weather watches, warnings, and advisories are issued IAW AFMAN 15-129. Warnings and advisories may be issued as forecast or observed. These watches warning and advisories are issued as Terminal (within 5nm of Hurlburt) with the exception of the Thunderstorms within 10 NM.

5.2. The 1 SOW Command Post will:

5.2.1. Monitor weather information disseminated over JET.

5.2.2. Disseminate weather watches, warnings and advisories to required agencies.

5.2.3. When called by the WF, acknowledge receipt of the weather watch, warning, or advisory. The WF should not have to read the text of the weather watch, warning, or advisory to Airfield Operations unless their JET is not working.

5.2.4. The Control Tower will:

5.2.4.1. Monitor weather information disseminated over JET to AFAS.

5.2.4.2. Disseminate weather watches, warnings and advisories to airborne aircraft via radio and ATIS.

5.2.4.3. When called by the WF, acknowledge receipt of the weather watch, warning, or advisory. The WF should not have to read the text of the weather watch, warning, or advisory to Airfield Operations unless their AFAS is not working.

5.3. Weather Watches. 23 SOWS/WXF will issue a forecast weather watch for within 5 nm of the center of the Hurlburt Field runway complex when the potential for the criteria defined in **Table 5.1** exists.

Table 5.1. Forecasted Weather Watch Criteria and Minimum Desired Lead-Times.

Forecasted Weather Watch Criteria and Minimum Desired Lead-Times	
Criteria	**Desired Lead-Time**
Tornado/Waterspout	At Least 60 Minutes Prior to Possible Occurrence
Severe Thunderstorm[##] (Damaging Winds ≥ 45 knots associated with thunderstorms **and/or** Severe Hail ≥ 3/4 inch)	At Least 60 Minutes Prior to Possible Occurrence
Damaging Winds ≥ 45 knots not associated with thunderstorms	At Least 60 Minutes Prior to Possible Occurrence
Freezing Precipitation (Any Intensity)	At Least 60 Minutes Prior to Possible Occurrence
Heavy Rain (≥ 3 Inches in ≤ 12 Hours)	At Least 60 Minutes Prior to Possible Occurrence
Heavy Snow (≥ 1/2 Inch in ≤ 12 Hours)	At Least 60 Minutes Prior to Possible Occurrence
Lightning Within 5 NM	30 minutes prior to first Lightning Strike
Note: Lead-time requirements have been determined by the needs of the installation commander and default lead-times and criteria are not being used.	
[##] The Severe Thunderstorm watch will be issued with the wind and hail criteria both combined into a single watch for precautionary purposes.	

5.4. Weather Warnings.

5.4.1. Forecast Weather Warnings. Forecasted warnings are issued IAW AFMAN 15-129. 23 SOWS/WXF will issue a forecasted weather warning for within 5 NM of the center of Hurlburt Field when the criteria defined in **Table 5.2** occurs, or is expected to occur.

Table 5.2. Forecasted Weather Warning Criteria and Minimum Desired Lead-Times.

Forecasted Weather Warning Criteria and Minimum Desired Lead-Times		
Warning	**Criteria**	**Desired Lead-Time**
Tornado	Tornado, Waterspout or Funnel Cloud	5 minutes
Severe Thunderstorm[##]	Damaging Winds ≥ 45 knots associated with thunderstorms **and/or** Damaging Hail ≥ 3/4 inch at Hurlburt Field	120 minutes
Damaging Winds	Surface winds not associated with thunderstorms ≥ 45 knots	120 minutes
Heavy Rain ≥ 3 inches	Heavy Rain ≥ 3 inches within 12 hrs	120 minutes
Heavy Snow ≥ 1/2 inch	Heavy Snow ≥ 1/2 inch within 12 hrs	60 minutes
Note: Lead-time and weather requirements have been determined by the needs of the installation commander and default lead-times and criteria are not being used.		
[##] The Severe Thunderstorm warning can be issued with either the wind or the hail criteria separately or both the hail and wind criteria combined into a single warning criteria.		

5.4.2. Observed Weather Warnings. The WF will issue an observed weather warning for within 5 nm of Hurlburt Field runway complex when the criteria defined in **Table 5.3** occurs.

Table 5.3. Observed Weather Warning Criteria and Desired Lead Times.

Criteria	Desired Lead-Time	Issued By
Lightning From Thunderstorms (Within 5nm)	First Observed	WF

5.5. Weather Advisories.

5.5.1. Forecast Weather Advisories. Forecast advisories are issued IAW AFMAN 15-129. The 23 SOWS/WXF will issue a forecast weather advisory for within **5 nm** of the center of the Hurlburt Field runway complex when the criteria defined in **Table 5.4** is occurring, or is expected to occur.

Table 5.4. Forecast Weather Advisory Criteria and Associated Desired Lead Times.

Criteria	Desired Lead-Time	Issuing Agency
Winds ≥ 30 but < 45 Knots	60 minutes	WF
Surface Air Temperature ≤ 32°F	120 minutes	WF

5.5.2. Observed Weather Advisories.

5.5.2.1. Observed Terminal Weather Advisories. The WF will issue an observed terminal weather advisory for within 5 nm of Hurlburt Field runway complex when the criteria

defined in **Table 5.5** occurs. Exception: An observed advisory will be issued for Thunderstorms within 10 NM.

Table 5.5. Observed Terminal Weather Advisory Criteria and Desired Lead Times.

Criteria	Desired Lead-Time	Issued By
Ceiling less than 200 FT and/or visibility less than ½ mile	First Observed	WF
Cross winds ≥ 25 knots (wet runway)	First Observed	WF
Cross winds ≥ 35 knots (dry runway)	First Observed	WF
Gust spread ≥ 20 knots	First Observed	WF
Low-level wind shear (LLWS) (Not associated with thunderstorms)	First Observed	WF
Winds ≥ 20 but < 30 Knots	First Observed	WF
Surface Air Temperature ≤ 40°F	First Observed	WF

5.6. Dissemination of Watches/Warnings/Advisories. All weather warnings, watches, and advisories will be disseminated using JET. Telephone confirmation will be used to ensure the Command Post, Airfield Management Operations, and the tower has received them. If the JET is inoperative, warnings, watches, and advisories will be disseminated by phone to the same agencies. The Command Post and Airfield Management Operations will disseminate information to the agencies listed in Attachment **6, 7, and 8**.

5.7. Weather Warning/Watch/Advisory Text Format. The text of weather warnings, watches, and advisories will contain the warning/watch/advisory number, the specific valid time period (until further notice for observed products), and specific conditions expected. They will be numbered consecutively with the number of the month, and the number of the warning. For example, the first warning issued in March will be No. 3-1; the next is No. 3-2. A warning for observed lightning is the only criterion that will be issued separately from other warning criteria. More than one advisory may be in effect at the same time. The following additional requirements apply to warnings issued for criteria other than observed lightning.

5.7.1. Only one warning will be in effect at a time (other than observed lightning), and it will include all elements meeting warning criteria. The only exception to this rule will be a Tornado Warning. In the interest of safety, this warning will be issued as soon as possible and may be issued as a separate warning allowing for two warnings to be simultaneously valid.

5.7.2. Warnings issued to add or delete a weather phenomenon (for example, adding hail greater than or equal to 1/2 inch to an existing warning for winds greater than 45 knots) will include the explanation “This warning upgrades/downgrades Weather Warning # (previous warning)”.

5.7.2.1. UPGRADES. The new warning forecasts more severe weather.

5.7.2.2. DOWNGRADES. The new warning forecasts less severe weather.

5.7.2.3. EXTENDS. The valid period of a previously issued warning is extended.

5.7.3. Warnings and watches issued to extend the valid time will not be re-issued or re-numbered. These will include the explanation "This is an extension of Weather Warning Number (current warning)".

5.7.4. When the weather technician believes that phenomena meeting warning, watch, or advisory criteria are no longer expected during the valid time, they will be canceled with the explanation "Weather Warning Number (current warning) is canceled". See **Attachment 5** for dissemination formats.

5.8. Severe Weather Action Procedures (SWAP). The purpose of SWAP is to ensure the WF has sufficient personnel available to provide effective resource protection during potential and/or actual severe weather events. The SWAP may be implemented for any warning criteria (**Table 5.2**) but will primarily be used for severe thunderstorm, high wind, and tornado/waterspout events. The SWAP may also be implemented in the event of unforeseen circumstances (i.e. communications line or critical equipment failure). The SWAP will be implemented in coordination with WF leadership, and/or the standby forecaster.

5.8.1. WF Responsibilities. WF will perform the WF SWAP responsibilities as defined in AFMAN 15-129 and AFMAN 10-206, *Operational Reporting* and this instruction. More specifically, WF will accomplish the following procedures:

5.8.1.1. During normal staff duty hours (0700 to 1500, Monday through Friday, except federal holidays/authorized down days) the weather technician will implement SWAP by notifying the WF Commander, the Superintendent, Operations Manager, Wing Weather Officer (WWO) and/or the SWAT standby member in their offices or by phone. It is likely that the above personnel are present in the weather station and do not need to be recalled/activated.

5.8.1.2. During nights, weekends and federal holidays/authorized down days the weather technician will implement SWAP by notifying the SWAT standby member, as indicated on the current duty schedule, by home phone or cell phone.

5.8.1.3. Activation. The weather person on duty will discuss the meteorological situation, manning requirements, and the recall of additional personnel (or place on standby) with the SWAT standby member. If the SWAT standby member is unavailable, coordinate with the WF Commander, Superintendent, Operations Manager, and/or WWO. If deemed necessary the SWAT standby member will report to the weather station no later than 30 minutes after notification by the weather technician or as soon as possible. Once the SWAT standby member has arrived they will assist in evaluating the situation, determine the need to recall additional personnel, and execute the SWAP duties/responsibilities in **Attachment 10**.

5.8.1.4. The FMQ-19 will be placed in Augment Mode if severe weather is expected to occur.

5.8.1.5. Post Event Procedures. If severe weather actually occurs the following procedures will be executed if necessary.

5.8.1.5.1. OPREP-3 BEELINE Reporting procedures. When damage to the installation or aircraft has occurred due to weather, provide the information in

Attachment 11 to the 1st Special Operations Wing Command Post. A copy of OPREP-3 information will be sent to AFSOC/A3W.

5.8.1.5.2. If the event is to be used as one of the semi-annual SWAP tests, complete a memorandum for record documenting the event.

5.8.1.6. The WF personnel's home and cell phone numbers will be reviewed monthly or when a change in personnel occurs to ensure the most current numbers are available for SWAP.

Chapter 6

MISSION AND REQUIREMENTS OF SUPPORTED AGENCIES

6.1. General. The WF supports numerous units with diversified missions assigned to Hurlburt Field. Each unit has unique weather requirements to accomplish their mission.

6.2. 1st Special Operations Wing.

6.2.1. Mission. The 1 SOW mission focus is unconventional warfare: counter-terrorism, combat search and rescue, personnel recovery, psychological operations, aviation assistance to developing nations, "deep battlefield" re-supply, interdiction and close air support.

6.2.2. Weather Support Requirements. The WF will provide briefings for the Wing Standup Briefing (as requested) and Battle Staff Briefing (as requested), as well as the Operations/Intelligence Briefing (as scheduled).

6.3. 1 SOW Flying Units.

6.3.1. Weather Support Requirements. The WF will provide MEFs and MISSIONWATCH for local flying operations and missions in scheduled Flying Areas.

6.4. Air Traffic Control (ATC). WF will provide timely updates to surface weather observations and forecasts. Provide METWATCH information.

6.5. 1st Special Operations Civil Engineering Squadron/Readiness Flight. WF will provide weather information for calculating toxic corridors. Upon request obtain/provide CDMs from the servicing CU.

6.6. Emergency Operations Center (EOC). WF will provide a forecaster when the EOC is activated and it is deemed necessary for continuous support. The WF is better postured to provide critical support from the Base Weather Station, but some significant situations may exists where a forecaster should be embedded in the EOC (e.g. After declaring HURCON 2, NBC attack, etc.).

Chapter 7

RECIPROCAL SUPPORT

7.1. General. The agencies listed in this chapter will provide services as described below.

7.2. 1st Special Operations Wing. 1 SOW/CC will chair a review of installation severe weather preparedness, capabilities, requirements, and procedures, no less than annually. The 1 SOW/CCE (executive officer) will notify the WF of all requirements for or changes to the Commander's scheduled briefings. Notify WF of all changes to 1 SOW meeting times and requirements.

7.3. 1st Special Operations Group Commander.

7.3.1. Establish operational weather support requirements and procedures with the WF.

7.3.2. Notify the WF of all changes in mission weather support.

7.4. 1st SOW Flying Squadrons.

7.4.1. Notify WF at least 24 hours in advance for mass briefs.

7.4.2. Ensure all pilot reports (PIREPs) during departure, in-flight, post-flight are relayed to the weather technician in a timely manner.

7.4.3. Provide at least 72-hour notice for seasonal safety presentations.

7.4.4. Provide feedback on MEFs when encountered weather conditions are not as forecasted, or if weather had an impact in completing the mission.

7.5. Command Post.

7.5.1. Monitor JET for updates to weather conditions.

7.5.2. Notify weather technician of all requirements for briefings in the Command Post.

7.5.3. Be the single point of contact for notification of weather warnings, watches, and advisories, and disseminate them to agencies listed in **Attachment 6.**

7.5.4. Notify WF of JET outages. When the JET is not operational, weather information will be disseminated via hotline or other suitable means such as the weather web page.

7.5.5. Notify duty technician of recalls requiring WF briefing support, plus initial briefing time, if required.

7.5.6. Notify duty technician of any weather-related difficulties reported to the command post (including from weapon ranges, refueling areas, or other training areas).

7.5.7. Notify the WF of changes in FPCON status.

7.5.8. Provide earliest possible notification of requirements for Battle Staff Weather Briefings associated with exercises/contingencies.

7.6. 1 SOW Maintenance Operations Center (MOC) Senior Controller.

7.6.1. Notify duty technician of any weather-dependent maintenance activities requiring weather support.

7.6.2. Establish procedures to ensure affected maintenance activities are promptly notified of all applicable Weather Warnings, Watches and Advisories.

7.7. Airfield Management Operations.

7.7.1. Notify weather personnel of in-flight emergencies inbound to Hurlburt Field.

7.7.2. Include appropriate weather information in the Flight Information Publications (FLIP). Required changes will be submitted when requested by the WF.

7.7.3. Relay weather warnings, watches, and advisories to the agencies listed in Attachment **6 and 7**.

7.7.4. Notify the WF of aircraft mishaps/incidents at, or in the vicinity of Hurlburt Field and all aircraft mishaps involving Hurlburt based aircraft.

7.7.5. Notify WF of any changes to normal airfield operating hours. This includes the notification of early opening and closing of the airfield.

7.7.6. When notified by the WF that the back-up dissemination tree is in use, update applicable units IAW **Attachment 8**.

7.8. Control Tower.

7.8.1. Notify WF of AFAS outages. When the AFAS is not operational, weather information will be disseminated via hotline or other suitable means.

7.8.2. Conduct daily operational checks of the PMSV radio.

7.8.3. Notify WF via hotline or other suitable means runway and runway light setting changes.

7.8.4. Notify WF via hotline or other suitable means of any changes to navigational aids status.

7.8.5. Tower personnel will receive local weather training prior to certification. The WF will assist with initial training/familiarization, but tower personnel will administer recurring training with WF assistance as necessary.

7.8.6. Provide a cooperative weather watch as outlined in **paragraph 2.3**.

7.8.7. Provide weather personnel with initial ATC indoctrination.

7.8.8. Relay PIREPs to the weather flight within 5 minutes of receipt.

7.9. Safety Office.

7.9.1. Notify WF of any local aircraft mishap/incidents where weather or weather service may have been a factor.

7.9.2. Notify the WF of any damage on Hurlburt caused by weather.

7.9.3. Coordinate with WF on all messages containing references to weather.

7.10. Security Forces. Notify WF of observed hail, tornadoes, freezing precipitation, or other significant weather encountered during routine patrols.

7.11. 1st Special Operations Civil Engineering Squadron.

7.11.1. Provide emergency backup power to the weather station equipment at building 90730.

7.11.2. Notify WF prior to planned switches from commercial power to backup power and back to commercial power, which will affect weather equipment at building 90730 and/or the airfield.

7.12. 1st Special Operations Communications Squadron.

7.12.1. Provide routine and emergency maintenance for weather observing, weather-related communications located on Hurlburt not covered by contractor logistics.

7.12.1.2. Fully maintain the JET server, including but not limited to, ensuring that all TCNO's and software upgrades from the 557th Weather Wing are installed and compliance reported to the weather flight in order to facilitate timely reporting compliance to 557th Weather Wing. Provide a point of contact for the JET server to the WF.

7.12.1.3. Telephone lines or equipment.

7.12.1.4. Network and internet connectivity and provide 24-hour notice of any downtime or interruption to service.

7.12.1.5. Provide for locally procured non-standard weather equipment/capabilities.

7.13. 1st Special Operations Support Squadron/RAWS.

7.13.1. **Priorities for restoring inoperative weather sensing equipment.** The WF reserves the right to change priorities of weather equipment when existing or forecasted weather requires such change. Maintenance personnel will receive permission from the weather technician before taking equipment down for maintenance. Equipment is listed below by priority below:

7.13.1.1. FMQ-19 (Weather observation equipment)

7.13.1.2. Joint Environmental Toolkit (JET)

7.13.1.3. Pilot to Metro Service (PMSV)

7.13.2. **Respond to an equipment outage** . If the outage is judged to be significant by weather personnel. The weather person will provide a verbal mission impact statement upon notification of outage. Weather personnel may defer maintenance for minimal outages during non-duty hours if backup equipment is available. Maintenance will only be deferred until the beginning of the next duty day.

7.14. Emergency Operations Center (EOC).

7.14.1. During an emergency condition such as a hurricane, toxic spill, or any other condition that would require the EOC to stand up. The EOC will provide a weather technician with a desk, NIPR computer with specialized weather software and access to a phone**.**

Chapter 8

TROPICAL WEATHER

8.1. General.

8.1.1. Hurlburt Field is located in a hurricane threat zone. The hurricane season lasts from 1 June - 30 November; however, hurricanes have occurred at other times throughout the year. The intensity of the storm surge and high winds will depend on the strength of the hurricane/tropical storm and the local topography. Serious threats that can occur with the hurricane are storm surge, tornados, extreme wind gusts, and flash flooding. These natural phenomena cause extensive damage and degrade the mission of the 1 SOW.

8.1.2. The National Hurricane Operations Plan establishes policies, procedures and responsibilities for all locations on the Atlantic and Gulf Coasts.

8.1.3. The WF will use the tropical cyclone forecasts issued by the National Hurricane Center (NHC). No deviation from the official forecast position, track, movement, maximum wind speed, or intensity trend is authorized. The WF is authorized to tailor the official tropical cyclone forecasts into a specific mission forecast product for the 1 SOW. Tailoring may include factors such as specific local effects such as terrain or relative position to the storm.

8.1.3.1. The 26 OWS will produce a Tropical Cyclone Threat Assessment Product (TC-TAP) when Hurlburt Field is expected to receive sustained winds > 35-knots during the next 96 hours as a result of a tropical cyclone.

8.1.3.2. The WF will translate the official tropical cyclone forecast to include TC-TAP when available, into a specific mission forecast for Hurlburt Field units.

8.2. Hurricane Categories. The extent of damage expected with a tropical cyclone is dependent upon the strength or wind speed. Hurlburt Field uses the Saffir/Simpson Hurricane Scale to classify hurricanes. The Saffir/Simpson Hurricane Scale is a 1-5 rating based on the hurricane's present intensity. This is used to give an estimate of the potential property damage and flooding expected along the coast from a hurricane landfall. Wind speed is the determining factor in the scale, as storm surge values are highly dependent on the slope of the continental shelf in the landfall region. Note that a “major” hurricane is one that is classified as category three or higher.

Table 8.1. Saffir/Simpson Hurricane Scale.

Category One Winds 74-95 mph (64-82 kts). **Very dangerous winds will produce some damage:** Well-constructed frame homes could have damage to roof, singles, vinyl siding and gutters. Large branches of trees will snap and shallowly rooted trees may be toppled. Extensive damage to power lines and poles likely will result in power outages that could last a few to several days.
Category Two Winds 96-110 mph (83-95 kts). **Extremely dangerous winds will cause extensive damage:** Well- constructed frame homes could sustain major roof and siding damage. Many shallowly rooted trees will be snapped or uprooted and block numerous roads. Near-total power loss is expected with outages that could last from several days to weeks.
Category Three (major) Winds 111-129 mph (96-112 kts). **Devastating damage will occur:** Well-built framed homes may incur major damage or removal of roof decking and gable ends. Many trees will be snapped or uprooted, blocking numerous roads. Electricity and water will be unavailable for several days to weeks after the storm passes.
Category Four (major) Winds 130-156 mph (113-136 kts). **Catastrophic damage will occur:** Well-built framed homes can sustain severe damage with loss of most of the roof structure and/or some exterior walls. Most trees will be snapped or uprooted and power poles downed. Fallen trees and power poles will isolate residential areas. Power outages will last weeks to possibly months. Most of the area will be uninhabitable for weeks or months.
Category Five (major) Winds 157 mph or higher (137 kts or higher). **Catastrophic damage will occur**: A high percentage of framed homes will be destroyed, with total roof failure and wall collapse. Fallen trees and power poles will isolate residential areas. Power outages will last for weeks to possibly months. Most of the area will be uninhabitable for weeks or months.

8.3. Hurricane Conditions (HURCON)/Response Phases. The prerequisite for any preparatory and survival situation is a positive means of relaying warning or disaster information to organizations and assigned personnel. HURCON/Response Phases is the tool Hurlburt Field uses to ensure pre-disaster information is passed. These conditions give sufficient preparation time to safeguard personnel, aircraft, equipment, and facilities. HURCON/Response Phases are determined by the 1 SOW/CC or a designated representative and disseminated throughout the base by all available means.

Table 8.2. Hurricane Conditions (HURCON)/Response Phases.

HURCON 5 Destructive winds of 50kt/58mph or greater are possible within 96 hours at HFLD.
HURCON 4 – Alert Phase Destructive winds of 50kt/58mph or greater are possible within 72 hours at HFLD.

HURCON 3 – Preparation Phase Destructive winds of 50kt/58mph or greater are possible within 48 hours at HFLD.
HURCON 2 – Final Preparation Phase Destructive winds of 50kt/58mph or greater are possible within 24 hours at HFLD.
HURCON 1 – Secure Phase Destructive winds of 50kt/58mph or greater are possible within 12 hours at HFLD.
HURCON 1E 50kt/58mph winds are occurring and other dangerous conditions associated with the storm are present (as observed by the 23 SOWS/WXF).
HURCON 1R – Recovery Phase Storm hazards have passed but damage may persist. Recovery operations begin.

8.4. Notification Procedures.

8.4.1. The WF will provide initial notification via email through the 23 SOWS/WXF Tropical Update (Distribution List).

8.4.2. Area of Concern (AOC). North Atlantic Ocean, Caribbean Sea, and the Gulf of Mexico.

8.4.3. Once the hurricane/tropical storm enters our AOC, the WF will provide a 120 hour storm track (either hand plotted or computer generated) at the initial time the hurricane or tropical storm enters the AOC and then at each 6 hour forecast with the following information:

8.4.3.1. Center Position (latitude and longitude).

8.4.3.2. Intensity of the winds (knots).

8.4.3.3. Radius of 50-knots winds.

8.4.3.4. Direction and speed of movement.

8.4.3.5. All forecast positions up to 120 hours.

8.4.4. The WF will provide continuous tropical storm or hurricane information when Hurlburt is in HURCON 4.

8.4.4.1. The 1 SOW/CC or a designated representative will be briefed on the latest advisories and recommended times that hurricane conditions are effective.

8.4.4.2. All data will be provided in Zulu, local times and in nautical miles.

8.4.5. The WF will provide a forecaster to the Emergency Operations Center on a full time basis when HURCON 2 is declared. The technician will be responsible for continuous updates to the EOC and Battle Staff. The EOC will provide the weather technician with a desk, NIPR computer with specialized weather software and access to a phone.

8.4.6. The WF will provide 2 forecasters to the Hurricane Ride-out team. These technicians will provide continual updates on the hurricane and also provide recovery forecasts.

8.5. WF Responsibilities.

8.5.1. Consider activating the SWAT.

8.5.2. When requested, advise the 1 SOW/CC or CP of the most suitable aircraft refuge.

8.5.3. Provide a weather briefing for the Battle Staff when activated. The briefing will include, as a minimum, Current Weather, Hurricane Update, Hurricane Conditions, and Hurricane Categories, surge potential, total rainfall amounts, most likely Course of Action (COA)/Impact and Most Dangerous Course of Action/Impact.

8.5.4. Provide flight weather MEFs for all aircraft leaving Hurlburt due to HUREVAC.

8.5.5. Tropical/Hurricane Watch Criteria

Table 8.3. Tropical Watch Criteria.

TROPICAL WATCH CRITERIA			
Watch Type	Threshold	Lead Time	
Tropical Strom Effects	Potential for Tropical Storm force winds greater than 33kt but less than 64 kt, heavy rain excess of 2 inches, and the conditions for tornadoes are forecast to occur	72 hours in advance of earliest predicted onset of34 knots indicated by TC- TAP	WF See Note
Hurricane Effects	Potential for Hurricane force winds greater than 63kt, heavy rain excess of2 inches, and the conditions for tornadoes are forecast to occur	72 hours in advance of earliest predicted onset of64 knots indicated by TC- TAP	WF See Note
Note: Once issued the only additional watch to be issued is lightning. Will remain valid until base has not been included in 34 or 64 knots threshold on last 3 TC-TAP			

Table 8.4. Tropical Warning Criteria.

TROPICAL WARNING CRITERIA			
Watch Type	Threshold	Lead Time	
TROPICAL STORM EFFECTS	Tropical Storm force winds greater than 33 knots butless than 64 knots, heavyrain excess of 2 inches	NET 50 hours in advance of earliest predicted onset of34 knots indicated by TC- TAP	WF See Note
Hurricane Effects	Hurricane force winds greater than 63 knots, heavy rain excess of 2 inches	NET 50 hours in advance of earliest predicted onset of64 knots indicated by TC- TAP	WF See Note
Note: Once issued the only additional WWs to be issued is lightning and tornado warnings. Will remain valid until base has not been included in 34 or 64 knots threshold on last 3 TC-TAP updates and observations have consistently shown for 3 hours that tropical storm or hurricane conditions are no longer occurring			

JOCELYN J. SCHERMERHORN, Colonel, USAF
Commander

GLOSSARY OF REFERENCES AND SUPPORTING INFORMATION

References

AFPD 15-1, *Weather Operations*, 13 November 2019
AFI 15-128, *Weather Force Structure*, 20 June 2019
AFI 34-101, *Air Force Morale, Welfare, and Recreation (MWR) Programs and Use Eligibility,* 16 April 2019
AFI 33-332, *Air Force Privacy and Civil Liberties Program*, 9 March 2020
AFMAN 15-111, *Surface Weather Observations*, 11 March 2019
AFMAN 15-124, *Meteorological Codes*, 15 January 2019
AFMAN 15-129, *Air and Space Weather Operations,* 9 July 2020
AFSOSH Standard 91-504, *Air Force Consolidated Occupational Safety Standard,* 7 July 2004
FCM-P12-2006, *National Hurricane Operations Plan,* (2006)

Prescribed Forms:

None.

Adopted Forms:

AF Form 847, *Recommendation for Change of Publication*
AFSOC Form 87, *AFSOC Mission Weather Briefing*

Abbreviations and Acronyms

ACFT MISHAP-Aircraft Mishap
AFW–Air Force Weather
AFRC-Air Force Reserve Command
AGE-Aerospace Ground Equipment
ALSTG-Altimeter
ALT-Actual Lead Time
AMD-Amendment
AFRIMS-Air Force Records Information Management System
ANG-Air National Guard
AOC-Area of Concern
AOL-Alternate Operating Location
AOS-Automated Observing System
ASOS-Air Support Operations Squadron/Automated Surface Observing System
ATC-Air Traffic Control
BKN-Broken
BWS-Base Weather Station
BWW-Basic Weather Watch
CAT-Clear Air Turbulence
CB-Cumulonimbus
COA-Course of Action
CU–Characterization Unit
CWW-Continuous Weather Watch
DLT-Desired Lead Time
EO-Electro-Optics

EOC-Emergency Operations Center
ETA–Estimated Time of Arrival
ETD–Estimated Time of Departure
EU–Exploitation Unit
EWO-Emergency War Order
FLIP–Flight Information Publication
FW-Fighter Wing
FWA–Forecast Weather Advisory
GPS-Global Positioning System
GTE–Greater Than or Equal To
HURCON-Hurricane Conditions
HURREVAC - Hurricane Evacuation
IAW-In Accordance With
ICAO-International Civil Aviation Organization.
IRC–Instrument Refresher Course
IWEDA–Integrated Weather Effects Decision Aid
JET–Joint Environmental Toolkit
KT–Knot
LLWS–Low-Level Wind Shear
LTE–Less Than or Equal To
MAJCOM-Major Command
MBWW–Modified Basic Weather Watch
MEF–Mission Execution Forecast
METAR–Aviation Routine Weather Report
METCON–Meteorological Conference or Discussion
METWATCH–Meteorological Watch
METSAT–Meteorological Satellite
MISSIONWATCH–Mission Meteorological Watch
MOA–Memorandum of Agreement
MOAF–Military Operation Area Forecast
MOCC-Maintenance Operations Control Center
MWA–Military Weather Advisory
NHC-National Hurricane Center
NLT–No Later Than/Negative Lead Time
NM–Nautical Mile
NOWS–NVG (Night Vision Goggles) Operations Weather Software
N-TFS–New Tactical Forecast System
NVG–Night Vision Goggles
NWS–National Weather Service
RDS-Records Disposition Schedule
SOF-Supervisor of Flying
SOSS–Special Operations Support Squadron
SOWS-Special Operations Weather Squadron
OPR–Office of Primary Responsibility
OPUP–Open Systems Principle User Processor
OVC–Overcast

OWA–Observed Weather Advisory
OWS--Operational Weather Squadron
OWW–Observed Weather Watch
PIREP–Pilot Weather Report
PMSV–Pilot –to-Metro Service
RCR–Runway Condition Reading
RVR–Runway Visual Range
SOP–Standing Operating Procedures
SPECI–Aviation Selected Special Weather Report**SWAP-**Severe Weather Action Plan
SWAT–Severe Weather Action Team
TAF–Terminal Aerodrome Forecast
TC-TAP–Tropical Cyclone Threat Assessment Product
TOLD-Takeoff and Landing Data
UTC-Coordinated Universal Time
VFR–Visual Flight Rules
VT–Valid Time
WA–Weather Advisory
WF–Weather Flight
WMO-World meteorological Organization
WSD–Weather Support Document
WSR-88D–NEXRAD (Next Generation Doppler Radar)
WWO-Wing Weather Officer
WW–Weather Warning

Terms

Actual Lead-time – The elapsed time between issue time of a watch, warning, or advisory and the first occurrence of the event.

Aircraft Mishap - Term used to denote any event resulting in damage to, or destruction of any aircraft to include lightning strikes, inadvertent departure from the paved runway or taxiway surface, aircraft or Aerospace Ground Equipment (AGE) fires, and forced landings due to in-flight emergencies.

Amendment (AMD) – Used as a message modifier when transmitting an aerodrome forecast amendment.

Climatology – The historical records of weather conditions measured or observed at a specific location is known as climatology. Some data goes back over 100 years, but generally, a 10- to 25-year history is more common. Climatology is useful in planning operations beyond 5 to 7 days. It usually describes the average (or mean) conditions such as high and low temperatures and extremes.

Desired Lead-time (DLT) – The amount of advance notice a supported agency desires before the onset of a particular weather phenomenon.

Eyes Forward – Weather Flight technicians are the eyes forward for the technicians in the Operational Weather Squadron (OWS) and integrate weather radar data, meteorological satellite imagery, lightning detection readouts, and non-standard weather data systems (vertical profilers, mesonet data, etc.) to create an integrated weather picture and near-term trend forecasts for the OWS. Eyes forward yields meaningful meteorological information not contained in coded observation to the servicing OWS and is an integral part of the meteorological watch for an installation or contingency operating location.

Forecast Weather Advisory (FWA) - A weather advisory issued when the customer requires advance notification of an impending weather condition with sufficient time to allow for protective actions.
Issue Time – The time when an agency is notified of a watch, warning, or advisory. When more than one agency is notified, the issue time is the time the last agency is notified. Follow-up notifications are not considered when determining issue time.
Joint Environmental Toolkit (JET) – The computer system and associated interfaces that provide an automated weather support and communications capability to the Weather Flight. JET is the computer software and hardware that replaced the N-TFS for weather information dissemination.
LOCAL Observation – An unscheduled observation taken when specific local criteria are met. All LOCALs shall be made as soon as possible after the relevant criteria are observed. This only applies when the FMQ-19 is in Augment or Backup Mode.
METAR Observation - Meteorological Aviation Report. A routine scheduled surface weather observation. It contains a report of wind, visibility, runway visual range, present weather, sky condition, temperature, dew point, and altimeter setting. In addition, significant remarks are appended to the METAR observation.
METWATCH – Monitoring aerospace weather for a route, area, or terminal and advising concerned organizations when phenomena that could affect their operations or pose a hazard to life or property are occurring or about to occur.
Mission Execution Forecast (MEF) - A customized weather product providing terrestrial and space weather data and forecasts for a specific mission, or set of missions. It fully integrates aerospace weather with the customer's tactics, weapon systems, environmental sensitivities of equipment, and other operational requirements.
MISSIONWATCH - The monitoring of aerospace weather for a specific mission (i.e., ground, air, or space) and informing supported agencies when un-forecast mission-limiting phenomena could impact operations.
Observed Weather Advisory (OWA) – A weather advisory issued when a particular weather event first occurs and the customer does not require advanced notification of the observed weather phenomena.
Operational Weather Squadron (OWS) – An organization comprised of management, technician, and training personnel responsible for providing regional weather support. Their mission is to produce theater-scale tailored weather forecast products and services to customers within their area of responsibility.
Pilot Report (PIREP) – A report of in-flight weather provided by an aircrew member.
Severe Thunderstorm – A thunderstorm that produces hail greater than or equal to ¾ inch diameter and/or surface wind greater than or equal to 50 knots.
Severe Weather – Any weather condition that poses a hazard to property or life.
SPECI Observation - An unscheduled observation taken when significant changes in weather elements meet special criteria. All SPECIs shall be made as soon as possible after the relevant criteria are observed.
Terminal Aerodrome Forecast (TAF) – A weather forecast prepared by the 26th Operational Weather Squadron (OWS) composed of required weather elements for Hurlburt airfield and covers a 24-hour period. Forecast elements in the body of the forecast text refer to the area within 5 SM of the center of the aerodrome complex. Operationally significant elements outside

this area are included in remarks (e.g., TS OMTNS or VCTS). The term VC (vicinity) refers to the area between 5 SM and 10 SM of the aerodrome complex.
Weather Flight (WF) - A military weather organization providing direct operational support at the tactical level.
Weather Advisory (WA) – A special notice provided to a supported agency when an established weather condition that could affect its operation is occurring or is expected to occur.
Weather Warning (WW) – A special notice provided to a supported agency when an established weather condition of such intensity as to affect operations, pose a hazard to life or property, and requires protective action, is occurring or is expected to occur.
Weather Watch – A special notice provided to supported customers that alerts them of a potential for weather conditions of such intensity as to pose a hazard to life or property for which the customer must take protective action.

Attachment 2

SPECIAL OBSERVATION CRITERIA
A2.1. Special observation: Special observation will be disseminated when the following conditions are reached. This may be generated by the FMQ-19 when in Automatic Mode or manually by the weather forecaster when in Manual Mode.

A2.2. Ceiling. The ceiling is observed to form below, decrease to less than or, if below, increase to equal or exceed:
A2.2.1. 3000 feet (AFMAN 15-111, Attachment 2, Special Criteria).
A2.2.2. 1500 feet (AFMAN 15-111).

A2.2.3. 1000 feet (AFMAN 15-111).
A2.2.4. 900 feet (DOD FLIP)
A2.2.5. 800 feet (AFMAN 15-111 and DOD FLIP).

A2.2.6. 700 feet (AFMAN 15-111 and DOD FLIP).
A2.2.7. 500 feet (AFMAN 15-111 and DOD FLIP).
A2.2.8. 400 feet (DOD FLIP).

A2.2.9. 200 feet (AFMAN 15-111 and DOD FLIP).
A2.3. Sky Condition. A layer of clouds or obscuring phenomena aloft is observed below 800 ft (the highest published landing minimum), and no layer aloft was reported below this height in the previous METAR or SPECI observation.
A2.4. Prevailing Visibility. Prevailing visibility is observed to decrease to less than or, if below, increase to equal or exceed:

A2.4.1. 3 miles (AFMAN 15-111).
A2.4.2. 2 miles (AFMAIN 15-111 and DOD FLIP).
A2.4.3. 1¾ miles (DOD FLIP).

A2.4.4. 1½ miles (DOD FLIP).
A2.4.5. 1¼ miles (DOD FLIP).

A2.4.6. 1 mile (AFMAN 15-111 and DOD FLIP).

A2.4.7. 3/4 mile (DOD FLIP).
A2.4.8. 1/2 mile (AFMAN 15-111 and DOD FLIP).
A2.5. Tornado, Funnel Cloud, or Waterspout. Is observed or disappears from sight. (AFMAN 15-111).

A2.6. Thunderstorm. (AFMAN 15-111).

A2.6.1. Begins (A SPECI is not required to report the beginning of a new thunderstorm if one is currently being reported).

A2.6.2. Ends (15 minutes after last occurrence of thunder).

A2.7. Precipitation. (AFMAN 15-111).

A2.7.1. Hail begins or ends. (AFMAN 15-111).

A2.7.2. Freezing precipitation begins, ends, or changes in intensity. (AFMAN 15-111).

A2.7.3. Any other type of precipitation begins or ends. Note that, except for freezing rain, freezing drizzle, hail, and ice pellets, a SPECI is not required for changes in type or the beginning or ending of one type while another is in progress. (AFMAN 15-111).

A2.8. Squall. A strong wind characterized by a sudden onset in which the wind speed increases at least 16 knots and is sustained at 22 knots for at least one minute. A SPECI is not required to report a squall if one is currently in progress. (AFMAN 15-111).

A2.9. Wind Shift. The wind direction changes by 45 degrees or more in less than 15 minutes with sustained winds of 10 knots or more throughout the wind shift. (AFMAN 15-111).

A2.10. Runway Visual Range (RVR).

A2.10.1. Visibility conditions for reporting RVR are first observed (i.e. $\leq$ RVR 6000 ft or prevailing visibility $\leq$ 1 SM), and when the conditions no longer exist. (AFMAN 15-111).

A2.10.2. RVR for the active runway is observed to decrease to less than or, if below, increase to equal or exceed:

A2.10.3. 6000 feet (AFMAN 15-111 and DOD FLIP).

A2.10.4. 5000 feet (AFMAN 15-111 and DOD FLIP).

A2.10.5. 4000 feet (DOD FLIP).

A2.10.6. 2400 feet (AFMAN 15-111)

A2.10.7. RVR is first determined as unavailable (RVRNO) for the runway in use, and when it is first determined that the RVRNO report is no longer applicable, provided conditions for reporting RVR exist.

A2.10.8. Reporting RVR values: When runway 18 is active the RVR value from runway 36 will be evaluated at the time of SPECI/METAR observations and carried as **a local remark whenever the prevailing visibility is equal to or less than 1 SM or the RVR reading is less than 6000 ft.** The remarks will appear as **RVR36/xxxx (xxxx being the value in feet).** A SPECI will not be initiated based on RVR36 values unless runway 36 is the active runway. **Note:** This information is provided for ATC to authorize aircraft to land using the inactive

runway if the RVR value is greater than or equal to 2400 ft (airfield minimum) and the aircraft commander so desires when the reported prevailing visibility and ceiling are below airfield minimums.

A2.11. Miscellaneous.

A2.11.1. Volcanic Ash. When first observed. (AFMAN 15-111).

A2.11.2. Any other meteorological situation which, in the opinion of the technician, is critical to the safely of aircraft operations. (AFMAN 15-111).

A2.12. SPECI Upon Resumption of Observing Services. Required within 15 minutes after returning to duty following a break in hourly coverage if a METAR was not filed as scheduled during that 15-minute period. (AFMAN 15-111).

A2.13. Aircraft Mishap (AFMAN 15-111). A SPECI local will be transmitted when an aircraft mishap/accident is observed or when weather personnel are notified of an aircraft mishap/major accident in the local flying area and the FMQ-19 is in back-up or supplemented mode.

Attachment 3

LOCAL OBSERVATION CRITERIA

A3.1. Special (AFMAN 15-111). A SPECI observation will be generated by the FMQ-19 when in Automatic Mode or a local will be generated by the forecaster when in Manual Mode for the following conditions.

A3.2. Altimeter Setting (AFMAN 15-111). At an interval not to exceed 35 minutes when there has been a change of .01 inch Hg or more since the last locally disseminated value. This observation may be disseminated as a single element local.

A3.3. Advisories (AFMAN 15-111). Disseminated anytime criteria for observed advisories occurs or is no longer occurring, and a METAR or SPECI would not be required.

A3.4. Other Meteorological Situations. For any other meteorological situation which is significant to local operations.

Attachment 4

TAF SPECIFICATION AND AMENDMENT CRITERIA

A4.1. Specification Criteria. 23 SOWS/WXF will issue the Hurlburt Field TAF using the specification criteria listed in **Table 2.7.** of AFMAN 15-129 and the ceiling/visibility criteria listed in **Table A4.1** below.

Table A4.1. Hurlburt Field Terminal Aerodrome Forecast Specification Criteria.

Forecast Element/Occurrence	Hurlburt Field TAF Specification Criteria	
Ceiling and/or visibility decreases to less than, or if below, increases to equal or exceed:	Ceiling (feet) ≥ 5,000	Visibility (miles) ≥ 5
Ceiling and/or visibility decreases to less than, or if below, increases to equal or exceed:	Ceiling (feet) ≥ 2,000	Visibility (miles) ≥ 3
	< 2,000 but ≥1,000	< 3 but ≥ 2
	< 1,000 but ≥ 700	< 3 but ≥ 2
	< 700 but ≥ 200	< 2 but ≥ 1/2
	<200	< 1/2

A4.2. Icing and Turbulence Criteria. As an exception to AFMAN 15-129, any intensity of icing or turbulence will be specified in the Hurlburt Field TAF.

Table A4.2. Hurlburt Field Terminal Aerodrome Forecast Specification Criteria.

Forecast Element/Occurrence	TAF Amendment Criteria
Turbulence (for Cat II aircraft), Not associated with thunderstorms, from the surface to 10,000 feet AGL.	The beginning or ending of turbulence first meets, exceeds, or decreases below light to moderate or greater thresholds and was not specified in the forecast.

A4.3. Amendment Criteria. 23 SOWS/WXF will amend the Hurlburt Field TAF using the amendment criteria listed AFMAN 15-129 and the ceiling/visibility criteria listed in **Table A4.3** below.

Table A4.3. Hurlburt Field Terminal Aerodrome Forecast Amendment Criteria.

Forecast Element/Occurrence	Standard TAF Amendment Criteria	
Ceiling and/or visibility decreases to less than, or if	Ceiling (feet) ≥ 2,000	Visibility (miles) ≥ 3
	< 2,000 but ≥ 1,000	< 3 but ≥ 2

below, increases to equal or exceed:	< 1,000 but ≥ 700	< 3 but ≥ 2
	< 700 but ≥ 200	< 2 but ≥ 1/2
	< 200	< 1/2

A4.4. TAF Issue Times. The Hurlburt Field TAF will be issued at the times shown in **Table A4.4** below:

Table A4.4. Hurlburt Field Terminal Aerodrome Forecast Issue Times.

Day	(CST/CDST)	TAF Times
Monday – Friday	0400L/0500L	1000Z
	1200L/1300L	1800Z
	2000L/2100L	0200Z
Saturday/Sunday	As Required	As Required

Attachment 5

EXAMPLE JET DISSEMINATION FORMATS

A5.1. WEATHER WARNING.

A5.1.1. Received 09/1242Z.

HURLBURT FLD, FL WEATHER WARNING 11-005.
VALID 06/2105Z (06/1705L) TO UFN (UFN).
STRONG WINDS GTE 45 KNOTS ARE EXPECTED AT HURLBURT FROM 1500Z TO 2200Z. MAXIMUM SPEED 55 KNOTS.
16/RD.

A5.2. WEATHER WATCH.

A5.2.1. Received 09/1242Z.

HURLBURT FLD WEATHER WATCH 11-005.
VALID 06/2100Z (06/1700L) TO 07/0100Z (06/2100L).
POTENTIAL EXISTS FOR LIGHTNING TO OCCUR WITHIN 5NM OF HURLBURT FLD.
A WARNING WILL BE ISSUED LATER IF REQUIRED.
18/RD.

A5.3. WEATHER ADVISORY.

A5.3.1. Received 12/2148Z.

HURLBURT FLD, FL WEATHER ADVISORY.
VALID 06/2058Z (06/1658L) TO UFN (UFN).
SURFACE WINDS GTE 30 KNOTS LTE 45 KNOTS WILL OCCUR AT HURLBURT FLD PEAK GUST EXPECTED 40 KNOTS.
15/R.

A5.4. SURFACE WEATHER OBSERVATION.

A5.4.1. Received 08/1959Z.

KHRT METAR 1956Z COR 26005KT 7 SCT035 BKN250 32/23 ALSTG 30.00 COR 2000 PA 62 59/TH;

A5.5. TERMINAL AERODROME FORECAST.

A5.5.1. TAF KHRT 201000Z 2010/2116 03006KT 9999 BKN100 BKN250 QNH2996INS

BECMG 2014/2015 10008KT 9999 SCT100 BKN250 QNH2993INS
BECMG 2023/2024 24008KT 9999 SCT250 QNH2994INS
BECMG 2105/2106 27008KT 9999 SKC QNH2994INS TX24/2019Z TN14/2012Z

Attachment 6

WEATHER WARNING /WATCH NOTIFICATION DIAGRAM

A6.1. The JET is the primary method of disseminating weather advisories, warnings and watches to key installation agencies.

A6.2. When the JET is inoperable notifications from weather will be done via telephone according to the attached BACK-UP diagram.

A6.3. Upon receipt, the 1 SOW/CP, 1 SOSS/OSAB, 1 SOMSG/SFS, 1 SOW/MOCC, and 1 SOFSS/CC, will notify all agencies that are listed in the attached dissemination diagrams.

A6.3.1. The PRIMARY method of disseminating weather advisories, warnings and watches from the 1 SOW/CP to installation users is through the use of computer network alerting system. A select few users are also notified via radio. The installation LAN protocol, for all NIPRNET (unclassified work station) users is configured so that alert messages transmitted by the CP will be received by all (installation and host) computer users immediately, within 3 minutes of transmission. Users who do not immediately receive alert messages must contact their respective CSA's, and if necessary submit a work order (ticket), to correct the deficiency.


A6.3.2. The BACK-UP method of disseminating weather advisories, warnings and watches, when the computer network alerting system is down or major computer outages are present, will be via phone/conference calls, radio, Giant Voice, etc. as detailed in the back-up dissemination tree.

A6.4. Organizations will establish their own PRIMARY and BACK-UP checklists, as required, to ensure all other internal and subordinate agencies/units are notified as required of advisories and warnings. Forward a copy of unit established checklists, flowcharts, or plans (and changes as they occur) to 23 SOWS/WXF.

Attachment 7

WEATHER WATCH/WARNING ADVISORY PRIMARY DISSEMINATION TREE


Figure A7.1. Weather Watch/Warning Advisory Primary Dissemination Tree.

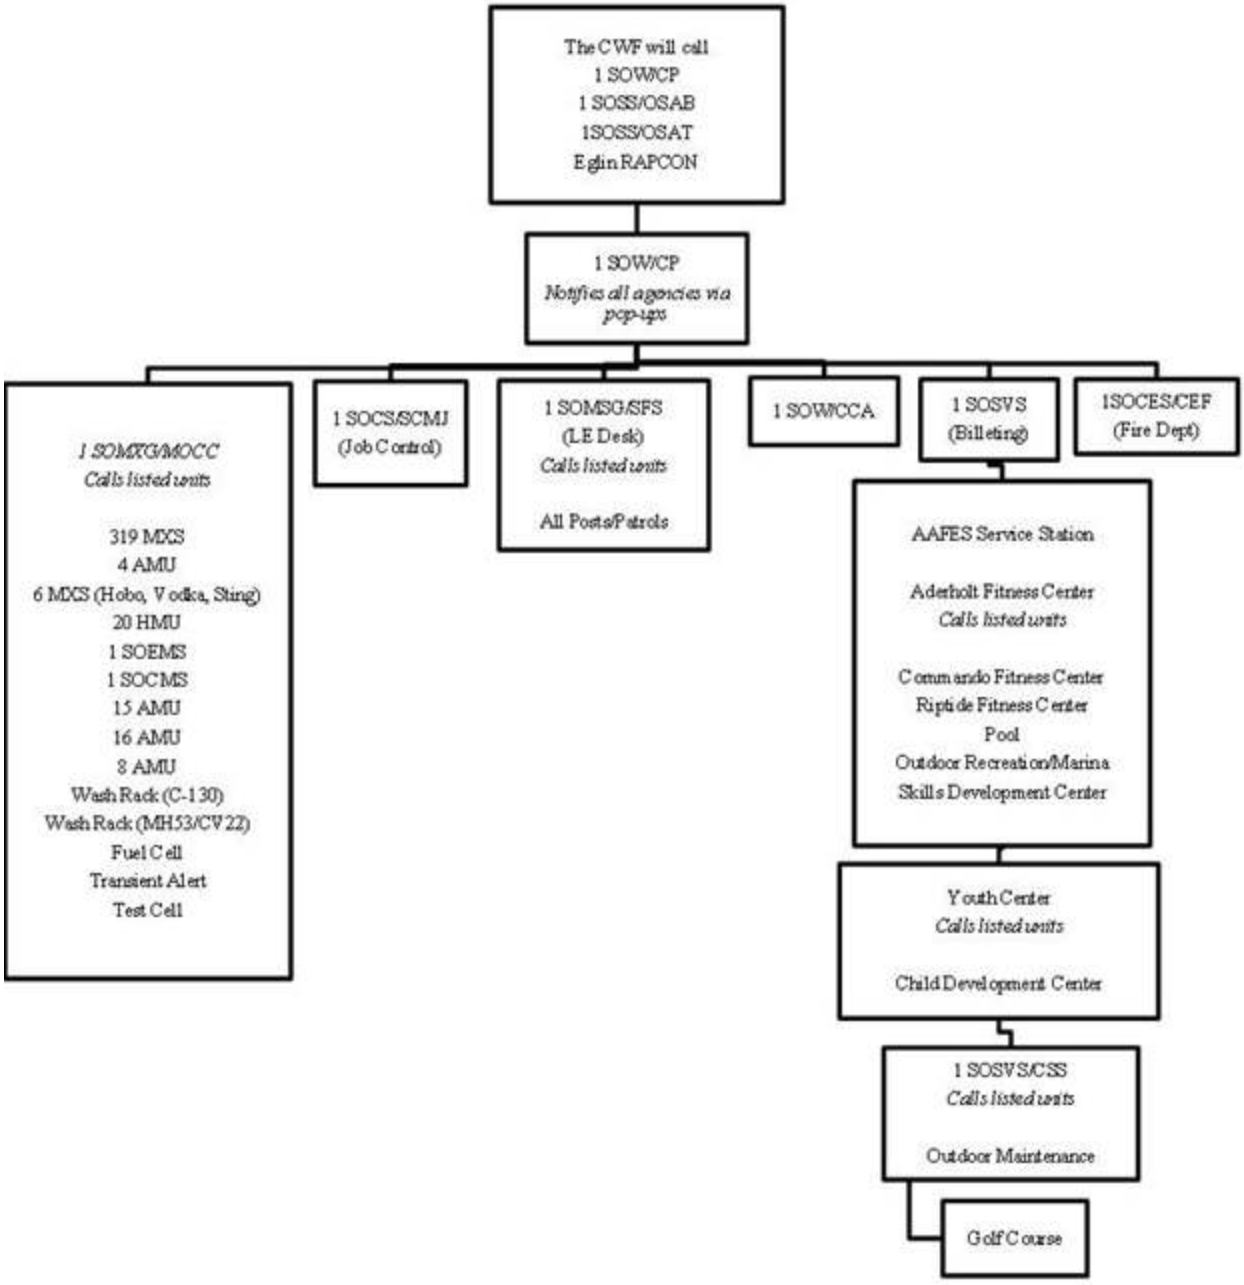

Attachment 8

WEATHER WATCH WARNING ADVISORY/ BACKUP DISSEMINATION TREE

Figure A8.1. Weather Watch Warning Advisory/Backup Dissemination Tree.

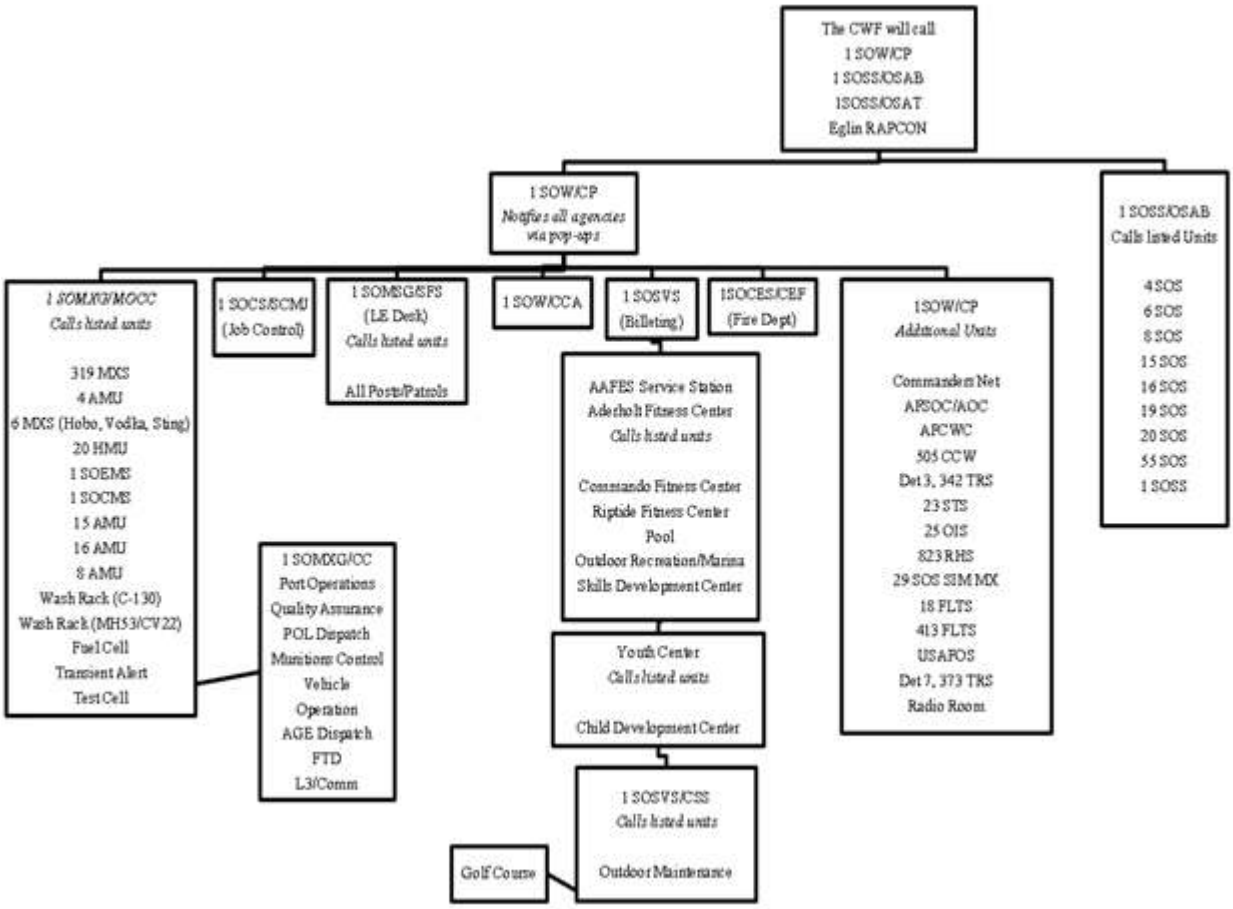

Attachment 9

FORMAT FOR WEATHER WARNING, WATCHES, AND WEATHER ADVISORIES

A9.1. TORNADO WATCH. THE POTENTIAL EXISTS FOR A TORNADO, WATERSPOUT, OR FUNNEL CLOUD AT HURLBURT FIELD.

A9.2. SEVERE THUNDERSTORM WATCH. THE POTENTIAL EXISTS FOR SEVERE THUNDERSTORM DEVELOPMENT AT HURLBURT FIELD. WINDS OF 45 KNOTS OR GREATER AND/OR HAIL OF 1/2 INCH OR GREATER ACCOMPANYING SEVERE THUNDERSTORMS. A WARNING WILL BE ISSUED LATER, IF REQUIRED.

A9.3. SURFACE WIND WATCH. THE POTENTIAL EXISTS FOR SURFACE WINDS 45 KNOTS OR GREATER AT HURLBURT FIELD.

A9.4. HAIL WATCH. THE POTENTIAL EXISTS FOR THUNDERSTORMS WITH ⅛ INCH HAIL, BUT LESS THAN ½ INCH AT HURLBURT FIELD.

A9.5. FREEZING RAIN WATCH. FREEZING PRECIPITATION IS POSSIBLE. A WARNING WILL BE ISSUED LATER, IF REQUIRED.

A9.6. LIGHTNING WATCH. POTENTIAL EXISTS FOR THUNDERSTORMS WITH LIGHTNING WITHIN 5NM OF HURLBURT FIELD. A WARNING WILL BE ISSUED LATER IF REQUIRED.

A9.7. TROPICAL STORM WATCH. POTENTIAL FOR TROPICAL STORM EFFECTS AT HURLBURT FIELD. STORM SURGE GREATER THAN 1FT, HEAVY RAIN ACCUMULATION GREATER THAN OR EQUAL TO 2 INCHES, AND CONDITIONS FOR TORNADOES ARE FORECAST TO OCCUR. TROPICAL FORCE WINDS GREATER THAN 33 BUT LESS THAN 64 KNOTS.

A9.8. HURRICANE WATCH. POTENTIAL FOR HURRICANE EFFECTS AT HURLBURT FIELD. STORM SURGE GREATER THAN 1FT, HEAVY RAIN ACCUMULATION GREATER THAN OR EQUAL TO 2 INCHES, AND CONDITIONS FOR TORNADOES ARE FORECAST TO OCCUR. TROPICAL FORCE WINDS GREATER THAN 63 KNOTS.

A9.9. TORNADO WARNING. A TORNADO HAS EITHER BEEN SIGHTED OR CONFIRMED ON RADAR. THIS TORNADO IS (DIRECTION) MOVING (DIRECTION OF MOVEMENT). TAKE IMMEDIATE SHELTER!

A9.10. SEVERE THUNDERSTORM WARNING. SEVERE THUNDERSTORMS WITH SURFACE WINDS OF 45 KNOTS OR GREATER AND HAIL 3/4 INCH OR GREATER AT HURLBURT FIELD. MAX WIND ____ AND MAX HAIL SIZE ____.

A9.11. SURFACE WIND WARNING. (DIRECTION) SURFACE WINDS 45 KNOTS OR GREATER WILL OCCUR AT HURLBURT FIELD. PEAK GUST EXPECTED XX KNOTS.

A9.12. HAIL WARNING. THUNDERSTORMS WITH HAIL 3/4 INCH WILL OCCUR AT HURLBURT FIELD.

A9.13. FREEZING PRECIPITATION WARNING. FREEZING PRECIPITATION WILL OCCUR AT HURLBURT FIELD. EXPECT (freezing rain, freezing drizzle or both).

A9.14. HEAVY SNOW WARNING. HEAVY SNOW GTE 1/2 INCHES IN 12 HOURS WILL OCCUR AT HURLBURT FIELD. EXPECT (amount) INCHES.

A9.15. HEAVY RAIN WARNING. HEAVY RAIN GTE 3 INCHES IN 12 HOURS WILL OCCUR AT HURLBURT FIELD. EXPECT (amount) INCHES.

A9.16. LIGHTNING WARNING. OBSERVED THUNDERSTORMS WITH LIGHTNING WITHIN 5NM OF HURLBURT FIELD FROM THE CURRENT TIME UNTIL FURTHER NOTICE.

A9.17. TROPICAL STORM WARNING. TROPICAL STORM EFFECTS AT HURLBURT FIELD. STORM SURGE GREATER THAN 1FT, HEAVY RAIN ACCUMULATION GREATER THAN OR EQUAL TO 2 INCHES, TROPICAL FORCE WINDS GREATER THAN 33 BUT LESS THAN 64 KNOTS.

A9.18. HURRICANE WATCH. HURRICANE EFFECTS AT HURLBURT FIELD. STORM SURGE GREATER THAN 1FT, HEAVY RAIN ACCUMULATION GREATER THAN OR EQUAL TO 2 INCHES, TROPICAL FORCE WINDS GREATER THAN 63 KNOTS.

A9.19. FORECASTED TERMINAL WEATHER ADVISORY FOR WINDS. (Direction of winds) SURFACE WINDS GTE 30 KNOTS LTE 44 KNOTS WILL OCCUR AT HURLBURT FIELD. PEAK GUST EXPECTED (speed) KNOTS.

A9.20. OBSERVED TERMINAL ADVISORY FOR THUNDERSTORMS WITHIN 10 NM. THUNDERSTORMS ARE OCCURING WITHIN 10NM OF HURLBURT FIELD.

A9.21. OBSERVED TERMINAL ADVISORY FOR CROSSWIND GTE 25 KTS. CROSSWIND GTE 25 KTS AT HURLBURT FIELD.

A9.22. OBSERVED TERMINAL ADVISORY FOR CROSSWIND GTE 35 KTS. CROSSWIND GTE 35 KTS AT HURLBURT FIELD.

A9.23. OBSERVED TERMINAL ADVISORY FOR TEMPERATURE. TEMPERATURE LTE 40 DEGREES FAHRENHEIT AT HURLBURT FIELD.

Attachment 10

SEVERE WEATHER ACTION PROCEDURES DUTIES/RESPONSIBILITIES

A11.1. If the SWAP is implemented, the actions in Table A10.2. will be performed when the conditions in paragraph 5.7.1. are expected to occur or are occurring.

Table A10.1. Duty Forecaster.

1.	Initiate and maintain an events log as time permits IAW local policy.
2.	Notify/recall SWAT Standby Member as necessary.
3.	Notify appropriate agencies of the issuance of Watches/Warnings.
4.	Advise senior base leadership of the situation as requested.
5	Review SWAT Standby Member/Team Chief checklist and begin any duties, as necessary, until the member arrives.
6	Conduct a concise forecast discussion of the current situation to apprise SWAT Standby Member/Team Chief upon their arrival.
7	Issue observed Warnings/Advisories.
8.	Review PIREPs, SIGMETs, and area NWS forecasts products for severe weather reports. If applicable, incorporate into products.
9.	Update Mission Execution Forecast (MEF) as needed.
10.	Work closely with the SWAT members. Allow them to accomplish tasks which will free duty forecaster to handle critical tasks such as watch/warning/advisory issuance/notification, MEF amendments.
11.	Provide inputs to post-event OPREP-3 report (if required). Archive data for and perform forecast review.

Table A10.2. SWAT Standby Member/Team Chief.

1.	When first notified report to the station within 30 minutes of notification. Determine if the situation warrants the recall/stand-by placement of additional personnel.
2.	Upon arrival, receive initial forecast discussion from Duty Forecaster.
3.	Ensure duty positions are delegated and members are performing assigned tasks (combine duty positions when necessary). a. Duty Forecaster. b. Duty Observer. c. RADAR operator.
4.	Ensure the following tasks are accomplished on a recurring basis: a. Recall additional personnel if needed.

	b. Adjust duties as deemed necessary. c. As requested, keep senior base leadership, command post and customers apprised of latest developments. d. Keep personnel focused on assigned tasks. e. Ensure all applicable watches/warnings/advisory are issued and notification has been accomplished. f. Review all forecast products for accuracy and horizontal consistency (e.g., watches/warnings/advisories, TAF's, and MEF's). g. Provide meteorological expertise and guide decision making.
5.	Conduct post –event review and discussion to provide team members with feedback (positive and negative).
6.	Consolidate inputs for OPREP-3 report and provide to Hurlburt Command Post (if required).

Table A10.3. RADAR Operator.

1.	Interrogate storms and related phenomena using RADAR and, during thunderstorms, lightning detection products.
2.	Keep Duty Forecasters and Team Chief informed of local severe activity.
3.	Monitor RPS list and request change as the situation warrants.
4.	During tornado and thunderstorm events, provide the Duty Weather technician with storm positions and movements.
5.	During thunderstorm events, advise the SWAT members when thunderstorms are within 10nm and 5 nm.
6.	Answer phones and questions. Prioritize calls for the Duty Forecaster and Team Chief. Direct calls from unofficial sources to Public Affairs.
7.	Answer PMSV calls.
8.	Assist other team members as needed.
9.	Archive data if deemed necessary.
10.	Provide inputs to and contribute to forecast review. Provide inputs to OPREP-3 report (if required).

Attachment 11

OPREP-3 REPORT FORMAT

A11.1. ***Type of report: BEELINE.*** *1. Actual severe weather experienced: (e.g. 75 knot gust at 2115Z, 15 June 2000).*

2. Text of MEF and TAF in effect at the time of the event.

3. KHRT MEF 151500, etc.

4. KHRT AMD 151817 AMD, etc.

5. Weather watches and warnings issued.

6. HURLBURT FIELD WEATHER WATCH #06-002.

7. VALID 20/2000Z (20/1600L) to 20/2300Z (20/1900L).

8. LIGHTNING WATCH:, etc.

9. Issued at: (time).

10. Lead time: (time).

11. Desired lead time: (time).

12. HURLBURT FIELD WEATHER WARNING #06-003.

13. VALID 20/2000Z (20/1600L) to 20/2300Z (20/1900L).

14. THUNDERSTORMS WITH SFC WIND OF 50 KNOTS,etc.

15. Issued at: (time).

16. Lead time: (time).

17. Desired lead time: (time).

18. All Other watches and warnings.

19. D. Operational status of meteorological equipment.

20. All observing equipment 100% operational. OPUP was operating at full capacity.

21 JET was 100% operational.

22. Essential addresses for OPREP-3 Beeline.

23. AFOC Washington DC, HQ USAF Washington DC//.

24. HQ USAF WASHINGTON DC//XOW//

25. 557 WG OFFUT AFB NE//.

26. HQ AFSOC COMMAND CENTER HURLBURT FIELD FL//.

27. HQ AFSOC HURLBURT FIELD FL//A3W//.

28. POC: RANK NAME, 23 SOWS/WXF.

29. DSN 579-7423 e-mail address.