

三禮電子集團控股有限公司

3L ELECTRONIC GROUP HOLDINGS LIMITED




SPECIFICATION FOR APPROVAL 樣品承認書

CUSTOMER(客戶): CS2Z0 喬山健康科技(上海)有限公司 PAGE: OF

3L P/N: SNR8040M-6R8N YOUR REF.:

1.MECHANICAL DIMENSIONS (外形尺寸): DRAW NO.: SNR8835

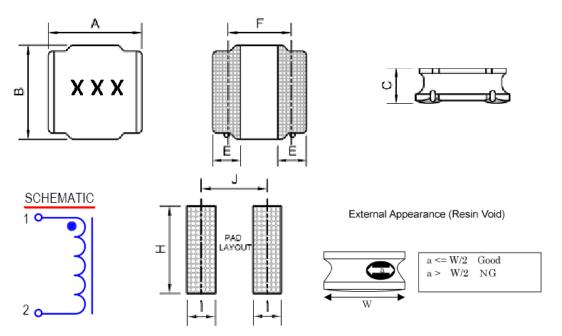

Item項目	Spec.(規格mm)	Typ.(參考值)	Item項目	Spec.(規格mm)	Typ.(參考值)
А	8.0 +- 0.2	8.07	F	5.0 REF	
В	8.0 +- 0.2	8.08	G		
С	4.2 MAX	4.08	Н	7.5 REF	
D			I	1.8 REF	
E	2.0 REF		J	5.6 REF	

2. NOTES (備注, 包括印字及起始同相端等特別要求):

2.1 Marking (印字): "6R8"

Color/ Style/ Size(顏色.字體.字高): BLACK

CUSTOMER APPROVED (客戶確認)	APPROVED(確認)	CHECKED(檢查)	DRAWN(制圖)
		工程部 2014.01.14 杨仁进	工程部 2014.01.14 陈道明

ISSUED DATE(出版日期): 2014/01/10 PRINT DATE(出圖日期): 2014/01/14 REV(版次):XA



三禮電子集團控股有限公司

3L ELECTRONIC GROUP HOLDINGS LIMITED



SPECIFICATION FOR APPROVAL 樣品承認書

CUSTOMER				PAG	E :	OF				
3L P/N : SNR8040M-6R8N			YOUR F	R REF.:						
3. ELECTRICAL CHARACTERISTICS (電特性要求):										
Item (項目)	Specifications (規格)	Тур.	(參考值)	Test	equipments (浿	間試設	備):			
L	6.8uH +-30%			HP4284A PRECISION LCR METER						
L Load	+4.0A:L DROP 30% MAX			HP4284A WITH HP42841A CURRENT SOURCE						
Test Freq.	@100kHz 1.0V		HP4284A WITH HP42841A CURRENT SOURCE					OURCE		
DCR	25mOHM +-30%		CHENHWA 502 OHM METER							
Isat	4.0A MAX			HP4284A WITH HP42841A CURRENT SOURCE				OURCE		
I rms.	3.7A MAX			HP4284A WITH HP42841A CURRENT SOURCE				OURCE		
Ope.Temp.	-25℃ TO 85℃			HC-D3M TEMP. & HUMIDITY CHAMBER)		
ELECTRICAI	L NOTES (電特性備注欄):									
			APPROVED(確認) CH		CHECKED(核	会查)	DRA	WN(制圖)		
					工程部 2014.01.14 杨仁进	4	201	程部 4.01.14 注 道明		