

Sparky V2.2

C h e c k l i s t


PRE-FLIGHT CHECKLIST

- Install the batteries in their respective supports.....INSTALLED
- Tie and fix all the velcros of the two batteries.....COMPLETED
- Check with the multimeter that both batteries have the same voltage.....OK
- Connect both batteries to the connector.....CONNECTED
- Connect Sparky to the Ground Station via Mission Planner.....CONNECTED
- Switch on the transmitter.....ON
- External review checking that nothing is out of place.....COMPLETED
- Verification of the correct movement of the ailerons.....COMPLETED
- Visual verification that there is no one near the UAV.....VERIFIED
- Armed Sparky.....ARMED

POST-FLIGHT CHECKLIST

- Disarm Sparky.....DISARMED
- Turn off the RC transmitter.....OFF
- Disconnect both batteries from the connector.....DISCONNECTED
- Check with the multimeter that the battery voltage limit has not been exceeded.....CHECK
- External review checking that nothing is out of place.....COMPLETED

BATTERY CHARGE CHECKLIST

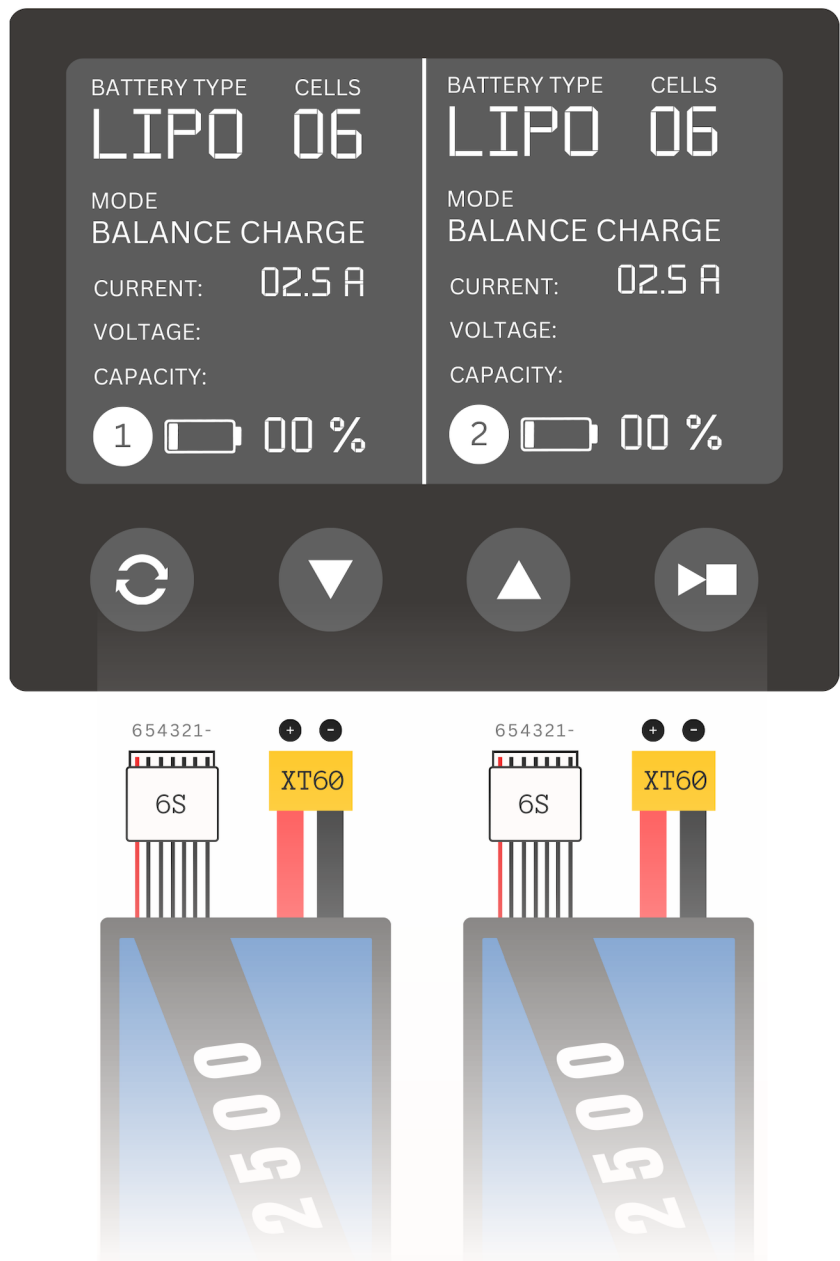

- Connect the batteries as shown in the illustration.....CONECTED
- Set the battery type to LIPO.....SET
- Set the battery cells to 6.....SET
- Set the charging mode to Balance Charge.....SET
- Set the current to 2.5 A.....SET