

## INSTALLATION

1. INSTALL REINFORCEMENT
2. INSTALL NO. 1 BRACE
3. INSTALL FLOOR BRACE
4. INSTALL GLOVE COMPARTMENT DOOR DAMPER
5. INSTALL NO. 4 HEATER TO REGISTER DUCT
6. INSTALL NO. 3 HEATER TO REGISTER DUCT
7. INSTALL ECU



### 8. INSTALL INSTRUMENT PANEL

#### HINT:

- Install the airbag connector between the No. 5 heater to register duct and center bracket temporarily, then install the instrument panel.
  - Remove the airbag connector before installing the lower No. 2 panel.
- (a) Install the 6 bolts, 2 nuts and instrument panel, then connect the connectors.
  - (b) Install the 2 bolts to the front passenger airbag assembly.  
**Torque: 20 N·m (204 kgf·cm, 15 ft·lbf)**
  - (c) Connect the junction connectors.


#### HINT:

The connectors can be connected by tightening the bolts.

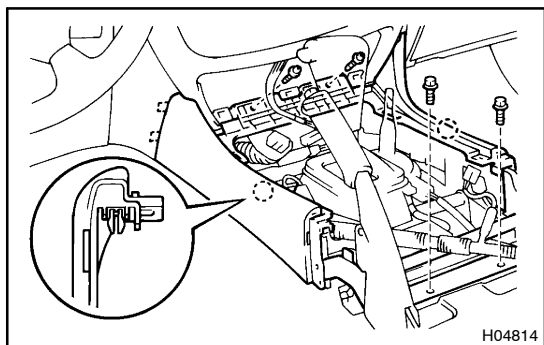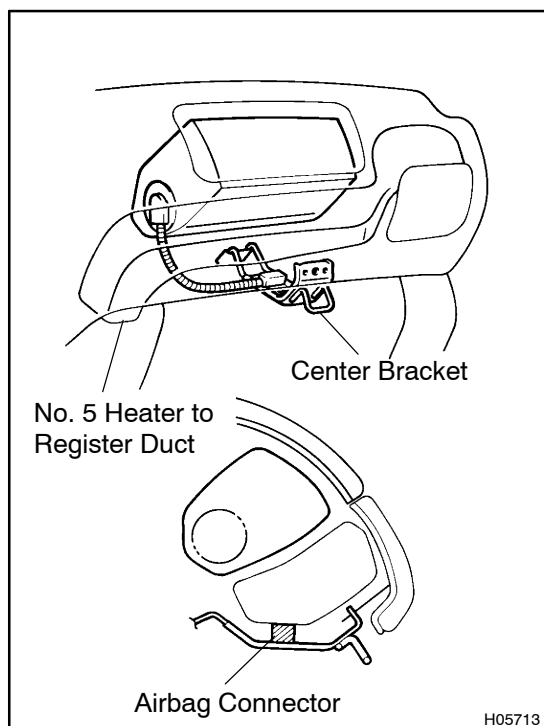


### 9. INSTALL FRONT CONSOLE BOX

Install the front console box with the 2 bolts and 2 screws.

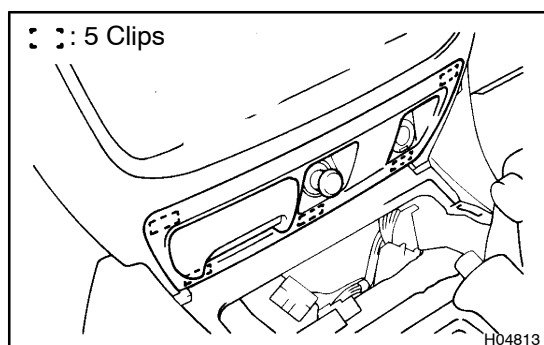


### 10. INSTALL CENTER LOWER CLUSTER FINISH PANEL


Connect the connector, then install the center lower cluster finish panel.

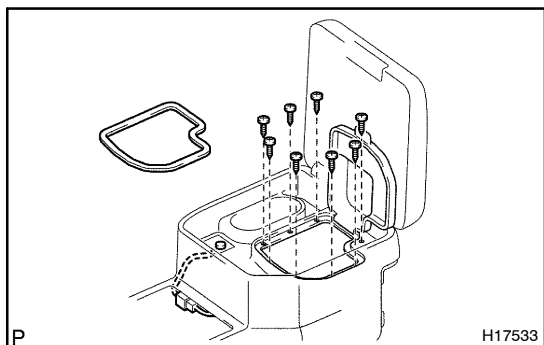**11. INSTALL REAR CONSOLE BOX**


- (a) w/ Cool box:  
Install the rear console box with the 8 screws.
- (b) w/ Cool box:  
Install new door packing.
- (c) w/ Cool box:  
Connect the connector.

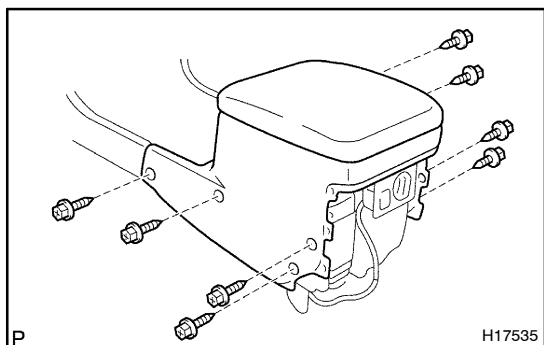


- (d) w/ Cool box:  
Install the 8 screws.

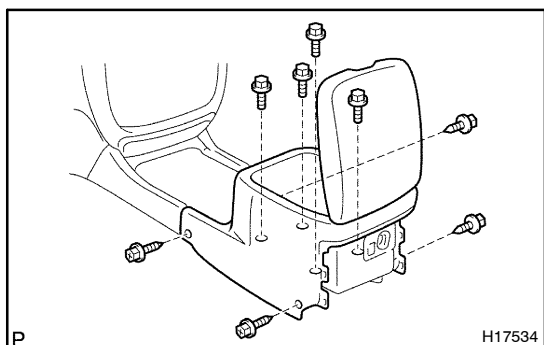

- (e) w/o Cool box:  
Install the rear console box with the 4 bolts and 4 screws.

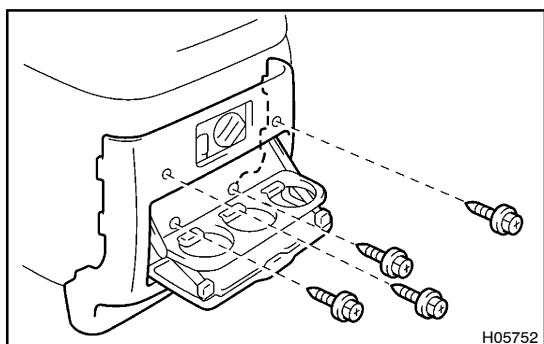**12. INSTALL CONSOLE REAR END PANEL**

Install the console rear end panel with the 4 screws.

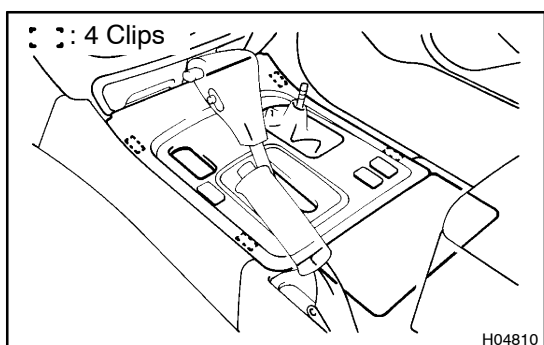**13. INSTALL REAR CONSOLE PANEL**

Install the rear console panel, then install the transfer shift lever knob.

**14. INSTALL NAVIGATION SYSTEM WITH A/C CONTROL ASSEMBLY**


- (a) Connect the connectors, then install the navigation system with A/C control assembly.
- (b) Install the 4 screws.

**15. INSTALL CENTER CLUSTER**


Connect the connectors, then install the center cluster.

**16. INSTALL LOWER NO. 2 PANEL**


Install the lower No. 2 panel with the 3 screws.

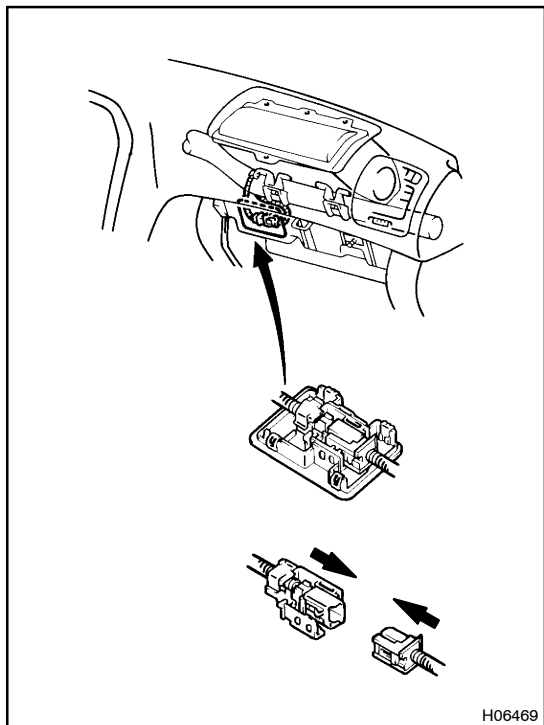**17. CONNECT AIRBAG CONNECTOR (See Pub. No. RM616E on page RS-35)****18. INSTALL GLOVE COMPARTMENT DOOR**

- (a) Connect the glove compartment door damper clip, then install the glove compartment door.
- (b) Install the 2 screws.

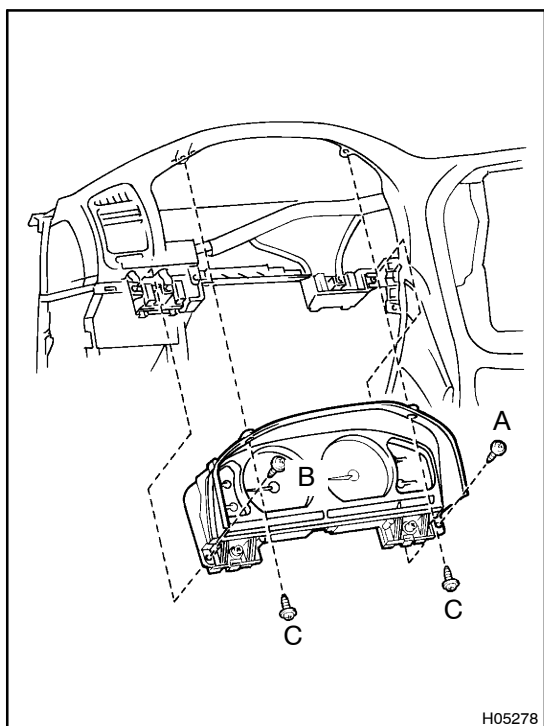**19. INSTALL COMBINATION METER**

- (a) Check that the set-in connectors are connected in the installation holes on the instrument panel securely.
- (b) Place the combination meter on the instrument panel.
- (c) Install the combination meter by tightening the screws, "A", "B" and "C" in the order.

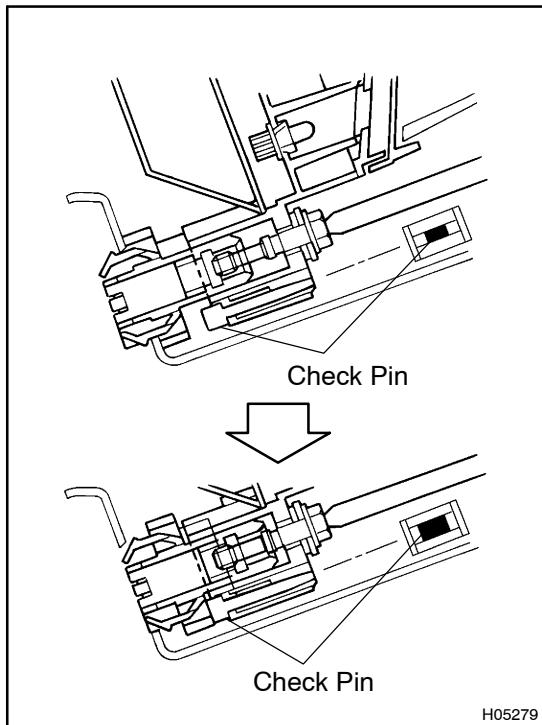

(d) Tighten the connection bolts.


HINT:

- When connection completes, the bolts turn vainly, causing turning noise.
- Check this noise and that the connection check pins protrude from the lower side of the connection bolts.

NOTICE:


Follow the procedures in order of (c) and (d). Otherwise, set-in connectors on the wire harness side and connectors on the meter side might not be connected properly.

20. **INSTALL STEERING COLUMN** (See Pub. No. RM616E on page SR-24 or SR-37)

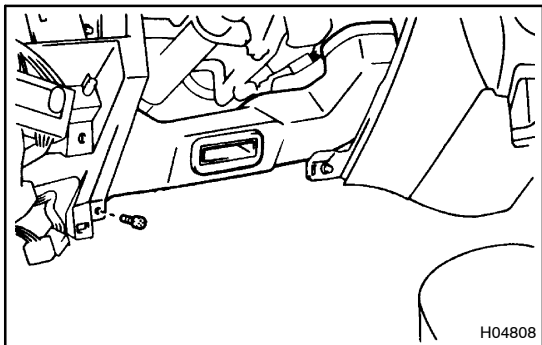

21. **INSTALL NO. 2 HEATER TO REGISTER DUCT**

Install the No. 2 heater to register duct with the screw.

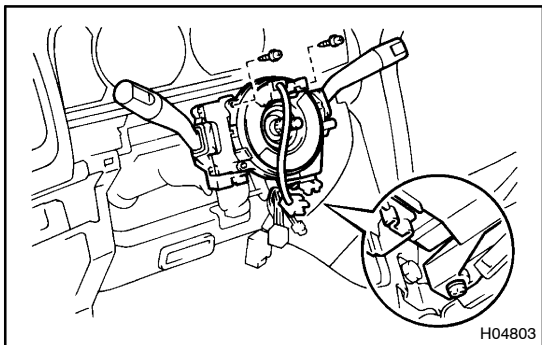


22. **INSTALL COMBINATION SWITCH**

- Install the combination switch with the 3 screws.
- Install the clamp, then connect the connectors.

23. **INSTALL COLUMN COVERS**

Install the column covers with the 3 screws.


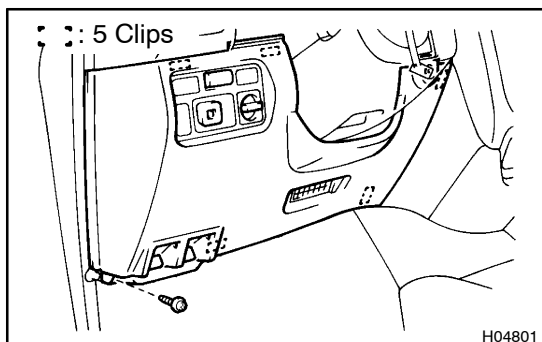


24. **INSTALL LOWER NO. 1 PANEL**

Connect the connector, then install the lower No. 1 panel with the screw.

25. **INSTALL HOOD LOCK AND FUEL LID CONTROL CABLE LEVER**

- Install the fuel lid control cable lever with the 2 screws.
- Install the hood lock control cable with the 2 screws.

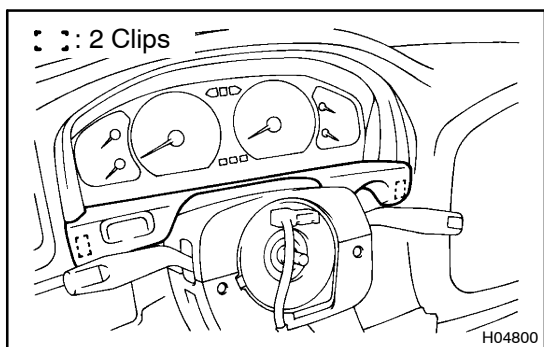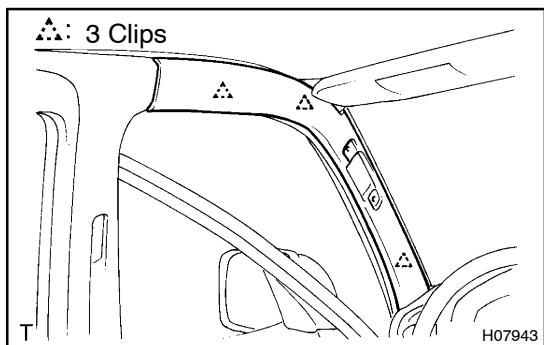**26. INSTALL CLUSTER FINISH PANEL****27. INSTALL STEERING WHEEL (See Pub. No. RM616E on page SR-24 or SR-37)****28. INSTALL FRONT PILLAR GARNISH**

- (a) Install the front pillar garnish.
- (b) Use the same manner described above to the other side.
- (c) Driver's side:  
Install the assist grip with the 2 screws, then install the 2 assist grip plugs.
- (d) Passenger's side:  
Install the 2 assist grips with the 4 screws, then install the 4 assist grip plugs.

**29. INSTALL FRONT DOOR OPENING TRIMS****30. INSTALL COWL SIDE TRIMS****31. INSTALL FRONT DOOR SCUFF PLATES**