

μC/OS-III™

The Real-Time Kernel

For the STM32 ARM® Cortex-M3™



 STMicroelectronics

 IAR
SYSTEMS

Micriμm

Jean J. Labrosse

This book puts the spotlight on how a real-time kernel works. Using Micrium's µC/OS-III as a reference, the book consists of two complete parts. The first describes real-time kernels in generic terms. Part II provides examples to the reader, using STMicroelectronics' STM32F107 microcontroller, based on the popular ARM Cortex-M3® architecture. A companion evaluation board (µC/Eval-STM32F107), and tools (IAR Systems Embedded Workbench for ARM), enable the reader to be up and running quickly, and have an amazing hands-on experience, leading to a high level of proficiency.

This book is written for serious embedded systems programmers, consultants, hobbyists, and students interested in understanding the inner workings of a real-time kernel. µC/OS-III is not just a great learning platform, but also a full commercial-grade software package, ready to be part of a wide range of products.

µC/OS-III is a highly portable, ROMable, scalable, preemptive real-time, multitasking kernel designed specifically to address the demanding requirements of today's embedded systems. µC/OS-III is the successor to the highly popular µC/OS-II real-time kernel but can use most of µC/OS-II's ports with minor modifications. Some of the features of µC/OS-III are:

- Preemptive multitasking with round-robin scheduling of tasks at the same priority
- Supports and unlimited number of tasks and other kernel objects
- Rich set of services: semaphores, mutual exclusion semaphores with full priority inheritance, event flags, message queues, timers, fixed-size memory block management, and more.
- Built-in performance measurements



About the author

Jean Labrosse founded Micrium in 1999. He is a regular speaker at the Embedded Systems Conference in Boston and Silicon Valley, and other industry conferences. Author of two definitive books on embedded design: MicroC/OS-II, The Real-Time Kernel and Embedded Systems Building Blocks, Complete and Ready-to-Use Modules in C, he holds BSEE and MSEE from the University of Sherbrooke, Quebec, Canada.

Jean J. Labrosse
Founder, President
and CEO

www.micrium.com

Micrium
Press
2011

ISBN 978-0-9823375-3-0



9 780982 337530



μC/OS-II™

The Real-Time Kernel

Jean J. Labrosse

Micrium
Press

Weston, FL 33326

Micrium Press
1290 Weston Road, Suite 306
Weston, FL 33326
USA
www.micrium.com

Designations used by companies to distinguish their products are often claimed as trademarks. In all instances where Micrium Press is aware of a trademark claim, the product name appears in initial capital letters, in all capital letters, or in accordance with the vendor's capitalization preference. Readers should contact the appropriate companies for more complete information on trademarks and trademark registrations. All trademarks and registered trademarks in this book are the property of their respective holders.

Copyright © 2011 by Micrium Press except where noted otherwise. Published by Micrium Press. All rights reserved. Printed in the United States of America. No part of this publication may be reproduced or distributed in any form or by any means, or stored in a database or retrieval system, without the prior written permission of the publisher; with the exception that the program listings may be entered, stored, and executed in a computer system, but they may not be reproduced for publication.

The programs and code examples in this book are presented for instructional value. The programs and examples have been carefully tested, but are not guaranteed to any particular purpose. The publisher does not offer any warranties and does not guarantee the accuracy, adequacy, or completeness of any information herein and is not responsible for any errors or omissions. The publisher assumes no liability for damages resulting from the use of the information in this book or for any infringement of the intellectual property rights of third parties that would result from the use of this information.

Library of Congress Control Number: 2009934275

Library of Congress subject headings:

1. Embedded computer systems
2. Real-time data processing
3. Computer software - Development

For bulk orders, please contact Micrium Press at: +1 954 217 2036

ISBN: 978-0-9823375-3-0
100-uCOS-III-ST-STM32-003



*To my loving and caring wife, Manon,
and our two children James and Sabrina.*

Table of Contents

Part I: µC/OS-III – The Real-Time Kernel

Foreword to µC/OS-III — by Jack Ganssle.....	19	
Preface	21	
Chapter 1	Introduction	31
1-1	Foreground/Background Systems	32
1-2	Real-Time Kernels	33
1-3	RTOS (Real-Time Operating System)	35
1-4	µC/OS-III	35
1-5	µC/OS, µC/OS-II and µC/OS-III Features Comparison	40
1-6	How the Book is Organized	42
1-7	µC/Probe	42
1-8	Conventions	43
1-9	Chapter Contents	44
Chapter 2	Directories and Files	49
2-1	Application Code	52
2-2	CPU	53
2-3	Board Support Package (BSP)	54
2-4	µC/OS-III, CPU Independent Source Code	55
2-5	µC/OS-III, CPU Specific Source Code	59
2-6	µC/CPU, CPU Specific Source Code	60
2-7	µC/LIB, Portable Library Functions	62
2-8	Summary	64
Chapter 3	Getting Started with µC/OS-III	67
3-1	Single Task Application	68
3-2	Multiple Tasks Application with Kernel Objects	76

Table of Contents

Chapter 4	Critical Sections	85
4-1	Disabling Interrupts	86
4-1-1	Measuring Interrupt Disable Time	86
4-2	Locking the Scheduler	87
4-2-1	Measuring Scheduler Lock Time	88
4-3	μ C/OS-III Features with Longer Critical Sections	89
4-4	Summary	90
 Chapter 5		
5-1	Task Management	91
5-1	Assigning Task Priorities	100
5-2	Determining the Size of a Stack	102
5-3	Detecting Task Stack Overflows	103
5-4	Task Management Services	107
5-5	Task Management Internals	108
5-5-1	Task States	108
5-5-2	Task Control Blocks (TCBs)	113
5-6	Internal Tasks	125
5-6-1	The Idle Task (OS_IdleTask(), os_core.c)	125
5-6-2	The Tick Task (OS_TickTask(), os_tick.c)	127
5-6-3	The Statistic Task (OS_StatTask(), os_stat.c)	134
5-6-4	The Timer Task (OS_TmrTask(), os_tmr.c)	137
5-6-5	The ISR Handler Task (OS_IntQTask(), os_int.c)	138
5-7	Summary	139
 Chapter 6		
6-1	The Ready List	141
6-1	Priority Levels	142
6-2	The Ready List	146
6-3	Adding Tasks to the Ready List	149
6-4	Summary	150
 Chapter 7		
7-1	Scheduling	151
7-1	Preemptive Scheduling	152
7-2	Scheduling Points	154
7-3	Round-Robin Scheduling	156
7-4	Scheduling Internals	158
7-4-1	OSSched()	159

7-4-2	OSIntExit()	160
7-4-3	OS_SchedRoundRobin()	161
7-5	Summary	163
Chapter 8	Context Switching	165
8-1	OSCtxSw()	168
8-2	OSIntCtxSw()	170
8-3	Summary	173
Chapter 9	Interrupt Management	175
9-1	Handling CPU Interrupts	176
9-2	Typical µC/OS-III Interrupt Service Routine (ISR)	177
9-3	Non Kernel-Aware Interrupt Service Routine (ISR)	180
9-4	Processors with Multiple Interrupt Priorities	181
9-5	All Interrupts Vector to a Common Location	183
9-6	Every Interrupt Vectors to a Unique Location	185
9-7	Direct and Deferred Post Methods	186
9-7-1	Direct Post Method	186
9-7-2	Deferred Post Method	189
9-8	Direct vs. Deferred Post Method	192
9-9	The Clock Tick (or System Tick)	193
9-10	Summary	195
Chapter 10	Pend Lists (or Wait Lists)	197
10-1	Summary	202
Chapter 11	Time Management	203
11-1	OSTimeDly()	204
11-2	OSTimeDlyHMSM()	209
11-3	OSTimeDlyResume()	211
11-4	OSTimeSet() and OSTimeGet()	212
11-5	OSTimeTick()	212
11-6	Summary	212

Table of Contents

Chapter 12	Timer Management	213
12-1	One-Shot Timers	215
12-2	Periodic (no initial delay)	216
12-3	Periodic (with initial delay)	217
12-4	Timer Management Internals	217
12-4-1	Timer Management Internals - Timers States	217
12-4-2	Timer Management Internals - OS_TMR	219
12-4-3	Timer Management Internals - Timer Task	221
12-4-4	Timer Management Internals - Timer List	223
12-5	Summary	229
Chapter 13	Resource Management	231
13-1	Disable/Enable Interrupts	234
13-2	Lock/Unlock	236
13-3	Semaphores	237
13-3-1	Binary Semaphores	239
13-3-2	Counting Semaphores	246
13-3-3	Notes on Semaphores	248
13-3-4	Semaphore Internals (for resource sharing)	249
13-3-5	Priority Inversions	254
13-4	Mutual Exclusion Semaphores (Mutex)	256
13-4-1	Mutual Exclusion Semaphore Internals	261
13-5	Should You Use a Semaphore Instead of a Mutex?	267
13-6	Deadlocks (or Deadly Embrace)	267
13-7	Summary	271
Chapter 14	Synchronization	273
14-1	Semaphores	274
14-1-1	Unilateral Rendez-vous	276
14-1-2	Credit Tracking	279
14-1-3	Multiple Tasks Waiting on a Semaphore	281
14-1-4	Semaphore Internals (for synchronization)	282
14-2	Task Semaphore	289
14-2-1	Pending (i.e., Waiting) on a Task Semaphore	290
14-2-2	Posting (i.e., Signaling) a Task Semaphore	291
14-2-3	Bilateral Rendez-vous	292
14-3	Event Flags	294

14-3-1	Using Event Flags	296
14-3-2	Event Flags Internals	300
14-4	Synchronizing Multiple Tasks	306
14-5	Summary	308
Chapter 15	Message Passing	309
15-1	Messages	310
15-2	Message Queues	310
15-3	Task Message Queue	312
15-4	Bilateral Rendez-vous	313
15-5	Flow Control	314
15-6	Keeping the Data in Scope	316
15-7	Using Message Queues	319
15-8	Clients and Servers	327
15-9	Message Queues Internals	328
15-10	Summary	331
Chapter 16	Pending On Multiple Objects	333
16-1	Summary	341
Chapter 17	Memory Management	343
17-1	Creating a Memory Partition	344
17-2	Getting a Memory Block from a Partition	348
17-3	Returning a Memory Block to a Partition	349
17-4	Using Memory Partitions	350
17-5	Summary	354
Chapter 18	Porting µC/OS-III	355
18-1	Conventions	359
18-2	µC/CPU	360
18-2-1	cpu_bsp.h	361
18-2-2	cpu_def.h	361
18-2-3	cpu_cfg.h	361
18-2-4	cpu_core.c	363
18-2-5	cpu_core.h	364
18-2-6	cpu.h	364

Table of Contents

18-2-7	cpu_c.c	368
18-2-8	cpu_a.asm	368
18-3	μC/OS-III Port	369
18-3-1	os_cpu.h	371
18-3-2	os_cpu_c.c	372
18-3-3	os_cpu_a.asm	381
18-3-4	os_cpu_a.inc	388
18-4	Board Support Package (BSP)	392
18-4-1	bsp.c and bsp.h	392
18-4-2	bsp_int.c and bsp_int.h	394
18-5	Testing a Port	395
18-5-1	Creating a Simple Test Project	395
18-5-2	Verifying Task Context Switches	400
18-5-3	Verifying Interrupt Context Switches	407
18-6	Summary	411
 Chapter 19		
19-1	Run-Time Statistics	413
19-1	General Statistics – Run-Time	414
19-2	Per-Task Statistics – Run-Time	419
19-3	Kernel Object – Run-Time	422
19-4	os_dbg.c – Static	425
19-5	os_cfg_app.c – Static	438
19-6	Summary	441
 Appendix A		
A-1	μC/OS-III API Reference	443
A-1	Task Management	444
A-2	Time Management	446
A-3	Mutual Exclusion Semaphores – Resource Management	447
A-4	Event Flags – Synchronization	448
A-5	Semaphores – Synchronization	449
A-6	Task Semaphores – Synchronization	450
A-7	Message Queues – Message Passing	451
A-8	Task Message Queues – Message Passing	452
A-9	Pending on Multiple Objects	453
A-10	Timers	454
A-11	Fixed-Size Memory Partitions – Memory Management	455
A-12	OSCtxSw()	456

A-13	OSFlagCreate()	458
A-14	OSFlagDel()	460
A-15	OSFlagPend()	462
A-16	OSFlagPendAbort()	466
A-17	OSFlagPendGetFlagsRdy()	469
A-18	OSFlagPost()	471
A-19	OSIdleTaskHook()	474
A-20	OSInit()	476
A-21	OSInitHook()	479
A-22	OSIntCtxSw()	480
A-23	OSIntEnter()	482
A-24	OSIntExit()	484
A-25	OSMemCreate()	485
A-26	OSMemGet()	488
A-27	OSMemPut()	490
A-28	OSMutexCreate()	492
A-29	OSMutexDel()	494
A-30	OSMutexPend()	496
A-31	OSMutexPendAbort()	500
A-32	OSMutexPost()	503
A-33	OSPendMulti()	506
A-34	OSQCreate()	511
A-35	OSQDel()	514
A-36	OSQFlush()	516
A-37	OSQPend()	519
A-38	OSQPendAbort()	523
A-39	OSQPost()	526
A-40	OSSafetyCriticalStart()	530
A-41	OSSched()	531
A-42	OSSchedLock()	533
A-43	OSSchedRoundRobinCfg()	535
A-44	OSSchedRoundRobinYield()	537
A-45	OSSchedUnlock()	539
A-46	OSSemCreate()	541
A-47	OSSemDel()	544
A-48	OSSemPend()	547
A-49	OSSemPendAbort()	551
A-50	OSSemPost()	554

Table of Contents

A-51	OSSemSet()	557
A-52	OSStart()	559
A-53	OSStartHighRdy()	561
A-54	OSStatReset()	563
A-55	OSStatTaskCPUUsageInit()	565
A-56	OSStatTaskHook()	567
A-57	OSTaskChangePrio()	569
A-58	OSTaskCreate()	571
A-59	OSTaskCreateHook()	581
A-60	OSTaskDel()	583
A-61	OSTaskDelHook()	586
A-62	OSTaskQFlush()	588
A-63	OSTaskQPend()	590
A-64	OSTaskQPendAbort()	593
A-65	OSTaskQPost()	595
A-66	OSTaskRegGet()	598
A-67	OSTaskRegSet()	601
A-68	OSTaskReturnHook()	604
A-69	OSTaskResume()	606
A-70	OSTaskSemPend()	608
A-71	OSTaskSemPendAbort()	611
A-72	OSTaskSemPost()	613
A-73	OSTaskSemSet()	615
A-74	OSStatTaskHook()	617
A-75	OSTaskStkChk()	619
A-76	OSTaskStkInit()	622
A-77	OSTaskSuspend()	627
A-78	OSTaskSwHook()	629
A-79	OSTaskTimeQuantaSet()	632
A-80	OSTickISR()	634
A-81	OSTimeDly()	636
A-82	OSTimeDlyHMSM()	639
A-83	OSTimeDlyResume()	642
A-84	OSTimeGet()	644
A-85	OSTimeSet()	646
A-86	OSTimeTick()	648
A-87	OSTimeTickHook()	649
A-88	OSTmrCreate()	651

A-89	OSTmrDel()	656
A-90	OSTmrRemainGet()	658
A-91	OSTmrStart()	660
A-92	OSTmrStateGet()	662
A-93	OSTmrStop()	664
A-94	OSVersion()	667
Appendix B	μC/OS-III Configuration Manual	669
B-1	μC/OS-III Features (os_cfg.h)	672
B-2	Data Types (os_type.h)	683
B-3	μC/OS-III Stacks, Pools and other (os_cfg_app.h)	683
Appendix C	Migrating from μC/OS-II to μC/OS-III	689
C-1	Differences in Source File Names and Contents	692
C-2	Convention Changes	695
C-3	Variable Name Changes	701
C-4	API Changes	702
C-4-1	Event Flags	703
C-4-2	Message Mailboxes	705
C-4-3	Memory Management	707
C-4-4	Mutual Exclusion Semaphores	708
C-4-5	Message Queues	710
C-4-6	Semaphores	712
C-4-7	Task Management	714
C-4-8	Time Management	718
C-4-9	Timer Management	719
C-4-10	Miscellaneous	721
C-4-11	Hooks and Port	723
Appendix D	MISRA-C:2004 and μC/OS-III	725
D-1	MISRA-C:2004, Rule 8.5 (Required)	726
D-2	MISRA-C:2004, Rule 8.12 (Required)	727
D-3	MISRA-C:2004, Rule 14.7 (Required)	728
D-4	MISRA-C:2004, Rule 15.2 (Required)	729
D-5	MISRA-C:2004, Rule 17.4 (Required)	730

Appendix E Bibliography 731

Appendix F Licensing Policy 733

Part II: µC/OS-III and the STMicroelectronics STM32F107

Chapter 1 Introduction 737

1-1 The MicriUm µC/Eval-STM32F107 738

1-2 Part II Chapter Contents 740

1-3 Acknowledgements 742

Chapter 2 The ARM Cortex-M3 and the STM32 743

2-1 The Cortex CPU 744

2-1-1 The Program Status Register 746

2-1-2 Stacking and Interrupts 746

2-2 Nested Vector Interrupt Controller (NVIC) 747

2-3 Exception Vector Table 748

2-4 SYSTICK (System Tick) 749

2-5 Memory Map 750

2-6 Instruction Set 751

2-7 Debugging Features 752

2-8 The STmicroelectronics STM32 753

Chapter 3 Setup 755

3-1 Downloading µC/OS-III projects for this book 757

3-1-1 \EvalBoards 759

3-1-2 \uC-CPU 761

3-1-3 \uC-LIB 761

3-1-4 \uCOS-III 762

3-2 Downloading µC/Probe 763

3-3 Downloading the IAR Embedded Workbench for ARM 764

3-4 Downloading the STM32F107 documentation 765

Chapter 4	μC/OS-III Example #1	767
4-1	Running the Project	770
4-2	How the example project works	772
4-3	Monitoring variables using μC/Probe	776
4-4	Summary	783
Chapter 5	μC/OS-III Example #2	785
5-1	Running the Project	786
5-2	Monitoring the temperature sensor using μC/Probe	790
Chapter 6	μC/OS-III Example #3	793
6-1	Running the Project	794
6-2	Examining Performance Test Results with μC/Probe	795
6-3	How the test code works	801
6-4	Other performance measurements	806
6-5	Summary	808
Chapter 7	μC/OS-III Example #4	809
7-1	Running the Project	810
7-2	Displaying Rotating Wheel Data	811
7-3	RPM Measurement simulation implementation	813
7-3-1	Measuring RPM using an Input Capture	816
7-4	How the code works	817
7-5	Observations	821
7-6	Summary	822
Appendix A	μC/OS-III port for the Cortex-M3	823
A-1	os_cpu.h	824
A-2	os_cpu_c.c	826
A-2-1	os_cpu_c.c – OSIdleTaskHook()	826
A-2-2	os_cpu_c.c – OSInitHook()	827
A-2-3	os_cpu_c.c – OSStatTaskHook()	828
A-2-4	os_cpu_c.c – OSTaskCreateHook()	829
A-2-5	os_cpu_c.c – OSTaskDelHook()	830
A-2-6	os_cpu_c.c – OSTaskReturnHook()	831
A-2-7	os_cpu_c.c – OSTaskStkInit()	832

Table of Contents

A-2-8	os_cpu_c.c – OSTaskSwHook()	835
A-2-9	os_cpu_c.c – OSTimeTickHook()	838
A-2-10	os_cpu_c.c – OS_CPU_SysTickHandler()	839
A-2-11	os_cpu_c.c – OS_CPU_SysTickInit()	840
A-3	os_cpu_a.asm	841
A-3-1	os_cpu_a.asm – OSStartHighRdy()	841
A-3-2	os_cpu_a.asm – OSCtxSw() and OSIntCtxSw()	842
A-3-3	os_cpu_a.asm – OS_CPU_PendSVHandler()	843
Appendix B	μC/CPU port for the Cortex-M3	847
B-1	cpu_core.c	847
B-2	cpu_core.h	848
B-3	cpu_def.h	848
B-4	cpu_cfg.h	848
B-5	μC/CPU Functions in bsp.c	849
B-5-1	μC/CPU Functions in bsp.c, CPU_TS_TmrInit()	850
B-5-2	μC/CPU Functions in bsp.c, CPU_TS_TmrRd()	850
B-6	cpu.h	851
B-6-1	cpu.h – #defines	851
B-6-2	cpu.h – Data Types	852
B-6-3	cpu.h – Function Prototypes	855
B-7	cpu_a.asm	855
Appendix C	IAR Systems IAR Embedded Workbench for ARM	857
C-1	IAR Embedded Workbench for ARM – Highlights	858
C-2	Modular and extensible IDE	859
C-3	Highly optimizing C/C++ Compiler	861
C-4	Device Support	862
C-5	State-of-the-art C-SPY® Debugger	863
C-6	C-SPY Debugger and target system support	864
C-7	IAR Assembler	864
C-8	IAR J-LINK Linker	864
C-9	IAR Library and library tools	865
C-10	Comprehensive documentation	865
C-11	First class technical support	865

Appendix D	Micrium's μC/Probe	867
D-1	μC/Probe is a Windows™-based application	870
D-2	Assigning a variable to an object	872
Appendix E	μC/Eval-STM32F107 User's Guide	875
E-1	Features	877
E-2	Hardware layout and configuration	878
E-3	Power Supply	880
E-4	Boot Options	881
E-5	Reset Sources	881
E-6	CAN (Controller Area Network)	882
E-7	RS-232C	882
E-8	SD/MMC card	882
E-9	USB-OTG (USB On-The-Go)	882
E-10	LM75 Temperature Sensor	883
E-11	Debug Interface	883
E-12	Ethernet	884
E-13	Clock SourceS	885
E-14	Connectors	886
E-14-1	Extension connector (CN3)	886
E-14-2	Power connectors (CN1 & CN9)	887
E-14-3	RS-232C connectors (CN7)	887
E-15	I/O Assignments	888
E-16	Schematics	892
Appendix F	Bibliography	905
Appendix G	Licensing Policy	907
Index	909

Table of Contents

Foreword to µC/OS-III — by Jack Ganssle

Your system has to read a keyboard and update the display. That's pretty easy to handle in a simple loop.

Oh, wait, then there's the A/D converter which needs service once a millisecond. The data is noisy so ten samples must be averaged and the result fed into a computation which is sent to the display. But you can't do the math till the results of the encoder become available, and that can only be read on 20 msec intervals.

But don't forget to monitor the radiation source; if it goes out of limits a safety protocol has to be invoked to avoid harming users. That has to be monitored every 250 milliseconds.

How would one write this code? Sure, it's possible to write an interrupt handler that takes clock ticks and then, via a number of tortured loops, sequences off the proper activities. It'll be tough to debug and harder to maintain. You can be sure the boss will come in, red-faced, wondering why the heck the system only looks at safety parameters every quarter second when any idiot knows the rate should be 0.230 sec, no matter how he wrote the spec. The loops grow more complex and the program ever more convoluted.

This is a very old problem, one solved by the use of a Real-Time Operating System (RTOS). Write each activity as a separate task. The code is simple, crystal clear, and easy to change.

An old problem, yes. But there's surprisingly little written about the use of an RTOS. Jean Labrosse wrote one of the first and best books on the subject: the first edition of this volume. I'm told the first edition, and the subsequent second edition, are the best selling books ever published about embedded systems, and I'm not surprised. Extremely-well written, they covered the subject in depth and with finesse. He wrote using the µC/OS and µC/OS-II RTOSes as examples.

Now Jean and the crew at Micrium have a new and hugely improved version of that RTOS: µC/OS-III. Where µC/OS-II is a commercial quality product, one that even meets the highest safety-critical requirements, µC/OS-III takes that quality and reliability level to even the most demanding applications.

Jean has supplemented the new RTOS with this book. It's much weightier than his previous RTOS books as this volume goes in depth into the nuances of using an operating system in real applications. µC/OS-III lays out the rationale behind an RTOS, and then in a very logical fashion presents each of the resources provided by an RTOS and how one goes about using those features in a product. Though µC/OS-III is used as an example, it is not presented as the canonical RTOS, and users of any real-time operating system will find this material immensely usable.

I have long counted Jean a friend, and have great respect for his perfectionism. That is clear when reading the µC/OS source code, which is probably the most beautiful code I have read, and, since it has been used in products certified to DO-178B level A, also works!

That perfectionism also manifests itself in this book, in which it's clear he has taken pains to get every fact right, every drawing clear, all while maintaining a very consistent style.

This is a book by an engineer, for engineers (including engineering students). Devoid of fluff, it's packed with information about using an RTOS in a real system... today. What do I need to do to get started? What are all those files? Where is the information I need located?

Are you using an RTOS? If so, read this book. If you're not using one, read this book; not every embedded system needs an operating system, but there are too many that have been cobbled together through the painful use of ad hoc loops that an RTOS would vastly improve.

Preface

WHAT IS µC/OS-III?

µC/OS-III (pronounced “Micro C O S Three) is a scalable, ROMable, preemptive real-time kernel that manages an unlimited number of tasks. µC/OS-III is a third-generation kernel and offers all of the services expected from a modern real-time kernel, such as resource management, synchronization, inter-task communications, and more. However, µC/OS-III offers many unique features not found in other real-time kernels, such as the ability to complete performance measurements at run-time, to directly signal or send messages to tasks, achieve pending on multiple kernel objects, and more.

WHY A NEW µC/OS VERSION?

The µC/OS series, first introduced in 1992, has undergone a number of changes over the years based on feedback from thousands of people using and deploying its evolving versions.

µC/OS-III is the sum of this feedback and experience. Rarely used µC/OS-II features were eliminated and newer, more efficient features and services, were added. Probably the most common request was to add round robin scheduling, which was not possible for µC/OS-II, but is now a feature of µC/OS-III.

µC/OS-III also provides additional features that better exploit the capabilities of today's newer processors. Specifically, µC/OS-III was designed with 32-bit processors in mind, although it certainly works well with 16- and even several 8-bit processors.

WHAT'S NEW ABOUT THIS BOOK?

The MicroC/OS-II book focused primarily on documenting the µC/OS-II product with a great, yet brief, RTOS introduction. This book changes that focus. This time, the spotlight is on real-time kernels and Real-Time Operating Systems (RTOS), with µC/OS-III used as a reference. In-depth product documentation is now provided in the appendices.

By taking this approach, the intent is to reach a larger target audience, especially those from industry and academia alike that are completely new to the topic of RTOS. This book is also suitable for use as the foundation of a generic RTOS class.

From a didactic perspective, every person has four different learning styles:

- Activist (A)
- Observational (O)
- Theoretical (T)
- Pragmatic (P)

The style that is more dominant differs from person to person. Based on these learning styles, there are strong improvements over the previous book, MicroC/OS-II, The Real-Time Kernel, which primarily focused on theoretical and, thanks to the good illustrations, also the observational learning styles. However, activist and pragmatic styles were somewhat missing. This book answers more questions for the pragmatist concerning: Why would I be interested in this? What could I use this for? What does this mean for my project? How does this help me get the job done?

Typically, books completely lack an activist learning style. This is a tricky one for a book because the question then becomes, how do you get readers to become active and do something with the material? That's where the companion evaluation board and tools come in. This two-part text, combined with tools and evaluation board, enable readers to receive the material, and begin to have a hands-on experience right away.

This book is split into two parts. The first part describes real-time kernels in generic terms, using µC/OS-III as a real-life example. The second part, which actually looks like a completely different book, provides examples using a popular microprocessor or

microcontroller. As mentioned, the book is accompanied by a matching evaluation board and such tools as a compiler, assembler, linker, and debugger, which enable the reader to experiment with µC/OS-III and become proficient with its use.

In summary, the general topic of RTOS is now the prevailing topic of this book. Explaining the concept of RTOS in combination with µC/OS-III, an evaluation board and tools simply makes sense.

µC/OS-III GOALS

The main goal of µC/OS-III is to provide a best-in-class real-time kernel that literally shaves months of development time from an embedded-product schedule. Using a commercial real-time kernel such as µC/OS-III provides a solid foundation and framework to the design engineer dealing with the growing complexity of embedded designs.

Another goal for µC/OS-III, and therefore this book, is to explain inner workings of a commercial-grade kernel. This understanding will assist the reader in making logical design decisions and informed tradeoffs between hardware and software that make sense.

INTENDED AUDIENCE

This book is written for embedded systems programmers, consultants, hobbyists and students interested in understanding the inner workings of a real-time kernel. µC/OS-III is not just a great learning platform, but also a commercial-grade software package ready to be part of a range of products.

To get the most from this book, it is assumed that the reader has a good working knowledge of microprocessors, microcontrollers, and/or Digital Signal Processors (DSPs). That knowledge should extend to CPU instructions, interrupts, I/O devices, RAM and ROM or Flash, memory addresses, and stack pointers.

It is also expected that the reader will have a good working knowledge of the C programming language and assembly language.

THE µC/OS STORY

The µC/OS story started when, in 1989, I joined Dynalco Controls in Fort Lauderdale, Florida, and began working on the design of a new microprocessor-based ignition control system for a large industrial reciprocating engine.

Given that I had experience using a kernel, I was convinced that an operating system would substantially benefit this project and other planned projects at Dynalco. Time to market was of paramount importance for this ignition control system, and I knew that a kernel would help meet scheduling requirement. I also knew that new features would be added to this product in the future, and a preemptive operating system would allow for such updates without negatively impacting system responsiveness.

The kernel that I initially considered was one that had served me well in the past. However, it carried a hefty price tag, and my budget was somewhat meager. The alternative was a kernel that I had not used before, but it was five-times cheaper than my original choice. Ultimately, I decided that the financial benefits of using the unfamiliar operating system outweighed the potential advantages that its higher-priced counterpart could offer.

I quickly realized, however, that I would pay for the seemingly cheaper operating system with my time. During the two months after receiving the kernel, I was in constant contact with technical support, trying fruitlessly to determine why even the simplest applications would not run. The operating system, said to be written in C, required me to initialize all of the kernel's internal variables in assembly language, a task laden with problems. I eventually discovered that I was one of the first customers to purchase this operating system and was essentially an unknowing beta tester.

Frustrated with the software's many shortcomings, I turned to the relatively expensive operating system that I originally rejected. It seems that if a project is late, money is no object. Within two days, I was running simple applications that the cheap operating system seemed unable to support. My kernel-related problems seemed to be over.

Before long, however, I would find myself at another impasse. My second set of problems began when one of my engineers reported that the new operating system seemed to contain a bug. I promptly relayed the engineer's findings to the software vendor, assuming that the company would be interested. Instead of receiving assurance that the bug would be fixed, I was notified that the 90-day warranty expired. Unless I purchased a maintenance contract, the bug would not be eliminated, which was absurd to me. The software provider thought otherwise, and I forked over the maintenance fee.

Incredibly, the vendor took six months to actually remove the bug. All told, I completed my ignition system, incorporating the second operating system, a year after receiving the software. Clearly, I needed a better solution.

Twice disappointed, I began to develop my own kernel. In my naive opinion, all a kernel really did was to save and restore CPU registers; writing one should not be especially challenging.

The project kept me busy at night and on weekends, and proved to be much more difficult than anticipated. Approximately a year after I starting the project, my first operating system was complete.

With a new kernel in hand, there was finally a handy means of developing multitasking applications. The operating system, consisted of little more than a single C file and allowed up to 64 tasks to be created in a single application. Each task was required to be have a unique priority. The highest priority task that was ready to run when the operating system's scheduler was invoked was given control of the CPU. µC/OS was preemptive, so scheduling could occur at practically any time.

Efficient task scheduling was actually one of many services offered by µC/OS. The operating system also facilitated inter-task communication (via message queues and mailboxes) and task synchronization (through semaphores). All elements of µC/OS were designed to be both highly dependable and easy to use.

Presumably, most kernel developers have similar goals in mind when they write new software. I was especially well equipped to meet these goals, in part because of my punctilious coding style. Throughout my career, I focused on consistency and documentation. I began using formal coding standards in 1984, and the consistency of the µC/OS code is a testimony to this process.

µC/OS was designed according to the stringent standards that I created and promulgated at Dynalco. The operating system's source code featured liberal spacing, carefully worded comments, and consistent naming. Offering further evidence of the prudent coding techniques, the kernel was also highly portable. Although µC/OS, like its kernel peers, featured a small number of processor-specific functions, these routines were clearly separated from other portions of the operating system. Engineers could easily adapt µC/OS to new CPU architectures.

Unfortunately, I was the only one to know about the virtues of µC/OS. Eager to describe my new software to others, I wrote an in-depth paper explaining the inner workings of µC/OS. There was plenty to say, and my final paper was approximately 70 pages in length.

I offered my paper to C User's Journal, and they rejected it on the grounds that it was too long and that its subject matter wasn't fresh. The magazine had already published several kernel articles, and this was just one more. Convinced that my article was unique, I offered it to Embedded Systems Programming. The editor of this periodical likewise expressed misgivings, but I convinced him that µC/OS was attention-worthy. I explained that the operating system was comparable in quality to products that major embedded software companies offered (and better than at least two). I also explained that the source code for µC/OS could actually be placed on the publication's bulletin board service (BBS).

Embedded Systems Programming published a trimmed-down version of the paper as a two-part series. Both issues generated strong responses. Engineers were grateful that the inner workings of a high-quality kernel were revealed, and they downloaded the µC/OS source code in droves. Kernel vendors, on the other hand, were less than thrilled with the article. In fact, the vendor of the low cost kernel was especially upset claiming that I had copied his work. Imagine that I would base µC/OS on software that didn't work!

There would soon be even more reason for the kernel vendors to be upset. Shortly after my article appeared in Embedded Systems Programming, R & D Publications, publisher of C User's Journal contacted me, and they were interested in printing an entire µC/OS book.

Originally, the plan for the book simply involved printing all of the material that I had originally submitted to C User's Journal. Had I taken that route, the resulting book would have been approximately 80 pages or so in length. To make the most of this opportunity, I prepared a comprehensive text. With the consent of R & D, I spent the next several months writing. In late 1992, my first book, aptly titled µC/OS, The Real-Time Kernel, was released. The book had 250 pages, and was available in paperback form.

Although initial sales of the book were somewhat disappointing, R & D advertised µC/OS, The Real-Time Kernel each month in C User's Journal. At the same time, I was beginning to gain attention as a kernel expert. In the spring of 1993, I was invited to speak at the Embedded Systems Conference (ESC) in Atlanta, Georgia, where I described operating system fundamentals to a highly receptive audience of more than 70 embedded enthusiasts. Within a few years, I was an ESC fixture, delivering my kernel lectures to hundreds of engineers at each conference.

While my popularity as a speaker rose, interest in my book also picked up steam. After its slow start, µC/OS, The Real-Time Kernel, went on to sell more than 15,000 copies.

Thanks to the success of my book, the number of engineers using µC/OS increased substantially throughout the 1990s. Developers easily adapted the operating system to new hardware platforms, and were designing a myriad of µC/OS-based applications. Although several µC/OS users simply tinkered with the operating system in their spare time, many engineers used the software commercially in complex and demanding projects. Comments and suggestions from µC/OS users helped me to continue to refine and evolve the operating system.

For several years, only minor changes were made to µC/OS. However, when R & D asked me to write a second edition, I decided that a substantial update of both the operating system and the book was warranted. The updated operating system became µC/OS-II.

A quick glance at the µC/OS-II files revealed that this operating system was different from µC/OS. Whereas all of the processor-independent code incorporated by µC/OS was contained in a single C file, µC/OS-II spanned multiple files, each corresponding to one of the operating system's services. µC/OS-II also offered many features that its predecessor lacked, including stack-checking capabilities, hook functions, and a safe means to dynamically allocate memory.

To fully describe all of the new operating system's features, I nearly doubled the size of the book. Just as the latest version of the software received a new name, the new edition became MicroC/OS-II, The Real-Time Kernel. ("Micro" was used in place of "µ" because titles incorporating Greek letters posed problems for many book retailers.) Unlike my first text, the new book would be a hardcover.

MicroC/OS-II, The Real-Time Kernel was released in 1998. This new text was accompanied by the source code that it described and I would again have thousands of developers testing the kernel and providing valuable feedback.

Among the thousands of readers of my books using the software, there were many kernel rookies. For them, the book provided thorough and accessible coverage of operating system fundamentals. Many university professors recognized the book's appeal to new kernel users and started designing entire courses around µC/OS-II. Soon college graduates whose kernel training focused on the operating system made their way into the workforce, where they continued to use µC/OS-II.

While students gravitated to µC/OS-II because of my book and readily available source code, a substantial number of engineers using µC/OS-II commercially selected the software for its reliability. Definitive proof of the operating system's reliability was provided in July 2000, when DO-178B Level A certification was conferred on an avionics product incorporating µC/OS-II. This certification, recognized by the Federal Avionics Administration (FAA), is awarded to software deemed safe enough to be used in aircraft. To this day, there are few operating systems that have successfully completed the rigorous testing that certified software must undergo.

DO-178B certification is only one of µC/OS-II's credentials. Additional certifications include Food and Drug Administration (FDA) pre-market notification (510(k)), pre-market approval (PMA) for medical devices, and IEC-61508 for industrial controls. Compliance with such standards is critical within industry segments; however, the certifications also have value for engineers in other industries as they evidence reliability, documentation, and time-to-market advantages beneficial to any design.

As the decade came to a close, I still worked full time at Dynalco, and experienced difficulty keeping up with the demand for the operating system. I felt obligated to respond to each µC/OS-II user that contacted me, and the flow of messages into my inbox was unrelenting. Since I could no longer treat the operating system as a side project, I made the decision to found my own software company. In September 1999, Micrium, officially came into being. Micrium comes from the word 'Micro' (for microprocessors or microcontrollers) and 'ium' (which means the Universe of) and thus, Micrium means the Universe of Microprocessors (as seen through the eyes of software).

In the months before incorporating Micrium, I began working on a second edition of the µC/OS-II book, which made its debut in November 1999 and was accompanied by a new version of the kernel. Two major features to the operating system were added: event flags and mutual exclusion semaphores. These new features, fully described in the book, were heartily welcomed by µC/OS-II users. The book itself was similarly embraced; the second edition of MicroC/OS-II, The Real-Time Kernel quickly became common sight on the bookshelves of embedded software developers. In fact, the MicroC/OS-II book is the most popular embedded systems book ever sold.

Micrium expanded. Engineers were hired to adapt µC/OS-II to new hardware platforms and develop a bevy of example projects and application notes. A long-time friend of mine, Christian Legare joined Micrium as Vice President in 2002, and his substantial corporate and technical expertise further accelerated the company's rapid growth. Since Christian joined Micrium, the company expanded from a one-product company to one with a portfolio of 15 products.

Meanwhile, new features were added to satisfy the ever-evolving needs of µC/OS-II users, including a variety of new API functions to the operating system and expanding the maximum number of tasks supported by the kernel from 64 to 255.

As Micrium's president, I remain dedicated to writing world-class kernel code, most recently µC/OS-III. The product of countless hours of meticulous programming and testing, this robust operating system has its roots in µC/OS-II, yet is an entirely new kernel. Addressing input received from customers and all of the lessons learned along the way, several additional important µC/OS-III features were included (see Introduction).

I am highly circumspect of fads and unproven technology as I write new software. Although I like to keep abreast of the latest developments in the high-tech world, the focus is on solving engineers' problems and providing a solid and complete infrastructure, rather than on how to prematurely exploit emerging trends.

This philosophy has yielded considerable success. Micrium, now in its tenth year, is a highly respected embedded software provider. Industry surveys consistently show the operating systems to be among the most popular in the embedded space. My goal has always been, and continues to be to provide effective solutions for the same types of problems that I confronted at Dynalco, and that millions of embedded systems developers continue to face today.

ACKNOWLEDGEMENTS

First and foremost, I'd like to thank my loving and caring wife Manon for her unconditional support, encouragement, understanding and patience. This new book and µC/OS-III software was again a huge undertaking, and I could not have done it without her.

I would also like to thank many fine people at Micrium who have tested the code and reviewed the book. In alphabetic order:

- Brian Nagel
- Eric Shufro
- Hong Soong
- Freddy Torres

A special thanks to Frank Voorburg from Feaser and to Ian Hall and Robert Mongrain from Renesas for feedback and corrections to the book, to Michael Barr for sharing his real life RTOS experiences, and to Carolyn Mathas for the incredible job of editing this huge project.

A very special thanks to my long-time friend, colleague and partner, Christian Legare, who has provided his advice and support throughout this project and on a day-to-day basis at Micrium. Thank you also to the dozens of people who provided feedback about the µC/OS-III code, as well as reviewers of the book.

Finally, I listen to music when I write software, and artist Gino Vannelli's awesome music has provided a creative environment for me for over three decades. I would be remiss if I did not acknowledge his contribution here as well.

Chapter

1

Introduction

Real-time systems are systems whereby the correctness of the computed values and their timeliness are at the forefront. There are two types of real-time systems, hard and soft real time.

What differentiates hard and soft real-time systems is their tolerance to missing deadlines and the consequences associated with those misses. Correctly computed values after a deadline has passed are often useless.

For hard real-time systems, missing deadlines is not an option. In fact, in many cases, missing a deadline often results in catastrophe, which may involve human lives. For soft real-time systems, however, missing deadlines is generally not as critical.

Real-time applications cover a wide range, but many real-time systems are embedded. An embedded system is a computer built into a system and not acknowledged by the user as being a computer. Embedded systems are also typically dedicated systems. In other words, systems that are designed to perform a dedicated function. The following list shows just a few examples of embedded systems:

Aerospace <ul style="list-style-type: none">■ Flight management systems■ Jet engine controls■ Weapons systems	Communications <ul style="list-style-type: none">■ Routers■ Switches■ Cell phones Computer peripherals <ul style="list-style-type: none">■ Printers■ Scanners	Office automation <ul style="list-style-type: none">■ FAX machines / copiers Process control <ul style="list-style-type: none">■ Chemical plants■ Factory automation■ Food processing Robots Video <ul style="list-style-type: none">■ Broadcasting equipment■ HD Televisions And many more
Audio <ul style="list-style-type: none">■ MP3 players■ Amplifiers and tuners	Domestic <ul style="list-style-type: none">■ Air conditioning units■ Thermostats■ White goods	

Real-time systems are typically more complicated to design, debug, and deploy than non-real-time systems.

1-1 FOREGROUND/BACKGROUND SYSTEMS

Small systems of low complexity are typically designed as foreground/background systems or super-loops. An application consists of an infinite loop (F1-1(1)) that calls modules (i.e., tasks) to perform the desired operations (background). Interrupt Service Routines (ISRs) shown in F1-1(3) handle asynchronous events (foreground). Foreground is also called interrupt level; background is called task level.

Critical operations that should be performed at the task level must unfortunately be handled by the ISRs to ensure that they are dealt with in a timely fashion. This causes ISRs to take longer than they should. Also, information for a background module that an ISR makes available is not processed until the background routine gets its turn to execute, which is called the task-level response. The worst-case task-level response time depends on how long a background loop takes to execute and, since the execution time of typical code is not constant, the time for successive passes through a portion of the loop is nondeterministic. Furthermore, if a code change is made, the timing of the loop is affected.

Most high-volume and low-cost microcontroller-based applications (e.g., microwave ovens, telephones, toys, etc.) are designed as foreground/background systems.

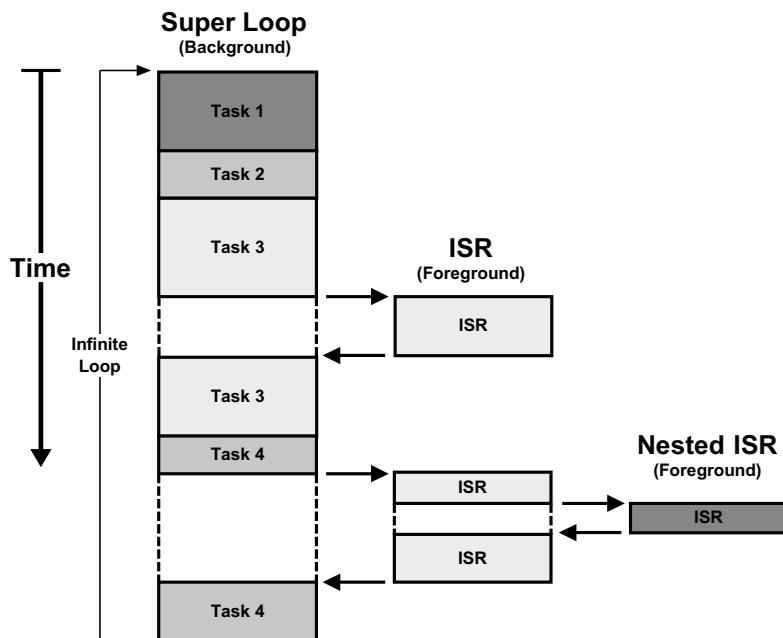


Figure 1-1 Foreground/Background (SuperLoops) systems

1-2 REAL-TIME KERNELS

A real-time kernel is software that manages the time and resources of a microprocessor, microcontroller or Digital Signal Processor (DSP).

The design process of a real-time application involves splitting the work into tasks, each responsible for a portion of the job. A task (also called a thread) is a simple program that thinks it has the Central Processing Unit (CPU) completely to itself. On a single CPU, only one task executes at any given time. A task is also typically implemented as an infinite loop.

The kernel is responsible for the management of tasks. This is called multitasking. Multitasking is the process of scheduling and switching the CPU between several tasks. The CPU switches its attention between several sequential tasks. Multitasking provides the illusion of having multiple CPUs and maximizes the use of the CPU. Multitasking also helps in the creation of modular applications. One of the most important aspects of multitasking is that it allows the application programmer to manage the complexity inherent in real-time applications. Application programs are easier to design and maintain when multitasking is used.

μ C/OS-III is a preemptive kernel, which means that μ C/OS-III always runs the most important task that is ready-to-run as shown in Figure 1-2.

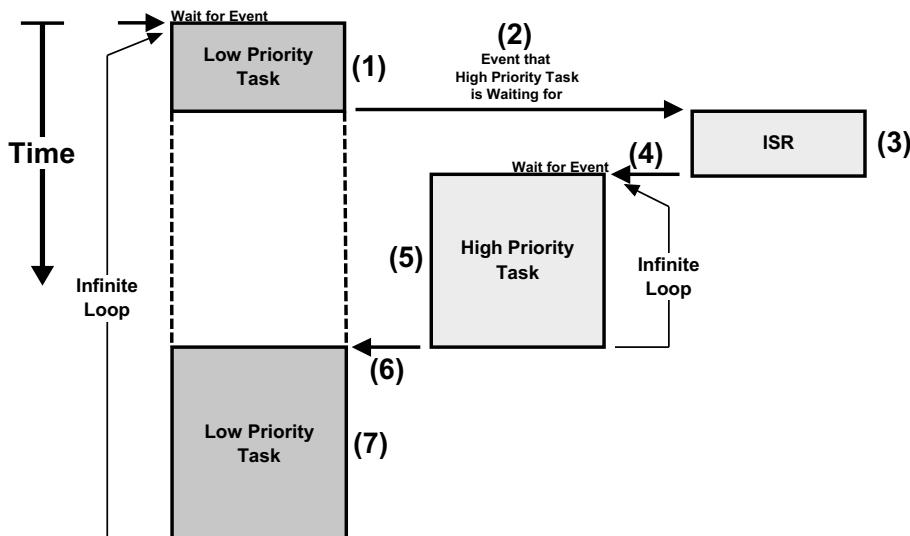


Figure 1-2 μ C/OS-III is a preemptive kernel

- F1-2(1) A low-priority task is executing.
- F1-2(2) An interrupt occurs, and the CPU vectors to the ISR responsible for servicing the interrupting device.
- F1-2(3) The ISR services the interrupt device, but actually does very little work. The ISR will typically signal or send a message to a higher-priority task that will be responsible for most of the processing of the interrupting device. For example, if the interrupt comes from an Ethernet controller, the ISR simply signals a task, which will process the received packet.
- F1-2(4) When the ISR finishes, μ C/OS-III notices that a more important task has been made ready-to-run by the ISR and will not return to the interrupted task, but instead context switch to the more important task.
- F1-2(5) The higher-priority task executes and performs the necessary processing in response to the interrupt device.
- F1-2(6) When the higher-priority task completes its work, it loops back to the beginning of the task code and makes a μ C/OS-III function call to wait for the next interrupt from the device.
- F1-2(7) The low-priority task resumes exactly at the point where it was interrupted, not knowing what happened.

Kernels such as μ C/OS-III are also responsible for managing communication between tasks, and managing system resources (memory and I/O devices).

A kernel adds overhead to a system because the services provided by the kernel require time to execute. The amount of overhead depends on how often these services are invoked. In a well-designed application, a kernel uses between 2% and 4% of a CPU's time. And, since μ C/OS-III is software that is added to an application, it requires extra ROM (code space) and RAM (data space).

Low-end single-chip microcontrollers are generally not able to run a real-time kernel such as μ C/OS-III since they have access to very little RAM. μ C/OS-III requires between 1 Kbyte and 4 Kbytes of RAM, plus each task requires its own stack space. It is possible for μ C/OS-III to work on processors having as little as 4 Kbytes of RAM.

Finally, µC/OS-III allows for better use of the CPU by providing approximately 70 indispensable services. After designing a system using a real-time kernel such as µC/OS-III, you will not return to designing a foreground/background system.

1-3 RTOS (REAL-TIME OPERATING SYSTEM)

A Real Time Operating System generally contains a real-time kernel and other higher-level services such as file management, protocol stacks, a Graphical User Interface (GUI), and other components. Most additional services revolve around I/O devices.

Micrium offers a complete suite of RTOS components including: µC/FS (an Embedded File System), µC/TCP-IP (a TCP/IP stack), µC/GUI (a Graphical User Interface), µC/USB (a USB device and host stack), and more. Most of these components are designed to work standalone. Except for µC/TCP-IP, a real-time kernel is not required to use the components in an application. In fact, users can pick and choose only the components required for the application. Contact Micrium (www.micrium.com) for additional details and pricing.

1-4 µC/OS-III

µC/OS-III is a scalable, ROMable, preemptive real-time kernel that manages an unlimited number of tasks. µC/OS-III is a third-generation kernel, offering all of the services expected from a modern real-time kernel including resource management, synchronization, inter-task communication, and more. However, µC/OS-III also offers many unique features not found in other real-time kernels, such as the ability to perform performance measurements at run time, directly signal or send messages to tasks, and pending (i.e., waiting) on such multiple kernel objects as semaphores and message queues.

Here is a list of features provided by µC/OS-III:

Source Code: µC/OS-III is provided in ANSI-C source form. The source code for µC/OS-III is arguably the cleanest and most consistent kernel code available. Clean source is part of the corporate culture at Micrium. Although many commercial kernel vendors provide source code for their products, unless the code follows strict coding standards and is accompanied by complete documentation with examples to show how the code works, these products may be cumbersome and difficult to harness. With this book, you will gain a deep understanding of the inner workings of µC/OS-III, which will protect your investment.

Intuitive Application Programming Interface (API): µC/OS-III is highly intuitive. Once familiar with the consistent coding conventions used, it is simple to predict the functions to call for the services required, and even predict which arguments are needed. For example, a pointer to an object is always the first argument, and a pointer to an error code is always the last one.

Preemptive multitasking: µC/OS-III is a preemptive multi-tasking kernel and therefore, µC/OS-III always runs the most important ready-to-run task.

Round robin scheduling of tasks at equal priority: µC/OS-III allows multiple tasks to run at the same priority level. When multiple tasks at the same priority are ready-to-run, and that priority level is the most important level, µC/OS-III runs each task for a user-specified time called a time quanta. Each task can define its own time quanta, and a task can also give up the CPU to another task at the same priority if it does not require the full time quanta.

Low interrupt disable time: µC/OS-III has a number of internal data structures and variables that it needs to access atomically. To ensure this, µC/OS-III is able to protect these critical regions by locking the scheduler instead of disabling interrupts. Interrupts are therefore disabled for very little time. This ensures that µC/OS-III is able to respond to some of the fastest interrupt sources.

Deterministic: Interrupt response with µC/OS-III is deterministic. Also, execution times of most services provided by µC/OS-III are deterministic.

Scalable: The footprint (both code and data) can be adjusted based on the requirements of the application. Adding and removing features (i.e., services) is performed at compile time through approximately 40 `#defines` (see `os_cfg.h`). µC/OS-III also performs a number of run-time checks on arguments passed to µC/OS-III services. Specifically, µC/OS-III verifies that the user is not passing `NULL` pointers, not calling task level services from ISRs, that arguments are within allowable range, and options specified are valid, etc.. These checks can be disabled (at compile time) to further reduce the code footprint and improve performance. The fact that µC/OS-III is scalable allows it to be used in a wide range of applications and projects.

Portable: µC/OS-III can be ported to a large number of CPU architectures. Most µC/OS-II ports are easily converted to work on µC/OS-III with minimal changes in just a matter of minutes and therefore benefit from more than 45 CPU architectures already supported by µC/OS-II.

ROMable: μC/OS-III was designed especially for embedded systems and can be ROMed along with the application code.

Run-time configurable: μC/OS-III allows the user to configure the kernel at run time. Specifically, all kernel objects such as tasks, stacks, semaphores, event-flag groups, message queues, number of messages, mutual exclusion semaphores, memory partitions and timers, are allocated by the user at run time. This prevents over-allocating resources at compile time.

Unlimited number of tasks: μC/OS-III supports an unlimited number of tasks. From a practical standpoint, however, the number of tasks is actually limited by the amount of memory (both code and data space) that the processor has access to. Each task requires its own stack space and, μC/OS-III provides features to allow stack growth of the tasks to be monitored at run-time.

μC/OS-III does not impose any limitations on the size of each task, except that there be a minimum size based on the CPU used.

Unlimited number of priorities: μC/OS-III supports an unlimited number of priority levels. However, configuring μC/OS-III for between 32 and 256 different priority levels is more than adequate for most applications.

Unlimited number of kernel objects: μC/OS-III allows for any number of tasks, semaphores, mutual exclusion semaphores, event flags, message queues, timers, and memory partitions. The user allocates all kernel objects at run-time.

Services: μC/OS-III provides all the services expected from a high-end real-time kernel, such as task management, time management, semaphores, event flags, mutexes, message queues, software timers, fixed-size memory pools, etc.

Mutual Exclusion Semaphores (Mutexes): Mutexes are provided for resource management. Mutexes are special types of semaphores that have built-in priority inheritance, which eliminate unbounded priority inversions. Accesses to a mutex can be nested and therefore, a task can acquire the same mutex up to 250 times. Of course, the mutex owner needs to release the mutex an equal number of times.

Nested task suspension: µC/OS-III allows a task to suspend itself or another task. Suspending a task means that the task will not be allowed to execute until the task is resumed by another task. Suspension can be nested up to 250 levels deep. In other words, a task can suspend another task up to 250 times. Of course, the task must be resumed an equal number of times for it to become eligible to run on the CPU.

Software timers: You can define any number of “one-shot” and/or “periodic” timers. Timers are countdown counters that perform a user-definable action upon counting down to 0. Each timer can have its own action and, if a timer is periodic, the timer is automatically reloaded and the action is executed every time the countdown reaches zero.

Pend on multiple objects: µC/OS-III allows an application to wait (i.e., pend) on multiple events at the same time. Specifically, a task can wait on multiple semaphores and/or message queues to be posted. The waiting task wakes up as soon as one of the events occurs.

Task Signals: µC/OS-III allows an ISR or task to directly signal a task. This avoids having to create an intermediate kernel object such as a semaphore or event flag just to signal a task, and results in better performance.

Task Messages: µC/OS-III allows an ISR or a task to send messages directly to a task. This avoids having to create and use a message queue, and also results in better performance.

Task registers: Each task can have a user-definable number of “task registers.” Task registers are different than CPU registers. Task registers can be used to hold “errno” type variable, IDs, interrupt disable time measurement on a per-task basis, and more.

Error checking: µC/OS-III verifies that `NULL` pointers are not passed, that the user is not calling task-level services from ISRs, that arguments are within allowable range, that options specified are valid, that a pointer to the proper object is passed as part of the arguments to services that manipulate the desired object, and more. Each µC/OS-III API function returns an error code concerning the outcome of the function call.

Built-in performance measurements: µC/OS-III has built-in features to measure the execution time of each task, stack usage of each task, number of times a task executes, CPU usage, ISR-to-task and task-to-task response time, peak number of entries in certain lists, interrupt disable and scheduler lock time on a per-task basis, and more.

Can easily be optimized: μC/OS-III was designed so that it could easily be optimized based on the CPU architecture. Most data types used in μC/OS-III can be changed to make better use of the CPU's natural word size. Also, the priority resolution algorithm can easily be written in assembly language to benefit from special instructions such as bit set and clear, as well as count-leading-zeros (CLZ), or find-first-one (FF1) instructions.

Deadlock prevention: All of the μC/OS-III “pend” services include timeouts, which help avoid deadlocks.

Tick handling at task level: The clock tick manager in μC/OS-III is accomplished by a task that receives a trigger from an ISR. Handling delays and timeouts by a task greatly reduces interrupt latency. Also, μC/OS-III uses a hashed delta list mechanism, which further reduces the amount of overhead in processing delays and timeouts of tasks.

User definable hooks: μC/OS-III allows the port and application programmer to define “hook” functions, which are called by μC/OS-III. A hook is simply a defined function that allows the user to extend the functionality of μC/OS-III. One such hook is called during a context switch, another when a task is created, yet another when a task is deleted, etc.

Timestamps: For time measurements, μC/OS-III requires that a 16-bit or 32-bit free running counter be made available. This counter can be read at run time to make time measurements of certain events. For example, when an ISR posts a message to a task, the timestamp counter is automatically read and saved as part of the message posted. When the recipient receives the message, the timestamp is provided to the recipient, and by reading the current timestamp, the time it took for the message to be received can be determined.

Built-in support for Kernel Awareness debuggers: This feature allows kernel awareness debuggers to examine and display μC/OS-III variables and data structures in a user-friendly way. The kernel awareness support in μC/OS-III can be used by μC/Probe to display this information at run-time.

Object names: Each μC/OS-III kernel object can have a name associated with it. This makes it easy to recognize what the object is assigned to. You can thus assign an ASCII name to a task, a semaphore, a mutex, an event flag group, a message queue, a memory partition, and a timer. The object name can have any length, but must be NUL terminated.

1-5 µC/OS, µC/OS-II AND µC/OS-III FEATURES COMPARISON

Table 1-1 shows the evolution of µC/OS over the years, comparing the features available in each version.

Feature	µC/OS	µC/OS-II	µC/OS-III
Year introduced	1992	1998	2009
Book	Yes	Yes	Yes
Source code available	Yes	Yes	Yes
Preemptive Multitasking	Yes	Yes	Yes
Maximum number of tasks	64	255	Unlimited
Number of tasks at each priority level	1	1	Unlimited
Round Robin Scheduling	No	No	Yes
Semaphores	Yes	Yes	Yes
Mutual Exclusion Semaphores	No	Yes	Yes (Nestable)
Event Flags	No	Yes	Yes
Message Mailboxes	Yes	Yes	No (not needed)
Message Queues	Yes	Yes	Yes
Fixed Sized Memory Management	No	Yes	Yes
Signal a task without requiring a semaphore	No	No	Yes
Option to Post without scheduling	No	No	Yes
Send messages to a task without requiring a message queue	No	No	Yes
Software Timers	No	Yes	Yes
Task suspend/resume	No	Yes	Yes (Nestable)
Deadlock prevention	Yes	Yes	Yes
Scalable	Yes	Yes	Yes
Code Footprint	3K to 8K	6K to 26K	6K to 24K
Data Footprint	1K+	1K+	1K+
ROMable	Yes	Yes	Yes

Feature	μ C/OS	μ C/OS-II	μ C/OS-III
Run-time configurable	No	No	Yes
Compile-time configurable	Yes	Yes	Yes
ASCII names for each kernel object	No	Yes	Yes
Pend on multiple objects	No	Yes	Yes
Task registers	No	Yes	Yes
Built-in performance measurements	No	Limited	Extensive
User definable hook functions	No	Yes	Yes
Time stamps on posts	No	No	Yes
Built-in Kernel Awareness support	No	Yes	Yes
Optimizable Scheduler in assembly language	No	No	Yes
Catch a task that returns	No	No	Yes
Tick handling at task level	No	No	Yes
Source code available	Yes	Yes	Yes
Number of services	~20	~90	~70
MISRA-C:1998	No	Yes (except 10 rules)	N/A
MISRA-C:2004	No	No	Yes (except 7 rules)
DO178B Level A and EUROCAE ED-12B	No	Yes	In progress
Medical FDA pre-market notification (510(k)) and pre-market approval (PMA)	No	Yes	In progress
SIL3/SIL4 IEC for transportation and nuclear systems	No	Yes	In progress
IEC-61508	No	Yes	In progress

Table 1-1 μ C/OS, μ C/OS-II and μ C/OS-III Features Comparison Chart

1-6 HOW THE BOOK IS ORGANIZED

This book actually consists of two books in one.

Part I describes µC/OS-III and is not tied to any specific CPU architecture. Here, the reader will learn about real-time kernels through µC/OS-III. Specifically, critical sections, task management, the ready list, scheduling, context switching, interrupt management, wait lists, time management, timers, resource management, synchronization, memory management, how to use µC/OS-III's API, how to configure µC/OS-III, and how to port µC/OS-III to different CPU architectures, are all covered.

Part II describes the port of a popular CPU architecture. Here, you will learn about this CPU architecture and how µC/OS-III gets the most out of the CPU. Examples are provided to actually run code on the evaluation board that is available with this book.

As I just mentioned, this book assumes the presence of an evaluation board that allows the user to experiment with the wonderful world of real-time kernels, and specifically µC/OS-III. The book and board are complemented by a full set of tools that are provided free of charge either in a companion CD/DVD, or downloadable through the Internet. The tools and the use of µC/OS-III are free as long as they are used with the evaluation board, and there is no commercial intent to use them on a project. In other words, there is no additional charge except for the initial cost of the book, evaluation board and tools, as long as they are used for educational purposes.

The book also comes with a trial version of an award-winning tool from Micrium called µC/Probe. The trial version allows the user to monitor and change up to eight (8) variables in a target system.

1-7 µC/PROBE

µC/Probe is a Microsoft Windows™ based application that enables the user to visualize variables in a target at run time. Specifically, you can display or change the value of any variable in a system while the target is running. These variables can be displayed using such graphical elements as gauges, meters, bar graphs, virtual LEDs, numeric indicators, and many more. Sliders, switches, and buttons can be used to change variables. This is accomplished without the user having to write a single line of code!

μ C/Probe interfaces to any target (8-, 16-, 32-, 64-bit, or even DSPs) through one of the many interfaces supported (J-Tag, RS-232C, USB, Ethernet, etc.). μ C/Probe displays or changes any variable (as long as they are global) in the application, including μ C/OS-III's internal variables.

μ C/Probe works with any compiler/assembler/linker able to generate an ELF/DWARF or IEEE695 file. This is the exact same file that the user will download to the evaluation board or a final target. From this file, μ C/Probe is able to extract symbolic information about variables, and determine where variables are stored in RAM or ROM.

μ C/Probe also allows users to log the data displayed into a file for analysis of the collected data at a later time. μ C/Probe also provides μ C/OS-III kernel awareness as a built-in feature.

The trial version that accompanies the book is limited to the display or change of up to eight (8) variables.

μ C/Probe is a tool that serious embedded software engineers should have in their toolbox. The full version of μ C/Probe is available from Micrium, see www.micrium.com for more details.

1-8 CONVENTIONS

There are a number of conventions in this book.

First, you will notice that when a specific element in a figure is referenced, the element has a number next to it in parenthesis. A description of this element follows the figure and in this case, the letter "F" followed by the figure number, and then the number in parenthesis. For example, F3-4(2) indicates that this description refers to Figure 3-4 and the element (2) in that figure. This convention also applies to listings (starts with an "L") and tables (starts with a "T").

Second, you will notice that sections and listings are started where it makes sense. Specifically, do not be surprised to see the bottom half of a page empty. New sections begin on a new page, and listings are found on a single page, instead of breaking listings on two pages.

Third, code quality is something I've been avidly promoting throughout my whole career. At Micrium, we pride ourselves in having the cleanest code in the industry. Examples of this are seen in this book. I created and published a coding standard in 1992 that was published in the original µC/OS book. This standard has evolved over the years, but the spirit of the standard has been maintained throughout. The Micrium coding standard is available for download from the Micrium website, www.micrium.com

One of the conventions used is that all functions, variables, macros and `#define` constants are prefixed by “OS” (which stands for Operating System) followed by the acronym of the module (e.g., `Sem`), and then the operation performed by the function. For example `OSSemPost()` indicates that the function belongs to the OS (µC/OS-III), that it is part of the Semaphore services, and specifically that the function performs a `Post` (i.e., signal) operation. This allows all related functions to be grouped together in the reference manual, and makes those services intuitive to use.

You should notice that signaling or sending a message to a task is called posting, and waiting for a signal or a message is called pending. In other words, an ISR or a task signals or sends a message to another task by using `OS???Post()`, where ??? is the type of service: `Sem`, `TaskSem`, `Flag`, `Mutex`, `Q`, and `TaskQ`. Similarly, a task can wait for a signal or a message by calling `OS???Pend()`.

1-9 CHAPTER CONTENTS

Figure 1-3 shows the layout and flow of Part I of the book. This diagram should be useful to understand the relationship between chapters. The first column on the left indicates chapters that should be read in order to understand µC/OS-III's structure. The second column shows chapters that are related to additional services provided by µC/OS-III. The third column relates to chapters that will help port µC/OS-III to different CPU architectures. The top of the fourth column explains how to obtain valuable run-time and compile-time statistics from µC/OS-III. This is especially useful if developing a kernel awareness plug-in for a debugger, or using µC/Probe. The middle of column four contains the µC/OS-III API and configuration manuals. You will be referencing these sections regularly when designing a product using µC/OS-III. Finally, the bottom of the last column contains miscellaneous appendices.

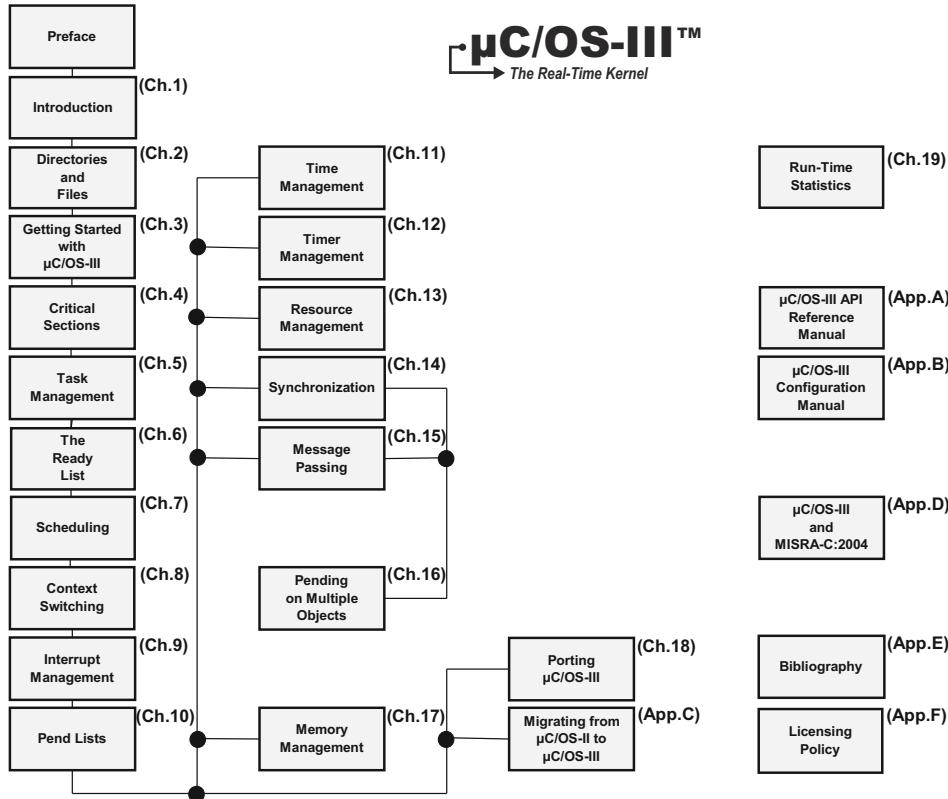


Figure 1-3 μC/OS-III Book Layout

Chapter 1, Introduction. This chapter.

Chapter 2, Directories and Files. This chapter explains the directory structure and files needed to build a μC/OS-III-based application. Here, you will learn about the files that are needed, where they should be placed, which module does what, and more.

Chapter 3, Getting Started with μC/OS-III. In this chapter, you will learn how to properly initialize and start a μC/OS-III-based application.

Chapter 4, Critical Sections. This chapter explains what critical sections are, and how they are protected.

Chapter 5, Task Management. This chapter is an introduction to one of the most important aspects of a real-time kernel, the management of tasks in a multitasking environment.

Chapter 6, The Ready List. In this chapter, you will learn how µC/OS-III efficiently keeps track of all of the tasks that are waiting to execute on the CPU.

Chapter 7, Scheduling. This chapter explains the scheduling algorithms used by µC/OS-III, and how it decides which task will run next.

Chapter 8, Context Switching. This chapter explains what a context switch is, and describes the process of suspending execution of a task and resuming execution of a higher-priority task.

Chapter 9, Interrupt Management. Here is how µC/OS-III deals with interrupts and an overview of services that are available from Interrupt Service Routines (ISRs). Here you will learn how µC/OS-III supports nearly any interrupt controller.

Chapter 10, Pend Lists (or Wait Lists). Tasks that are not able to run are most likely blocked waiting for specific events to occur. Pend Lists (or wait lists), are used to keep track of tasks that are waiting for a resource or event. This chapter describes how µC/OS-III maintains these lists.

Chapter 11, Time Management. In this chapter, you will find out about µC/OS-III's services that allow users to suspend a task until some time expires. With µC/OS-III, you can specify to delay execution of a task for an integral number of clock ticks or until the clock-tick counter reaches a certain value. The chapter will also show how a delayed task can be resumed, and describe how to get the current value of the clock tick counter, or set this counter, if needed.

Chapter 12, Timer Management. µC/OS-III allows users to define any number of software timers. When a timer expires, a function can be called to perform some action. Timers can be configured to be either periodic or one-shot. This chapter also explains how the timer-management module works.

Chapter 13, Resource Management. In this chapter, you will learn different techniques so that tasks share resources. Each of these techniques has advantages and disadvantages that will be discussed. This chapter also explains the internals of semaphores, and mutual exclusion semaphore management.

Chapter 14, Synchronization. µC/OS-III provides two types of services for synchronization: semaphores and event flags and these are explained in this chapter, as well as what happens when calling specific services provided in this module.

Chapter 15, Message Passing. µC/OS-III allows a task or an ISR to send messages to a task. This chapter describes some of the services provided by the message queue management module.

Chapter 16, Pending on multiple objects. In this chapter, see how µC/OS-III allows an application to pend (or wait) on multiple kernel objects (semaphores or message queues) at the same time. This feature makes the waiting task ready-to-run as soon as any one of the objects is posted (i.e., OR condition), or a timeout occurs.

Chapter 17, Memory Management. Here is how µC/OS-III's fixed-size memory partition manager can be used to allocate and deallocate dynamic memory.

Chapter 18, Porting µC/OS-III. This chapter explains, in generic terms, how to port µC/OS-III to any CPU architecture.

Chapter 19, Run-Time Statistics. µC/OS-III provides a wealth of information about the run-time environment, such as number of context switches, CPU usage (as a percentage), stack usage on a per-task basis, µC/OS-III RAM usage, maximum interrupt disable time, maximum scheduler lock time, and more.

Appendix A, µC/OS-III API Reference Manual. This appendix provides a alphabetical reference for all user-available services provided by µC/OS-III.

Appendix B, µC/OS-III Configuration Manual. This appendix describes how to configure a µC/OS-III-based application. `os_cfg.h` configures the µC/OS-III features (semaphores, queues, event flags, etc.), while `os_cfg_app.h` configures the run-time characteristics (tick rate, tick wheel size, stack size for the idle task, etc.).

Appendix C, Migrating from µC/OS-II to µC/OS-III. µC/OS-III has its roots in µC/OS-II and, in fact, most of the µC/OS-II ports can be easily converted to µC/OS-III. However, most APIs have changed from µC/OS-II to µC/OS-III, and this appendix describes some of the differences.

Appendix D, MISRA-C:2004 rules and µC/OS-III. µC/OS-III follows most of the MISRA-C:2004, except for a few of these rules.

Appendix E, Bibliography.

Appendix F, Licensing µC/OS-III.

Chapter


2

Directories and Files

μ C/OS-III is fairly easy to use once it is understood exactly which source files are needed to make up a μ C/OS-III-based application. This chapter will discuss the modules available for μ C/OS-III and how everything fits together.

Figure 2-1 shows the μ C/OS-III architecture and its relationship with hardware. Of course, in addition to the timer and interrupt controller, hardware would most likely contain such other devices as Universal Asynchronous Receivers Transmitters (UARTs), Analog to Digital Converters (ADCs), Ethernet controller(s) and more.

This chapter assumes development on a Windows®-based platform and makes references to typical Windows-type directory structures (also called Folder). However, since μ C/OS-III is provided in source form, it can also be used on Unix, Linux or other development platforms.

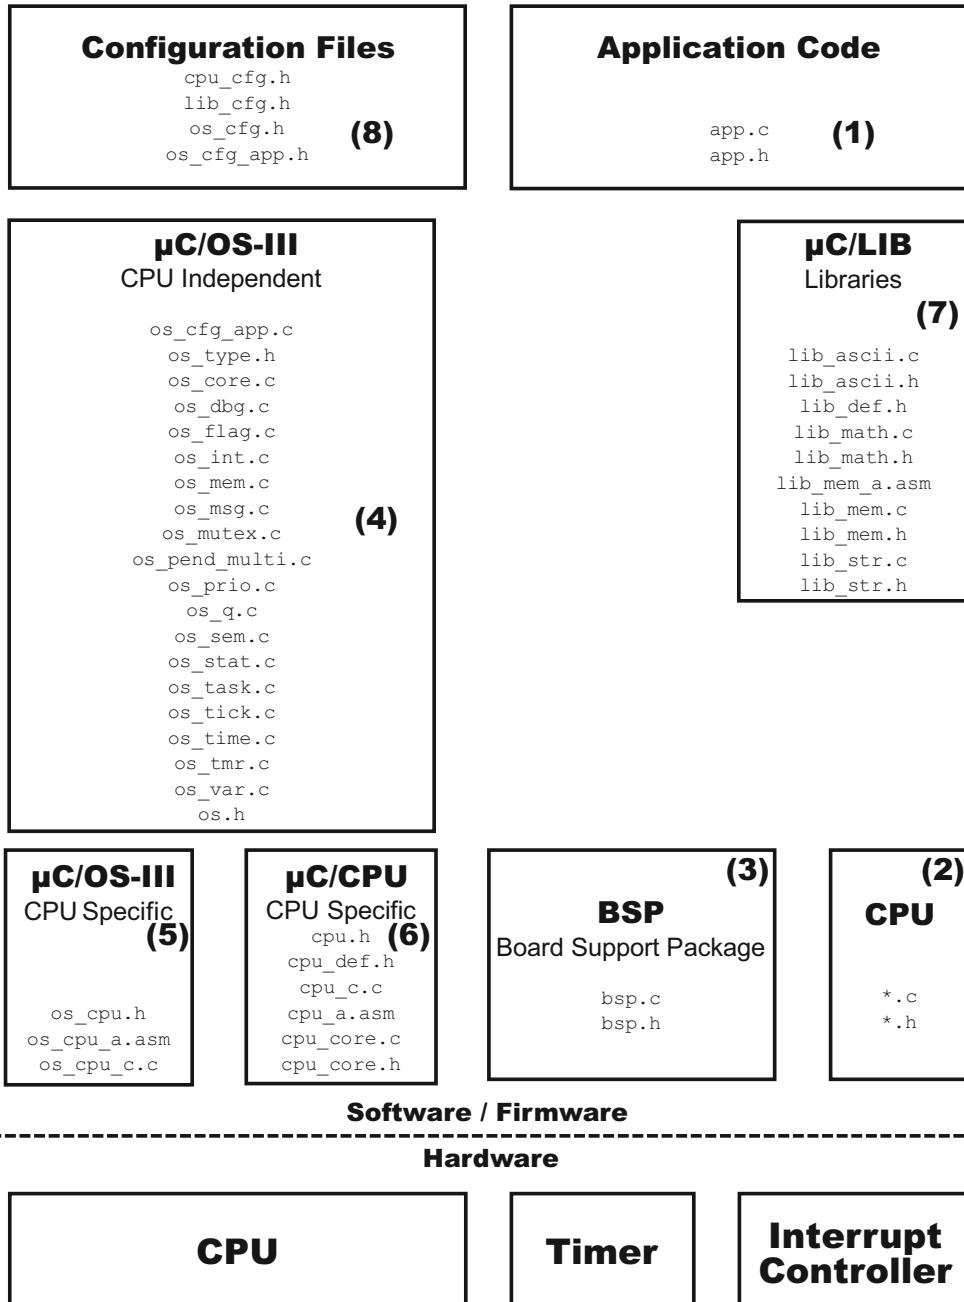Figure 2-1 **μC/OS-III Architecture**

-
- F2-1(1) The application code consists of project or product files. For convenience, these are simply called **app.c** and **app.h**, however an application can contain any number of files that do not have to be called **app.***. The application code is typically where one would find the **main()**.
- F2-1(2) Semiconductor manufacturers often provide library functions in source form for accessing the peripherals on their CPU or MCU. These libraries are quite useful and often save valuable time. Since there is no naming convention for these files, ***.c** and ***.h** are assumed.
- F2-1(3) The Board Support Package (BSP) is code that is typically written to interface to peripherals on a target board. For example such code can turn on and off LEDs, turn on and off relays, or read switches, temperature sensors, and more.
- F2-1(4) This is the µC/OS-III processor-independent code. This code is written in highly portable ANSI C.
- F2-1(5) This is the µC/OS-III code that is adapted to a specific CPU architecture and is called a port. µC/OS-III has its roots in µC/OS-II and benefits from being able to use most of the 45 or so ports available for µC/OS-II. µC/OS-II ports, however, will require small changes to work with µC/OS-III. These changes are described in Appendix C, “Migrating from µC/OS-II to µC/OS-III” on page 689.
- F2-1(6) At Micrium, we encapsulate CPU functionality. These files define functions to disable and enable interrupts, **CPU_???** data types to be independent of the CPU and compiler used, and many more functions.
- F2-1(7) µC/LIB is of a series of source files that provide common functions such as memory copy, string, and ASCII-related functions. Some are occasionally used to replace **stdlib** functions provided by the compiler. The files are provided to ensure that they are fully portable from application to application and especially, from compiler to compiler. µC/OS-III does not use these files, but µC/CPU does.
- F2-1(8) Configuration files are used to define µC/OS-III features (**os_cfg.h**) to include in the application, specify the size of certain variables and data structures expected by µC/OS-III (**os_cfg_app.h**), such as idle task stack size, tick rate, size of the message pool, configure the µC/CPU features available to the application programmer (**cpu_cfg.h**) and also configure µC/LIB options (**lib_cfg.h**).

2-1 APPLICATION CODE

When Micriµm provides example projects, they are placed in a directory structure shown below. Of course, a directory structure that suits a particular project/product can also be used.

```
\Micrium
  \Software
    \EvalBoards
      \<manufacturer>
        \<board_name>
          \<compiler>
            \<project name>
              \*.*
```

\Micrium

This is where we place all software components and projects provided by Micriµm. This directory generally starts from the root directory of the computer.

\Software

This sub-directory contains all software components and projects.

\EvalBoards

This sub-directory contains all projects related to evaluation boards supported by Micriµm.

\<manufacturer>

This is the name of the manufacturer of the evaluation board. The “<” and “>” are not part of the actual name.

\<board name>

This is the name of the evaluation board. A board from Micriµm will typically be called uC-Eval-xxxx where “xxxx” represents the CPU or MCU used on the board. The “<” and “>” are not part of the actual name.

\<compiler>

This is the name of the compiler or compiler manufacturer used to build the code for the evaluation board. The “<” and “>” are not part of the actual name.

\<project name>

The name of the project that will be demonstrated. For example, a simple µC/OS-III project might have a project name of “**OS-Ex1**”. The “**-Ex1**” represents a project containing only µC/OS-III.

.

These are the project source files. Main files can optionally be called **app*.***. This directory also contains configuration files **os_cfg.h**, **os_cfg_app.h** and other required source files.

2-2 CPU

The directory where you will find semiconductor manufacturer peripheral interface source files is shown below. Any directory structure that suits the project/product may be used.

```
\Micrium
  \Software
    \CPU
      \<manufacturer>
        \<architecture>
          \*.*
```

\Micrium

The location of all software components and projects provided by Micrium.

\Software

This sub-directory contains all software components and projects.

\CPU

This sub-directory is always called CPU.

\<manufacturer>

Is the name of the semiconductor manufacturer providing the peripheral library.

\<architecture>

The name of the specific library, generally associated with a CPU name or an architecture.

.

Indicates library source files. The semiconductor manufacturer names the files.

2-3 BOARD SUPPORT PACKAGE (BSP)

The Board Support Package (BSP) is generally found with the evaluation or target board as it is specific to that board. In fact, when well written, the BSP should be used for multiple projects.

```
\Micrium
  \Software
    \EvalBoards
      \<manufacturer>
        \<board name>
          \<compiler>
            \BSP
              \*.*
```

\Micrium

Contains all software components and projects provided by Micrium.

\Software

This sub-directory contains all software components and projects.

\EvalBoards

This sub-directory contains all projects related to evaluation boards.

\<manufacturer>

The name of the manufacturer of the evaluation board. The “<” and “>” are not part of the actual name.

\<board name>

The name of the evaluation board. A board from Micrium will typically be called uC-Eval-xxxx where “xxxx” is the name of the CPU or MCU used on the evaluation board. The “<” and “>” are not part of the actual name.

\<compiler>

The name of the compiler or compiler manufacturer used to build code for the evaluation board. The “<” and “>” are not part of the actual name.

\BSP

This directory is always called BSP.

.

The source files of the BSP. Typically all of the file names start with BSP. It is therefore normal to find **bsp.c** and **bsp.h** in this directory. BSP code should contain such functions as LED control functions, initialization of timers, interface to Ethernet controllers and more.

2-4 μC/OS-III, CPU INDEPENDENT SOURCE CODE

The files in these directories are μC/OS-III processor independent files provided in source form. See Appendix F, “Licensing Policy” on page 733.

```
\Micrium
  \Software
    \uCOS-III
      \Cfg\Template
        \os_app_hooks.c
        \os_cfg.h
        \os_cfg_app.h
      \Source
        \os_cfg_app.c
        \os_core.c
        \os_dbg.c
        \os_flag.c
        \os_int.c
        \os_mem.c
        \os_msg.c
        \os_mutex.c
        \os_pend_multi.c
        \os_prio.c
        \os_q.c
        \os_sem.c
        \os_stat.c
        \os_task.c
        \os_tick.c
        \os_time.c
```

**\os_tmrc
\os_var
\os.h
\os_type.h**

\Micrium

Contains all software components and projects provided by Micrium.

\Software

This sub-directory contains all software components and projects.

\uCOS-III

This is the main µC/OS-III directory.

\Cfg\Template

This directory contains examples of configuration files to copy to the project directory. You will then modify these files to suit the needs of the application.

os_app_hooks.c shows how to write hook functions that are called by µC/OS-III. Specifically, this file contains eight empty functions.

os_cfg.h specifies which features of µC/OS-III are available for an application. The file is typically copied into an application directory and edited based on which features are required from µC/OS-III. See Appendix B, “µC/OS-III Configuration Manual” on page 669.

os_cfg_app.h is a configuration file that is typically copied into an application directory and edited based on application requirements. This file enables the user to determine the size of the idle task stack, the tick rate, the number of messages available in the message pool and more. See Appendix B, “µC/OS-III Configuration Manual” on page 669.

\Source

The directory containing the CPU-independent source code for μC/OS-III. All files in this directory should be included in the build. Features that are not required will be compiled out based on the value of `#define` constants in **os_cfg.h** and **os_cfg_app.h**.

os_cfg_app.c declares variables and arrays based on the values in **os_cfg_app.h**.

os_core.c contains core functionality for μC/OS-III such as `OSInit()` to initialize μC/OS-III, `OSSched()` for the task level scheduler, `OSIntExit()` for the interrupt level scheduler, pend list (or wait list) management (see Chapter 10, “Pend Lists (or Wait Lists)” on page 197), ready list management (see Chapter 6, “The Ready List” on page 141), and more.

os_dbg.c contains declarations of constant variables used by a kernel aware debugger or μC/Probe.

os_flag.c contains the code for event flag management. See Chapter 14, “Synchronization” on page 273 for details about event flags.

os_int.c contains code for the interrupt handler task, which is used when **OS_CFG_ISR_POST_DEFERRED_EN** (see **os_cfg.h**) is set to 1. See Chapter 9, “Interrupt Management” on page 175 for details regarding the interrupt handler task.

os_mem.c contains code for the μC/OS-III fixed-size memory manager, see Chapter 17, “Memory Management” on page 343.

os_msg.c contains code to handle messages. μC/OS-III provides message queues and task specific message queues. **os_msg.c** provides common code for these two services. See Chapter 15, “Message Passing” on page 309.

os_mutex.c contains code to manage mutual exclusion semaphores, see Chapter 13, “Resource Management” on page 231.

os_pend_multi.c contains the code to allow code to pend on multiple semaphores or message queues. This is described in Chapter 16, “Pending On Multiple Objects” on page 333.

os_prio.c contains the code to manage the bitmap table used to keep track of which tasks are ready-to-run, see Chapter 6, “The Ready List” on page 141. This file can be replaced by an assembly language equivalent to improve performance if the CPU used provides bit set, clear and test instructions, and a count leading zeros instruction.

os_q.c contains code to manage message queues. See Chapter 15, “Message Passing” on page 309.

os_sem.c contains code to manage semaphores used for resource management and/or synchronization. See Chapter 13, “Resource Management” on page 231 and Chapter 14, “Synchronization” on page 273.

os_stat.c contains code for the statistic task, which is used to compute the global CPU usage and the CPU usage of each task. See Chapter 5, “Task Management” on page 91.

os_task.c contains code for managing tasks using `OSTaskCreate()`, `OSTaskDel()`, `OSTaskChangePrio()`, and many more. See Chapter 5, “Task Management” on page 91.

os_tick.c contains code to manage tasks that have delayed themselves or that are pending on a kernel object with a timeout. See Chapter 5, on page 91.

os_time.c contains code to allow a task to delay itself until some time expires. See Chapter 11, “Time Management” on page 203.

os_tmr.c contains code to manage software timers. See Chapter 12, “Timer Management” on page 213.

os_var.c contains the µC/OS-III global variables. These variables are for µC/OS-III to manage and should not be accessed by application code.

os.h contains the main µC/OS-III header file, which declares constants, macros, µC/OS-III global variables (for use by µC/OS-III only), function prototypes, and more.

os_type.h contains declarations of µC/OS-III data types that can be changed by the port designer to make better use of the CPU architecture. In this case, the file would typically be copied to the port directory and then modified. See Appendix B, “µC/OS-III Configuration Manual” on page 669.

2-5 µC/OS-III, CPU SPECIFIC SOURCE CODE

The µC/OS-III port developer provides these files. See also Chapter 18, “Porting µC/OS-III” on page 355.

```
\Micrium
  \Software
    \uCOS-III
      \Ports
        \<architecture>
          \<compiler>
            \os_cpu.h
            \os_cpu_a.asm
            \os_cpu_c.c
```

\Micrium

Contains all software components and projects provided by Micrium.

\Software

This sub-directory contains all software components and projects.

\uCOS-III

The main µC/OS-III directory.

\Ports

The location of port files for the CPU architecture(s) to be used.

\<architecture>

This is the name of the CPU architecture that µC/OS-III was ported to. The “<” and “>” are not part of the actual name.

\<compiler>

The name of the compiler or compiler manufacturer used to build code for the port. The “<” and “>” are not part of the actual name.

The files in this directory contain the µC/OS-III port, see Chapter 18, “Porting µC/OS-III” on page 355 for details on the contents of these files.

os_cpu.h contains a macro declaration for `OS_TASK_SW()`, as well as the function prototypes for at least the following functions: `OSCtxSw()`, `OSIntCtxSw()` and `OSStartHighRdy()`.

os_cpu_a.asm contains the assembly language functions to implement at least the following functions: `OSCtxSw()`, `OSIntCtxSw()` and `OSStartHighRdy()`.

os_cpu_c.c contains the C code for the port specific hook functions and code to initialize the stack frame for a task when the task is created.

2-6 μC/CPU, CPU SPECIFIC SOURCE CODE

μC/CPU consists of files that encapsulate common CPU-specific functionality and CPU and compiler-specific data types. See Chapter 18, “Porting μC/OS-III” on page 355.

```
\Micrium
  \Software
    \uC-CPU
      \cpu_core.c
      \cpu_core.h
      \cpu_def.h
      \Cfg\Template
        \cpu_cfg.h
      \<architecture>
        \<compiler>
          \cpu.h
          \cpu_a.asm
          \cpu_c.c
```

\Micrium

Contains all software components and projects provided by Micrium.

\Software

This sub-directory contains all software components and projects.

\uC-CPU

This is the main μC/CPU directory.

cpu_core.c contains C code that is common to all CPU architectures. Specifically, this file contains functions to measure the interrupt disable time of the `CPU_CRITICAL_ENTER()` and `CPU_CRITICAL_EXIT()` macros, a function that emulates a count leading zeros instruction in case the CPU does not provide such an instruction, and a few other functions.

cpu_core.h contains function prototypes for the functions provided in `cpu_core.c` and allocation of the variables used by the module to measure interrupt disable time.

cpu_def.h contains miscellaneous `#define` constants used by the μC/CPU module.

\Cfg\Template

This directory contains a configuration template file (`cpu_cfg.h`) that must be copied to the application directory to configure the μC/CPU module based on application requirements.

cpu_cfg.h determines whether to enable measurement of the interrupt disable time, whether the CPU implements a count leading zeros instruction in assembly language, or whether it will be emulated in C, and more.

\<architecture>

The name of the CPU architecture that μC/CPU was ported to. The “`<`” and “`>`” are not part of the actual name.

\<compiler>

The name of the compiler or compiler manufacturer used to build code for the μC/CPU port. The “`<`” and “`>`” are not part of the actual name.

The files in this directory contain the μC/CPU port, see Chapter 18, “Porting μC/OS-III” on page 355 for details on the contents of these files.

cpu.h contains type definitions to make μC/OS-III and other modules independent of the CPU and compiler word sizes. Specifically, one will find the declaration of the `CPU_INT16U`, `CPU_INT32U`, `CPU_FP32` and many other data types. This file also specifies whether the CPU is a big or little endian machine, defines the `CPU_STK` data type used by μC/OS-III, defines the macros `CPU_CRITICAL_ENTER()` and `CPU_CRITICAL_EXIT()`, and contains function prototypes for functions specific to the CPU architecture, and more.

cpu_a.asm contains the assembly language functions to implement code to disable and enable CPU interrupts, count leading zeros (if the CPU supports that instruction), and other CPU specific functions that can only be written in assembly language. This file may also contain code to enable caches, setup MPUs and MMU, and more. The functions provided in this file are accessible from C.

cpu_c.c contains C code of functions that are based on a specific CPU architecture but written in C for portability. As a general rule, if a function can be written in C then it should be, unless there is significant performance benefits available by writing it in assembly language.

2-7 μC/LIB, PORTABLE LIBRARY FUNCTIONS

μC/LIB consists of library functions meant to be highly portable and not tied to any specific compiler. This facilitates third-party certification of Micrium products. μC/OS-III does not use any μC/LIB functions, however μC/OS-III and μC/CPU assumes the presence of **lib_def.h** for such definitions as: **DEF_YES**, **DEF_NO**, **DEF_TRUE**, **DEF_FALSE**, **DEF_ON**, **DEF_OFF** and more.

```
\Micrium
  \Software
    \uC-LIB
      \lib_ascii.c
      \lib_ascii.h
      \lib_def.h
      \lib_math.c
      \lib_math.h
      \lib_mem.c
      \lib_mem.h
      \lib_str.c
      \lib_str.h
    \Cfg\Template
      \lib_cfg.h
  \Ports
    <architecture>
      <compiler>
        \lib_mem_a.asm
```

\Micrium

Contains all software components and projects provided by Micrium.

\Software

This sub-directory contains all software components and projects.

\uC-LIB

This is the main µC/LIB directory.

`lib_ascii.c` and `lib_ascii.h` contain source code to replace some standard library functions such as `tolower()`, `toupper()`, `isalpha()`, `isdigit()`, etc. with µC/LIB equivalent functions `ASCII_ToLower()`, `ASCII_ToUpper()`, `ASCII_IsAlpha()`, and `ASCII_IsDig()`, respectively.

`lib_def.h` defines constants for many common values such as `TRUE/FALSE`, `YES/NO`, `ENABLED/DISABLED`; as well as for integer, octet, and bit values. However, all `#define` in this file starts with `DEF_` so those constants are actually called `DEF_TRUE/DEF_FALSE`, `DEF_YES/DEF_NO`, `DEF_ENABLED/DEF_DISABLED`, etc. This file also contains macros for common mathematical operations like `min()`, `max()`, `abs()`, `bit_set()`, `bit_clr()`, etc. with `DEF_MIN()`, `DEF_MAX()`, `DEF_ABS()`, `DEF_BIT_SET()`, `DEF_BIT_CLR()`, respectively.

`lib_math.c` and `lib_math.h` contain source code to replace some standard library functions such as `rand()`, `strrand()`, etc. with µC/LIB equivalent functions `Math_Rand()`, `Math_SetSeed()`, respectively.

`lib_mem.c` and `lib_mem.h` contain source code to replace some standard library functions such as `memclr()`, `memset()`, `memcpy()`, `memcmp()`, etc. with µC/LIB equivalent functions `Mem_Clr()`, `Mem_Set()`, `Mem_Copy()`, `Mem_Cmp()`, respectively.

`lib_str.c` and `lib_str.h` contain source code to replace some standard library functions such as `strlen()`, `strcpy()`, `strcmp()`, `memcmp()`, etc. with µC/LIB equivalent functions `Str_Lenr()`, `Str_Copy()`, `Str_Cmp()`, respectively.

\Cfg\Template

This directory contains a configuration template file (`lib_cfg.h`) that should be copied to the application directory to configure the µC/LIB module based on application requirements.

lib_cfg.h determines whether to enable assembly language optimization (assuming there is an assembly language file for the processor, i.e., `lib_mem_a.asm`) and a few other `#defines`.

\Ports\Architecture\Compiler

This directory contains optimized assembly language files specific to the CPU architecture to replace C functions with much faster assembly language implementations. The presence of this folder depends on whether such assembly language functions were implemented by the port developer of the µC/LIB module.

`lib_mem_a.asm` contains optimized versions of the `lib_mem.c` functions.

2-8 SUMMARY

Below is a summary of all directories and files involved in a µC/OS-III-based project. The “<-Cfg” on the far right indicates that these files are typically copied into the application (i.e., project) directory and edited based on the project requirements.

```

\Micrium
  \Software
    \EvalBoards
      \<manufacturer>
        \<board name>
          \<compiler>
            \<project name>
              \app.c
              \app.h
              \other
    \CPU
      \<manufacturer>
        \<architecture>
          \*.*
```

```
\uCOS-III
  \Cfg\Template
    \os_app_hooks.c
    \os_cfg.h          <-Cfg
    \os_cfg_app.h      <-Cfg
  \Source
    \os_cfg_app.c
    \os_core.c
    \os_dbg.c
    \os_flag.c
    \os_int.c
    \os_mem.c
    \os_msg.c
    \os_mutex.c
    \os_pend_multi.c
    \os_prio.c
    \os_q.c
    \os_sem.c
    \os_stat.c
    \os_task.c
    \os_tick.c
    \os_time.c
    \os_tmr.c
    \os_var.c
    \os.h
    \os_type.h        <-Cfg
  \Ports
    \<architecture>
      \<compiler>
        \os_cpu.h
        \os_cpu_a.asm
        \os_cpu_c.c
\uC-CPU
  \cpu_core.c
  \cpu_core.h
  \cpu_def.h
  \Cfg\Template
    \cpu_cfg.h        <-Cfg
```

```
\<architecture>
  \<compiler>
    \cpu.h
    \cpu_a.asm
    \cpu_c.c
\uC-LIB
  \lib_ascii.c
  \lib_ascii.h
  \lib_def.h
  \lib_math.c
  \lib_math.h
  \lib_mem.c
  \lib_mem.h
  \lib_str.c
  \lib_str.h
\Cfg\Template
  \lib_cfg.h          <-Cfg
\Ports
  \<architecture>
    \<compiler>
      \lib_mem_a.asm
```

Chapter 3

Getting Started with µC/OS-III

µC/OS-III provides services to application code in the form of a set of functions that perform specific operations. µC/OS-III offers services to manage tasks, semaphores, message queues, mutual exclusion semaphores and more. As far as the application is concerned, it calls the µC/OS-III functions as if they were any other functions. In other words, the application now has access to a library of approximately 70 new functions.

In this chapter, the reader will appreciate how easy it is to start using µC/OS-III. Refer to Appendix A, “µC/OS-III API Reference” on page 443, for the full description of several of the µC/OS-III services presented in this chapter.

It is assumed that the project setup (files and directories) is as described in the previous chapter, and that a C compiler exists for the target processor that is in use. However, this chapter makes no assumptions about the tools or the processor that is used.

3-1 SINGLE TASK APPLICATION

Listing 3-1 shows the top portion of a simple application file called `app.c`.

```
/*
***** INCLUDE FILES *****
*/
#include <app_cfg.h>                                (1)
#include <bsp.h>
#include <os.h>
/*
***** LOCAL GLOBAL VARIABLES *****
*/
static OS_TCB          AppTaskStartTCB;             (2)
static CPU_STK          AppTaskStartStk[APP_TASK_START_STK_SIZE]; (3)
/*
***** FUNCTION PROTOTYPES *****
*/
static void AppTaskStart (void *p_arg);                (4)
```

Listing 3-1 `app.c` (1st Part)

- L3-1(1) As with any C programs, you need to include the necessary headers to build the application.

app_cfg.h is a header file that configures the application. For our example, `app_cfg.h` contains `#define` constants to establish task priorities, stack sizes, and other application specifics.

bsp.h is the header file for the Board Support Package (BSP), which `defines` `#defines` and function prototypes, such as `BSP_Init()`, `BSP_LED_On()`, `OS_TS_GET()` and more.

os.h is the main header file for µC/OS-III, and includes the following header files:

```
os_cfg.h  
cpu.h  
cpu_core.h  
lib_def.h  
os_type.h  
os_cpu.h
```

- L3-1(2) We will be creating an application task and it is necessary to allocate a task control block (**OS_TCB**) for this task. The **OS_TCB** data type will be described in Chapter 5, “Task Management” on page 91.
- L3-1(3) Each task created requires its own stack. A stack must be declared using the **CPU_STK** data type as shown. The stack can be allocated statically as shown here, or dynamically from the heap using **malloc()**. It should not be necessary to free the stack space, because the task should never be destroyed, and thus, the stack would always be used.
- L3-1(4) This is the function prototype of the task that we will create.

Most C applications start at **main()** as shown in Listing 3-2.

```

void main (void)
{
    OS_ERR err;

    BSP_IntDisAll();                                     (1)
    OSInit(&err);                                      (2)
    if (err != OS_ERR_NONE) {
        /* Something didn't get initialized correctly ... */
        /* ... check os.h for the meaning of the error code, see OS_ERR_xxxx */
    }
    OSTaskCreate((OS_TCB      *)AppTaskStartTCB,          (3)
                 (CPU_CHAR     *)"App Task Start",           (4)
                 (OS_TASK_PTR )AppTaskStart,                (5)
                 (void        *)0,                         (6)
                 (OS_PRIO      )APP_TASK_START_PRIO,        (7)
                 (CPU_STK      *)&AppTaskStartStk[0],       (8)
                 (CPU_STK_SIZE)APP_TASK_START_STK_SIZE / 10, (9)
                 (CPU_STK_SIZE)APP_TASK_START_STK_SIZE,       (10)
                 (OS_MSG_QTY   )0,
                 (OS_TICK      )0,
                 (void        *)0,
                 (OS_OPT       )(OS_OPT_TASK_STK_CHK | OS_OPT_TASK_STK_CLR), (11)
                 (OS_ERR      *)&err);                      (12)

    if (err != OS_ERR_NONE) {
        /* The task didn't get created. Lookup the value of the error code ... */
        /* ... in os.h for the meaning of the error */
    }
    OSStart(&err);                                      (13)
    if (err != OS_ERR_NONE) {
        /* Your code is NEVER supposed to come back to this point. */
    }
}

```

Listing 3-2 app.c (2nd Part)

- L3-2(1) The startup code for the compiler will bring the CPU to `main()`. `main()` then starts by calling a BSP function that disables all interrupts. On most processors, interrupts are disabled at startup until explicitly enabled by application code. However, it is safer to turn off all peripheral interrupts during startup.
- L3-2(2) `OSInit()` is the called to initialize μC/OS-III. `OSInit()` initializes internal variables and data structures, and also creates between two (2) and five (5) internal tasks. At a minimum, μC/OS-III creates the idle task (`OS_IdleTask()`), which executes when no other task is ready-to-run. μC/OS-III also creates the tick task, which is responsible for keeping track of time.

Depending on the value of `#define` constants, µC/OS-III will create the statistic task (`OS_StatTask()`), the timer task (`OS_TmrTask()`), and the interrupt handler queue management task (`OS_IntQTask()`). Those are all discussed in Chapter 5, “Task Management” on page 91.

Most of µC/OS-III’s functions return an error code via a pointer to an `OS_ERR` variable, `err` in this case. If `OSInit()` was successful, `err` will be set to `OS_ERR_NONE`. If `OSInit()` encounters a problem during initialization, it will return immediately upon detecting the problem and set `err` accordingly. If this occurs, look up the error code value in `os.h`. Specifically, all error codes start with `OS_ERR_`.

It is important to note that `OSInit()` must be called before any other µC/OS-III function.

- L3-2(3) You create a task by calling `OSTaskCreate()`. `OSTaskCreate()` requires 13 arguments. The first argument is the address of the `OS_TCB` that is declared for this task (see L3-1(2)). Chapter 5, “Task Management” on page 91 provides additional information about tasks.
- L3-2(4) `OSTaskCreate()` allows a name to be assigned to each of the tasks. µC/OS-III stores a pointer to the task name inside the `OS_TCB` of the task. There is no limit on the number of ASCII characters used for the name.
- L3-2(5) The third argument is the address of the task code. A typical µC/OS-III task is implemented as an infinite loop as shown:

```
void MyTask (void *p_arg)
{
    /* Do something with "p_arg".
    while (1) {
        /* Task body */
    }
}
```

The task receives an argument when it first starts. As far as the task is concerned, it looks like any other C function that can be called by the code. However, your code *must not* call `MyTask()`. The call is actually performed through µC/OS-III.

- L3-2(6) The fourth argument of `OSTaskCreate()` is the actual argument that the task receives when it first begins. In other words, the “`p_arg`” of `MyTask()`. In the example a `NULL` pointer is passed, and thus “`p_arg`” for `AppTaskStart()` will be a `NULL` pointer.
- The argument passed to the task can actually be any pointer. For example, the user may pass a pointer to a data structure containing parameters for the task.
- L3-2(7) The next argument to `OSTaskCreate()` is the priority of the task. The priority establishes the relative importance of this task with respect to the other tasks in the application. A low-priority number indicates a high priority (or more important task). You can set the priority of the task to any value between 1 and `OS_CFG_PRIO_MAX-2`, inclusively. Avoid using priority #0, and priority `OS_CFG_PRIO_MAX-1`, because these are reserved for μC/OS-III. `OS_CFG_PRIO_MAX` is a compile time configuration constant, which is declared in `os_cfg.h`.
- L3-2(8) The sixth argument to `OSTaskCreate()` is the base address of the stack assigned to this task. The base address is always the lowest memory location of the stack.
- L3-2(9) The next argument specifies the location of a “watermark” in the task’s stack that can be used to determine the allowable stack growth of the task. See Chapter 5, “Task Management” on page 91 for more details on using this feature. In the code above, the value represents the amount of stack space (in `CPU_STK` elements) before the stack is empty. In other words, in the example, the limit is reached when there is 10% of the stack left.
- L3-2(10) The eighth argument to `OSTaskCreate()` specifies the size of the task’s stack in number of `CPU_STK` elements (not bytes). For example, if you want to allocate 1 Kbyte of stack space for a task and the `CPU_STK` is a 32-bit word, then you need to pass 256.
- L3-2(11) The next three arguments are skipped as they are not relevant for the current discussion. The 12th argument to `OSTaskCreate()` specifies options. In this example, we specify that the stack will be checked at run time (assuming the statistic task was enabled in `os_cfg.h`), and that the contents of the stack will be cleared when the task is created.

-
- L3-2(12) The last argument of `OSTaskCreate()` is a pointer to a variable that will receive an error code. If `OSTaskCreate()` is successful, the error code will be `OS_ERR_NONE` otherwise, you can look up the value of the error code in `os.h` (See `OS_ERR_xxxx`) to determine the cause of the error.
 - L3-2(13) The final step in `main()` is to call `osstart()`, which starts the multitasking process. Specifically, µC/OS-III will select the highest-priority task that was created before calling `osstart()`.

You should note that the highest-priority task is always `OS_IntQTask()` if that task is enabled in `os_cfg.h` (through the `OS_CFG_ISR_POST_DEFERRED_EN` constant). If this is the case, `OS_IntQTask()` will perform some initialization of its own and then µC/OS-III will switch to the next most important task that was created.

A few important points are worth noting. For one thing, you can create as many tasks as you want before calling `osstart()`. However, it is recommended to only create one task as shown in the example because, having a single application task allows µC/OS-III to determine the relative speed of the CPU. This allows µC/OS-III to determine the percentage of CPU usage at run-time. Also, if the application needs other kernel objects such as semaphores and message queues then it is recommended that these be created prior to calling `osstart()`. Finally, notice that interrupts are not enabled. This will be discussed next by examining the contents of `AppTaskStart()`, which is shown in Listing 3-3.

```

static void AppTaskStart (void *p_arg) (1)
{
    OS_ERR err;

    p_arg = p_arg;
    BSP_Init(); (2)
    CPU_Init(); (3)
    BSP_Cfg_Tick(); (4)
    BSP_LED_Off(0); (5)
    while (1) { (6)
        BSP_LED_Toggle(0); (7)
        OSTimeDlyHMSM((CPU_INT16U) 0, (8)
                       (CPU_INT16U) 0,
                       (CPU_INT16U) 0,
                       (CPU_INT32U)100,
                       (OS_OPT     )OS_OPT_TIME_HMSM_STRICT,
                       (OS_ERR    *)&err);
        /* Check for 'err' */
    }
}

```

Listing 3-3 app.c (3rd Part)

- L3-3(1) As previously mentioned, a task looks like any other C function. The argument “**p_arg**” is passed to **AppTaskStart()** by **OSTaskCreate()**, as discussed in the previous listing description.
- L3-3(2) **BSP_Init()** is a Board Support Package (BSP) function that is responsible for initializing the hardware on an evaluation or target board. The evaluation board might have General Purpose Input Output (GPIO) lines that might need to be configured, relays, sensors and more. This function is found in a file called **bsp.c**.
- L3-3(3) **CPU_Init()** initializes the μC/CPU services. μC/CPU provides services to measure interrupt latency, obtain time stamps, and provides emulation of the count leading zeros instruction if the processor used does not have that instruction, and more.
- L3-3(4) **BSP_Cfg_Tick()** sets up the μC/OS-III tick interrupt. For this, the function needs to initialize one of the hardware timers to interrupt the CPU at a rate of: **OSCfg_TickRate_Hz**, which is defined in **os_cfg_app.h** (See **OS_CFG_TICK_RATE_HZ**).

-
- L3-3(5) `BSP_LED_Off()` is a function that will turn off all LEDs. `BSP_LED_Off()` is written such that a zero argument means all the LEDs.
 - L3-3(6) Most µC/OS-III tasks will need to be written as an infinite loop.
 - L3-3(7) This BSP function toggles the state of the specified LED. Again, a zero indicates that all the LEDs should be toggled on the evaluation board. You simply change the zero to 1 and this will cause LED #1 to toggle. Exactly which LED is LED #1? That depends on the BSP developer. Specifically, access to LEDs are encapsulated through the functions: `BSP_LED_On()`, `BSP_LED_Off()` and `BSP_LED_Toggle()`. Also, for sake of portability, we prefer to assign LEDs logical values (1, 2, 3, etc.) instead of specifying which port and which bit on each port.
 - L3-3(8) Finally, each task in the application must call one of the µC/OS-III functions that will cause the task to “wait for an event.” The task can wait for time to expire (by calling `OSTimeDly()`, or `OSTimeDlyHMSM()`), or wait for a signal or a message from an ISR or another task. In the code shown, we used `OSTimeDlyHMSM()` which allows a task to be suspended until the specified number of hours, minutes, seconds and milliseconds have expired. In this case, 100 ms. Chapter 11, “Time Management” on page 203 provides additional information about time delays.

3-2 MULTIPLE TASKS APPLICATION WITH KERNEL OBJECTS

The code of Listing 3-4 through Listing 3-8 shows a more complete example and contains three tasks: a mutual exclusion, semaphore, and a message queue.

```
/*
***** INCLUDE FILES *****
*/
#include <app_cfg.h>
#include <bsp.h>
#include <os.h>
/*
***** LOCAL GLOBAL VARIABLES *****
*/
static OS_TCB      AppTaskStartTCB;           (1)
static OS_TCB      AppTask1_TCB;
static OS_TCB      AppTask2_TCB;
static OS_MUTEX    AppMutex;                   (2)
static OS_Q        AppQ;                      (3)
static CPU_STK    AppTaskStartStk[APP_TASK_START_STK_SIZE]; (4)
static CPU_STK    AppTask1_Stk[128];
static CPU_STK    AppTask2_Stk[128];
/*
***** FUNCTION PROTOTYPES *****
*/
static void AppTaskStart (void *p_arg);          (5)
static void AppTask1   (void *p_arg);
static void AppTask2   (void *p_arg);
```

Listing 3-4 app.c (1st Part)

-
- L3-4(1) Here we allocate storage for the OS_TCBs of each task.
- L3-4(2) A mutual exclusion semaphore (a.k.a. a mutex) is a kernel object (a data structure) that is used to protect a shared resource from being accessed by more than one task. A task that wants to access the shared resource must obtain the mutex before it is allowed to proceed. The owner of the resource relinquishes the mutex when it has finished accessing the resource. This process is demonstrated in this example.
- L3-4(3) A message queue is a kernel object through which Interrupt Service Routines (ISRs) and/or tasks send messages to other tasks. The sender “formulates” a message and sends it to the message queue. The task(s) wanting to receive these messages wait on the message queue for messages to arrive. If there are already messages in the message queue, the receiver immediately retrieves those messages. If there are no messages waiting in the message queue, then the receiver will be placed in a wait list associated with the message queue. This process will be demonstrated in this example.
- L3-4(4) A stack is allocated for each task.
- L3-4(5) The prototype of the tasks are declared.

Listing 3-5 shows the C entry point, i.e. `main()`.

Chapter 3

```

void main (void)
{
    OS_ERR err;

    BSP_IntDisAll();
    OSInit(&err);
    /* Check for 'err' */

    OSMutexCreate((OS_MUTEX *) &AppMutex,
                  (CPU_CHAR *) "My App. Mutex",
                  (OS_ERR *) &err);
    /* Check for 'err' */

    OSQCreate ((OS_Q *) &AppQ,
               (CPU_CHAR *) "My App Queue",
               (OS_MSG_QTY) 10,
               (OS_ERR *) &err);
    /* Check for 'err' */

    OSTaskCreate((OS_TCB *) &AppTaskStartTCB,
                 (CPU_CHAR *) "App Task Start",
                 (OS_TASK_PTR) AppTaskStart,
                 (void *) 0,
                 (OS_PRIO) APP_TASK_START_PRIO,
                 (CPU_STK *) &AppTaskStartStk[0],
                 (CPU_STK_SIZE)APP_TASK_START_STK_SIZE / 10,
                 (CPU_STK_SIZE)APP_TASK_START_STK_SIZE,
                 (OS_MSG_QTY) 0,
                 (OS_TICK) 0,
                 (void *) 0,
                 (OS_OPT) (OS_OPT_TASK_STK_CHK | OS_OPT_TASK_STK_CLR),
                 (OS_ERR *) &err);
    /* Check for 'err' */

    OSStart(&err);
    /* Check for 'err' */
}

```

Listing 3-5 app.c (2nd Part)

-
- L3-5(1) Creating a mutex is simply a matter of calling `OSMutexCreate()`. You need to specify the address of the `OS_MUTEX` object that will be used for the mutex. Chapter 13, “Resource Management” on page 231 provides additional information about mutual exclusion semaphores.

You can assign an ASCII name to the mutex, which is useful when debugging.

- L3-5(2) You create the message queue by calling `OSQCreate()` and specify the address of the `OS_Q` object. Chapter 15, “Message Passing” on page 309 provides additional information about message queues.

You can assign an ASCII name to the message queue which can also be useful during debugging.

You need to specify how many messages the message queue is allowed to receive. This value must be greater than zero. If the sender sends messages faster than they can be consumed by the receiving task, messages will be lost. This can be corrected by either increasing the size of the message queue, or increasing the priority of the receiving task.

- L3-5(3) The first application task is created.

Listing 3-6 shows how to create other tasks once multitasking as started.

Chapter 3

```

static void AppTaskStart (void *p_arg)
{
    OS_ERR err;

    p_arg = p_arg;
    BSP_Init();
    CPU_Init();
    BSP_Cfg_Tick();
    OSTaskCreate((OS_TCB     *)&AppTask1_TCB,
                (CPU_CHAR   *)"App Task 1",
                (OS_TASK_PTR )AppTask1,
                (void       *)0,
                (OS_PRIO     )5,
                (CPU_STK     *)&AppTask1_Stk[0],
                (CPU_STK_SIZE)0,
                (CPU_STK_SIZE)128,
                (OS_MSG_QTY  )0,
                (OS_TICK     )0,
                (void       *)0,
                (OS_OPT      )(OS_OPT_TASK_STK_CHK | OS_OPT_TASK_STK_CLR),
                (OS_ERR     *)&err);

    OSTaskCreate((OS_TCB     *)&AppTask2_TCB,
                (CPU_CHAR   *)"App Task 2",
                (OS_TASK_PTR )AppTask2,
                (void       *)0,
                (OS_PRIO     )6,
                (CPU_STK     *)&AppTask2_Stk[0],
                (CPU_STK_SIZE)0,
                (CPU_STK_SIZE)128,
                (OS_MSG_QTY  )0,
                (OS_TICK     )0,
                (void       *)0,
                (OS_OPT      )(OS_OPT_TASK_STK_CHK | OS_OPT_TASK_STK_CLR),
                (OS_ERR     *)&err);

    BSP_LED_Off(0);
    while (1) {
        BSP_LED_Toggle(0);
        OSTimeDlyHMSM((CPU_INT16U) 0,
                      (CPU_INT16U) 0,
                      (CPU_INT16U) 0,
                      (CPU_INT32U)100,
                      (OS_OPT     )OS_OPT_TIME_HMSM_STRICT,
                      (OS_ERR     *)&err);
    }
}

```

Listing 3-6 app.c (3rd Part)

- L3-6(1) Task #1 is created by calling **OSTaskCreate()**. If this task happens to have a higher priority than the task that creates it, µC/OS-III will immediately start Task #1. If the created task has a lower priority, **OSTaskCreate()** will return to **AppTaskStart()** and continue execution.
- L3-6(2) Task #2 is created and if it has a higher priority than **AppTaskStart()**, µC/OS-III will immediately switch to that task.

```

static void AppTask1 (void *p_arg)
{
    OS_ERR err;
    CPU_TS ts;

    p_arg = p_arg;
    while (1) {
        OSTimeDly ((OS_TICK      )1,                               (1)
                   (OS_OPT       )OS_OPT_TIME_DLY,
                   (OS_ERR      *)&err);
        OSQPost  ((OS_Q      *)&AppQ,                                (2)
                  (void      *)1,
                  (OS_MSG_SIZE)sizeof(void *),
                  (OS_OPT       )OS_OPT_POST_FIFO,
                  (OS_ERR      *)&err);
        OSMutexPend((OS_MUTEX   *)&AppMutex,                           (3)
                     (OS_TICK      )0,
                     (OS_OPT       )OS_OPT_PEND_BLOCKING,
                     (CPU_TS     *)&ts,
                     (OS_ERR      *)&err);
        /* Access shared resource */                                     (4)
        OSMutexPost((OS_MUTEX   *)&AppMutex,                           (5)
                     (OS_OPT       )OS_OPT_POST_NONE,
                     (OS_ERR      *)&err);
    }
}

```

Listing 3-7 app.c (4th Part)

- L3-7(1) The task starts by waiting for one tick to expire before it does anything useful. If the µC/OS-III tick rate is configured for 1000 Hz, the task will be suspended for 1 millisecond.

Chapter 3

- L3-7(2) The task then sends a message to another task using the message queue `AppQ`. In this case, the example sends a fixed message of value “1,” but the message could have consisted of the address of a buffer, the address of a function, or whatever would need to be sent.
- L3-7(3) The task then waits on the mutual exclusion semaphore since it needs to access a shared resource with another task. If the resource is already owned by another task, `AppTask1()` will wait forever for the mutex to be released by its current owner. The forever wait is specified by passing 0 as the second argument of the call.
- L3-7(4) When `OSMutexPend()` returns, the task owns the resource and can therefore access the shared resource. The shared resource may be a variable, an array, a data structure, an I/O device, etc. You should note that we didn’t actually show the access to the shared resource. This is not relevant at this point.
- L3-7(5) When the task is done with the shared resource, it must call `OSMutexPost()` to release the mutex.

```

static void AppTask2 (void *p_arg)
{
    OS_ERR      err;
    void        *p_msg;
    OS_MSG_SIZE msg_size;
    CPU_TS      ts;
    CPU_TS      ts_delta;

    p_arg = p_arg;
    while (1) {
        p_msg = OSQPend((OS_Q      *)&AppQ,                      (1)
                        (OS_MSG_SIZE *) &msg_size,
                        (OS_TICK       ) 0,
                        (OS_OPT        )OS_OPT_PEND_BLOCKING,
                        (CPU_TS       *) &ts,
                        (OS_ERR       *) &err);
        ts_delta = OS_TS_GET() - ts;                                (2)
        /* Process message received */                               (3)
    }
}

```

Listing 3-8 app.c (5th Part)

-
- L3-8(1) Task #2 starts by waiting for messages to be sent through the message queue `AppQ`. The task waits forever for a message to be received because the third argument specifies an infinite timeout.

When the message is received `p_msg` will contain the message (i.e., a pointer to “something”). In our case, `AppTask2()` will always receive a message value of ‘1’. Both the sender and receiver must agree as to the meaning of the message. The size of the message received is saved in “`msg_size`”. Note that “`p_msg`” could point to a buffer and “`msg_size`” would indicate the size of this buffer.

Also, when the message is received, “`ts`” will contain the timestamp of when the message was sent. A timestamp is the value read from a fairly fast free-running timer. The timestamp is typically an unsigned 32-bit (or more) value.

- L3-8(2) Knowing when the message was sent allows the user to determine how long it took this task to get the message. This is done by reading the current timestamp and subtracting the timestamp of when the message was sent allows users to know how long it took for the message to be received. Note that the receiving task may not get the message immediately since ISRs or other higher-priority tasks might execute before the receiver gets to run.

- L3-8(3) Here you would add your own code to process the received message.

Chapter 4

Critical Sections

A critical section of code, also called a *critical region*, is code that needs to be treated indivisibly. There are many critical sections of code contained in µC/OS-III. If a critical section is accessible by an Interrupt Service Routine (ISR) and a task, then disabling interrupts is necessary to protect the critical region. If the critical section is only accessible by task level code, the critical section may be protected through the use of a *preemption lock*.

Within µC/OS-III, the critical section access method depends on which ISR post method is used by interrupts (see Chapter 9, “Interrupt Management” on page 175). If `OS_CFG_ISR_POST_DEFERRED_EN` is set to 0 (see `os_cfg.h`) then µC/OS-III will disable interrupts when accessing internal critical sections. If `OS_CFG_ISR_POST_DEFERRED_EN` is set to 1 then µC/OS-III will lock the scheduler when accessing most of its internal critical sections.

Chapter 9, “Interrupt Management” on page 175 discusses how to select the method to use.

µC/OS-III defines one macro for entering a critical section and two macros for leaving:

```
OS_CRITICAL_ENTER(),
OS_CRITICAL_EXIT() and
OS_CRITICAL_EXIT_NO_SCHED()
```

These macros are internal to µC/OS-III and must not be invoked by the application code. However, if you need to access critical sections in your application code, consult Chapter 13, “Resource Management” on page 231.

4-1 DISABLING INTERRUPTS

When setting `OS_CFG_ISR_POST_DEFERRED_EN` to 0, μC/OS-III will disable interrupts before entering a critical section and re-enable them when leaving the critical section.

`OS_CRITICAL_ENTER()` invokes the μC/CPU macro `CPU_CRITICAL_ENTER()` that, in turn, calls `CPU_SR_Save()`. `CPU_SR_Save()` is a function typically written in assembly language that saves the current interrupt disable status and then disables interrupts. The saved interrupt disable status is returned to the caller and in fact, it is stored onto the caller's stack in a variable called “`cpu_sr`”.

`OS_CRITICAL_EXIT()` and `OS_CRITICAL_EXIT_NO_SCHED()` both invoke the μC/CPU macro `CPU_CRITICAL_EXIT()`, which maps to `CPU_SR_Restore()`. `CPU_SR_Restore()` is passed the value of the saved “`cpu_sr`” variable to re-establish interrupts the way they were prior to calling `OS_CRITICAL_ENTER()`.

The typical code for the macros is shown in Listing 4-1.

```
#define OS_CRITICAL_ENTER()          { CPU_CRITICAL_ENTER(); }
#define OS_CRITICAL_EXIT()           { CPU_CRITICAL_EXIT(); }
#define OS_CRITICAL_EXIT_NO_SCHED()   { CPU_CRITICAL_EXIT(); }
```

Listing 4-1 Critical section code – Disabling interrupts

4-1-1 MEASURING INTERRUPT DISABLE TIME

μC/CPU provides facilities to measure the amount of time interrupts are disabled. This is done by setting the configuration constant `CPU_CFG_INT_DIS_MEAS_EN` to 1 in `cpu_cfg.h`.

The measurement is started each time interrupts are disabled and ends when interrupts are re-enabled. The measurement keeps track of two values: a global interrupt disable time, and an interrupt disable time for each task. Therefore, it is possible to know how long a task disables interrupts, enabling the user to better optimize their code.

The per-task interrupt disable time is saved in the task's `OS_TCB` during a context switch (see `OSTaskSwHook()` in `os_cpu_c.c` and described in Chapter 8, “Context Switching” on page 165).

The unit of measure for the measured time is in CPU_TS (timestamp) units. It is necessary to find out the resolution of the timer used to measure these timestamps. For example, if the timer used for the timestamp is incremented at 1 MHz then the resolution of `CPU_TS` is 1 microsecond.

Measuring the interrupt disable time obviously adds measurement artifacts and thus increases the amount of time the interrupts are disabled. However, as far as the measurement is concerned, measurement overhead is accounted for and the measured value represents the actual interrupt disable time as if the measurement was not present.

Interrupt disable time is obviously greatly affected by the speed at which the processor accesses instructions and thus, the memory access speed. In this case, the hardware designer might have introduced wait states to memory accesses, which affects overall performance of the system. This may show up as unusually long interrupt disable times.

4-2 LOCKING THE SCHEDULER

When setting `OS_CFG_ISR_POST_DEFERRED_EN` to 1, μC/OS-III locks the scheduler before entering a critical section and unlocks the scheduler when leaving the critical section.

`OS_CRITICAL_ENTER()` simply increments `OSSchedLockNestingCtr` to lock the scheduler. This is the variable the scheduler uses to determine whether or not the scheduler is locked. It is locked when the value is non-zero.

`OS_CRITICAL_EXIT()` decrements `OSSchedLockNestingCtr` and when the value reaches zero, invokes the scheduler.

`OS_CRITICAL_EXIT_NO_SCHED()` also decrements `OSSchedLockNestingCtr`, but does not invoke the scheduler when the value reaches zero.

The code for the macros is shown in Listing 4-2.

```

#define OS_CRITICAL_ENTER()          \
{                                     \
    CPU_CRITICAL_ENTER();             \
    OSSchedLockNestingCtr++;       \
    CPU_CRITICAL_EXIT();            \
}
#define OS_CRITICAL_EXIT()          \
{                                     \
    CPU_CRITICAL_ENTER();             \
    OSSchedLockNestingCtr--;       \
    if (OSSchedLockNestingCtr == (OS_NESTING_CTR)0) { \
        CPU_CRITICAL_EXIT();         \
        OSSched();                  \
    } else {                         \
        CPU_CRITICAL_EXIT();         \
    }                                \
}
#define OS_CRITICAL_EXIT_NO_SCHED() \
{                                     \
    CPU_CRITICAL_ENTER();             \
    OSSchedLockNestingCtr--;       \
    CPU_CRITICAL_EXIT();            \
}

```

Listing 4-2 Critical section code – Locking the Scheduler

4-2-1 MEASURING SCHEDULER LOCK TIME

*μ*C/OS-III provides facilities to measure the amount of time the scheduler is locked. This is done by setting the configuration constant `OS_CFG_SCHED_LOCK_TIME_MEAS_EN` to 1 in `os_cfg.h`.

The measurement is started each time the scheduler is locked and ends when the scheduler is unlocked. The measurement keeps track of two values: a global scheduler lock time, and a per-task scheduler lock time. It is therefore possible to know how long each task locks the scheduler allowing the user to better optimize code.

The per-task scheduler lock time is saved in the task's `OS_TCB` during a context switch (see `OSTaskSwHook()` in `os_cpu_c.c` and described in Chapter 8, “Context Switching” on page 165).

The unit of measure for the measured time is in `CPU_TS` (timestamp) units so it is necessary to find the resolution of the timer used to measure the timestamps. For example, if the timer used for the timestamp is incremented at 1 MHz then the resolution of `CPU_TS` is 1 microsecond.

Measuring the scheduler lock time adds measurement artifacts and thus increases the amount of time the scheduler is actually locked. However, measurement overhead is accounted for and the measured value represents the actual scheduler lock time as if the measurement was not present.

4-3 μC/OS-III FEATURES WITH LONGER CRITICAL SECTIONS

Table 4-1 shows several μC/OS-III features that have potentially longer critical sections. Knowledge of these will help the user decide whether to direct μC/OS-III to use one critical section over another.

Feature	Reason
Multiple tasks at the same priority Chapter 14, “Synchronization” on page 273	<p>Although this is an important feature of μC/OS-III, multiple tasks at the same priority create longer critical sections. However, if there are only a few tasks at the same priority, interrupt latency would be relatively small.</p> <p>If multiple tasks are not created at the same priority, use the interrupt disable method.</p>
Event Flags Chapter 14, “Synchronization” on page 273	<p>If multiple tasks are waiting on different events, going through all of the tasks waiting for events requires a fair amount of processing time, which means longer critical sections.</p> <p>If only a few tasks (approximately one to five) are waiting on an event flag group, the critical section would be short enough to use the interrupt disable method.</p>
Pend on multiple objects Chapter 16, “Pending On Multiple Objects” on page 333	<p>Pending on multiple objects is probably the most complex feature provided by μC/OS-III, requiring interrupts to be disabled for fairly long periods of time should the interrupt disable method be selected. If pending on multiple objects, it is highly recommended that the user select the scheduler-lock method.</p> <p>If the application does not use this feature, the interrupt disable method is an alternative.</p>
Broadcast on Post calls See <code>osSemPost()</code> and <code>osQPost()</code> descriptions in Appendix A, “μC/OS-III API Reference” on page 443.	<p>μC/OS-III disables interrupts while processing a post to multiple tasks in a broadcast.</p> <p>When not using the broadcast option, you can use the interrupt disable method.</p>

Table 4-1 Disabling interrupts or locking the Scheduler

4-4 SUMMARY

μ C/OS-III needs to access critical sections of code, which it protects by either disabling interrupts (OS_CFG_ISR_POST_DEFERRED_EN set to 0 in os_cfg.h), or locking the scheduler (OS_CFG_ISR_POST_DEFERRED_EN set to 1 in os_cfg.h).

The application code must not use:

```
OS_CRITICAL_ENTER()  
OS_CRITICAL_EXIT()  
OS_CRITICAL_EXIT_NO_SCHED()
```

When setting CPU_CFG_INT_DIS_MEAS_EN in cpu_cfg.h, μ C/CPU measures the maximum interrupt disable time. There are two values available, one for the global maximum and one for each task.

When setting OS_CFG_SCHED_LOCK_TIME_MEAS_EN to 1 in os_cfg.h, μ C/OS-III will measure the maximum scheduler lock time.

Chapter 5

Task Management

The design process of a real-time application generally involves splitting the work to be completed into tasks, each responsible for a portion of the problem. µC/OS-III makes it easy for an application programmer to adopt this paradigm. A task (also called a *thread*) is a simple program that thinks it has the Central Processing Unit (CPU) all to itself. On a single CPU, only one task can execute at any given time.

µC/OS-III supports multitasking and allows the application to have any number of tasks. The maximum number of task is actually only limited by the amount of memory (both code and data space) available to the processor. Multitasking is the process of *scheduling* and *switching* the CPU between several tasks (this will be expanded upon later). The CPU switches its attention between several *sequential* tasks. Multitasking provides the illusion of having multiple CPUs and, actually maximizes the use of the CPU. Multitasking also helps in the creation of modular applications. One of the most important aspects of multitasking is that it allows the application programmer to manage the complexity inherent in real-time applications. Application programs are typically easier to design and maintain when multitasking is used.

Tasks are used for such chores as monitoring inputs, updating outputs, performing computations, control loops, update one or more displays, reading buttons and keyboards, communicating with other systems, and more. One application may contain a handful of tasks while another application may require hundreds. The number of tasks does not establish how good or effective a design may be, it really depends on what the application (or product) needs to do. The amount of work a task performs also depends on the application. One task may have a few microseconds worth of work to perform while another task may require tens of milliseconds.

Tasks look like just any other C function except for a few small differences. There are two types of tasks: run-to-completion (Listing 5-1) and infinite loop (Listing 5-2). In most embedded systems, tasks typically take the form of an infinite loop. Also, no task is allowed to return as other C functions can. Given that a task is a regular C function, it can declare local variables.

When a µC/OS-III task begins executing, it is passed an argument, `p_arg`. This argument is a pointer to a `void`. The pointer is a universal vehicle used to pass your task the address of a variable, a structure, or even the address of a function, if necessary. With this pointer, it is possible to create many identical tasks, that all use the same code (or task body), but, with different run-time characteristics. For example, you may have four asynchronous serial ports that are each managed by their own task. However, the task code is actually identical. Instead of copying the code four times, you can create the code for a “generic” task that receives a pointer to a data structure, which contains the serial port’s parameters (baud rate, I/O port addresses, interrupt vector number, etc.) as an argument. In other words, you can instantiate the same task code four times and pass it different data for each serial port that each instance will manage.

A run-to-completion task must *delete* itself by calling `OSTaskDel()`. The task starts, performs its function, and terminates. There would typically not be too many such tasks in the embedded system because of the overhead associated with “creating” and “deleting” tasks at run-time. In the task body, you can call most of µC/OS-III’s functions to help perform the desired operation of the task.

```
void MyTask (void *p_arg)
{
    OS_ERR  err;
    /* Local variables */

    /* Do something with 'p_arg'
    /* Task initialization
    /* Task body ... do work!
    OSTaskDel((OS_TCB *)0, &err);
}
```

Listing 5-1 Run-To-Completion task

With µC/OS-III, you either can call a C or assembly language functions from a task. In fact, it is possible to call the same C function from different tasks as long as the functions are reentrant. A *reentrant* function is a function that does not use static or otherwise global variables unless they are protected (µC/OS-III provides mechanisms for this) from multiple access. If shared C functions only use local variables, they are generally reentrant (assuming that the compiler generates reentrant code). An example of a non-reentrant function is the famous `strtok()` provided by most C compilers as part of the standard library. This function is used to parse an ASCII string for “tokens.” The first time you call this function,

you specify the ASCII string to parse and a list of token delimiters. As soon as the function finds the first token, it returns. The function “remembers” where it was last so when called again, it can extract additional tokens, which is clearly non-reentrant.

The use of an infinite loop is more common in embedded systems because of the repetitive work needed in such systems (reading inputs, updating displays, performing control operations, etc.). This is one aspect that makes a task different than a regular C function. Note that one could use a “**while (1)**” or “**for (;;)**” to implement the infinite loop, since both behave the same. The one used is simply a matter of personal preference. At Micrium, we like to use “**while (DEF_ON)**”. The infinite loop **must** call a µC/OS-III service (i.e., function) that will cause the task to wait for an event to occur. It is important that each task wait for an event to occur, otherwise the task would be a true infinite loop and there would be no easy way for other lower priority tasks to execute. This concept will become clear as more is understood regarding µC/OS-III.

```
void MyTask (void *p_arg)
{
    /* Local variables */

    /* Do something with "p_arg"
    /* Task initialization
    while (DEF_ON) {      /* Task body, as an infinite loop.
        :
        /* Task body ... do work!
        :
        /* Must call one of the following services:
        /*     OSFlagPend()
        /*     OSMutexPend()
        /*     OSPendMulti()
        /*     OSQPend()
        /*     OSSemPend()
        /*     OSTimeDly()
        /*     OSTimedDlyHMSM()
        /*     OSTaskQPend()
        /*     OSTaskSemPend()
        /*     OSTaskSuspend()      (Suspend self)
        /*     OSTaskDel()          (Delete self)
        :
        /* Task body ... do work!
        :
    }
}
```

Listing 5-2 Infinite Loop task

The event the task is waiting for may simply be the passage of time (when `OSTimeDly()` or `OSTimeDlyHMSM()` is called). For example, a design may need to scan a keyboard every 100 milliseconds. In this case, you would simply delay the task for 100 milliseconds then see if a key was pressed on the keyboard and, possibly perform some action based on which key was pressed. Typically, however, a keyboard scanning task should just buffer an “identifier” unique to the key pressed and use another task to decide what to do with the key(s) pressed.


Similarly, the event the task is waiting for could be the arrival of a packet from an Ethernet controller. In this case, the task would call one of the `OS???Pend()` calls (pend is synonymous with wait). The task will have nothing to do until the packet is received. Once the packet is received, the task processes the contents of the packet, and possibly moves the packet along a network stack.

It's important to note that when a task waits for an event, it does not consume CPU time.

Tasks must be created in order for μC/OS-III to know about tasks. You create a task by simply calling `OSTaskCreate()` as we've seen in Chapter 3. The function prototype for `OSTaskCreate()` is shown below:

```
void OSTaskCreate (OS_TCB      *p_tcb,
                  OS_CHAR     *p_name,
                  OS_TASK_PTR p_task,
                  void        *p_arg,
                  OS_PRIO     prio,
                  CPU_STK    *p_stk_base,
                  CPU_STK_SIZE stk_limit,
                  CPU_STK_SIZE stk_size,
                  OS_MSG_QTY  q_size,
                  OS_TICK     time_slice,
                  void        *p_ext,
                  OS_OPT      opt,
                  OS_ERR      *p_err)
```

A complete description of `OSTaskCreate()` and its arguments is provided in Appendix A, “μC/OS-III API Reference” on page 443. However, it is important to understand that a task needs to be assigned a *Task Control Block* (i.e., TCB), a stack, a priority and a few other parameters which are initialized by `OSTaskCreate()`, as shown in Figure 5-1.

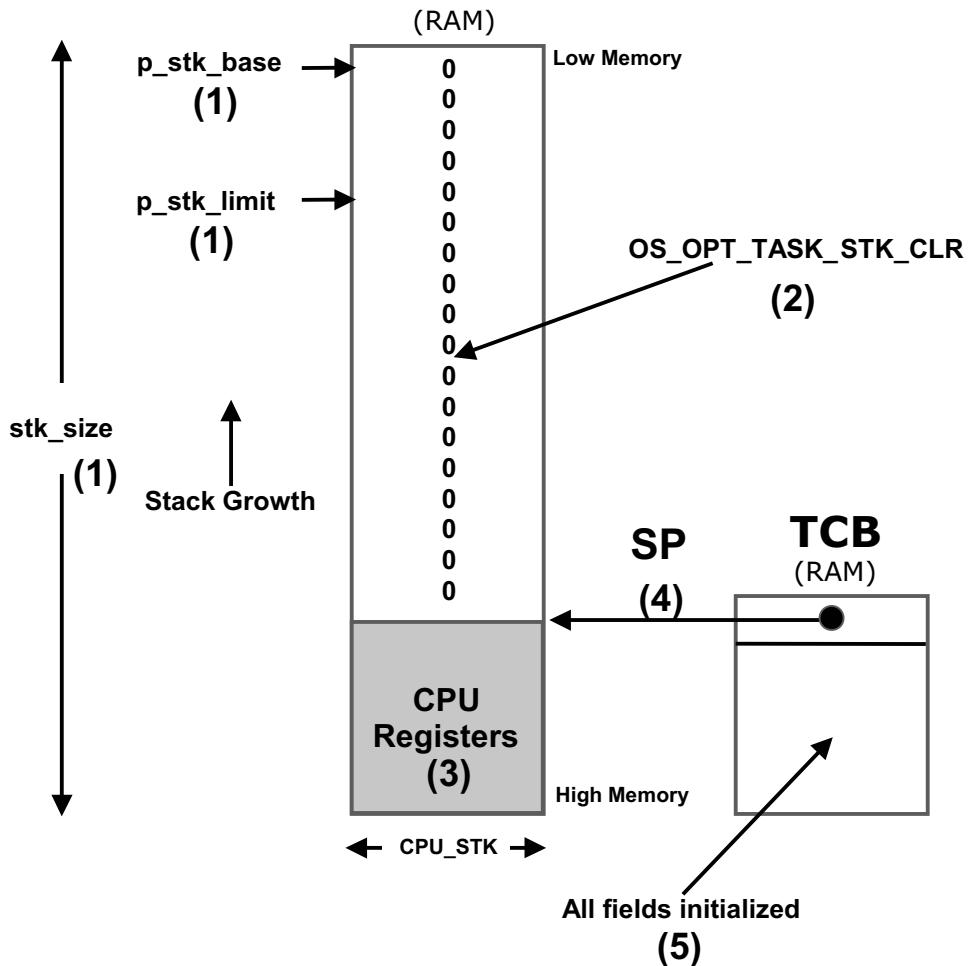Figure 5-1 **OSTaskCreate()** initializes the task's TCB and stack

- F5-1(1) When calling **OSTaskCreate()**, you pass the base address of the stack (**p_stk_base**) that will be used by the task, the watermark limit for stack growth (**stk_limit**) which is expressed in number of **CPU_STK** entries before the stack is empty, and the size of that stack (**stk_size**), also in number of **CPU_STK** elements.
- F5-1(2) When specifying **OS_OPT_TASK_STK_CHK + OS_OPT_TASK_STK_CLR** in the opt argument of **OSTaskCreate()**, µC/OS-III initializes the task's stack with all zeros.

- F5-1(3) μC/OS-III then initializes the top of the task's stack with a copy of the CPU registers in the same stacking order as if they were all saved at the beginning of an ISR. This makes it easy to perform context switches as we will see when discussing the context switching process. For illustration purposes, the assumption is that the stack grows from high memory to low memory, but the same concept applies for CPUs that use the stack in the reverse order.
- F5-1(4) The new value of the stack pointer (SP) is saved in the TCB. Note that this is also called the **top-of-stack**.
- F5-1(5) The remaining fields of the TCB are initialized: task priority, task name, task state, internal message queue, internal semaphore, and many others.

Next, a call is made to a function that is defined in the CPU port, `OSTaskCreateHook()` (see `os_cpu_c.c`). `OSTaskCreateHook()` is passed the pointer to the new TCB and this function allows you (or the port designer) to extend the functionality of `OSTaskCreate()`. For example, one could printout the contents of the fields of the newly created TCB onto a terminal for debugging purposes.

The task is then placed in the ready-list (see Chapter 6, “The Ready List” on page 141) and finally, if multitasking has started, μC/OS-III will invoke the scheduler to see if the created task is now the highest priority task and, if so, will context switch to this new task.

The body of the task can invoke other services provided by μC/OS-III. Specifically, a task can create another task (i.e., call `OSTaskCreate()`), suspend and resume other tasks (i.e., call `OSTaskSuspend()` and `OSTaskResume()` respectively), post signals or messages to other tasks (i.e., call `OS??Post()`), share resources with other tasks, and more. In other words, tasks are not limited to only make “wait for an event” function calls.

Figure 5-2 shows the resources with which a task typically interacts.

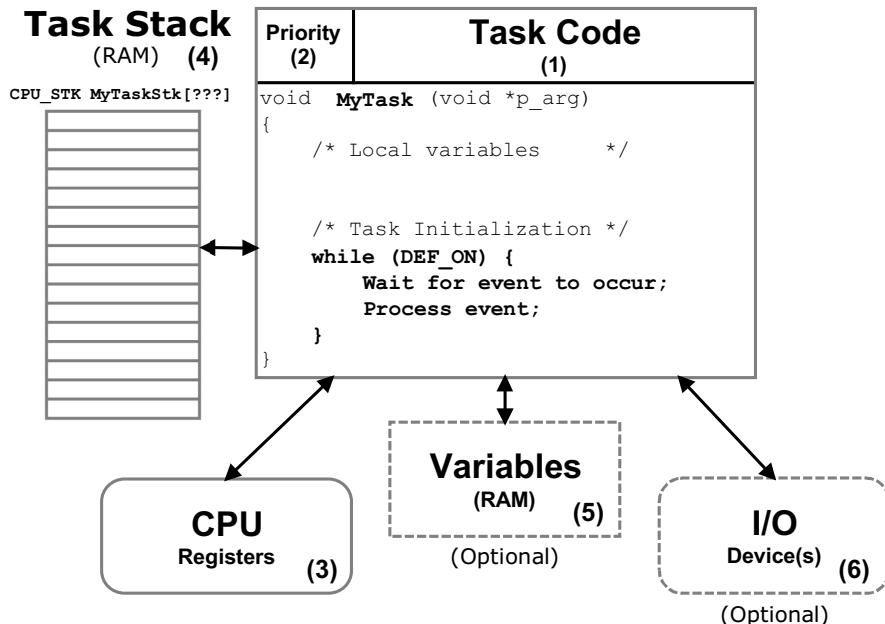


Figure 5-2 Tasks interact with resources

F5-2(1) An important aspect of a task is its code. As previously mentioned, the code looks like any other C function, except that it is typically implemented as an infinite loop and, a task is not allowed to return.

F5-2(2) Each task is assigned a priority based on its importance in the application. μC/OS-III's job is to decide which task will run on the CPU. The general rule is that μC/OS-III will run the most important *ready-to-run* task (highest priority).

With μC/OS-III, a low priority number indicates a high priority. In other words, a task at priority 1 is more important than a task at priority 10.

μC/OS-III supports a compile-time user configurable number of different priorities (see `OS_PRIO_MAX` in `os_cfg.h`). Thus, μC/OS-III allows the user to determine the number of different priority levels the application is allowed to use. Also, μC/OS-III supports an unlimited number of tasks at the same priority. For example, μC/OS-III can be configured to have 64 different priority levels and one can assign dozens of tasks at each priority level.

See section 5-1 “Assigning Task Priorities” on page 100.

- F5-2(3) A task has its own set of CPU registers. As far as a task is concerned, the task thinks it actually has the CPU all to itself.
- F5-2(4) Because μC/OS-III is a preemptive kernel, each task must have its own stack area. The stack always resides in RAM and is used to keep track of local variables, function calls, and possibly ISR (Interrupt Service Routine) nesting.

Stack space can be allocated either statically (at compile-time) or dynamically (at run-time). A static stack declaration is shown below. This declaration is made outside of a function.

```
static CPU_STK MyTaskStk[???];
```

or,

```
CPU_STK MyTaskStk[???];
```

Note that “???” indicates that the size of the stack (and thus the array) depends on the task stack requirements. Stack space may be allocated dynamically by using the C compiler’s heap management function (i.e., `malloc()`) as shown below. However, care must be taken with fragmentation. If creating and deleting tasks, the process of allocating memory might not be able to provide a stack for the task(s) because the heap will eventually become fragmented. For this reason, allocating stack space dynamically in an embedded system is typically allowed but, once allocated, stacks should not be deallocated. Said another way, it’s fine to create a task’s stack from the heap as long as you don’t free the stack space back to the heap.

```
void SomeCode (void)
{
    CPU_STK *p_stk;
    :
    :
    p_stk = (CPU_STK *)malloc(stk_size);
    if (p_stk != (CPU_STK *)0) {
        Create the task and pass it "p_stk" as the base address of the stack;
    }
    :
    :
}
```

See section 5-2 “Determining the Size of a Stack” on page 102.

- F5-2(5) A task can also have access to global variables. However, because µC/OS-III is a preemptive kernel care must be taken with code when accessing such variables as they may be shared between multiple tasks. Fortunately, µC/OS-III provides mechanisms to help with the management of such shared resources (semaphores, mutexes and more).
- F5-2(6) A task may also have access to one or more Input/Output (I/O) devices (also known as *peripherals*). In fact, it is common practice to assign tasks to manage I/O devices.

5-1 ASSIGNING TASK PRIORITIES

Sometimes task priorities are both obvious and intuitive. For example, if the most important aspect of the embedded system is to perform some type of control and it is known that the control algorithm must be responsive then it is best to assign the control task(s) a high priority while display and operator interface tasks are assigned low priority. However, most of the time, assigning task priorities is not so cut and dry because of the complex nature of real-time systems. In most systems, not all tasks are considered critical, and non-critical tasks should obviously be given low priorities.

An interesting technique called rate monotonic scheduling (RMS) assigns task priorities based on how often tasks execute. Simply put, tasks with the highest rate of execution are given the highest priority. However, RMS makes a number of assumptions, including:

- All tasks are periodic (they occur at regular intervals).
- Tasks do not synchronize with one another, share resources, or exchange data.
- The CPU must always execute the highest priority task that is ready-to-run. In other words, preemptive scheduling must be used.

Given a set of n tasks that are assigned RMS priorities, the basic RMS theorem states that all task hard real-time deadlines are always met if the following inequality holds true:

$$\sum_i \frac{E_i}{T_i} \leq n \left(2^{\frac{1}{n}} - 1 \right)$$

Where E_i corresponds to the maximum execution time of task i , and T_i corresponds to the execution period of task i . In other words, E_i/T_i corresponds to the fraction of CPU time required to execute task i .

Table 5-1 shows the value for size $n(2^{1/n} - 1)$ based on the number of tasks. The upper bound for an infinite number of tasks is given by $\ln(2)$, or **0.693**, which means that you meet all hard real-time deadlines based on RMS, CPU usage of all time-critical tasks should be less than 70 percent!

Note that you can still have non time-critical tasks in a system and thus use close to 100 percent of the CPU's time. However, using 100 percent of your CPU's time is not a desirable goal as it does not allow for code changes and added features. As a rule of thumb, always design a system to use less than 60 to 70 percent of the CPU.

RMS says that the highest rate task has the highest priority. In some cases, the highest rate task might not be the most important task. The application should dictate how to assign priorities. However, RMS is an interesting starting point.

Number of Tasks	$n(2^{1/n}-1)$
1	1.00
2	0.828
3	0.779
4	0.756
5	0.743
:	:
:	:
:	:
Infinite	0.693

Table 5-1 **Allowable CPU usage based on number of tasks**

5-2 DETERMINING THE SIZE OF A STACK

The size of the stack required by the task is application specific. When sizing the stack, however, one must account for the nesting of all the functions called by the task, the number of local variables to be allocated by all functions called by the task, and the stack requirements for all nested interrupt service routines. In addition, the stack must be able to store all CPU registers and possibly Floating-Point Unit (FPU) registers if the processor has a FPU. In addition, as a general rule in embedded systems, avoid writing recursive code.

It is possible to manually figure out the stack space needed by adding all the memory required by all function call nesting (1 pointer each function call for the return address), plus all the memory required by all the arguments passed in those function calls, plus storage for a full CPU context (depends on the CPU), plus another full CPU context for each nested ISRs (if the CPU doesn't have a separate stack to handle ISRs), plus whatever stack space is needed by those ISRs. Adding all this up is a tedious chore and the resulting number is a minimum requirement. Most likely you would not make the stack size that precise in order to account for "surprises." The number arrived at should probably be multiplied by some safety factor, possibly 1.5 to 2.0. This calculation assumes that the exact path of the code is known at all times, which is not always possible. Specifically, when calling a function such as `printf()` or some other library function, it might be difficult or nearly impossible to even guess just how much stack space `printf()` will require. In this case, start with a fairly large stack space and monitor the stack usage at run-time to see just how much stack space is actually used after the application runs for a while.

There are really cool and clever compilers/linkers that provide this information in a link map. For each function, the link map indicates the worst-case stack usage. This feature clearly enables you to better evaluate stack usage for each task. It is still necessary to add the stack space for a **full CPU** context plus, another **full CPU** context for each nested ISR (if the CPU does not have a separate stack to handle ISRs), plus whatever stack space is needed by those ISRs. Again, allow for a safety net and multiply this value by some factor.

Always monitor stack usage at run-time while developing and testing the product as stack overflows occur often and can lead to some curious behaviors. In fact, whenever someone mentions that his or her application behaves "strangely," insufficient stack size is the first thing that comes to mind.

5-3 DETECTING TASK STACK OVERFLOWS

1) Using an MMU or MPU

Stack overflows are easily detected if the processor has a Memory Management Unit (MMU) or a Memory Protection Unit (MPU). Basically, MMUs and MPUs are special hardware devices integrated alongside the CPU that can be configured to detect when a task attempts to access invalid memory locations, whether code, data, or stack. However, setting up an MMU or MPU is well beyond the scope of this book.

2) Using a CPU with stack overflow detection

Some processors, however, do have simple stack pointer overflow detection registers. When the CPU's stack pointer goes below (or above depending on stack growth) the value set in this register, an exception is generated and the exception handler ensures that the offending code does not do further damage (possibly issue a warning about the faulty code or even terminate it). The `.StkLimitPtr` field in the `OS_TCB` (see Task Control Blocks) is provided for this purpose as shown in Figure 5-3. Note that the position of the stack limit is typically set at a valid location in the task's stack with sufficient room left on the stack to handle the exception itself (assuming the CPU does not have a separate exception stack). In most cases, the position can be fairly close to `&MyTaskStk[0]`.

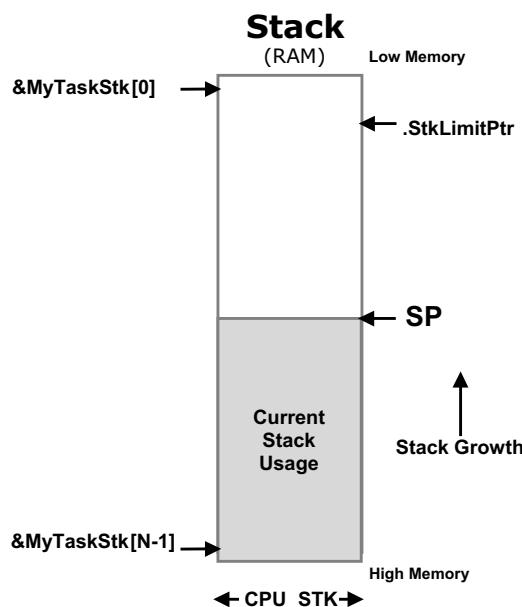


Figure 5-3 Hardware detection of stack overflows

As a reminder, the location of the `.StkLimitPtr` is determined by the “`stk_limit`” argument passed to `OSTaskCreate()`, when the task is created as shown below:

```
OS_TCB  MtTaskTCB;
CPU_STK MyTaskStk[1000];

OSTaskCreate(&MyTaskTCB,
            "MyTaskName",
            MyTask,
            &MyTaskArg,
            MyPrio,
            &MyTaskStk[0],    /* Stack base address */          */
            100,              /* Used to set .StkLimitPtr to trigger exception ... */ */
            /* ... at stack usage > 90% */           */
            1000,             /* Total stack size (in CPU_STK elements) */        */
            MyTaskQSize,
            MyTaskTimeQuanta,
            (void *)0,
            MY_TASK_OPT,
            &err);
```

Of course, the value of `.StkLimitPtr` used by the CPU’s stack overflow detection hardware needs to be changed whenever μC/OS-III performs a context switch. This can be tricky because the value of this register may need to be changed so that it first points to `NULL`, then the CPU’s stack pointer is changed, and finally the value of the stack checking register is set to the value saved in the TCB’s `.StkLimitPtr`. Why? Because if the sequence is not followed, the exception could be generated as soon as the stack pointer or the stack overflow detection register is changed. You can avoid this problem by first changing the stack overflow detection register to point to a location that ensures the stack pointer is never invalid (thus the `NULL` as described above). Note that I assumed here that the stack grows from high memory to low memory but the concept works in a similar fashion if the stack grows in the opposite direction.

3) Software-based stack overflow detection

Whenever μC/OS-III switches from one task to another, it calls a “hook” function (`OSTaskSwHook()`), which allows the μC/OS-III port programmer to extend the capabilities of the context switch function. So, if the processor doesn’t have hardware stack pointer overflow detection, it’s still possible to “simulate” this feature by adding code in the context switch hook function and, perform the overflow detection in software. Specifically, before a task is *switched in*, the code should ensure that the stack pointer to load into the CPU does

not exceed the “limit” placed in `.StkLimitPtr`. Because the software implementation cannot detect the stack overflow “as soon” as the stack pointer exceeds the value of `.StkLimitPtr`, it is important to position the value of `.StkLimitPtr` in the stack fairly far from `&MyTaskStk[0]`, as shown in Figure 5-4. A software implementation such as this is not as reliable as a hardware-based detection mechanism but still prevents a possible stack overflow. Of course, the `.StkLimitPtr` field would be set using `OSTaskCreate()` as shown above but this time, with a location further away from `&MyTaskStk[0]`.

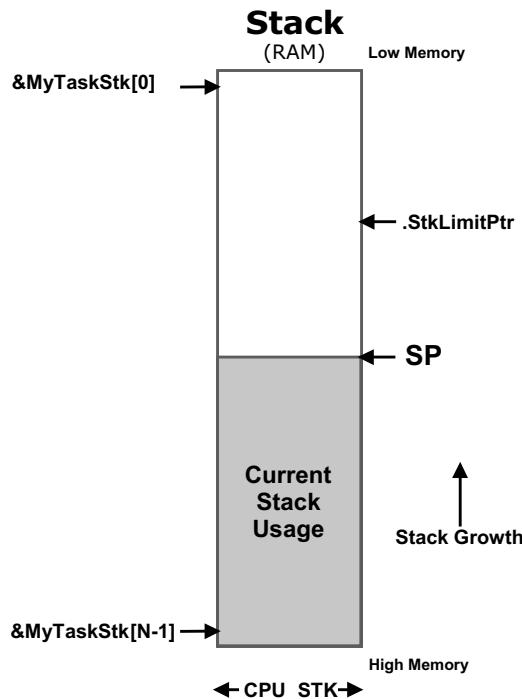


Figure 5-4 Software detection of stack overflows, monitoring `.StkLimitPtr`

4) Counting the amount of free stack space

Another way to check for stack overflows is to allocate more stack space than is anticipated to be used for the stack, then, monitor and possibly display actual maximum stack usage at run-time. This is fairly easy to do. First, the task stack needs to be cleared (i.e., filled with zeros) when the task is created. Next, a low priority task *walks the stack* of each task created, from the bottom (`&MyTaskStk[0]`) towards the top, counting the number of zero entries. When the task finds a non-zero value, the process is stopped and the usage of the stack can be computed (in number of bytes used or as a percentage). Then, you can adjust the size of the stacks (by recompiling the code) to allocate a more *reasonable* value (either

increase or decrease the amount of stack space for each task). For this to be effective, however, you need to run the application long enough for the stack to grow to its highest value. This is illustrated in Figure 5-5. µC/OS-III provides a function that performs this calculation at run-time, `OSTaskStkChk()` and in fact, this function is called by `OS_StatTask()` to compute stack usage for every task created in the application (to be described later).

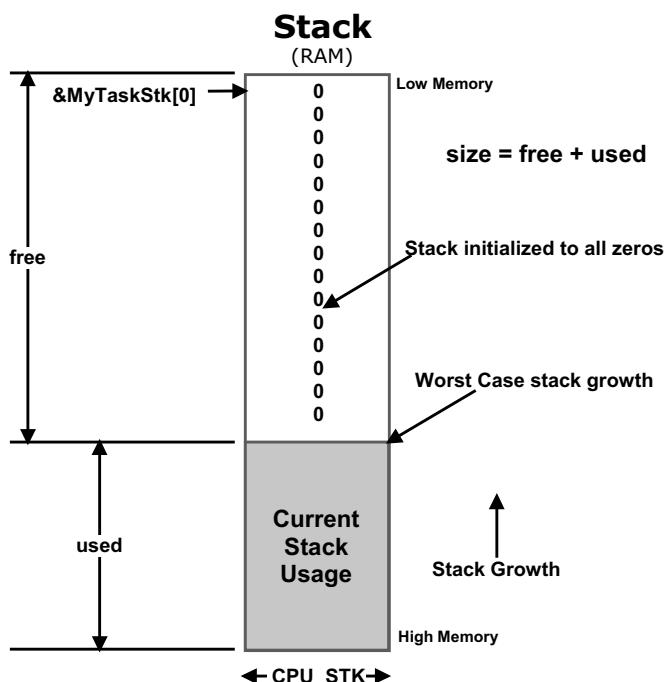


Figure 5-5 Software detection of stack overflows, walking the stack

5-4 TASK MANAGEMENT SERVICES

μ C/OS-III provides a number of task-related services to call from the application. These services are found in `os_task.c` and they all start with `OSTask???()`. The type of service they perform groups task-related services:

Group	Functions
General	<code>OSTaskCreate()</code> <code>OSTaskDel()</code> <code>OSTaskChangePrio()</code> <code>OSTaskRegSet()</code> <code>OSTaskRegGet()</code> <code>OSTaskSuspend()</code> <code>OSTaskResume()</code> <code>OSTaskTimeQuantaSet()</code>
Signaling a Task (See Chapter 14, “Synchronization” on page 273)	<code>OSTaskSemPend()</code> <code>OSTaskSemPost()</code> <code>OSTaskSemPendAbort()</code>
Sending Messages to a Task (See Chapter 15, “Message Passing” on page 309)	<code>OSTaskQPend()</code> <code>OSTaskQPost()</code> <code>OSTaskQPendAbort()</code> <code>OSTaskQFlush()</code>

Table 5-2 Task Management Services

A complete description of all μ C/OS-III task related services is provided in Appendix A, “ μ C/OS-III API Reference” on page 443.

5-5 TASK MANAGEMENT INTERNALS

5-5-1 TASK STATES

From a µC/OS-III user point of view, a task can be in any one of five states as shown in Figure 5-6. Internally, µC/OS-III does not need to keep track of the dormant state and the other states are tracked slightly differently. The actual µC/OS-III states will be discussed after a discussion on task states from the user's point of view. Figure 5-6 also shows which µC/OS-III functions are used to move from one state to another. The diagram is actually simplified as state transitions are a bit more complicated than this.

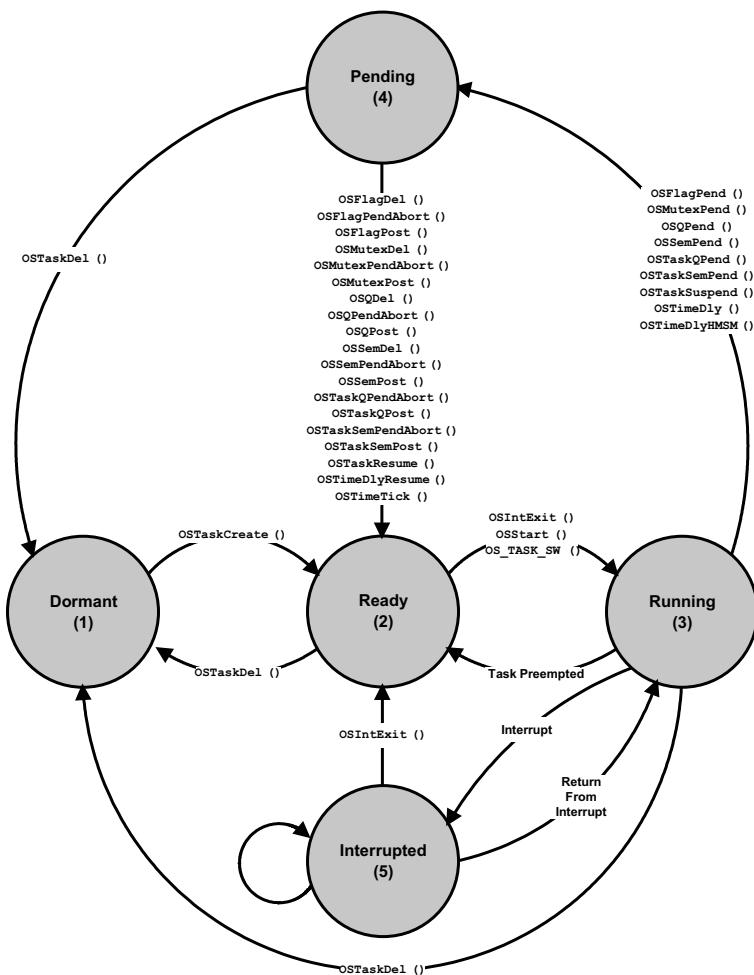


Figure 5-6 Five basic states of a task

- F5-6(1) The *Dormant* state corresponds to a task that resides in memory but has not been made available to µC/OS-III.

A task is made available to µC/OS-III by calling a function to create the task, `OSTaskCreate()`. The task code actually resides in code space but µC/OS-III needs to be informed about it.

When it is no longer necessary for µC/OS-III to manage a task, your code can call the task delete function, `OSTaskDel()`. `OSTaskDel()` does not actually delete the code of the task, it is simply not eligible to access the CPU.

- F5-6(2) A task is in the *Ready* state when it is ready-to-run. There can be any number of tasks ready and µC/OS-III keeps track of all ready tasks in a `ready list` (discussed later). This list is sorted by priority.

- F5-6(3) The most important ready-to-run task is placed in the *Running* state. On a single CPU, only one task can be running at any given time.

The task selected to run on the CPU is *switched in* by µC/OS-III when the application code calls `OSStart()`, or when µC/OS-III calls either `OSIntExit()` or `OS_TASK_SW()`.

As previously discussed, tasks must wait for an event to occur. A task waits for an event by calling one of the functions that brings the task to the pending state if the event has not occurred.

- F5-6(4) Tasks in the *Pending* state are placed in a special list called a *pend-list* (or wait list) associated with the event the task is waiting for. When waiting for the event to occur, the task does not consume CPU time. When the event occurs, the task is placed back into the ready list and µC/OS-III decides whether the newly readied task is the most important ready-to-run task. If this is the case, the currently running task will be preempted (placed back in the ready list) and the newly readied task is given control of the CPU. In other words, the newly readied task will run immediately if it is the most important task.

Note that the `OSTaskSuspend()` function unconditionally blocks a task and this task will not actually wait for an event to occur but in fact, waits until another task calls `OSTaskResume()` to make the task ready-to-run.

- F5-6(5) Assuming that CPU interrupts are enabled, an interrupting device will suspend execution of a task and execute an Interrupt Service Routine (ISR). ISRs are typically events that tasks wait for. Generally speaking, an ISR should simply notify a task that an event occurred and let the task process the event. ISRs should be as short as possible and most of the work of handling the interrupting devices should be done at the task level where it can be managed by μC/OS-III. ISRs are only allowed to make “Post” calls (i.e., `OSFlagPost()`, `OSQPost()`, `OSSemPost()`, `OSTaskQPost()` and `OSTaskSemPost()`). The only post call not allowed to be made from an ISR is `OSMutexPost()` since mutexes, as will be addressed later, are assumed to be services that are only accessible at the task level.

As the state diagram indicates, an interrupt can interrupt another interrupt. This is called **interrupt nesting** and most processors allow this. However, interrupt nesting easily leads to stack overflow if not managed properly.

Internally, μC/OS-III keeps track of task states using the state machine shown in Figure 5-7. The task state is actually maintained in a variable that is part of a data structure associated with each task, the task’s TCB. The task state diagram was referenced throughout the design of μC/OS-III when implementing most of μC/OS-III’s services. The number in parentheses is the state number of the task and thus, a task can be in any one of eight (8) states (see `os.h`, `OS_TASK_STATE_???`).

Note that the diagram does not keep track of a dormant task, as a dormant task is not known to μC/OS-III. Also, interrupts and interrupt nesting is tracked differently as will be explained further in the text.

This state diagram should be quite useful to understand how to use several functions and their impact on the state of tasks. In fact, I’d highly recommend that the reader bookmark the page of the diagram.

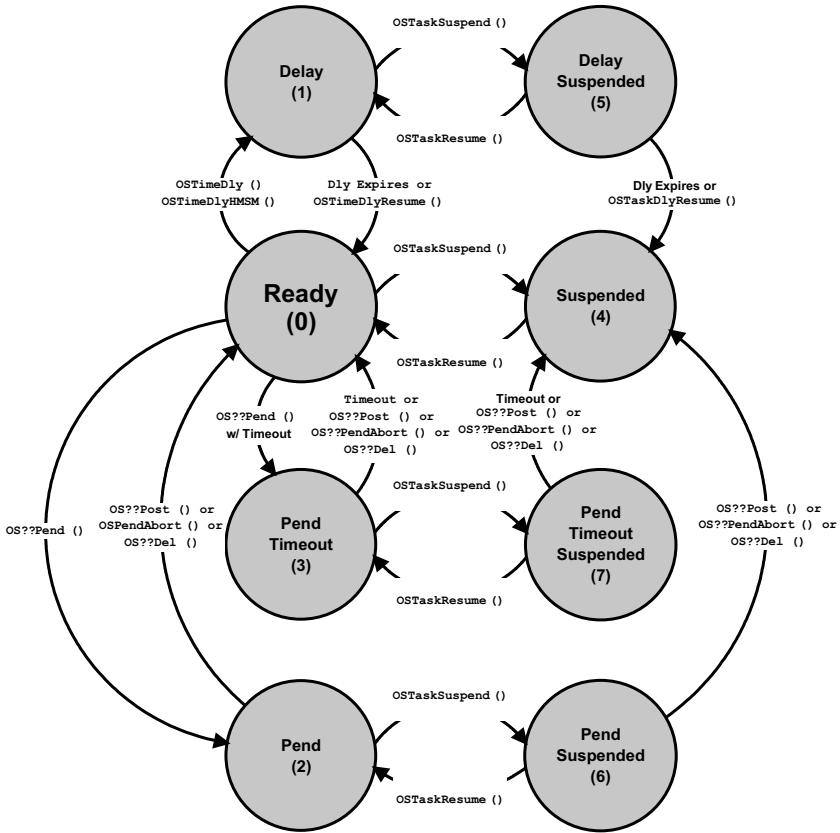


Figure 5-7 μC/OS-III's internal task state machine

- F5-7(0) A task is in State 0 when a task is ready-to-run. Every task “wants” to be ready-to-run as that is the only way it gets to perform their duties.
- F5-7(1) A task can decide to wait for time to expire by calling either `OSTimeDly()` or `OSTimeDlyHMSM()`. When the time expires or the delay is cancelled (by calling `OSTimeDlyResume()`), the task returns to the ready state.
- F5-7(2) A task can wait for an event to occur by calling one of the pend (i.e., wait) functions (`OSFlagPend()`, `OSMutexPend()`, `OSQPend()`, `OSSemPend()`, `OSTaskQPPend()`, or `OSTaskSemPend()`), and specify to wait forever for the event to occur. The pend terminates when the event occurs (i.e., a task or an ISR performs a “post”), the awaited object is deleted or, another task decides to abort the pend.

- F5-7(3) A task can wait for an event to occur as indicated, but specify that it is willing to wait a certain amount of time for the event to occur. If the event is not posted within that time, the task is readied, then the task is notified that a timeout occurred. Again, the pend terminates when the event occurs (i.e., a task or an ISR performs a “post”), the object awaited is deleted or, another task decides to abort the pend.
- F5-7(4) A task can suspend itself or another task by calling `OSTaskSuspend()`. The only way the task is allowed to resume execution is by calling `OSTaskResume()`. Suspending a task means that a task will not be able to run on the CPU until it is resumed. If a task suspends itself then it must be resumed by another task.
- F5-7(5) A delayed task can also be suspended by another task. In this case, the effect is additive. In other words, the delay must complete (or be resumed by `OSTimeDlyResume()`) and the suspension must be removed (by another task which would call `OSTaskResume()`) in order for the task to be able to run.
- F5-7(6) A task waiting on an event to occur may be suspended by another task. Again, the effect is additive. The event must occur and the suspension removed (by another task) in order for the task to be able to run. Of course, if the object that the task is pending on is deleted or, the pend is aborted by another task, then one of the above two condition is removed. The suspension, however, must be explicitly removed.
- F5-7(7) A task can wait for an event, but only for a certain amount of time, and the task could also be suspended by another task. As one might expect, the suspension must be removed by another task (or the same task that suspended it in the first place), and the event needs to either occur or timeout while waiting for the event.

5-5-2 TASK CONTROL BLOCKS (TCBs)

A task control block (TCB) is a data structure used by kernels to maintain information about a task. Each task requires its own TCB and, for µC/OS-III, the user assigns the TCB in user memory space (RAM). The address of the task's TCB is provided to µC/OS-III when calling task-related services (i.e., `OSTask???`(`)` functions). The task control block data structure is declared in `os.h` as shown in Listing 5-3. Note that the fields are actually commented in `os.h`, and some of the fields are conditionally compiled based on whether or not certain features are desired. Both are not shown here for clarity.

Also, it is important to note that even when the user understands what the different fields of the `OS_TCB` do, the application code must never directly access these (especially change them). In other words, `OS_TCB` fields must only be accessed by μC/OS-III and not the code.

```
struct os_tcb {
    CPU_STK             *StkPtr;
    void                *ExtPtr;
    CPU_STK             *StkLimitPtr;
    OS_TCB              *NextPtr;
    OS_TCB              *PrevPtr;
    OS_TCB              *TickNextPtr;
    OS_TCB              *TickPrevPtr;
    OS_TICK_SPOKE       *TickSpokePtr;
    OS_CHAR              *NamePtr;
    CPU_STK              *StkBasePtr;
    OS_TASK_PTR          TaskEntryAddr;
    void                *TaskEntryArg;
    OS_PEND_DATA         *PendDataTblPtr;
    OS_STATE              PendOn;
    OS_STATUS             PendStatus;
    OS_STATE              TaskState;
    OS_PRIO               Prio;
    CPU_STK_SIZE          StkSize;
    OS_OPT                Opt;
    OS_OBJ_QTY            PendDataEntries;
    CPU_TS                TS;
    OS_SEM_CTR             SemCtr;
    OS_TICK              TickCtrPrev;
    OS_TICK              TickCtrMatch;
    OS_TICK              TickRemain;
    OS_TICK              TimeQuanta;
    OS_TICK              TimeQuantaCtr;
    void                *MsgPtr;
    OS_MSG_SIZE            MsgSize;
    OS_MSG_Q              MsgQ;
    CPU_TS              MsgQPendTime;
    CPU_TS              MsgQPendTimeMax;
    OS_REG              RegTbl[OS_TASK_REG_TBL_SIZE];
    OS_FLAGS             FlagsPend;
    OS_FLAGS             FlagsRdy;
    OS_OPT                FlagsOpt;
```

```

OS_NESTING_CTR      SuspendCtr;
OS_CPU_USAGE         CPUUsage;
OS_CTX_SW_CTR       CtxSwCtr;
CPU_TS               cyclesDelta;
CPU_TS               cyclesStart;
OS_CYCLES            cyclesTotal;
OS_CYCLES            cyclesTotalPrev;
CPU_TS               SemPendTime;
CPU_TS               SemPendTimeMax;
CPU_STK_SIZE          StkUsed;
CPU_STK_SIZE          StkFree;
CPU_TS               IntDisTimeMax;
CPU                  SchedLockTimeMax;
OS_TCB                DbgNextPtr;
OS_TCB                DbgPrevPtr;
CPU_CHAR              DbgNamePtr;
};


```

Listing 5-3 OS_TCB Data Structure

.StkPtr

This field contains a pointer to the current top-of-stack for the task. µC/OS-III allows each task to have its own stack and each stack can be any size. **.StkPtr** should be the only field in the **OS_TCB** data structure accessed from assembly language code (for the context-switching code). This field is therefore placed as the first entry in the structure making access easier from assembly language code (it will be at offset zero in the data structure).


.ExtPtr

This field contains a pointer to a user-definable data area used to extend the TCB as needed. This pointer is provided as an argument passed in **OSTaskCreate()**. This pointer is easily accessible from assembly language since it always follows the **.StkPtr**. **.ExtPtr** can be used to add storage for saving the context of a FPU (Floating-Point Unit) if the processor you are using has a FPU.

.StkLimitPtr

The field contains a pointer to a location in the task's stack to set a *watermark* limit for stack growth and is determined from the value of the “**stk_limit**” argument passed to **OSTaskCreate()**. Some processors have special registers that automatically check the value of the stack pointer at run-time to ensure that the stack does not overflow. **.StkLimitPtr** may be used to set this register during a context switch. Alternatively, if the

processor does not have such a register, this can be “simulated” in software. However, this is not as reliable as a hardware solution. If this feature is not used then you can set the value of “`stk_limit`” can be set to 0 when calling `OSTaskCreate()`. See also section 5-3 “Detecting Task Stack Overflows” on page 103).

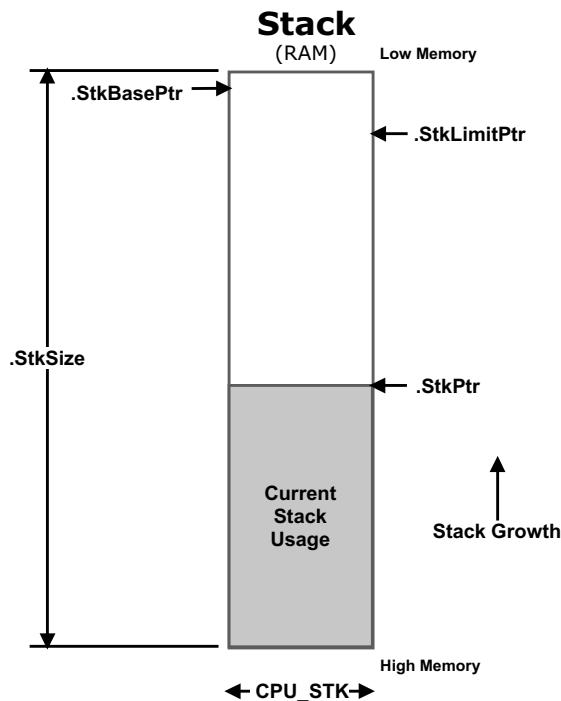

.NextPtr and **.PrevPtr**

These pointers are used to doubly link `OS_TCBs` in the ready list. A doubly linked list allows `OS_TCBs` to be quickly inserted and removed from the list.

.TickNextPtr and **.TickPrevPtr**

These pointers are used to doubly link `OS_TCBs` in the list of tasks waiting for time to expire or to timeout from pend calls. Again, a doubly linked list allows `OS_TCBs` to be quickly inserted and removed from the list.

.TickSpokePtr

This pointer is used to know which spoke in the “tick wheel” the task is linked to. The tick wheel will be described in “Chapter 9, “Interrupt Management” on page 175.”

.NamePtr

This pointer allows a name (an ASCII string) to be assigned to each task. Having a name is useful when debugging, since it is user friendly compared to displaying the address of the OS_TCB. Storage for the ASCII string is assumed to be in user space, either in code memory (ASCII string declared as a const) or in RAM.

.StkBasePtr

This field points to the base address of the task's stack. The stack base is typically the lowest address in memory where the stack for the task resides. A task stack is declared as follows:

```
CPU_STK MyTaskStk[???];
```

CPU_STK is the data type you must use to declare task stacks and ??? is the size of the stack associated with the task. The base address is always &MyTaskStk[0].

.TaskEntryAddr

This field contains the entry address of the task. As previously mentioned, a task is declared as shown below and this field contains the address of **MyTask**.

```
void MyTask (void *p_arg);
```

.TaskEntryArg

This field contains the value of the argument that is passed to the task when the task starts. As previously mentioned, a task is declared as shown below and this field contains the value of **p_arg**.

```
void MyTask (void *p_arg);
```

.PendDataTblPtr

μ C/OS-III allows the task to pend on any number of semaphores or message queues simultaneously. This pointer points to a table containing information about the pended objects. This is described in Chapter 10, “Pend Lists”.

.PendingOn

This field indicates what the task is pending on and contains one of the following values declared in **os.h**:

```
OS_TASK_PEND_ON_NOTHING
OS_TASK_PEND_ON_FLAG
OS_TASK_PEND_ON_TASK_Q
OS_TASK_PEND_ON_MULTI
OS_TASK_PEND_ON_MUTEX
OS_TASK_PEND_ON_Q
OS_TASK_PEND_ON_SEM
OS_TASK_PEND_ON_TASK_SEM
```

.PendStatus

This field indicates the outcome of a pend and contains one of the values declared in **os.h**:

```
OS_STATUS_PEND_OK
OS_STATUS_PEND_ABORT
OS_STATUS_PEND_DEL
OS_STATUS_PEND_TIMEOUT
```

.TaskState

This field indicates the current state of a task and contains one of the eight (8) task states that a task can be in. These states are declared in **os.h**:

```
OS_TASK_STATE_RDY
OS_TASK_STATE_DLY
OS_TASK_STATE_PEND
OS_TASK_STATE_PEND_TIMEOUT
OS_TASK_STATE_SUSPENDED
OS_TASK_STATE_DLY_SUSPENDED
OS_TASK_STATE_PEND_SUSPENDED
OS_TASK_STATE_PEND_TIMEOUT_SUSPENDED
```

.Prio

This field contains the current priority of a task. **.Prio** is a value between 0 and **OS_CFG_PRIO_MAX-1**. In fact, the idle task is the only task at priority **OS_CFG_PRIO_MAX-1**.

.StkSize

This field contains the size (in number of **CPU_STK** elements) of the stack associated with the task. Recall that a task stack is declared as follows:

```
CPU_STK MyTaskStk[???];
```

.StkSize is the number of elements in the above array.

.Opt

This field saves the “options” passed to `OSTaskCreate()` when the task is created as shown below. Note that task options are additive.

```
OS_OPT_TASK_NONE
OS_OPT_TASK_STK_CHK
OS_OPT_TASK_STK_CLR
OS_OPT_TASK_SAVE_FP
```

.PendDataTblEntries

This field works with the `.PendDataTblPtr` and indicates the number of objects a task is pending on at the same time.

.TS

This field is used to store a “time stamp” of when an event that the task was waiting on occurred. When the task resumes execution, this time stamp is returned to the caller.

.SemCtr

This field contains a semaphore counter associated with the task. Each task has its own semaphore built-in. An ISR or another task can signal a task using this semaphore. `.SemCtr` is therefore used to keep track of how many times the task is signaled. `.SemCtr` is used by `OSTaskSem???()` services.

.TickCtrPrev

This field stores the previous value of `OSTickCtr` when `OSTimeDly()` is called with the `OS_OPT_TIME_PERIODIC` option.

.TickCtrMatch

When a task is waiting for time to expire, or pending on an object with a timeout, the task is placed in a special list of tasks waiting for time to expire. When in this list, the task waits for `.TickCtrMatch` to match the value of the “tick counter” (`OSTickCtr`). When a match occurs, the task is removed from that list.

.TickRemain

This field is computed at run time by `OS_TickTask()` to compute the amount of time (expressed in “ticks”) left before a delay or timeout expires. This field is useful for debuggers or run-time monitors for display purposes.

.TimeQuanta and **.TimeQuantaCtr**

These fields are used for time slicing. When multiple tasks are ready-to-run at the same priority, **.TimeQuanta** determines how much time (in ticks) the task will execute until it is preempted by μC/OS-III so that the next task at the same priority gets a chance to execute. **.TimeQuantaCtr** keeps track of the remaining number of ticks for this to happen and is loaded with **.TimeQuanta** at the beginning of the task’s time slice.

.MsgPtr

When a message is sent to a task, this field contains the message received. This field only exists in a TCB if message queue services (`OS_CFG_Q_EN` is set to 1 in `os_cfg.h`), or task message queue services, are enabled (`OS_CFG_TASK_Q_EN` is set to 1 in `os_cfg.h`) at compile time.

.MsgSize

When a message is sent to a task, this field contains the size (in number of bytes) of the message received. This field only exists in a TCB if message queue services (`OS_CFG_Q_EN` is set to 1 in `os_cfg.h`), or task message queue services, (`OS_CFG_TASK_Q_EN` is set to 1 in `os_cfg.h`) are enabled at compile time.

.MsgQ

μC/OS-III allows tasks or ISRs to send messages directly to tasks. Because of this, a message queue is actually built into each TCB. This field only exists in a TCB if task message queue services are enabled at compile time (`OS_CFG_TASK_Q_EN` is set to 1 in `os_cfg.h`). **.MsgQ** is used by the `OSTaskQ???()` services.

.MsgQPendTime

This field contains the amount of time it took for a message to arrive. When `OSTaskQPost()` is called, the current time stamp is read and stored in the message. When `OSTaskQPending()` returns, the current time stamp is read again and the difference between the two times is stored in this variable. A debugger or μC/Probe can be used to indicate the time taken for a message to arrive by displaying this field.

This field is only available if setting `OS_CFG_TASK_PROFILE_EN` to 1 in `os_cfg.h`.

.MsgQPendingTimeMax

This field contains the maximum amount of time it takes for a message to arrive. It is a peak detector of the value of **.MsgQPendingTime**. The peak can be reset by calling **OSStatReset()**.

This field is only available if setting **OS_CFG_TASK_PROFILE_EN** to 1 in **os_cfg.h**.

.RegTbl[]

This field contains a table of “registers” that are task-specific. These registers are different than CPU registers. Task registers allow for the storage of such task-specific information as task ID, “errno” common in some software components, and more. Task registers may also store task-related data that needs to be associated with the task at run time. Note that the data type for elements of this array is **OS_REG**, which can be declared at compile time to be nearly anything. However, all registers must be of this data type. This field only exists in a TCB if task registers are enabled at compile time (**OS_CFG_TASK_REG_TBL_SIZE** is greater than 0 in **os_cfg.h**).

.FlagsPend

When a task pends on event flags, this field contains the event flags (i.e., bits) that the task is pending on. This field only exists in a TCB if event flags services are enabled at compile time (**OS_CFG_FLAG_EN** is set to 1 in **os_cfg.h**).

.FlagsRdy

This field contains the event flags that were posted and that the task was waiting on. In other words, it allows a task to know which event flags made the task ready-to-run. This field only exists in a TCB if event flags services are enabled at compile time (**OS_CFG_FLAG_EN** is set to 1 in **os_cfg.h**).

.FlagsOpt

When a task pends on event flags, this field contains the type of pend (pend on any event flag bit specified in **.FlagsPend** or all event flag bits specified in **.FlagsPend**). This field only exists in a TCB if event flags services are enabled at compile time (**OS_CFG_FLAG_EN** is set to 1 in **os_cfg.h**). There can be up to eight main values as shown below plus add-on options. Possible values are:

```
OS_OPT_PEND_FLAG_CLR_ALL
OS_OPT_PEND_FLAG_CLR_ANY
OS_OPT_PEND_FLAG_CLR_AND
OS_OPT_PEND_FLAG_CLR_OR
OS_OPT_PEND_FLAG_SET_ALL
```

```
OS_OPT_PEND_FLAG_SET_ANY  
OS_OPT_PEND_FLAG_SET_AND  
OS_OPT_PEND_FLAG_SET_OR
```

You can also ‘add’ `OS_OPT_PEND_FLAG_CONSUME` and either `OS_OPT_PEND_BLOCKING` or `OS_OPT_PEND_NON_BLOCKING` to the above options.

.SuspendCtr

This field is used by `OSTaskSuspend()` and `OSTaskResume()` to keep track of how many times a task is suspended. Task suspension can be nested. When `.SuspendCtr` is 0, all suspensions are removed. This field only exists in a TCB if task suspension is enabled at compile time (`OS_CFG_TASK_SUSPEND_EN` is set to 1 in `os_cfg.h`).

.CPUUsage

This field is computed by `OS_StatTask()` if `OS_CFG_TASK_PROFILE_EN` is set to 1 in `os_cfg.h`. `.CPUUsage` contains the CPU usage of a task in percent (0 to 100%). As of version V3.03.00, `.CPUUsage` is multiplied by 100. In other words, 10000 represents 100.00%.

.CtxSwCtr

This field keeps track of how often the task has executed (not how long it has executed). This field is generally used by debuggers or run-time monitors to see if a task is executing (the value of this field would be non-zero and would be incrementing). The field is enabled at compile time when `OS_CFG_TASK_PROFILE_EN` is set to 1 in `os_cfg.h`.

.CyclesDelta

`.CyclesDelta` is computed during a context switch and contains the value of the current time stamp (obtained by calling `OS_TS_GET()`) minus the value of `.CyclesStart`. This field is generally used by debuggers or a run-time monitor to see how long a task had control of the CPU until it got switched out. The field is enabled at compile time when `OS_CFG_TASK_PROFILE_EN` is set to 1 in `os_cfg.h`.

.CyclesStart

This field is used to measure how long a task had control of the CPU. `.CyclesStart` is updated when μC/OS-III performs a context switch. `.CyclesStart` contains the value of the current time stamp (it calls `OS_TS_GET()`) when a task is switched-in. The field is enabled at compile time when `OS_CFG_TASK_PROFILE_EN` is set to 1 in `os_cfg.h`.

.CyclesTotal

This field accumulates the value of `.CyclesDelta`, so it contains the total execution time of a task during a set period of time. `.CyclesTotal` is used by `OS_StatTask()` to determine CPU usage on a per-task basis. This is typically a 32-bit value because of the accumulation of cycles over time. On the other hand, using a 64-bit value ensures that we can accumulate CPU cycles for almost 600 years even if the CPU is running at 1 GHz! Of course, it's assumed that the compiler supports 64-bit data types. The field is enabled at compile time when `OS_CFG_TASK_PROFILE_EN` is set to 1 in `os_cfg.h`. `.CyclesTotal` is used by `OS_StatTask()` to determine CPU usage on a per-task basis.

.SemPendTime

This field contains the amount of time taken for the semaphore to be signaled. When `OSTaskSemPost()` is called, the current time stamp is read and stored in the `OS_TCB` (see `.TS`). When `OSTaskSemPend()` returns, the current time stamp is read again and the difference between the two times is stored in this variable. This field can be displayed by a debugger or μC/Probe to indicate how much time it took for the task to be signaled.

This field is only available when setting `OS_CFG_TASK_PROFILE_EN` to 1 in `os_cfg.h`.

.SemPendTimeMax

This field contains the maximum amount of time it took for the task to be signaled. It is a peak detector of the value of `.SemPendTime`. The peak can be reset by calling `OSStatReset()`.

This field is only available if setting `OS_CFG_TASK_PROFILE_EN` to 1 in `os_cfg.h`.

.StkUsed and .StkFree

μC/OS-III is able to compute (at run time) the amount of stack space a task actually uses and how much stack space remains. This is accomplished by a function called `OSTaskStkChk()`. Stack usage computation assumes that the task's stack is “cleared” when the task is created. In other words, when calling `OSTaskCreate()`, it is expected that the following options be specified: `OS_TASK_OPT_STK_CLR` and `OS_TASK_OPT_STK_CHK`. `OSTaskCreate()` will then clear all the RAM used for the task's stack.

μC/OS-III provides an internal task called `OS_StatTask()` that checks the stack of each of the tasks at run-time. `OS_StatTask()` typically runs at a low priority so that it does not interfere with the application code. `OS_StatTask()` saves the value computed for each task in the TCB of each task in these fields, which represents the maximum number of stack

bytes used and the amount of stack space still unused by the task. These fields only exist in a TCB if the statistic task is enabled at compile time (`OS_CFG_STAT_TASK_STK_CHK_EN` is set to 1 in `os_cfg.h`).

.IntDisTimeMax

This field keeps track of the maximum interrupt disable time of the task. The field is updated only if μC/CPU supports interrupt disable time measurements. This field is available only if setting `OS_CFG_TASK_PROFILE_EN` to 1 in `os_cfg.h` and μC/CPU's `CPU_CFG_INT_DIS_MEAS_EN` is defined in `cpu_cfg.h`.

.SchedLockTimeMax

The field keeps track of the maximum scheduler lock time of the task. In other words, the maximum amount of time the task locks the scheduler.

This field is available only if you set `OS_CFG_TASK_PROFILE_EN` to 1 and `OS_CFG_SCHED_LOCK_TIME_MEAS_EN` is set to 1 in `os_cfg.h`.

.DbgNextPtr

This field contains a pointer to the next `OS_TCB` in a doubly linked list of `OS_TCBs`. `OS_TCBs` are placed in this list by `OSTaskCreate()`. This field is only present if `OS_CFG_DBG_EN` is set to 1 in `os_cfg.h`.

.DbgPrevPtr

This field contains a pointer to the previous `OS_TCB` in a doubly linked list of `OS_TCBs`. `OS_TCBs` are placed in this list by `OSTaskCreate()`. This field is only present if `OS_CFG_DBG_EN` is set to 1 in `os_cfg.h`.

.DbgNamePtr

This field contains a pointer to the name of the object that the task is pending on when the task is pending on either an event flag group, a semaphore, a mutual exclusion semaphore or a message queue. This information is quite useful during debugging and thus, this field is only present if `OS_CFG_DBG_EN` is set to 1 in `os_cfg.h`.

5-6 INTERNAL TASKS

During initialization, μC/OS-III creates a minimum of two (2) internal tasks (`OS_IdleTask()`) and `OS_TickTask()` and, three (3) optional tasks (`OS_StatTask()`, `OS_TmrTask()` and `OS_IntQTask()`). The optional tasks are created based on the value of compile-time `#defines` found in `os_cfg.h`.

<code>OS_CFG_STAT_TASK_EN</code>	enables <code>OS_StatTask()</code>
<code>OS_CFG_TMR_EN</code>	enables <code>OS_TmrTask()</code>
<code>OS_CFG_ISR_POST_DEFERRED_EN</code>	enables <code>OS_IntQTask()</code>

5-6-1 THE IDLE TASK (`OS_IdleTask()`, `os_core.c`)

`OS_IdleTask()` is the very first task created by μC/OS-III and always exists in a μC/OS-III-based application. The priority of the idle task is always set to `OS_CFG_PRIO_MAX-1`. In fact, `OS_IdleTask()` is the only task that is ever allowed to be at this priority and, as a safeguard, when other tasks are created, `OSTaskCreate()` ensures that there are no other tasks created at the same priority as the idle task. The idle task runs whenever there are no other tasks that are ready-to-run. The important portions of the code for the idle task are shown below (refer to `os_core.c` for the complete code).

```
void OS_IdleTask (void *p_arg)
{
    while (DEF_ON) {                                (1)
        OS_CRITICAL_ENTER();
        OSIdleTaskCtr++;
        OSStatTaskCtr++;
        OS_CRITICAL_EXIT();
        OSIdleTaskHook();                            (3)
    }
}
```

Listing 5-4 Idle Task

- L5-4(1) The idle task is a “true” infinite loop that never calls functions to “wait for an event”. This is because, on most processors, when there is “nothing to do,” the processor still executes instructions. When μC/OS-III determines that there is

no other higher-priority task to run, µC/OS-III “parks” the CPU in the idle task. However, instead of having an empty “infinite loop” doing nothing, µC/OS-III uses this “idle” time to do something useful.

- L5-4(2) Two counters are incremented whenever the idle task runs.

`OSIdleTaskCtr` is typically defined as a 32-bit unsigned integer (see `os.h`). `OSIdleTaskCtr` is reset once when µC/OS-III is initialized. `OSIdleTaskCtr` is used to indicate “activity” in the idle task. In other words, if your code monitors and displays `OSIdleTaskCtr`, you should expect to see a value between `0x00000000` and `0xFFFFFFFF`. The rate at which `OSIdleTaskCtr` increments depend on how busy the CPU is at running the application code. The faster the increment, the less work the CPU has to do in application tasks.

`OSStatTaskCtr` is also typically defined as a 32-bit unsigned integer (see `os.h`) and is used by the statistic task (described later) to get a sense of CPU utilization at run time.

- L5-4(3) Every time through the loop, `OS_IdleTask()` calls `OSIdleTaskHook()`, which is a function that is declared in the µC/OS-III port for the processor used. `OSIdleTaskHook()` allows the implementer of the µC/OS-III port to perform additional processing during idle time. It is very important for this code to not make calls that would cause the idle task to “wait for an event”. This is generally not a problem as most programmers developing µC/OS-III ports know to follow this simple rule.

`OSIdleTaskHook()` may be used to place the CPU in low-power mode for battery-powered applications and thus avoid wasting energy. However, doing this means that `OSStatTaskCtr` cannot be used to measure CPU utilization (described later).

```
void OSIdleTaskHook (void)
{
    /* Place the CPU in low power mode */
}
```

Typically, most processors exit low-power mode when an interrupt occurs. Depending on the processor, however, the Interrupt Service Routine (ISR) may have to write to “special” registers to return the CPU to its full or desired speed. If the ISR wakes up a high-priority task (every task is higher in priority than the idle task) then the ISR will not immediately return to the interrupted idle task, but instead switch to the higher-priority task. When the higher-priority task completes its work and waits for its event to occur, µC/OS-III causes a context switch to return to `OSIdleTaskHook()` just “after” the instruction that caused the CPU to enter low-power mode. In turn, `OSIdleTaskHook()` returns to `os_IdleTask()` and causes another iteration through the “infinite loop” which places the CPU back in the low power state.

5-6-2 THE TICK TASK (`OS_TickTask()`, `os_tick.c`)

Nearly every RTOS requires a periodic time source called a *Clock Tick* or *System Tick* to keep track of time delays and timeouts. µC/OS-III’s clock tick handling is encapsulated in the file `os_tick.c`.

`OS_TickTask()` is a task created by µC/OS-III and its priority is configurable by the user through µC/OS-III’s configuration file `os_cfg_app.h` (see `OS_CFG_TICK_TASK_PRIO`). Typically `OS_TickTask()` is set to a relatively high priority. In fact, the priority of this task is set slightly lower than your most important tasks.

`OS_TickTask()` is used by µC/OS-III to keep track of tasks waiting for time to expire or, for tasks that are pending on kernel objects with a timeout. `OS_TickTask()` is a periodic task and it waits for signals from the tick ISR (described in Chapter 9, “Interrupt Management” on page 175) as shown in Figure 5-8.

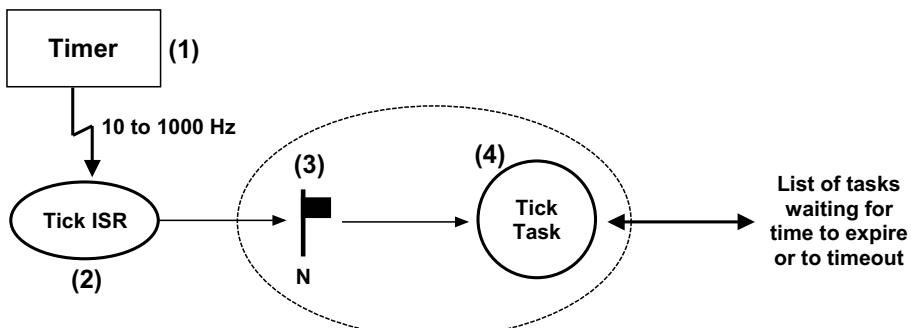


Figure 5-8 Tick ISR and Tick Task relationship

F5-8(1)

A hardware timer is generally used and configured to generate an interrupt at a rate between 10 and 1000 Hz (see `OS_CFG_TICK_RATE` in `os_cfg_app.h`). This timer is generally called the *Tick Timer*. The actual rate to use depends on such factors as: processor speed, desired time resolution, and amount of allowable overhead to handle the tick timer, etc.

The tick interrupt does not have to be generated by a timer and, in fact, it can come from other regular time sources such as the power-line frequency (50 or 60 Hz), which are known to be fairly accurate over long periods of time.

F5-8(2)

Assuming CPU interrupts are enabled, the CPU accepts the tick interrupt, preempts the current task, and vectors to the tick ISR. The tick ISR must call `OSTimeTick()` (see `os_time.c`), which accomplishes most of the work needed by μC/OS-III. The tick ISR then clears the timer interrupt (and possibly reloads the timer for the next interrupt). However, some timers may need to be taken care of prior to calling `OSTimeTick()` instead of after as shown below.

```
void TickISR (void)
{
    OSTimeTick();
    /* Clear tick interrupt source */
    /* Reload the timer for the next interrupt */
}
```

or,

```
void TickISR (void)
{
    /* Clear tick interrupt source */
    /* Reload the timer for the next interrupt */
    OSTimeTick();
}
```

`OSTimeTick()` calls `OSTimeTickHook()` at the very beginning of `OSTimeTick()` to give the opportunity to the μC/OS-III port developer to react as soon as possible upon servicing the tick interrupt.

F5-8(3)

`OSTimeTick()` calls a service provided by μC/OS-III to signal the tick task and make that task ready-to-run. The tick task executes as soon as it becomes the most important task. The reason the tick task might not run immediately is that

the tick interrupt could have interrupted a task higher in priority than the tick task and, upon completion of the tick ISR, μC/OS-III will resume the interrupted task.

- F5-8(4) When the tick task executes, it goes through a list of all tasks that are waiting for time to expire or are waiting on a kernel object with a timeout. From this point forward, this will be called the tick list. The tick task will make ready-to-run all of the tasks in the tick list for which time or timeout has expired. The process is explained below.

μC/OS-III may need to place literally hundreds of tasks (if an application has that many tasks) in the tick list. The tick list is implemented in such a way that it does not take much CPU time to determine if time has expired for those tasks placed in the tick list and, possibly makes those tasks ready-to-run. The tick list is implemented as shown in Figure 5-9.

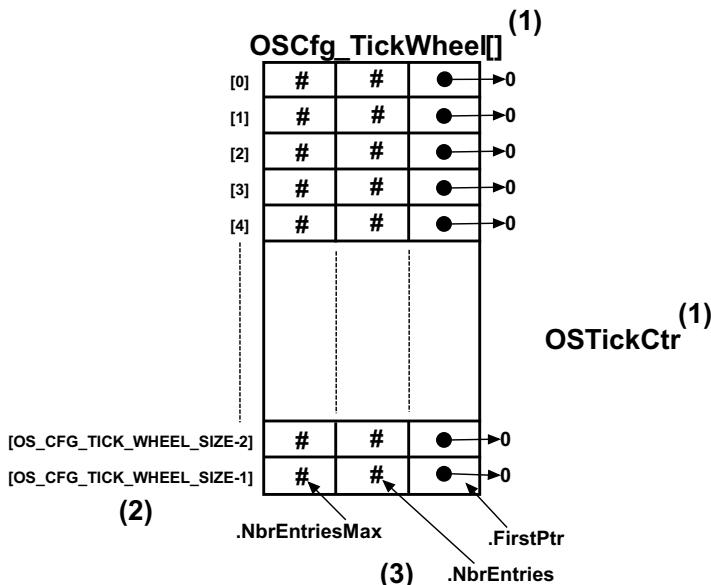


Figure 5-9 Empty Tick List

- F5-9(1) The tick list consists of a table (`OSCfg_TickWheel[]`, see `os_cfg_app.c`) and a counter (`OSTickCtr`).

F5-9(2) The table contains up to `OS_CFG_TICK_WHEEL_SIZE` entries (see `os_cfg_app.h`), which is a compile time configuration value. The number of entries depends on the amount of memory (RAM) available to the processor and the maximum number of tasks in the application. A good starting point for `OS_CFG_TICK_WHEEL_SIZE` may be: `#Tasks / 4`. It is recommended not to make `OS_CFG_TICK_WHEEL_SIZE` an even multiple of the tick rate. If the tick rate is 1000 Hz and you have 50 tasks in the application, you should avoid setting `OS_CFG_TICK_WHEEL_SIZE` to 10 or 20 (use 11 or 23 instead). Actually, prime numbers are good choices. Although it is not really possible to plan at compile time what will happen at run time, ideally, the number of tasks waiting in each entry of the table will be distributed uniformly.

F5-9(3) Each entry in the table contains three fields: `.NbrEntriesMax`, `.NbrEntries` and `.FirstPtr`.

`.NbrEntries` indicates the number of tasks linked to this table entry.

`.NbrEntriesMax` keeps track of the highest number of entries in the table. This value is reset when the application code calls `OSStatReset()`.

`.FirstPtr` contains a pointer to a doubly linked list of tasks (through the tasks `OS_TCB`) belonging to the list, at that table position.

`OSTickCtr` is incremented by `OS_TickTask()` each time the task is signaled by the tick ISR.

Tasks are automatically inserted in the tick list when the application programmer calls a `OSTimeDly???` function, or when an `OS???Pend()` call is made with a non-zero timeout value.

Example 5-1

Using an example to illustrate the process of inserting a task in the tick list, let's assume that the tick list is completely empty, `OS_CFG_TICK_WHEEL_SIZE` is configured to 12, and the current value of `OSTickCtr` is 10 as shown in Figure 5-10. A task is placed in the tick list when `OSTimeDly()` is called and let's assume `OSTimeDly()` is called as follows:

```
:
OSTimeDly(1, OS_OPT_TIME_DLY, &err);
:
```

Referring to the µC/OS-III reference manual in Appendix A, notice that this action indicates to µC/OS-III to delay the current task for 1 tick. Since `OSTickCtr` has a value of 10, the task will be put to sleep until `OSTickCtr` reaches 11 and thus sleep until the very next clock tick interrupt. Tasks are inserted in the `OSCfg_TickWheel[]` table using the following equation:

```
MatchValue          = OSTickCtr + dly
Index into OSCfg_TickWheel[] = MatchValue % OS_CFG_TICK_WHEEL_SIZE
```

Where “`dly`” is the value passed in the first argument of `OSTimeDly()` or, 1 in this example. We therefore obtain the following:

```
MatchValue          = 10 + 1
Index into OSCfg_TickWheel[] = (10 + 1) % 12
```

or,

```
MatchValue          = 11
Index into OSCfg_TickWheel[] = 11
```

Because of the “circular” nature of the table (a modulo operation using the size of the table), the table is referred to as a *tick wheel* and each entry is a *spoke* in the wheel.

The `OS_TCB` of the task being delayed is entered at index 11 in `OSCfg_TickWheel[]` (i.e., spoke 11 using the wheel analogy). The `OS_TCB` of the task is inserted in the first entry of the list (i.e., pointed to by `OSCfg_TickWheel[11].FirstPtr`), and the number of entries at spoke 11 is incremented (i.e., `OSCfg_TickWheel[11].NbrEntries` will be 1). Notice that the `OS_TCB` also links back to `&OSCfg_TickWheel[11]` and the “`MatchValue`” is placed in the `OS_TCB` field `.TickCtrMatch`. Since this is the first task inserted in the tick list at spoke 11, the `.TickNextPtr` and `.TickPrevPtr` of the task’s `OS_TCB` both point to `NULL`.

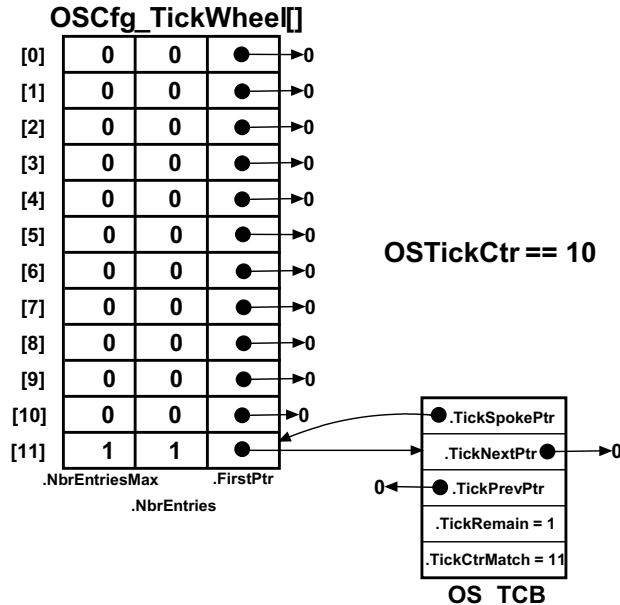


Figure 5-10 Inserting a task in the tick list

OSTimeDly() takes care of a few other details. Specifically, the task is removed from μC/OS-III’s ready list (described in Chapter 6, “The Ready List” on page 141) since the task is no longer eligible to run (because it is waiting for time to expire). Also, the scheduler is called because μC/OS-III will need to run the next most important ready-to-run task.

If the next task to run also happens to call **OSTimeDly()** “before” the next tick arrives and calls **OSTimeDly()** as follows:

```
:
OSTimeDly(13, OS_OPT_TIME_DLY, &err);
:
```

μC/OS-III will calculate the match value and spoke as follows:

```
MatchValue = 10 + 13
OSCfg_TickWheel[] spoke number = (10 + 13) % 12
```

or,

```
MatchValue = 23
OSCfg_TickWheel[] spoke number = 11
```

The “second task” will be inserted at the same table entry as shown in Figure 5-11. Tasks sharing the same spoke are sorted in ascending order such that the task with the least amount of time remaining is placed at the head of the list.

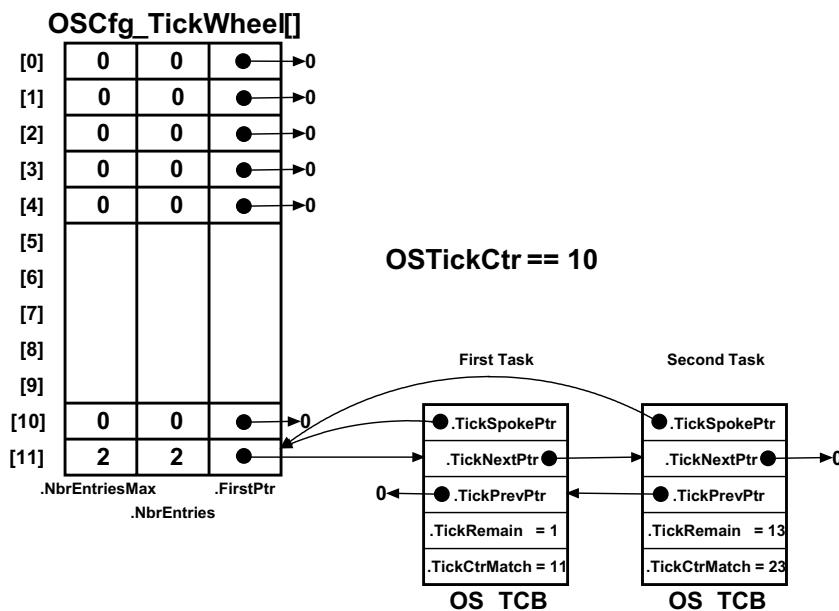


Figure 5-11 Inserting a second task in the tick list

When the tick task executes (see `OS_TickTask()` and also `OS_TickListUpdate()` in `os_tick.c`), it starts by incrementing `OSTickCtr` and determines which table entry (i.e., which spoke) needs to be processed. Then, if there are tasks in the list at this entry (i.e., `.FirstPtr` is not `NULL`), each `OS_TCB` is examined to determine whether the `.TickCtrMatch` value “matches” `OSTickCtr` and, if so, we remove the `OS_TCB` from the list. If the task is only waiting for time to expire, it will be placed in the ready list (described later). If the task is pending on an object, not only will the task be removed from the tick

list, but it will also be removed from the list of tasks waiting on that object. The search through the list terminates as soon as `OSTickCtr` does not match the task's `.TickCtrMatch` value; since there is no point in looking any further in the list.

Note that `OS_TickTask()` does most of its work in a critical section when the tick list is updated. However, because the list is sorted, the critical section has a chance to be fairly short.

5-6-3 THE STATISTIC TASK (`OS_StatTask()`, `os_stat.c`)

`μC/OS-III` contains an internal task that provides such run-time statistics as overall CPU utilization (0.00 to 100.00%), per-task CPU utilization (0.00 to 100.00%), and per-task stack usage. As of V3.03.00, CPU utilization is represented as a integer from 0 to 10,000 (0.00% to 100.00%). Prior to V3.03.00, CPU utilization was represented an integer ranging from 0 to 100.

The statistic task is optional in a `μC/OS-III` application and its presence is controlled by a compile-time configuration constant `OS_CFG_STAT_TASK_EN` defined in `os_cfg.h`. Specifically, the code is included in the build when `OS_CFG_STAT_TASK_EN` is set to 1.

Also, the priority of this task and the location and size of the statistic task's stack is configurable via `OS_CFG_STAT_TASK_PRIO` declared in `os_cfg_app.h`.

If the application uses the statistic task, it should call `OSStatTaskCPUUsageInit()` from the first, and only application task created in the `main()` function as shown in Listing 5-5. The startup code should create only one task before calling `OSStart()`. The single task created is, of course, allowed to create other tasks, but only after calling `OSStatTaskCPUUsageInit()`.

```

void main (void)                      (1)
{
    OS_ERR  err;
    :
    OSInit(&err);                  (2)
    if (err != OS_ERR_NONE) {
        /* Something wasn't configured properly, μC/OS-III not properly initialized */
    }
    /* (3) Create ONE task (we'll call it AppTaskStart() for sake of discussion)      */
    :
    OSStart(&err);                (4)
}

void AppTaskStart (void *p_arg)
{
    OS_ERR  err;
    :
    /* (5) Initialize the tick interrupt                                              */
#if OS_CFG_STAT_TASK_EN > 0
    OSStatTaskCPUUsageInit(&err);      (6)
#endif
    :
    /* (7) Create other tasks                                              */
    while (DEF_ON) {
        /* AppTaskStart() body                                              */
    }
}

```

Listing 5-5 Proper startup for computing CPU utilization

- L5-5(1) The C compiler should start up the CPU and bring it to `main()` as is typical in most C applications.
- L5-5(2) `main()` calls `OSInit()` to initialize μC/OS-III. It is assumed that the statistics task was enabled by setting `OS_CFG_STAT_TASK_EN` to 1 in `os_cfg.h`. You should always examine μC/OS-III's returned error code to make sure the call was done properly. Refer to `os.h` for a list of possible errors, `OS_ERR_???`.
- L5-5(3) As the comment indicates, you should create a single task called `AppTaskStart()` in the example (its name is left to the creator's discretion). When creating this task, give it a fairly high priority (do not use priority 0 since it's reserved for μC/OS-III).

Normally, μC/OS-III allows the user to create as many tasks as are necessary prior to calling `OSStart()`. However, when the statistic task is used to compute overall CPU utilization, it is necessary to create only one task.

- L5-5(4) You need to call `osstart()` to let μC/OS-III start the highest-priority task which, in our case is `AppTaskStart()`. At this point, there should be either four (4) to six (6) tasks created depending on configuration option: `OS_IdleTask()`, `OS_TickTask()`, `OS_StatTask()`, `OS_TmrTask()` (optional), `OS_IntQTask()` (optional) and now `AppTaskStart()`.
- L5-5(5) The start task should then configure and enable tick interrupts. This most likely requires that the user initialize the hardware timer used for the clock tick and have it interrupt at the rate specified by `OS_CFG_TICK_RATE_HZ` (see `os_cfg_app.h`). Additionally, Micrium provides sample projects that include a basic board-support package (BSP). The BSP initializes many aspects of the CPU as well as the periodic time source required by μC/OS-III. If available, the user may utilize BSP services by calling `BSP_Init()` from the startup task. After this point, no further time source initialization is required by the user.
- L5-5(6) `OSStatTaskCPUUsageInit()` is called to determine the maximum value that `OSStatTaskCtr` (see `OS_IdleTask()`) can count up to for $1/OS_CFG_STAT_TASK_RATE_HZ$ second when there are no other tasks running in the system (apart for the other μC/OS-III tasks). For example, if the system does not contain an application task and `OSStatTaskCtr` counts from 0 to 10,000,000 for $1/OS_CFG_STAT_TASK_RATE_HZ$ second, when adding tasks, and the test is redone every $1/OS_CFG_STAT_TASK_RATE_HZ$ second, the `OSStatTaskCtr` will not reach 10,000,000 and actual CPU utilization is determined as follows:

$$\text{CPU_Utilization\%} = \left(100 - \frac{100 \times \text{OSStatTaskCtr}}{\text{OSStatTaskCtrMax}} \right)$$

For example, if when redoing the test, `OSStatTaskCtr` reaches 7,500,000 the CPU is busy 25% of its time running application tasks:

$$25\% = \left(100 - \frac{100 \times 7,500,000}{10,000,000} \right)$$

L5-5(7) AppTaskStart() can then create other application tasks as needed.

As previously described, μC/OS-III stores run-time statistics for each task in each task's OS_TCB.

OS_StatTask() also computes stack usage of all created tasks by calling OSTaskStkChk() (see `os_task.c`) and stores the return values of this function (free and used stack space) in the `.StkFree` and `.StkUsed` field of the task's OS_TCB, respectively.

5-6-4 THE TIMER TASK (OS_TmrTask(), os_tmr.c)

μC/OS-III provides timer services to the application programmer and this code is found in `os_tmr.c`.

The timer task is optional in a μC/OS-III application and its presence is controlled by the compile-time configuration constant `OS_CFG_TMR_EN` defined in `os_cfg.h`. Specifically, the code is included in the build when `OS_CFG_TMR_EN` is set to 1.

Timers are countdown counters that perform an action when the counter reaches zero. The action is provided by the user through a callback function. A callback function is a function that the user declares and that will be called when the timer expires. The callback can thus be used to turn on or off a light, a motor, or perform whatever action needed. It is important to note that the callback function is called from the context of the timer task. The application programmer may create an unlimited number of timers (limited only by the amount of available RAM). Timer management is fully described in Chapter 12, "Timer Management" on page 213 and the timer services available to the application programmer are described in Appendix A, "μC/OS-III API Reference" on page 443.

`OS_TmrTask()` is a task created by μC/OS-III (this assumes setting `OS_CFG_TMR_EN` to 1 in `os_cfg.h`) and its priority is configurable by the user through μC/OS-III's configuration constant `OS_CFG_TMR_TASK_PRIO` found in `os_cfg_app.h`. `OS_TmrTask()` is typically set to a medium priority.

`OS_TmrTask()` is a periodic task using the same interrupt source that was used to generate clock ticks. However, timers are generally updated at a slower rate (i.e., typically 10 Hz). This is accomplished by dividing down the timer tick rate in software. In other words, if the tick rate is 1000 Hz and the desired timer rate is 10 Hz, the timer task will be signaled every 100th tick interrupt as shown in Figure 5-12.

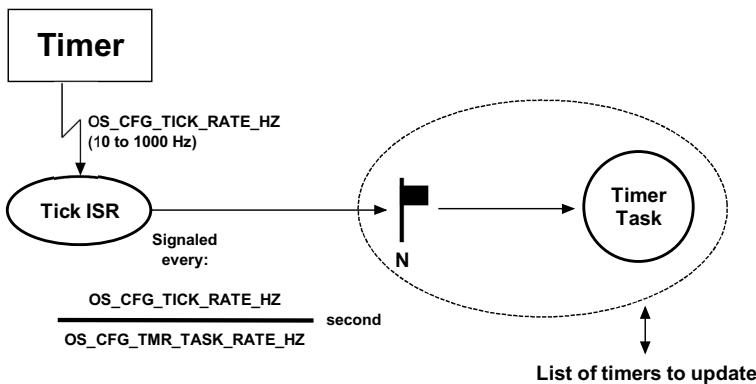


Figure 5-12 Tick ISR and Timer Task relationship

5-6-5 THE ISR HANDLER TASK (`OS_IntQTask()`, `os_int.c`)

When setting the compile-time configuration constant `OS_CFG_ISR_POST_DEFERRED_EN` in `os_cfg.h` to 1, μC/OS-III creates a task (called `OS_IntQTask()`) responsible for “deferring” the action of OS post service calls from ISRs.

As described in Chapter 4, “Critical Sections” on page 85, μC/OS-III manages critical sections either by disabling/enabling interrupts, or by locking/unlocking the scheduler. If selecting the latter method (i.e., setting `OS_CFG_ISR_POST_DEFERRED_EN` to 1), μC/OS-III “post” functions called from interrupts are not allowed to manipulate such internal data structures as the ready list, pend lists, and others.

When an ISR calls one of the “post” functions provided by μC/OS-III, a copy of the data posted and the desired destination is placed in a special “holding” queue. When all nested ISRs complete, μC/OS-III context switches to the ISR handler task (`OS_IntQTask()`), which “re-posts” the information placed in the holding queue to the appropriate task(s). This extra step is performed to reduce the amount of interrupt disable time that would otherwise be necessary to remove tasks from wait lists, insert them in the ready list, and perform other time-consuming operations.

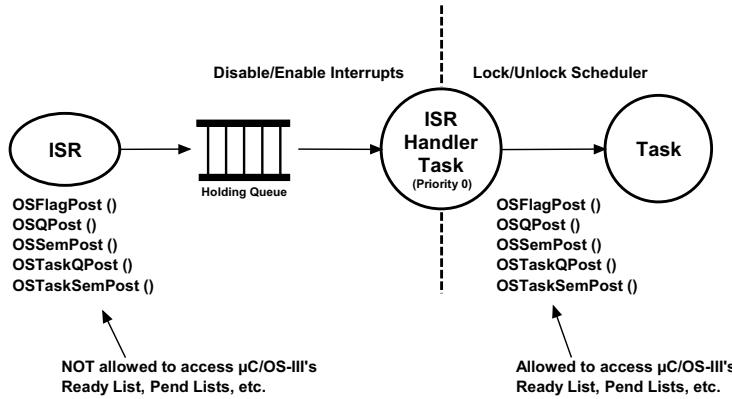


Figure 5-13 ISR Handler Task

`OS_IntQTask()` is created by μC/OS-III and always runs at priority 0 (i.e., the highest priority). If `OS_CFG_ISR_POST_DEFERRED_EN` is set to 1, no other task will be allowed to use priority 0.

5-7 SUMMARY

A task is a simple program that thinks it has the CPU all to itself. On a single CPU, only one task executes at any given time. μC/OS-III supports multitasking and allows the application to have any number of tasks. The maximum number of tasks is actually only limited by the amount of memory (both code and data space) available to the processor.

A task can be implemented as a run-to-completion task in which the task deletes itself when it is finished or more typically as an infinite loop, waiting for events to occur and processing those events.

A task needs to be created. When creating a task, it is necessary to specify the address of an `OS_TCB` to be used by the task, the priority of the task, an area in RAM for the task's stack and a few more parameters. A task can perform computations (CPU bound task), or manage one or more I/O (Input/Output) devices.

μC/OS-III creates up to five internal tasks: the idle task, the tick task, the ISR handler task, the statistics task, the ISR handler task and the timer task. The idle and tick tasks are always created while statistics, timer and the ISR handler tasks are optional.

Chapter 6

The Ready List

Tasks that are ready to execute are placed in the Ready List. The ready list consists of two parts: a bitmap containing the priority levels that are ready and a table containing pointers to all the tasks ready.

6-1 PRIORITY LEVELS

Figures 5-1 to 5-3 show the bitmap of priorities that are ready. The “width” of the table depends on the data type `CPU_DATA` (see `cpu.h`), which can either be 8-, 16- or 32-bits. The width depends on the processor used.

`μC/OS-III` allows up to `OS_CFG_PRIO_MAX` different priority levels (see `os_cfg.h`). In `μC/OS-III`, a low-priority number corresponds to a high-priority level. Priority level zero (0) is thus the highest priority level. Priority `OS_CFG_PRIO_MAX-1` is the lowest priority level. `μC/OS-III` uniquely assigns the lowest priority to the idle task and thus, no other tasks are allowed at this priority level. If there are tasks that are ready-to-run at a given a priority level, then its corresponding bit is set (i.e., 1) in the bitmap table. Notice in Figures 5-1 to 5-3 that “priority levels” are numbered from left to right and, the priority level increases (moves toward lower priority) with an increase in table index. The order was chosen to be able to use a special instruction called Count Leading Zeros (CLZ), which is found on many modern processors. This instruction greatly accelerates the process of determining the highest priority level.

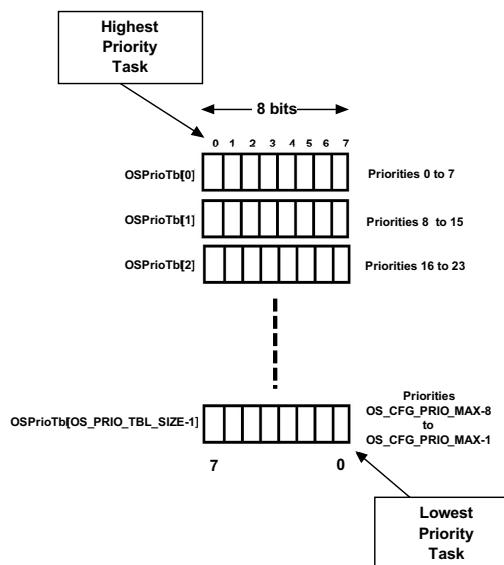
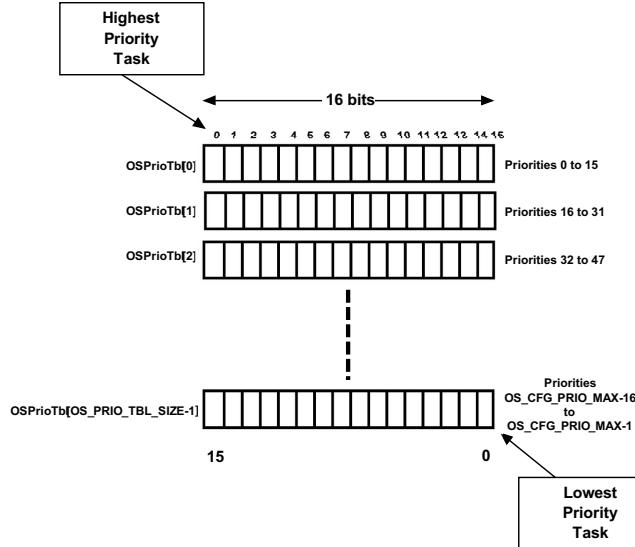
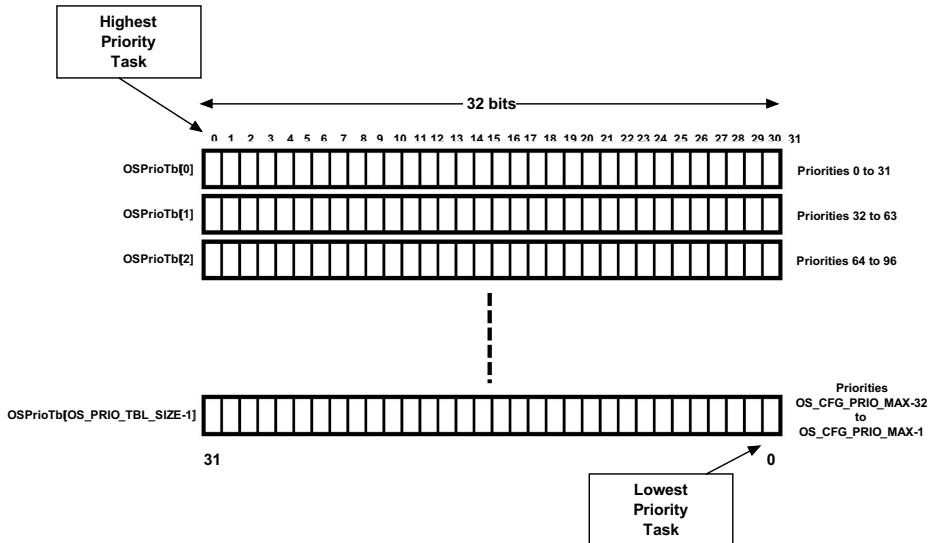


Figure 6-1 `CPU_DATA` declared as a `CPU_INT08U`

Figure 6-2 **CPU_DATA** declared as a **CPU_INT16U**Figure 6-3 **CPU_DATA** declared as a **CPU_INT32U**

Chapter 6

`os_prio.c` contains the code to set, clear, and search the bitmap table. These functions are internal to µC/OS-III and are placed in `os_prio.c` to allow them to be optimized in assembly language by replacing `os_prio.c` with an assembly language equivalent `OS_PRIO.ASM`, if necessary.

Function	Description
<code>OS_PrioGetHighest()</code>	Find the highest priority level
<code>OS_PrioInsert()</code>	Set bit corresponding to priority level in the bitmap table
<code>OS_PrioRemove()</code>	Clear bit corresponding to priority level in the bitmap table

Table 6-1 Priority Level access functions

To determine the highest priority level that contains ready-to-run tasks, the bitmap table is scanned until the first bit set in the lowest bit position is found using `OS_PrioGetHighest()`. The code for this function is shown in Listing 6-1.

```
OS_PRIO OS_PrioGetHighest (void)
{
    CPU_DATA *p_tbl;
    OS_PRIO    prio;

    prio = (OS_PRIO)0;
    p_tbl = &OSPrioTbl[0];
    while (*p_tbl == (CPU_DATA)0) {           (1)
        prio += DEF_INT_CPU_NBR_BITS;         (2)
        p_tbl++;
    }
    prio += (OS_PRIO)CPU_CntLeadZeros(*p_tbl); (3)
    return (prio);
}
```

Listing 6-1 Finding the highest priority level

- L6-1(1) `OS_PrioGetHighest()` scans the table from `OSPrioTbl[0]` until a non-zero entry is found. The loop will always terminate because there will always be a non-zero entry in the table because of the idle task.

- L6-1(2) Each time a zero entry is found, we move to the next table entry and increment “**prio**” by the width (in number of bits) of each entry. If each entry is 32-bits wide, “**prio**” is incremented by 32.
- L6-1(3) Once the first non-zero entry is found, the number of “**leading zeros**” of that entry is simply added and we return the priority level back to the caller. Counting the number of zeros is a CPU-specific function so that if a particular CPU has a built-in CLZ instruction, it is up to the implementer of the CPU port to take advantage of this feature. If the CPU used does not provide that instruction, the functionality must be implemented in C.

The function **CPU_CntLeadzeros()** simply counts how many zeros there are in a **CPU_DATA** entry starting from the left (i.e., most significant bit). For example, assuming 32 bits, **0xF0001234** results in 0 leading zeros and **0x00F01234** results in 8 leading zeros.

At first view, the linear path through the table might seem inefficient. However, if the number of priority levels is kept low, the search is quite fast. In fact, there are several optimizations to streamline the search. For example, if using a 32-bit processor and you are satisfied with limiting the number of different priority levels to 64, the above code can be optimized as shown in Listing 6-2. In fact, some processors have built-in “Count Leading Zeros” instructions and thus, the code can even be written with just a few lines of assembly language instead of C. Remember that with μC/OS-III, 64 priority levels does not mean that the user is limited to 64 tasks since with μC/OS-III, any number of tasks are possible at a given priority level (except 0 and **OS_CFG_PRIO_MAX-1**).

```
OS_PRIO OS_PrioGetHighest (void)
{
    OS_PRIO prio;

    if (OSPriorTbl[0] != (OS_PRIO_BITMAP)0) {
        prio = OS_CntLeadzeros(OSPriorTbl[0]);
    } else {
        prio = OS_CntLeadzeros(OSPriorTbl[1]) + 32;
    }
    return (prio);
}
```

Listing 6-2 Finding the highest priority level within 64 levels

6-2 THE READY LIST

Tasks that are ready-to-run are placed in the Ready List. As shown in Figure 6-4, the ready list is an array (`OSRdyList[]`) containing `OS_CFG_PRIO_MAX` entries, with each entry defined by the data type `OS_RDY_LIST` (see `os.h`). An `OS_RDY_LIST` entry consists of three fields: `.Entries`, `.TailPtr` and `.HeadPtr`.

`.Entries` contains the number of ready-to-run tasks at the priority level corresponding to the entry in the ready list. `.Entries` is set to zero (0) if there are no tasks ready-to-run at a given priority level.

`.TailPtr` and `.HeadPtr` are used to create a doubly linked list of all the tasks that are ready at a specific priority. `.HeadPtr` points to the head of the list and `.TailPtr` points to its tail.

The “index” into the array is the priority level associated with a task. For example, if a task is created at priority level 5 then it will be inserted in the table at `OSRdyList[5]` if that task is ready-to-run.

Table 6-2 shows the functions that µC/OS-III uses to manipulate entries in the ready list. These functions are found in `os_core.c` and are internal to µC/OS-III so, the application code must never call them.

Function	Description
<code>OS_RdyListInit()</code>	Initialize the ready list to “empty” (see Figure 6-4)
<code>OS_RdyListInsert()</code>	Insert a TCB into the ready list
<code>OS_RdyListInsertHead()</code>	Insert a TCB at the head of the list
<code>OS_RdyListInsertTail()</code>	Insert a TCB at the tail of the list
<code>OS_RdyListMoveHeadToTail()</code>	Move a TCB from the head to the tail of the list
<code>OS_RdyListRemove()</code>	Remove a TCB from the ready list

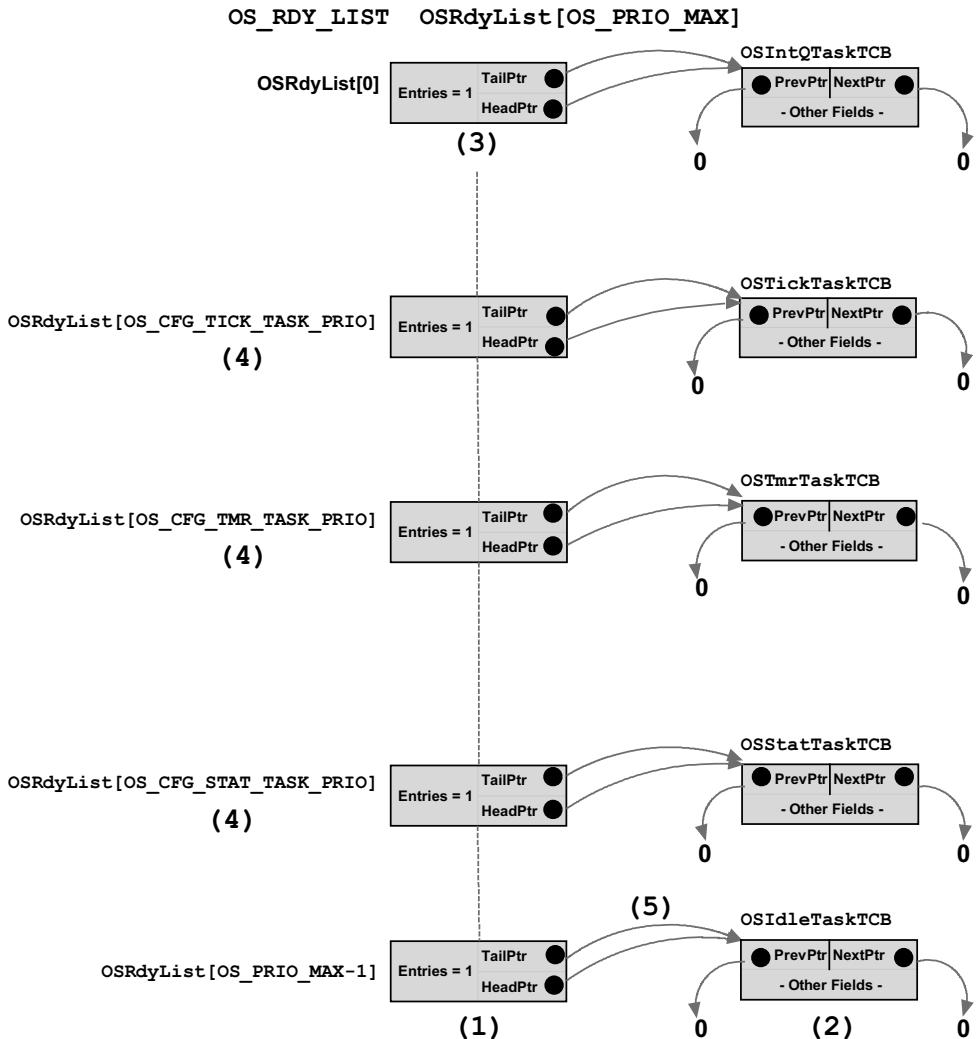
Table 6-2 Ready List access functions



Figure 6-4 Empty Ready List

Assuming all internal μC/OS-III's tasks are enabled, Figure 6-5 shows the state of the ready list after calling `OSInit()` (i.e., μC/OS-III's initialization). It is assumed that each μC/OS-III task had a unique priority. With μC/OS-III, this does not have to be the case.

- F6-4(1) There is only one entry in `OSRdyList[OS_CFG_PRIO_MAX-1]`, the idle task.
- F6-4(2) The list points to OS_TCBs. Only relevant fields of the TCB are shown. The `.PrevPtr` and `.NextPtr` are used to form a doubly linked list of `OS_TCBs` associated to tasks at the same priority. For the idle task, these fields always point to `NULL`.
- F6-4(3) Priority 0 is reserved to the ISR handler task when `OS_CFG_ISR_DEFERRED_EN` is set to 1 in `os_cfg.h`. In this case, this is the only task that can run at priority 0.

Figure 6-5 Ready List after calling `OSInit()`

- F6-5(1) The tick task and the other three optional tasks have their own priority level, as shown. Typically, you would set the priority of the tick task higher than the timer task and, the timer task higher in priority than the statistic task.
- F6-5(2) Both the tail and head pointers point to the same TCB when there is only one TCB at a given priority level.

6-3 ADDING TASKS TO THE READY LIST

Tasks are added to the ready list by a number of µC/OS-III services. The most obvious service is `OSTaskCreate()`, which always creates a task in the ready-to-run state and adds the task to the ready list. As shown in Figure 6-6, we created a task, and specified a priority level where tasks already existed (two in this example) in the ready list at the desired priority level. `OSTaskCreate()` will then insert the new task at the end of the list of tasks at that priority level.

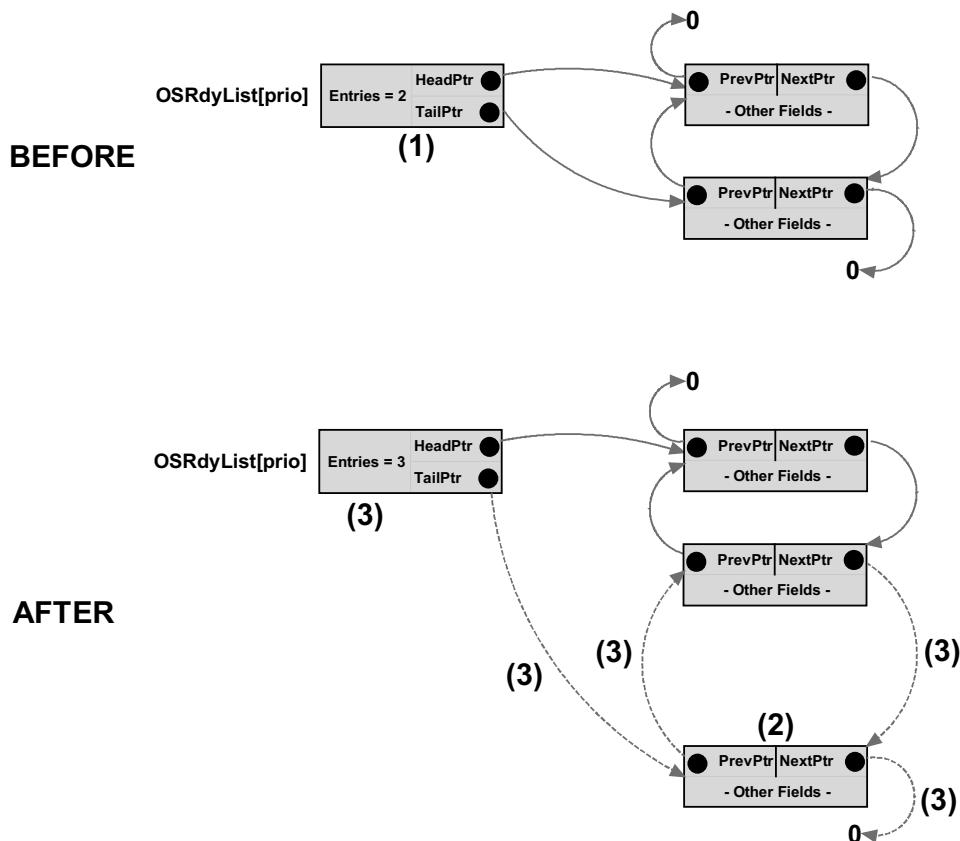


Figure 6-6 Inserting a newly created task in the ready list

- F6-6(1) Before calling `OSTaskCreate()` (in this example), two tasks were in the ready list at priority “`prio`”.
- F6-6(2) A new TCB is passed to `OSTaskCreate()` and, µC/OS-III initialized the contents of that TCB.

- F6-6(3) `OSTaskCreate()` calls `OS_RdyListInsertTail()`, which links the new TCB to the ready list by setting up four pointers and also incrementing the `.Entries` field of `OSRdyList[prio]`. Not shown in Figure 6-6 is that `OSTaskCreate()` also calls `OS_PrioInsert()` to set the bit in the bitmap table. Of course, this operation is not necessary as there are already entries in the list at this priority. However, `OS_PrioInsert()` is a very fast call and thus it should not affect performance.

The reason the new TCB is added to the end of the list is that the current head of the list could be the task creator and it could be at the same priority. So, there is no reason to make the new task the next task to run. In fact, a task being made ready will be inserted at the tail of the list if the current task is at the same priority. However, if a task is being made ready at a different priority than the current task, it will be inserted at the head of the list.

6-4 SUMMARY

μ C/OS-III supports any number of different priority levels. However, 256 different priority levels should be sufficient for the most complex applications and most systems will not require more than 64 levels.

The ready list consist of two data structures: a bitmap table that keeps track of which priority level is ready, and a table containing a list of all the tasks ready at each priority level.

Processors having “count leading zeros” instructions can accelerate the table lookup process used in determining the highest priority task.

Chapter 7

Scheduling

The scheduler, also called the dispatcher, is a part of µC/OS-III responsible for determining which task runs next. µC/OS-III is a *preemptive, priority-based kernel*. As we have seen, each task is assigned a priority based on its importance. The priority for each task depends on the application, and µC/OS-III supports multiple tasks at the same priority level.

The word preemptive means that when an event occurs, and that event makes a more important task ready-to-run, then µC/OS-III will immediately give control of the CPU to that task. Thus, when a task signals or sends a message to a higher-priority task, the current task is suspended and the higher-priority task is given control of the CPU. Similarly, if an Interrupt Service Routine (ISR) signals or sends a message to a higher priority task, when the message has been sent, the interrupted task remains suspended, and the new higher priority task resumes.

7-1 PREEMPTIVE SCHEDULING

μ C/OS-III handles event posting from interrupts using two different methods: Direct and Deferred Post. These will be discussed in greater detail in Chapter 9, “Interrupt Management” on page 175. From a scheduling point of view, the end result of the two methods is the same; the highest priority ready task will receive the CPU as shown in Figures 6-1 and 6-2.

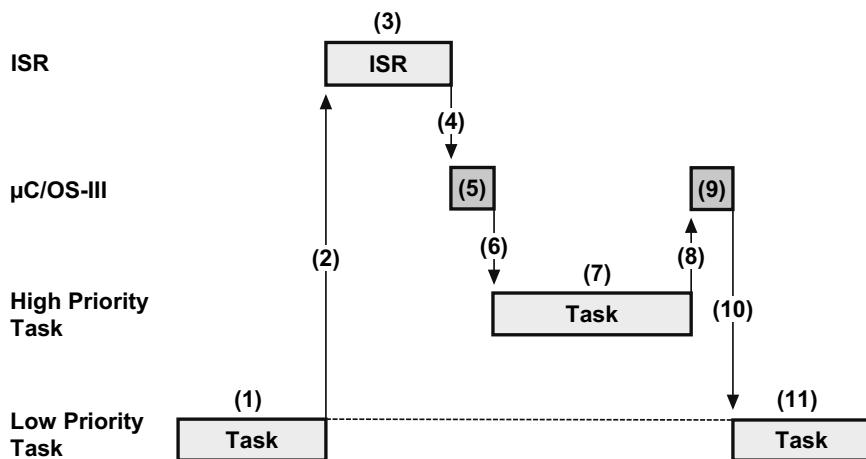


Figure 7-1 Preemptive scheduling – Direct Method

- F7-1(1) A low priority task is executing, and an interrupt occurs.
- F7-1(2) If interrupts are enabled, the CPU vectors (i.e., jumps) to the ISR that is responsible for servicing the interrupting device.
- F7-1(3) The ISR services the device and signals or sends a message to a higher-priority task waiting to service this device. This task is thus ready-to-run.
- F7-1(4) When the ISR completes its work it makes a service call to μ C/OS-III.
- F7-1(5)
- F7-1(6) Since there is a more important ready-to-run task, μ C/OS-III decides to not return to the interrupted task but switches to the more important task. See Chapter 8, “Context Switching” on page 165 for details on how this works.

F7-1(7)

F7-1(8) The higher priority task services the interrupting device and, when finished, calls µC/OS-III asking it to wait for another interrupt from the device.

F7-1(9)

F7-1(10) µC/OS-III blocks the high-priority task until the next time the device needs servicing. Since the device has not interrupted a second time, µC/OS-III switches back to the original task (the one that was interrupted).

F7-1(11) The interrupted task resumes execution, exactly at the point where it was interrupted.

Figure 7-2 shows that µC/OS-III performs a few extra steps when it is configured for the Deferred Post method. Notice that the end results is the same; the high-priority task preempts the low-priority one.

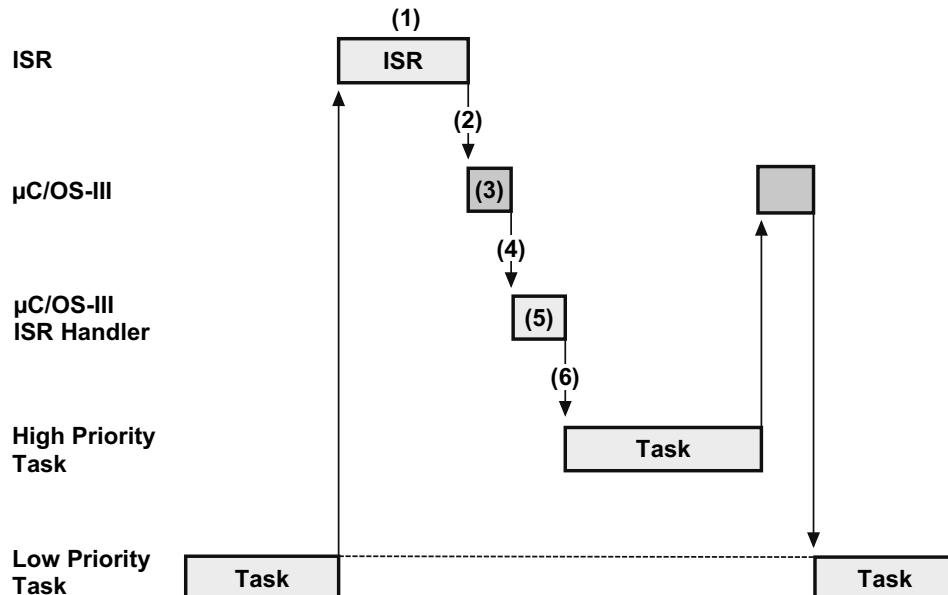


Figure 7-2 Preemptive scheduling – Deferred Post Method

-
- F7-2(1) The ISR services the device and, instead of signaling or sending the message to the task, µC/OS-III (through the POST call) places the post call into a special queue and makes a very high-priority task (actually the highest-possible priority) ready-to-run. This task is called the *ISR Handler Task*.
 - F7-2(2) When the ISR completes its work, it makes a service call to µC/OS-III.
 - F7-2(3)
 - F7-2(4) Since the ISR made the ISR Handler Task ready-to-run, µC/OS-III switches to that task.
 - F7-2(5)
 - F7-2(6) The ISR Handler Task then removes the post call from the message queue and reissues the post. This time, however, it does it at the task level instead of the ISR level. The reason this extra step is performed is to keep interrupt disable time as small as possible. See Chapter 9, “Interrupt Management” on page 175 to find out more on the subject. When the queue is emptied, µC/OS-III removes the ISR Handler Task from the ready list and switches to the task that was signaled or sent a message.

7-2 SCHEDULING POINTS

Scheduling occurs at scheduling points and nothing special must be done in the application code since scheduling occurs automatically based on the conditions described below.

A task signals or sends a message to another task:

This occurs when the task signaling or sending the message calls one of the post services, `OS???Post()`. Scheduling occurs towards the end of the `OS???Post()` call. Note that scheduling does not occur if one specifies (as part of the post call) to not invoke the scheduler (i.e., by setting the option argument to `OS_OPT_POST_NO_SCHED`).

A task calls `OSTimeDly()` or `OSTimeDlyHMSM()`:

If the delay is non-zero, scheduling always occurs since the calling task is placed in a list waiting for time to expire. Scheduling occurs as soon as the task is inserted in the wait list and this call will always result in a context switch to the next task that is ready-to-run at the same or lower priority than the task that called `OSTimeDly()` or `OSTimeDlyHMSM()`.

A task waits for an event to occur and the event has not yet occurred:

This occurs when one of the `OS???Pend()` functions are called. The task is placed in the wait list for the event and, if a non-zero timeout is specified, the task is also inserted in the list of tasks waiting to timeout. The scheduler is then called to select the next most important task to run.

If a task aborts a pend:

A task is able to abort the wait (i.e., pend) of another task by calling `OS???PendAbort()`. Scheduling occurs when the task is removed from the wait list for the specified kernel object.

If a task is created:

The newly created task may have a higher priority than the task's creator. In this case, the scheduler is called.

If a task is deleted:

When terminating a task, the scheduler is called if the current task is deleted.

If a kernel object is deleted:

If you delete an event flag group, a semaphore, a message queue, or a mutual exclusion semaphore, if tasks are waiting on the kernel object, those tasks will be made ready-to-run and the scheduler will be called to determine if any of the tasks have a higher priority than the task that deleted the kernel object. Those tasks will be notified that the kernel object was deleted.

A task changes the priority of itself or another task:

The scheduler is called when a task changes the priority of another task (or itself) and the new priority of that task is higher than the task that changed the priority.

A task suspends itself by calling `OSTaskSuspend()`:

The scheduler is called since the task that called `OSTaskSuspend()` is no longer able to execute. The suspended task must be resumed by another task.

A task resumes another task that was suspended by `OSTaskSuspend()`:

The scheduler is called if the resumed task has a higher priority than the task that calls `OSTaskResume()`.

At the end of all nested ISRs:

The scheduler is called at the end of all nested ISRs to determine whether a more important task is made ready-to-run by one of the ISRs. The scheduling is actually performed by `OSIntExit()` instead of `OSSched()`.

The scheduler is unlocked by calling `OSSchedUnlock()`:

The scheduler is unlocked after being locked. You can lock the scheduler by calling `OSSchedLock()`. Note that locking the scheduler can be nested and the scheduler must be unlocked a number of times equal to the number of locks.

A task gives up its time quanta by calling `OSSchedRoundRobinYield()`:

This assumes that the task is running alongside with other tasks at the same priority and the currently running task decides that it can give up its time quanta and let another task run.

The user calls `OSSched()`:

The application code can call `OSSched()` to run the scheduler. This only makes sense if calling `OS???Post()` functions and specifying `OS_OPT_POST_NO_SCHED` so that multiple posts can be accomplished without running the scheduler on every post. However, in the above situation, the last post can be a post without the `OS_OPT_POST_NO_SCHED` option.

7-3 ROUND-ROBIN SCHEDULING

When two or more tasks have the same priority, μC/OS-III allows one task to run for a predetermined amount of time (called a *Time Quanta*) before selecting another task. This process is called *Round-Robin Scheduling* or *Time Slicing*. If a task does not need to use its full time quanta it can voluntarily give up the CPU so that the next task can execute. This is called *Yielding*. μC/OS-III allows the user to enable or disable round robin scheduling at run time.

Figure 7-3 shows a timing diagram with tasks running at the same priority. There are three tasks that are ready-to-run at priority “X”. For sake of illustration, the time quanta occurs every 4th clock tick. This is shown as a darker tick mark.

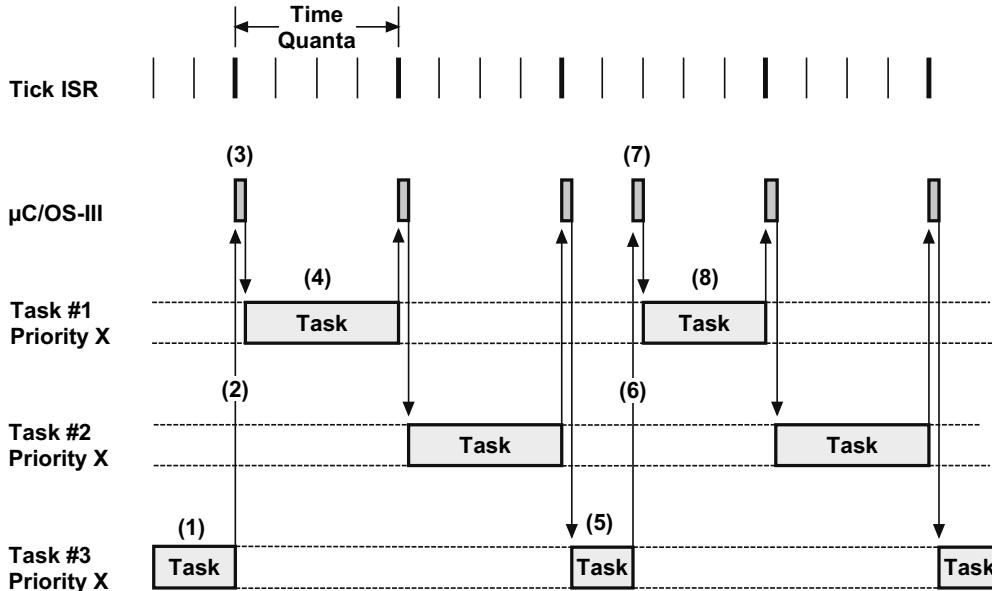


Figure 7-3 Round Robin Scheduling

- F7-3(1) Task #3 is executing. During that time, a tick interrupt occurs but the time quanta have not expired yet for Task #3.
- F7-3(2) On the 4th tick interrupt, the time quanta for Task #3 expire.
- F7-3(3) μC/OS-III resumes Task #1 since it was the next task in the list of tasks at priority “X” that was ready-to-run.
- F7-3(4) Task #1 executes until its time quanta expires (i.e., after four ticks).
- F7-3(5)
- F7-3(6)
- F7-3(7) Here Task #3 executes but decides to give up its time quanta by calling the μC/OS-III function `OSSchedRoundRobinYield()`, which causes the next task in the list of tasks ready at priority “X” to execute. An interesting thing occurred when μC/OS-III scheduled Task #1. It reset the time quanta for that task to four ticks so that the next time quanta will expire four ticks from this point.
- F7-3(8) Task #1 executes for its full time quanta.

μ C/OS-III allows the user to change the default time quanta at run time through the `OSSchedRoundRobinCfg()` function (see Appendix A, “ μ C/OS-III API Reference” on page 443). This function also allows round robin scheduling to be enabled/disabled, and the ability to change the default time quanta.

μ C/OS-III also enables the user to specify the time quanta on a per-task basis. One task could have a time quanta of 1 tick, another 12, another 3, and yet another 7, etc. The time quanta of a task is specified when the task is created. The time quanta of a task may also be changed at run time through the function `OSTaskTimeQuantaSet()`.

7-4 SCHEDULING INTERNALS

Scheduling is performed by two functions: `OSSched()` and `OSIntExit()`. `OSSched()` is called by task level code while `OSIntExit()` is called by ISRs. Both functions are found in `os_core.c`.

Figure 7-1 illustrates the two sets of data structures that the scheduler uses; the priority ready bitmap and the ready list as described in Chapter 6, “The Ready List” on page 141.

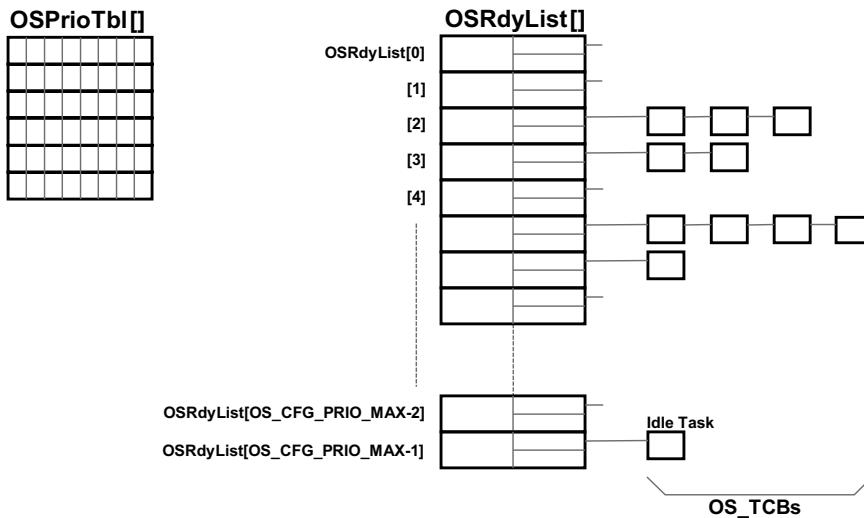


Figure 7-4 Priority ready bitmap and Ready list

7-4-1 OSSched()

The pseudo code for the task level scheduler, `OSSched()` (see `os_core.c`) is shown in Listing 7-1.

```
void OSSched (void)
{
    Disable interrupts;
    if (OSIntNestingCtr > 0) {                                (1)
        return;
    }
    if (OSSchedLockNestingCtr > 0) {                            (2)
        return;
    }
    Get highest priority ready;                                 (3)
    Get pointer to OS_TCB of next highest priority task;      (4)
    if (OSTCBNHighRdyPtr != OSTCBCurPtr) {                      (5)
        Perform task level context switch;
    }
    Enable interrupts;
}
```

Listing 7-1 **OSSched()** pseudocode

- L7-1(1) `OSSched()` starts by making sure it is not called from an ISR as `OSSched()` is the task level scheduler. Instead, an ISR must call `OSIntExit()`. If `OSSched()` is called by an ISR, `OSSched()` simply returns.
- L7-1(2) The next step is to make sure the scheduler is not locked. If your code called `OSSchedLock()` then the user does not want to run the scheduler and `OSSchedLock()` just returns.
- L7-1(3) `OSSched()` determines the priority of the highest priority task ready by scanning the bitmap `OSPriorTbl[]` as described in Chapter 6, “The Ready List” on page 141.
- L7-1(4) Once it is known which priority is ready, the priority is used as an index into the `OSRdyList[]` and we extract the `OS_TCB` at the head of the list (i.e., `OSRdyList[highest priority].HeadPtr`). At this point, we know which

`OS_TCB` to switch to and which `OS_TCB` to save to as this was the task that called `OSSched()`. Specifically, `OSTCBCurPtr` points to the current task's `OS_TCB` and `OSTCBHighRdyPtr` points to the new `OS_TCB` to switch to.

- L7-1(5) If the user is not attempting to switch to the same task that is currently running, `OSSched()` calls the code that will perform the context switch (see Chapter 8, “Context Switching” on page 165). As the code indicates, however, the task level scheduler calls a task-level function to perform the context switch.

Notice that the scheduler and the context switch runs with interrupts disabled. This is necessary because this process needs to be atomic.

7-4-2 OSIntExit()

The pseudo code for the ISR level scheduler, `OSIntExit()` (see `os_core.c`) is shown in Listing 7-2. Note that interrupts are assumed to be disabled when `OSIntExit()` is called.

```
void OSIntExit (void)
{
    if (OSIntNestingCtr == 0) {                                (1)
        return;
    }
    OSIntNestingCtr--;
    if (OSIntNestingCtr > 0) {                                (2)
        return;
    }
    if (OSSchedLockNestingCtr > 0) {                          (3)
        return;
    }
    Get highest priority ready;                                (4)
    Get pointer to OS_TCB of next highest priority task;      (5)
    if (OSTCBHighRdyPtr != OSTCBCurPtr) {                      (6)
        Perform ISR level context switch;
    }
}
```

Listing 7-2 `OSIntExit()` pseudocode

- L7-2(1) `OSIntExit()` starts by making sure that the call to `OSIntExit()` will not cause `OSIntNestingCtr` to wrap around. This would be an unlikely occurrence, but not worth verifying that it's not.

-
- L7-2(2) `OSIntExit()` decrements the nesting counter as `OSIntExit()` is called at the end of an ISR. If all ISRs have not nested, the code simply returns. There is no need to run the scheduler since there are still interrupts to return to.
- L7-2(3) `OSIntExit()` checks to see that the scheduler is not locked. If it is, `OSIntExit()` does not run the scheduler and simply returns to the interrupted task that locked the scheduler.
- L7-2(4) Finally, this is the last nested ISR (we are returning to task-level code) and the scheduler is not locked. Therefore, we need to find the highest priority task that needs to run.
- L7-2(5) Again, we extract the highest priority `OS_TCB` from `OSRdyList[]`.
- L7-2(6) If the highest-priority task is not the current task, μC/OS-III performs an ISR level context switch. The ISR level context switch is different as it is assumed that the interrupted task's context was saved at the beginning of the ISR and we only need to restore the context of the new task to run. This is described in Chapter 8, “Context Switching” on page 165.

7-4-3 OS_SchedRoundRobin()

When the time quanta for a task expires and there are multiple tasks at the same priority, μC/OS-III will select and run the next task that is ready-to-run at the current priority. `OS_SchedRoundRobin()` is the code used to perform this operation. `OS_SchedRoundRobin()` is either called by `OSTimeTick()` or `OS_IntQTask()`. `OS_SchedRoundRobin()` is found in `os_core.c`.

`OS_SchedRoundRobin()` is called by `OSTimeTick()` if you selected the Direct Method of posting (see Chapter 9, “Interrupt Management” on page 175). `OS_SchedRoundRobin()` is called by `OS_IntQTask()` if you selected the Deferred Post Method of posting, described in Chapter 8.

The pseudo code for the round-robin scheduler is shown in Listing 7-3.

```

void OS_SchedRoundRobin (void)
{
    if (OSSchedRoundRobinEn != TRUE) {                                (1)
        return;
    }
    if (Time quanta counter > 0) {                                     (2)
        Decrement time quanta counter;
    }
    if (Time quanta counter > 0) {
        return;
    }
    if (Number of OS_TCB at current priority level < 2) {          (3)
        return;
    }
    if (OSSchedLockNestingCtr > 0) {                                 (4)
        return;
    }
    Move OS_TCB from head of list to tail of list;                  (5)
    Reload time quanta for current task;                            (6)
}

```

Listing 7-3 **OS_SchedRoundRobin()** pseudocode

- L7-3(1) **OS_SchedRoundRobin()** starts by making sure that round robin scheduling is enabled. Recall that to enable round robin scheduling, your code must call **OSSchedRoundRobinCfg()**.
- L7-3(2) The time quanta counter, which resides inside the **OS_TCB** of the running task, is decremented. If the value is still non-zero then **OS_SchedRoundRobin()** returns.
- L7-3(3) Once the time quanta counter reaches zero, **OS_SchedRoundRobin()** checks to see that there are other ready-to-run tasks at the current priority. If there are none, the function returns. Round robin scheduling only applies when there are multiple tasks at the same priority and the task doesn't complete its work within its time quanta.
- L7-3(4) **OS_SchedRoundRobin()** also returns if the scheduler is locked.
- L7-3(5) Next, **OS_SchedRoundRobin()** moves the **OS_TCB** of the current task from the head of the ready list to the end.

- L7-3(6) The time quanta for the task at the head of the list is loaded. Each task may specify its own time quanta when the task is created or through `OSTaskTimeQuantaSet()`. If you set the task time quanta to 0 then µC/OS-III assumes the default time quanta, which corresponds to the value in the variable `OSSchedRoundRobinDfltTimeQuanta`.

7

7-5 SUMMARY

µC/OS-III is a preemptive scheduler so it will always execute the highest priority task that is ready-to-run.

µC/OS-III allows for multiple tasks at the same priority. If there are multiple ready-to-run tasks, µC/OS-III will round robin between these tasks.

Scheduling occurs at specific scheduling points when the application calls µC/OS-III functions.

µC/OS-III has two schedulers: `oSSched()`, which is called by task-level code, and `OSIntExit()` called at the end of each ISR.

Chapter 8

Context Switching

When μC/OS-III decides to run a different task (see Chapter 7, “Scheduling” on page 151), it saves the current task’s context, which typically consists of the CPU registers, onto the current task’s stack and restores the context of the new task and resumes execution of that task. This process is called a *Context Switch*.

Context switching adds overhead. The more registers a CPU has, the higher the overhead. The time required to perform a context switch is generally determined by how many registers must be saved and restored by the CPU.

The context switch code is generally part of a processor’s *port* of μC/OS-III. A port is the code needed to adapt μC/OS-III to the desired processor. This code is placed in special C and assembly language files: `os_cpu.h`, `os_cpu_c.c` and `os_cpu_a.asm`. Chapter 18, “Porting μC/OS-III” on page 355, Porting μC/OS-III provides more details on the steps needed to port μC/OS-III to different CPU architectures.

In this chapter, we will discuss the context switching process in generic terms using a fictitious CPU as shown in Figure 8-1. Our fictitious CPU contains 16 integer registers (R0 to R15), a separate ISR stack pointer, and a separate status register (SR). Every register is 32 bits wide and each of the 16 integer registers can hold either data or an address. The program counter (or instruction pointer) is R15 and there are two separate stack pointers labeled R14 and R14’. R14 represents a task stack pointer (TSP), and R14’ represents an ISR stack pointer (ISP). The CPU automatically switches to the ISR stack when servicing an exception or interrupt. The task stack is accessible from an ISR (i.e., we can push and pop elements onto the task stack when in an ISR), and the interrupt stack is also accessible from a task.

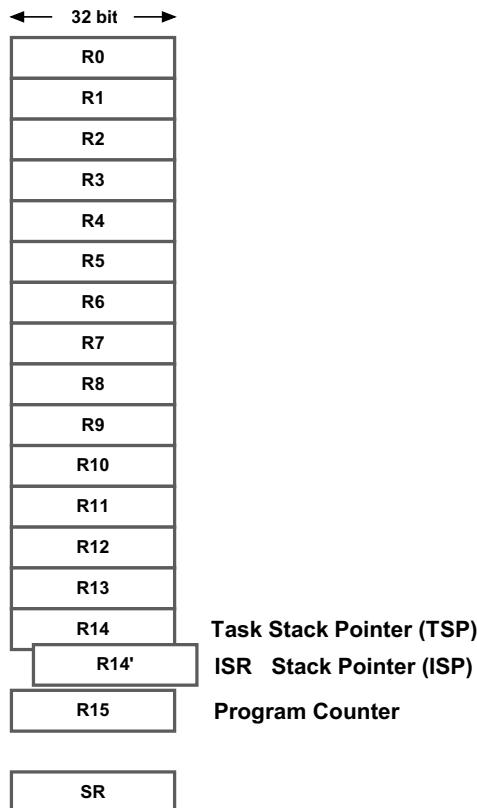


Figure 8-1 Fictitious CPU

In μC/OS-III, the stack frame for a ready task is always setup to look as if an interrupt has just occurred and all processor registers were saved onto it. Tasks enter the ready state upon creation and thus their stack frames are pre-initialized by software in a similar manner. Using our fictitious CPU, we'll assume that a stack frame for a task that is ready to be restored is shown in Figure 8-2.

The task stack pointer points to the last register saved onto the task's stack. The program counter (PC or R15) and status register (SR) are the first registers saved onto the stack. In fact, these are saved automatically by the CPU when an exception or interrupt occurs (assuming interrupts are enabled) while the other registers are pushed onto the stack by software in the exception handler. The stack pointer (SP or R14) is not actually saved on the stack but instead is saved in the task's OS_TCB.

The interrupt stack pointer points to the current top-of-stack for the interrupt stack, which is a different memory area. When an ISR executes, the processor uses R14' as the stack pointer for function calls and local arguments.

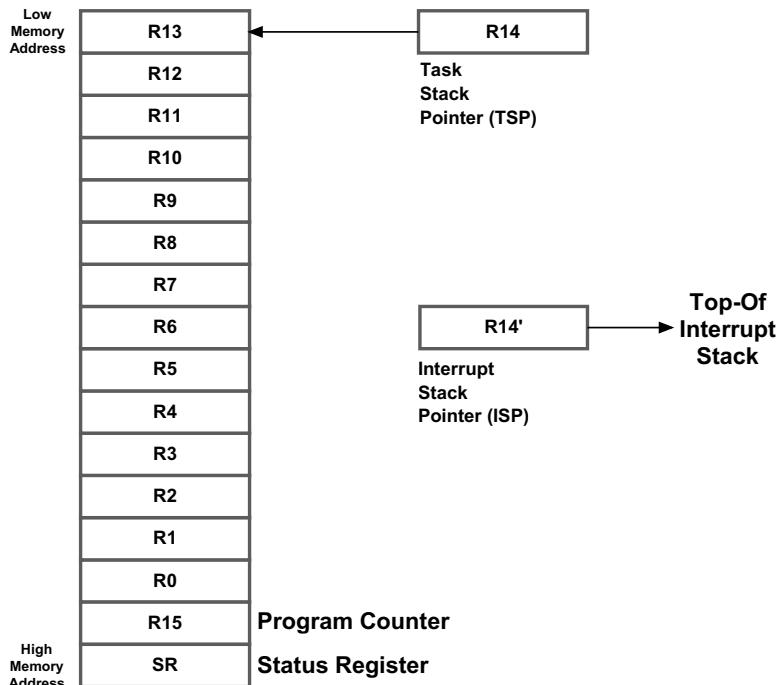


Figure 8-2 CPU register stacking order of ready task

There are two types of context switches: one performed from a task and another from an ISR. The task level context switch is implemented by the code in `OSCtxSw()`, which is actually invoked by the macro `OS_TASK_SW()`. A macro is used as there are many ways to invoke `OSCtxSw()` such as software interrupts, trap instructions, or simply calling the function.

The ISR context switch is implemented by `OSIntCtxSw()`. The code for both functions is typically written in assembly language and is found in a file called `os_cpu_a.asm`.

8-1 OSCtxSw()

`OSCtxSw()` (see `os_cpu_a.asm`) is called when the task level scheduler (`OSSched()`) determines that a new high priority task needs to execute. Figure 8-3 shows the state of several μC/OS-III variables and data structures just prior to calling `OSCtxSw()`.

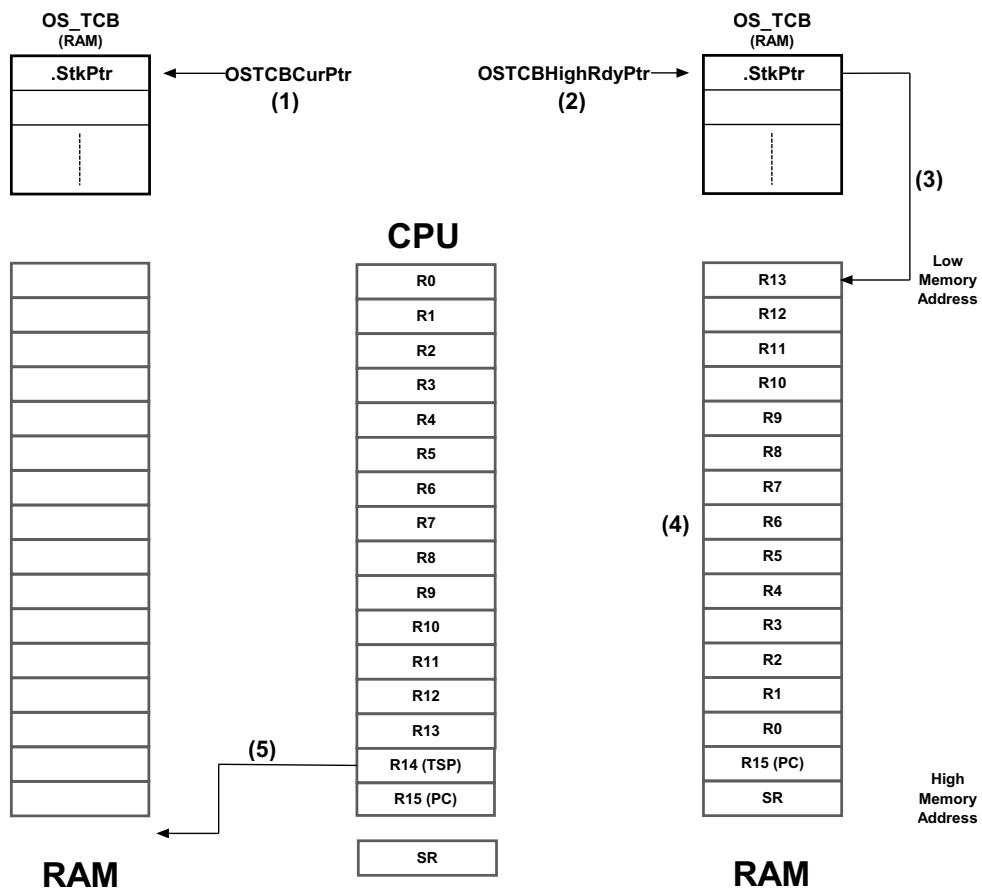


Figure 8-3 Variables and data structures prior to calling `OSCtxSw()`

- F8-3(1) `OSTCBCurPtr` points to the `OS_TCB` of the task that is currently running and that called `OSSched()`.
- F8-3(2) `OSSched()` finds the new task to run by having `OSTCBHighRdyPtr` point to its `OS_TCB`.

- F8-3(3) OSTCBHighRdyPtr->StkPtr points to the top of stack of the new task to run.
- F8-3(4) When µC/OS-III creates or suspends a task, it always leaves the stack frame to look as if an interrupt just occurred and all the registers saved onto it. This represents the expected state of the task so it can be resumed.
- F8-3(5) The CPU's stack pointer points within the stack area (i.e., RAM) of the task that called `OSSched()`. Depending on how `OSCtxSw()` is invoked, the stack pointer may be pointing at the return address of `OSCtxSw()`.

Figure 8-4 shows the steps involved in performing the context switch as implemented by `OSCtxSw()`.

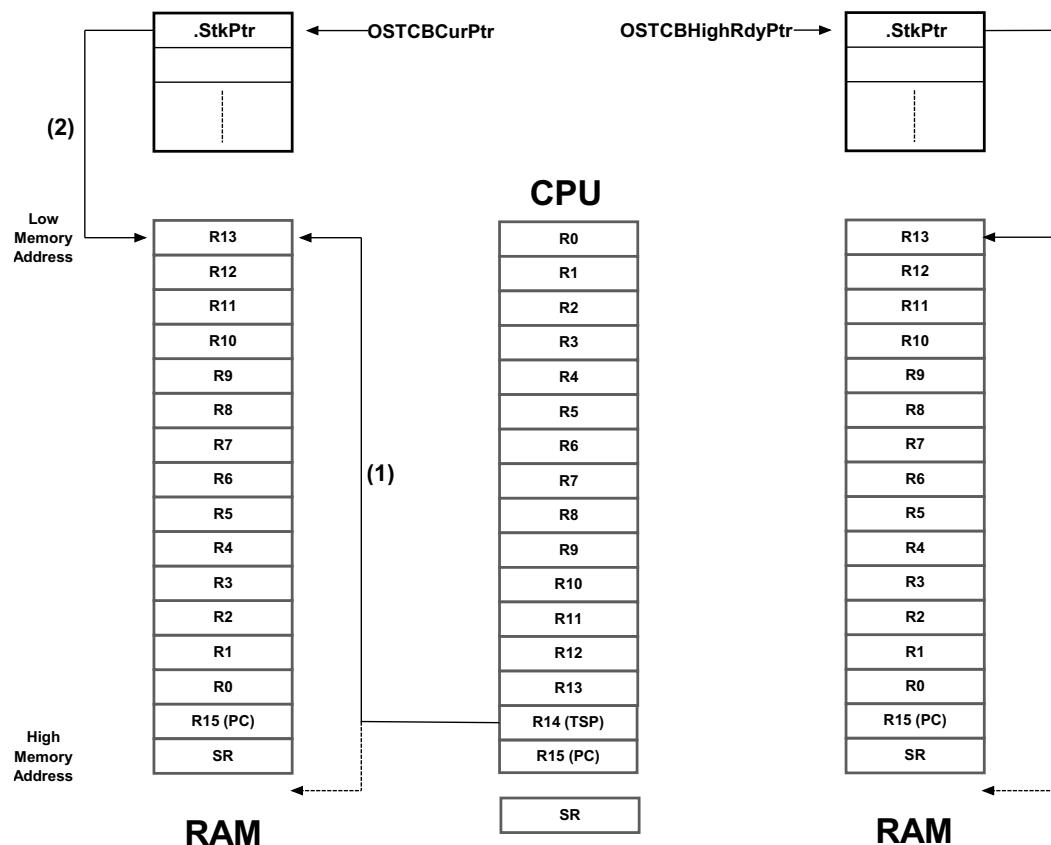
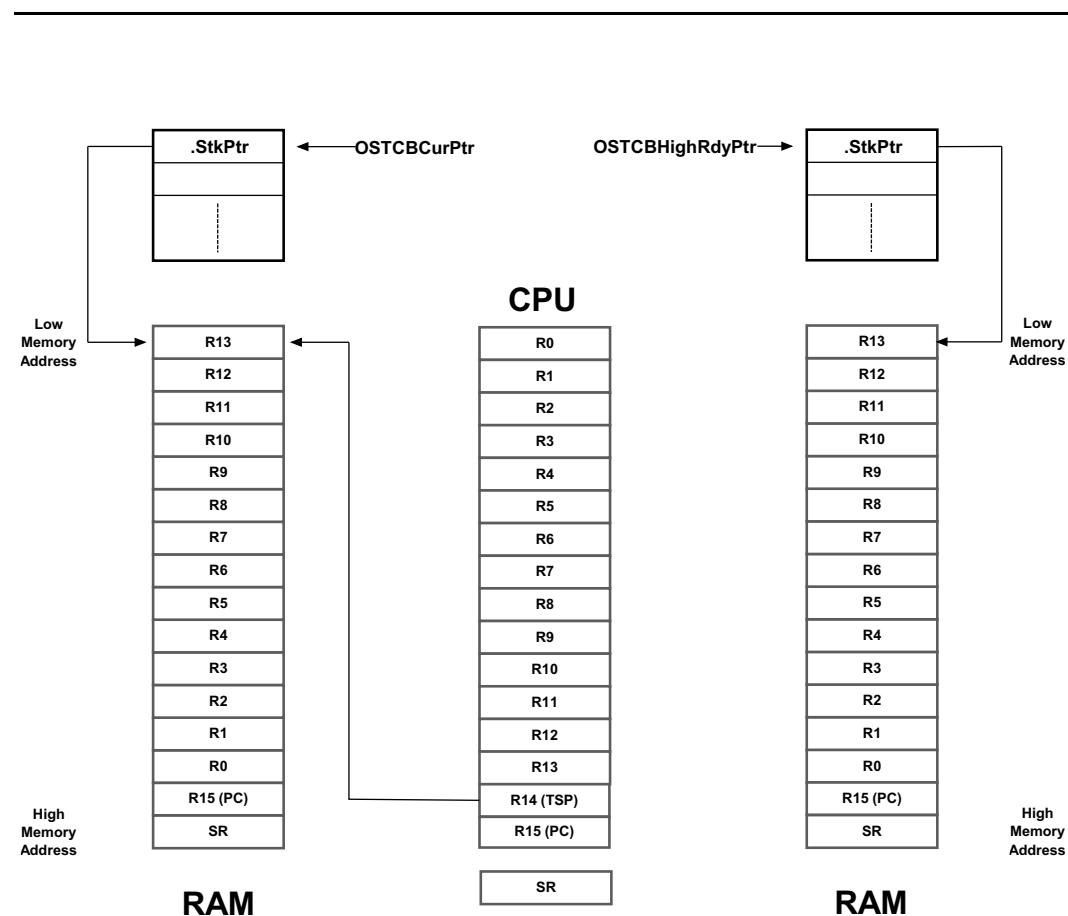


Figure 8-4 Operations performed by `OSCtxSw()`

- F8-4(1) `OSCtxSw()` begins by saving the status register and program counter of the current task onto the current task's stack. The saving order of register depends on how the CPU expects the registers on the stack frame when an interrupt occurs. In this case, it is assumed that the SR is stacked first. The remaining registers are then saved onto the stack.
- F8-4(2) `OSCtxSw()` saves the contents of the CPU's stack pointer into the `OS_TCB` of the task being context switched out. In other words, `OSTCBCurPtr->StkPtr = R14`.
- F8-4(3) `OSCtxSw()` then loads the CPU stack pointer with the saved top-of-stack from the new task's `OS_TCB`. In other words, `R14 = OSTCBHighRdyPtr->StkPtr`.
- F8-4(4) Finally, `OSCtxSw()` retrieves the CPU register contents from the new stack. The program counter and status registers are generally retrieved at the same time by executing a return from interrupt instruction.


8-2 OSIntCtxSw()

`OSIntCtxSw()` (see `os_cpu_a.asm`) is called when the ISR level scheduler (`OSIntExit()`) determines that a new high priority task is ready to execute. Figure 8-5 shows the state of several μC/OS-III variables and data structures just prior to calling `OSIntCtxSw()`.

Figure 8-5 Variables and data structures prior to calling **OSIntCtxSw()**

μ C/OS-III assumes that CPU registers are saved onto the task's stack at the beginning of an ISR (see Chapter 9, “Interrupt Management” on page 175). Because of this, notice that **OSTCBCurPtr->StkPtr** contains a pointer to the top-of-stack pointer of the task being suspended (the one on the left). **OSIntCtxSw()** does not have to worry about saving the CPU registers of the suspended task since that has already been done.

Figure 8-6 shows the operations performed by **OSIntCtxSw()** to complete the second half of the context switch. This is exactly the same process as the second half of **OSCtxSw()**.

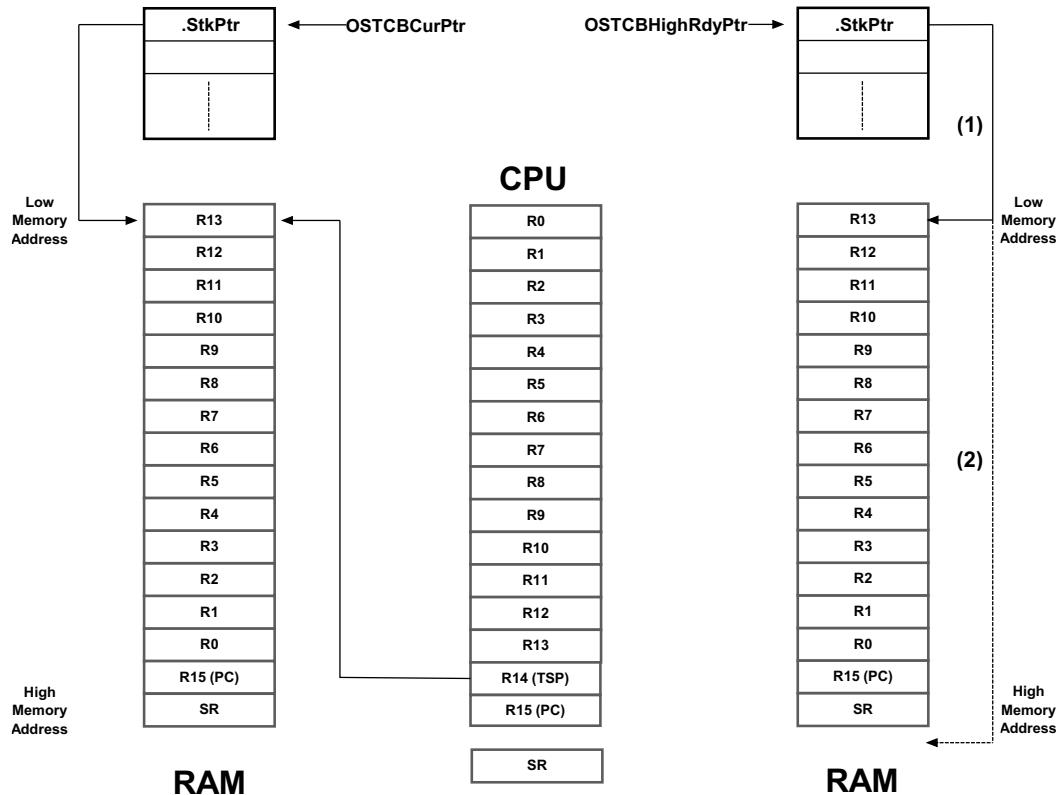Figure 8-6 Operations performed by `OSIntCtxSw()`

- F8-6(1) `OSIntCtxSw()` loads the CPU stack pointer with the saved top-of-stack from the new task's `OS_TCB`. $R14 = OSTCBBHighRdyPtr \rightarrow \text{StkPtr}$.
- F8-6(2) `OSIntCtxSw()` then retrieves the CPU register contents from the new stack. The program counter and status registers are generally retrieved at the same time by executing a return from interrupt instruction.

8-3 SUMMARY

A context switch consists of saving the context (i.e., CPU registers) associated with one task and restoring the context of a new, higher-priority task.

The new task to be switched to is determined by `OSSched()` when a context switch is initiated by task level code, and `OSIntExit()` when initiated by an ISR.

`OSCtxSw()` performs the context switch for `OSSched()` and `OSIntCtxSw()` performs the context switch for `OSIntExit()`. However, `OSIntCtxSw()` only needs to perform the second half of the context switch because it is assumed that the ISR saved CPU registers upon entry to the ISR.

Chapter 9

Interrupt Management

An *interrupt* is a hardware mechanism used to inform the CPU that an asynchronous event occurred. When an interrupt is recognized, the CPU saves part (or all) of its context (i.e., registers) and jumps to a special subroutine called an *Interrupt Service Routine* (ISR). The ISR processes the event, and – upon completion of the ISR – the program either returns to the interrupted task, or the highest priority task, if the ISR made a higher priority task ready-to-run.

Interrupts allow a microprocessor to process events when they occur (i.e., asynchronously), which prevents the microprocessor from continuously *polling* (looking at) an event to see if it occurred. Task level response to events is typically better using interrupt mode as opposed to polling mode. Microprocessors allow interrupts to be ignored or recognized through the use of two special instructions: disable interrupts and enable interrupts, respectively.

In a real-time environment, interrupts should be disabled as little as possible. Disabling interrupts affects interrupt latency possibly causing interrupts to be missed.

Processors generally allow interrupts to be nested, which means that while servicing an interrupt, the processor recognizes and services other (more important) interrupts.

One of the most important specifications of a real-time kernel is the maximum amount of time that interrupts are disabled. This is called *interrupt disable time*. All real-time systems disable interrupts to manipulate critical sections of code and re-enable interrupts when critical sections are completed. The longer interrupts are disabled, the higher the interrupt latency.

Interrupt response is defined as the time between the reception of the interrupt and the start of the user code that handles the interrupt. Interrupt response time accounts for the entire overhead involved in handling an interrupt. Typically, the processor's context (CPU registers) is saved on the stack before the user code is executed.

Interrupt recovery is defined as the time required for the processor to return to the interrupted code or to a higher priority task if the ISR made such a task ready-to-run.

Task latency is defined as the time it takes from the time the interrupt occurs to the time task level code resumes.

9-1 HANDLING CPU INTERRUPTS

There are many popular CPU architectures on the market today, and most processors typically handle interrupts from a multitude of sources. For example, a UART receives a character, an Ethernet controller receives a packet, a DMA controller completes a data transfer, an Analog-to-Digital Converter (ADC) completes an analog conversion, a timer expires, *etc.*

In most cases, an *interrupt controller* captures all of the different interrupts presented to the processor as shown in Figure 9-1 (note that the “CPU Interrupt Enable/Disable” is typically part of the CPU, but is shown here separately for sake of the illustration).

Interrupting devices signal the interrupt controller, which then prioritizes the interrupts and presents the highest-priority interrupt to the CPU.

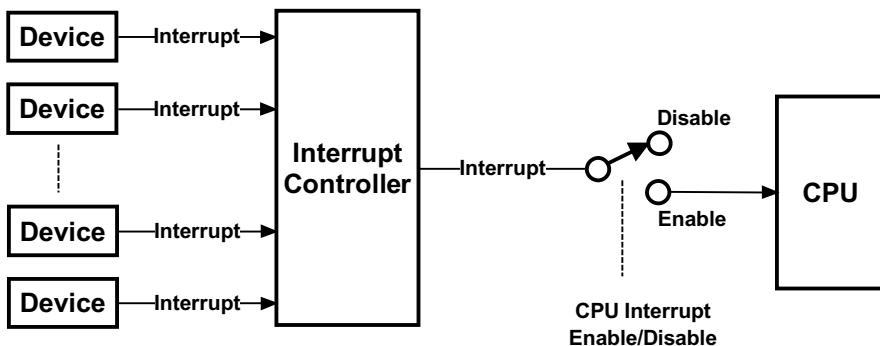


Figure 9-1 Interrupt controllers

Modern interrupt controllers have built-in intelligence that enable the user to prioritize interrupts, remember which interrupts are still pending and, in many cases, have the interrupt controller provide the address of the ISR (also called the vector address) directly to the CPU.

If “global” interrupts (i.e., the switch in Figure 9-1) are disabled, the CPU will ignore requests from the interrupt controller, but they will be held pending by the interrupt controller until the CPU re-enables interrupts.

CPUs deal with interrupts using one of two models:

- 1 All interrupts *vector* to a single interrupt handler.
- 2 Each interrupt *vectors* directly to an interrupt handler.

Before discussing these two methods, it is important to understand how μC/OS-III handles CPU interrupts.

9-2 TYPICAL μC/OS-III INTERRUPT SERVICE ROUTINE (ISR)

μC/OS-III requires that an interrupt service routine be written in assembly language. However, if a C compiler supports in-line assembly language, the ISR code can be placed directly into a C source file. The pseudo-code for a typical ISR when using μC/OS-III is shown in Listing 9-1.

```

MyISR:                                (1)
    Disable all interrupts;           (2)
    Save the CPU registers;         (3)
    OSIntNestingCtr++;             (4)
    if (OSIntNestingCtr == 1) {      (5)
        OSTCBCurPtr->StkPtr = Current task's CPU stack pointer register value;
    }
    Clear interrupting device;       (6)
    Re-enable interrupts (optional); (7)
    Call user ISR;                 (8)
    OSIntExit();                   (9)
    Restore the CPU registers;     (10)
    Return from interrupt;         (11)

```

Listing 9-1 ISRs under μC/OS-III (assembly language)

L9-1(1) As mentioned above, an ISR is typically written in assembly language. `MyISR` corresponds to the name of the handler that will handle the interrupting device.

L9-1(2) It is important that all interrupts are disabled before going any further. Some processors have interrupts disabled whenever an interrupt handler starts. Others require the user to explicitly disable interrupts as shown here. This step may be tricky if a processor supports different interrupt priority levels. However, there is always a way to solve the problem.

L9-1(3) The first thing the interrupt handler must do is save the context of the CPU onto the interrupted task's stack. On some processors, this occurs automatically. However, on most processors it is important to know how to save the CPU registers onto the task's stack. You should save the full "context" of the CPU, which may also include Floating-Point Unit (FPU) registers if the CPU used is equipped with an FPU.

Certain CPUs also automatically switch to a special stack just to process interrupts (i.e., an interrupt stack). This is generally beneficial as it avoids using up valuable task stack space. However, for µC/OS-III, the context of the interrupted task needs to be saved onto that task's stack.

If the processor does not have a dedicated stack pointer to handle ISRs then it is possible to implement one in software. Specifically, upon entering the ISR, simply save the current task stack, switch to a dedicated ISR stack, and when done with the ISR switch back to the task stack. Of course, this means that there is additional code to write, however the benefits are enormous since it is not necessary to allocate extra space on the task stacks to accommodate for worst case interrupt stack usage including interrupt nesting.

L9-1(4) Next, either call `OSIntEnter()`, or simply increment the variable `OSIntNestingCtr` in assembly language. This is generally quite easy to do and is more efficient than calling `OSIntEnter()`. As its name implies, `OSIntNestingCtr` keeps track of the interrupt nesting level.

L9-1(5) If this is the first nested interrupt, you need to save the current value of the stack pointer of the interrupted task into its `OS_TCB`. The global pointer `OSTCBCurPtr` conveniently points to the interrupted task's `OS_TCB`. The very

first field in `OS_TCB` is where the stack pointer needs to be saved. In other words, `OSTCBCurPtr->StkPtr` happens to be at offset 0 in the `OS_TCB` (this greatly simplifies assembly language).

- L9-1(6) At this point, you need to clear the interrupting device so that it does not generate the same another interrupt. However, most people defer the clearing of the source and prefer to perform the action within the user ISR handler in “C.”
- L9-1(7) At this point, it is safe to re-enable interrupts you want to support nested interrupts. This step is optional.
- L9-1(8) At this point, further processing can be deferred to a C function called from assembly language. This is especially useful if there is a large amount of processing to do in the ISR handler. However, as a general rule, keep the ISRs as short as possible. In fact, it is best to simply signal or send a message to a task and let the task handle the details of servicing the interrupting device.

The ISR must call one of the following functions: `OSSemPost()`, `OSTaskSemPost()`, `OSFlagPost()`, `OSQPost()` or `OSTaskQPost()`. This is necessary since the ISR will notify a task, which will service the interrupting device. These are the only functions able to be called from an ISR and they are used to signal or send a message to a task. However, if the ISR does not need to call one of these functions, consider writing the ISR as a “Non Kernel-Aware Interrupt Service Routine,” as described in the next section.

- L9-1(9) When the ISR completes, you must call `OSIntExit()` to tell μC/OS-III that the ISR has completed. `OSIntExit()` simply decrements `OSIntNestingCtr` and, if `OSIntNestingCtr` reaches 0, this indicates that the ISR is about to return to task-level code (instead of a previously interrupted ISR). μC/OS-III will need to determine whether there is a higher priority task that needs to run because of one of the nested ISRs. In other words, the ISR might have signaled or sent a message to a higher- priority task waiting for this signal or message. In this case, μC/OS-III will context switch to this higher priority task instead of returning to the interrupted task. In this latter case, `OSIntExit()` does not actually return, but takes a different path.

- L9-1(10) If the ISR signaled or sent a message to a lower-priority task than the interrupted task, `OSIntExit()` returns. This means that the interrupted task is still the highest-priority task to run and it is important to restore the previously saved registers.
- L9-1(11) The ISR performs a return from interrupts and so resumes the interrupted task.

NOTE: From this point on, (1) to (6) will be referred to as the *ISR Prologue* and (9) to (11) as the *ISR Epilogue*.

9-3 NON KERNEL-AWARE INTERRUPT SERVICE ROUTINE (ISR)

The above sequence assumes that the ISR signals or sends a message to a task. However, in many cases, the ISR may not need to notify a task and can simply perform all of its work within the ISR (assuming it can be done quickly). In this case, the ISR will appear as shown in Listing 9-2.

```
MyShortISR:                                (1)
    Save enough registers as needed by the ISR;      (2)
    Clear interrupting device;                      (3)
    DO NOT re-enable interrupts;                  (4)
    Call user ISR;                            (5)
    Restore the saved CPU registers;            (6)
    Return from interrupt;                     (7)
```

Listing 9-2 Non-Kernel Aware ISRs with μC/OS-III

- L9-2(1) As mentioned above, an ISR is typically written in assembly language. `MyShortISR` corresponds to the name of the handler that will handle the interrupting device.
- L9-2(2) Here, you save sufficient registers as required to handle the ISR.
- L9-2(3) The user probably needs to clear the interrupting device to prevent it from generating the same interrupt once the ISR returns.

- L9-2(4) Do not re-enable interrupts at this point since another interrupt could make μC/OS-III calls, forcing a context switch to a higher-priority task. This means that the above ISR would complete, but at a much later time.
- L9-2(5) Now you can take care of the interrupting device in assembly language or call a C function, if necessary.
- L9-2(6) Once finished, simply restore the saved CPU registers.
- L9-2(7) Perform a return from interrupt to resume the interrupted task.

9-4 PROCESSORS WITH MULTIPLE INTERRUPT PRIORITIES

There are some processors that actually supports multiple interrupt levels as shown in Figure 9-2.

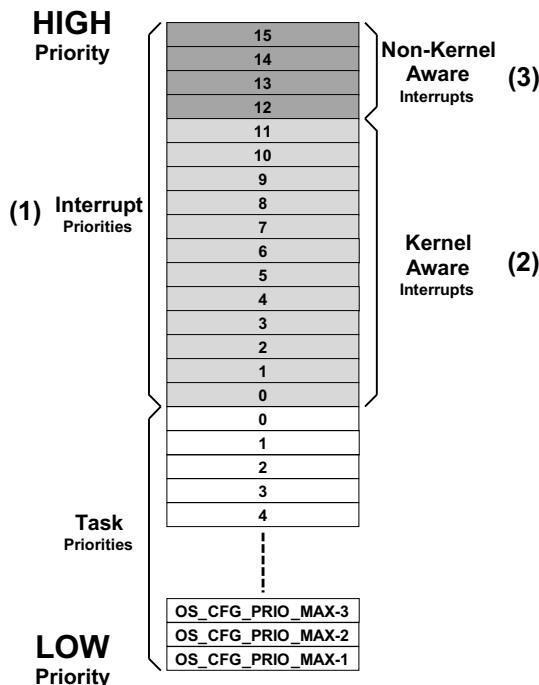


Figure 9-2 Kernel Aware and Non-Kernel Aware Interrupts

Chapter 9

- F9-2(1) Here, we are assuming that the processor supports 16 different interrupt priority levels. Priority 0 is the lowest priority while 15 is the highest. As shown, interrupts are always higher in priority than tasks (assuming interrupts are enabled).
- F9-2(2) The designer of the product decided that interrupt levels 0 through 12 will be allowed to make µC/OS-III ‘post’ calls to notify tasks that are assigned to service these interrupts. It’s important to note that disabling interrupts (when entering critical sections) for task aware interrupts means raising the interrupt mask to level 12. In other words, interrupt levels 0 through 11 would be disabled but, levels 12 and above would be allowed.
- F9-2(3) Interrupt levels 12 through 15 will **not** be allowed to make any µC/OS-III function calls and are thus implemented as shown in Listing 9-2. It’s important to note that since µC/OS-III cannot disable these interrupts, interrupt latency for these interrupts is very short.

Listing 9-3 shows how to implement non-kernel aware ISRs when the processor supports multiple interrupt priorities.

```
MyNonKernelAwareISR:
    Save enough registers as needed by the ISR; (1)
    Clear interrupting device; (2)
    Call user ISR; (3)
    Restore the saved CPU registers; (4)
    Return from interrupt; (5)
```

Listing 9-3 Non-Kernel Aware ISRs for Processors with Multiple Priority Levels

- L9-3(1) As mentioned above, an ISR is typically written in assembly language. **MyNonKernelAwareISR** corresponds to the name of the handler that will handle the interrupting device.
- L9-3(2) Here, you save sufficient registers as required to handle the ISR.
- L9-3(3) The user probably needs to clear the interrupting device to prevent it from generating the same interrupt once the ISR returns.

- L9-3(4) Now you can take care of the interrupting device in assembly language or call a C function, if necessary.
- L9-3(5) Once finished, simply restore the saved CPU registers.
- L9-3(6) Perform a return from interrupt to resume the interrupted task.

9-5 ALL INTERRUPTS VECTOR TO A COMMON LOCATION

Even though an interrupt controller is present in most designs, some CPUs still vector to a common interrupt handler, and the ISR queries the interrupt controller to determine the source of the interrupt. At first glance, this might seem silly since most interrupt controllers are able to force the CPU to jump directly to the proper interrupt handler. It turns out, however, that for μC/OS-III, it is easier to have the interrupt controller vector to a single ISR handler than to vector to a unique ISR handler for each source. Listing 9-4 describes the sequence of events to be performed when the interrupt controller forces the CPU to vector to a single location.

```

An interrupt occurs;                                (1)
The CPU vectors to a common location;              (2)
The ISR code performs the "ISR prologue"          (3)
The C handler performs the following:               (4)
    while (there are still interrupts to process) {
        Get vector address from interrupt controller;
        Call interrupt handler;
    }
The "ISR epilogue" is executed;                   (6)

```

Listing 9-4 Single interrupt vector for all interrupts

- L9-4(1) An interrupt occurs from any device. The interrupt controller activates the interrupt pin on the CPU. If there are other interrupts that occur after the first one, the interrupt controller will latch them and properly prioritize the interrupts.
- L9-4(2) The CPU vectors to a single interrupt handler address. In other words, all interrupts are to be handled by this one interrupt handler.

-
- L9-4(3) The ISR executes the “ISR prologue” code needed by µC/OS-III. as previously described. This ensures that all ISRs will be able to make µC/OS-III “post” calls.
 - L9-4(4) You call a µC/OS-III C handler, which will continue processing the ISR. This makes the code easier to write (and read). Notice that interrupts are not re-enabled.
 - L9-4(5) The µC/OS-III C handler then interrogates the interrupt controller and asks it: “Who caused the interrupt?” The interrupt controller will either respond with a number (0 to N-1) or with the address of the interrupt handler for the highest priority interrupting device. Of course, the µC/OS-III C handler will know how to handle the specific interrupt controller since the C handler is written specifically for that controller.

If the interrupt controller provides a number between 0 and N-1, the C handler simply uses this number as an index into a table (in ROM or RAM) containing the address of the interrupt service routine associated with the interrupting device. A RAM table is handy to change interrupt handlers at run-time. For many embedded systems, however, the table may also reside in ROM.

If the interrupt controller responds with the address of the interrupt service routine, the C handler only needs to call this function.

In both of the above cases, all interrupt handlers need to be declared as follows:

```
void MyISRHandler (void);
```

There is one such handler for each possible interrupt source (obviously, each having a unique name).

The “**while**” loop terminates when there are no other interrupting devices to service.

- L9-4(6) The µC/OS-III “ISR epilogue” is executed to see if it is necessary to return to the interrupted task, or switch to a more important one.

A couple of interesting points to note:

- If another device caused an interrupt before the C handler had a chance to query the interrupt controller, most likely the interrupt controller will capture that interrupt. In fact, if that second device happens to be a higher-priority interrupting device, it will most likely be serviced first, as the interrupt controller will prioritize the interrupts.
- The loop will not terminate until all pending interrupts are serviced. This is similar to allowing nested interrupts, but better, since it is not necessary to redo the ISR prologue and epilogue.

The disadvantage of this method is that a high priority interrupt that occurs after the servicing of another interrupt that has already started must wait for that interrupt to complete before it will be serviced. So, the latency of any interrupt, regardless of priority, can be as long as it takes to process the longest interrupt.

9-6 EVERY INTERRUPT VECTORS TO A UNIQUE LOCATION

If the interrupt controller vectors directly to the appropriate interrupt handler, each of the ISRs must be written in assembly language as described in section 9-2 “Typical µC/OS-III Interrupt Service Routine (ISR)” on page 177. This, of course, slightly complicates the design. However, you can copy and paste the majority of the code from one handler to the other and just change what is specific to the actual device.

If the interrupt controller allows the user to query it for the source of the interrupt, it may be possible to simulate the mode in which all interrupts vector to the same location by simply setting all vectors to point to the same location. Most interrupt controllers that vector to a unique location, however, do not allow users to query it for the source of the interrupt since, by definition, having a unique vector for all interrupting devices should not be necessary.

9-7 DIRECT AND DEFERRED POST METHODS

μ C/OS-III handles event posting from interrupts using two different methods: Direct and Deferred Post. The method used in the application is selected by changing the value of `OS_CFG_ISR_POST_DEFERRED_EN` in `os_cfg.h`. When set to 0, μ C/OS-III uses the Direct Post Method and when set to 1, μ C/OS-III uses the Deferred Post Method.

As far as application code and ISRs are concerned, these two methods are completely transparent. It is not necessary to change anything except the configuration value `OS_CFG_ISR_POST_DEFERRED_EN` to switch between the two methods. Of course, changing the configuration constant will require recompiling the product and μ C/OS-III.

Before explaining why to use one versus the other, let us review their differences.

9-7-1 DIRECT POST METHOD

The Direct Post Method is used by μ C/OS-II and is replicated in μ C/OS-III. Figure 9-3 shows a task diagram of what takes place in a Direct Post.

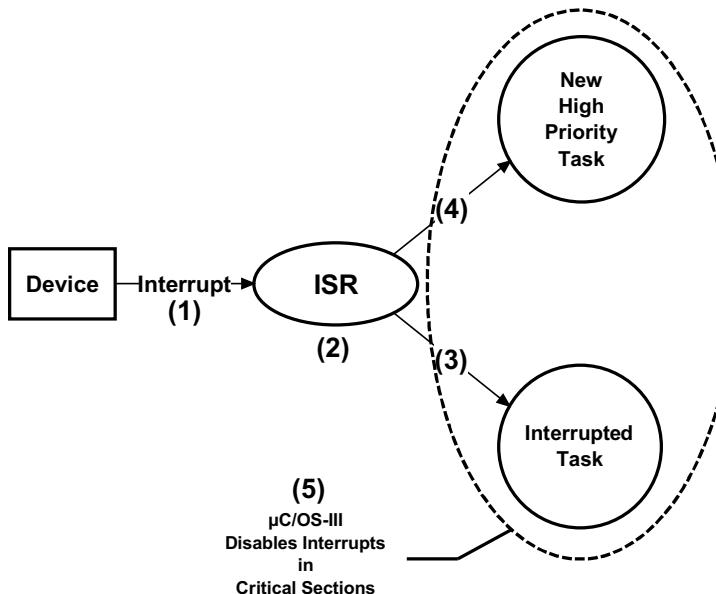


Figure 9-3 Direct Post Method

- F9-3(1) A device generates an interrupt.
- F9-3(2) The Interrupt Service Routine (ISR) responsible to handle the device executes (assuming interrupts are enabled). The device interrupt is generally the event a task is waiting for. The task waiting for this interrupt to occur either has a higher priority than the interrupted task, or lower (or equal) in priority.
- F9-3(3) If the ISR made a lower (or equal) priority task ready-to-run then upon completion of the ISR, μC/OS-III returns to the interrupted task exactly at the point the interrupt occurred.
- F9-3(4) If the ISR made a higher priority task ready-to-run, μC/OS-III will context switch to the new higher-priority task since the more important task was waiting for this device interrupt.
- F9-3(5) In the Direct Post Method, μC/OS-III must protect critical sections by disabling interrupts as some of these critical sections can be accessed by ISRs.

The above discussion assumed that interrupts were enabled and that the ISR could respond quickly to the interrupting device. However, if the application code makes μC/OS-III service calls (and it will at some point), it is possible that interrupts would be disabled. When `OS_CFG_ISR_POST_DEFERRED_EN` is set to 0, μC/OS-III disables interrupts while accessing critical sections. Thus, interrupts will not be responded to until μC/OS-III re-enables interrupts. Of course, everything was done to keep interrupt disable times as short as possible, but there are complex features of μC/OS-III that disable interrupts for relatively long periods of time.

The key factor in determining whether to use the Direct Post Method is generally the μC/OS-III interrupt disable time. This is fairly easy to determine since the μC/CPU files provided with the μC/OS-III port for the processor used includes code to measure maximum interrupt disable time. This code can be enabled testing purposes and removed when ready to deploy the product. The user would typically not want to leave measurement code in production code to avoid introducing measurement artifacts.

You can determine the interrupt latency, interrupt response, interrupt recovery, and task latency by adding the execution times of the code involved for each, as shown below.

Interrupt Latency = Maximum interrupt disable time;

Interrupt Response = Interrupt latency
+ Vectoring to the interrupt handler
+ ISR prologue;

Interrupt Recovery = Handling of the interrupting device
+ Posting a signal or a message to a task
+ `OSIntExit()`
+ `OSIntCtxSw()`;

Task Latency = Interrupt response
+ Interrupt recovery
+ Time scheduler is locked;

The execution times of the µC/OS-III ISR prologue, ISR epilogue, `OSIntExit()`, and `OSIntCtxSw()`, can be measured independently and should be fairly constant.

It should also be easy to measure the execution time of a post call by using `OS_TS_GET()`.

In the Direct Post Method, the scheduler is locked only when handling timers and therefore, task latency should be fast if there are few timers with short callbacks expiring at the same time. See Chapter 12, “Timer Management” on page 213. µC/OS-III is also able to measure the amount of time the scheduler is locked, providing task latency.

9-7-2 DEFERRED POST METHOD

In the Deferred Post Method (`OS_CFG_ISR_POST_DEFERRED_EN` is set to 1), instead of disabling interrupts to access critical sections, μ C/OS-III locks the scheduler. This avoids having other tasks access critical sections while allowing interrupts to be recognized and serviced. In the Deferred Post Method, interrupts are almost never disabled. The Deferred Post Method is, however, a bit more complex as shown in Figure 9-4.

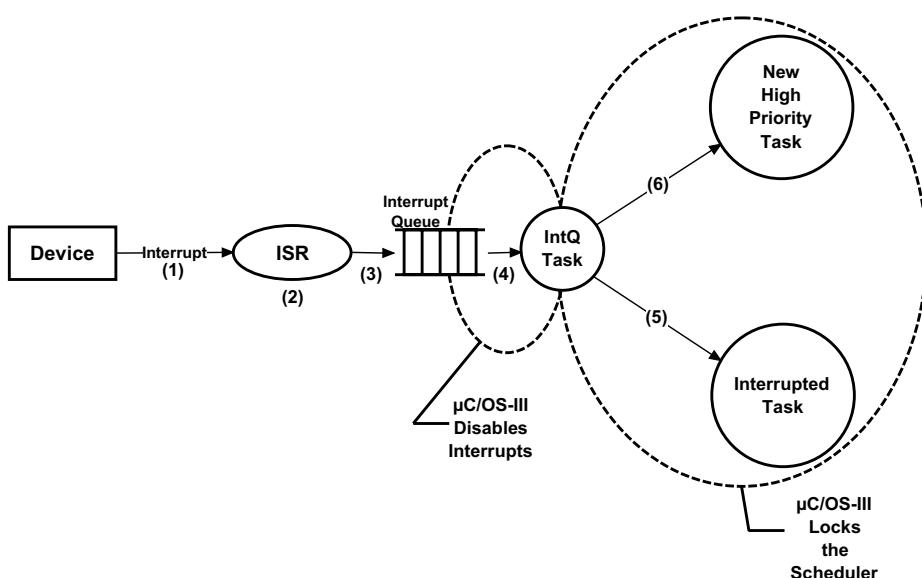


Figure 9-4 **Deferred Post Method block diagram**

F9-4(1) A device generates an interrupt.

F9-4(2) The ISR responsible for handling the device executes (assuming interrupts are enabled). The device interrupt is the event that a task was waiting for. The task waiting for this interrupt to occur is either higher in priority than the interrupted task, lower, or equal in priority.

- F9-4(3) The ISR calls one of the post services to signal or send a message to a task. However, instead of performing the post operation, the ISR queues the actual post call along with arguments in a special queue called the *Interrupt Queue*. The ISR then makes the *Interrupt Queue Handler Task* ready-to-run. This task is internal to μC/OS-III and is always the highest priority task (i.e., Priority 0).
- F9-4(4) At the end of the ISR, μC/OS-III always context switches to the interrupt queue handler task, which then extracts the post command from the queue. We disable interrupts to prevent another interrupt from accessing the interrupt queue while the queue is being emptied. The task then re-enables interrupts, locks the scheduler, and performs the post call as if the post was performed at the task level all along. This effectively manipulates critical sections at the task level.
- F9-4(5) When the interrupt queue handler task empties the interrupt queue, it makes itself not ready-to-run and then calls the scheduler to determine which task must run next. If the original interrupted task is still the highest priority task, μC/OS-III will resume that task.
- F9-4(6) If, however, a more important task was made ready-to-run because of the post, μC/OS-III will context switch to that task.

All the extra processing is performed to avoid disabling interrupts during critical sections of code. The extra processing time only consist of copying the post call and arguments into the queue, extracting it back out of the queue, and performing an extra context switch.

Similar to the Direct Post Method, it is easy to determine interrupt latency, interrupt response, interrupt recovery, and task latency, by adding execution times of the pieces of code involved for each as shown below.

Interrupt Latency = Maximum interrupt disable time;

Interrupt Response = Interrupt latency
+ Vectoring to the interrupt handler
+ ISR prologue;

Interrupt Recovery = Handling of the interrupting device
+ Posting a signal or a message to the Interrupt Queue
+ `OSIntExit()`
+ `OSIntCtxSw()` to Interrupt Queue Handler Task;

Task Latency = Interrupt response
+ Interrupt recovery
+ Re-issue the post to the object or task
+ Context switch to task
+ Time scheduler is locked;

The execution times of the µC/OS-III ISR prologue, ISR epilogue, `OSIntExit()`, and `OSIntCtxSw()`, can be measured independently and should be constant.


It should also be easy to measure the execution time of a post call by using `OS_TS_GET()`. In fact, the post calls should be short in the Deferred Post Method because it only involves copying the post call and its arguments into the interrupt queue.

The difference is that in the Deferred Post Method, interrupts are disabled for a very short amount of time and thus, the first three metrics should be fast. However, task latency is higher as µC/OS-III locks the scheduler to access critical sections.

9-8 DIRECT VS. DEFERRED POST METHOD

In the Direct Post Method, µC/OS-III disables interrupts to access critical sections. In comparison, while in the Deferred Post Method, µC/OS-III locks the scheduler to access the same critical sections.

In the Deferred Post Method, µC/OS-III must still disable interrupts to access the interrupt queue. However, the interrupt disable time is very short and fairly constant.

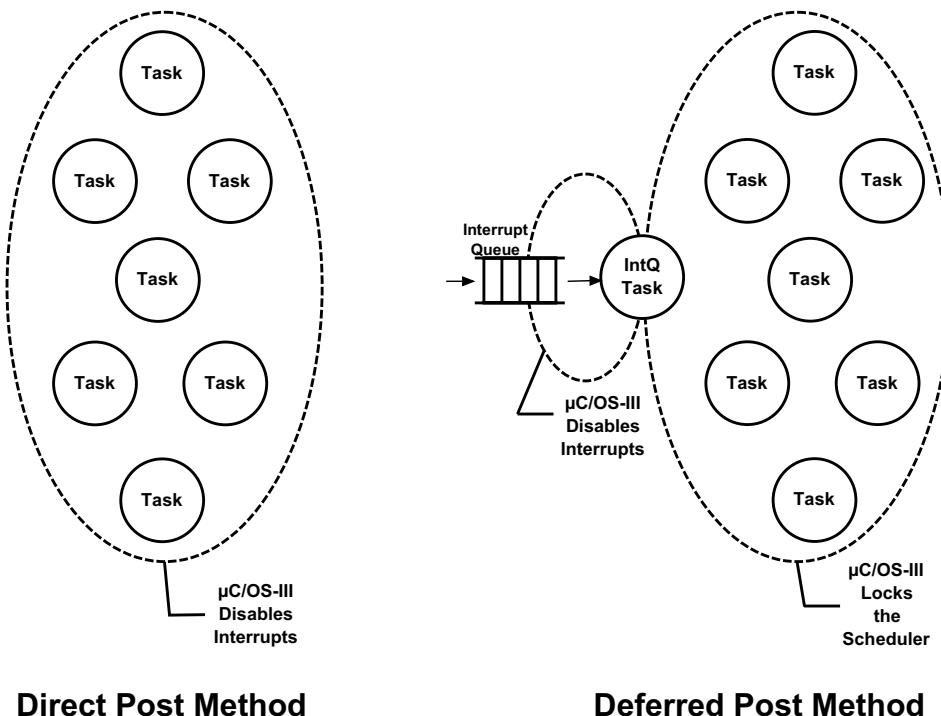

Direct Post Method

Deferred Post Method

Figure 9-5 Direct vs. Deferred Post Methods

If interrupt disable time is critical in the application because there are very fast interrupt sources and the interrupt disable time of µC/OS-III is not acceptable using the Direct Post Method, use the Deferred Post Method.

However, if you are planning on using the features listed in Table 9-1, consider using the Deferred Post Method.

Feature	Reason
Multiple tasks at the same priority Chapter 14, “Synchronization” on page 273	Although this is an important feature of µC/OS-III, multiple tasks at the same priority create longer critical sections. However, if there are only a few tasks at the same priority, interrupt latency will be relatively small. If the user does not create multiple tasks at the same priority, the Direct Post Method is recommended.
Event Flags Chapter 14, “Synchronization” on page 273	If multiple tasks are waiting on different events, going through all of the tasks waiting for events requires a fair amount of processing time, which means longer critical sections. If only a few tasks (approximately one to five) are waiting on an event flag group, the critical section will be short enough to use the Direct Post Method.
Pend on multiple objects Chapter 16, “Pending On Multiple Objects” on page 333	Pending on multiple objects is probably the most complex feature provided by µC/OS-III and requires interrupts to be disabled for fairly long periods of time when using the Direct Post Method. If pending on multiple objects, the Deferred Post Method is highly recommended. If the application does not use this feature, the user may select the Direct Post Method.
Broadcast on Post calls See OSSemPost() and OSQPost() descriptions.	µC/OS-III disables interrupts while processing a post to multiple tasks in a broadcast. If not using the broadcast option, use the Direct Post Method. Note that broadcasts only apply to semaphores and message queues.

Table 9-1 µC/OS-III features to avoid when using the Direct Post Method

9-9 THE CLOCK TICK (OR SYSTEM TICK)

µC/OS-III-based systems generally require the presence of a periodic time source called the *clock tick* or *system tick*.

A hardware timer configured to generate an interrupt at a rate between 10 and 1000 Hz provides the clock tick. A tick source may also be obtained by generating an interrupt from an AC power line (typically 50 or 60 Hz). In fact, you can easily derive 100 or 120 Hz by detecting zero crossings of the power line. That being said, if your product is subject to be used in regions that use both power line frequencies then you may need to have the user specify which frequency to use or, have the product automatically detect which region it's in.

The clock tick interrupt can be viewed as the system's heartbeat. The rate is application specific and depends on the desired resolution of this time source. However, the faster the tick rate, the higher the overhead imposed on the system.

The clock tick interrupt allows µC/OS-III to delay tasks for an integral number of clock ticks and provide timeouts when tasks are waiting for events to occur.

The clock tick interrupt must call `OSTimeTick()`. The pseudocode for `OSTimeTick()` is shown in Listing 9-5.

```
void OSTimeTick (void)
{
    OSTimeTickHook();                                     (1)
#if OS_CFG_ISR_POST_DEFERRED_EN > 0u
    Get timestamp;                                      (2)
    Post "time tick" to the Interrupt Queue;
#else
    Signal the Tick Task;                             (3)
    Run the round-robin scheduling algorithm;          (4)
    Signal the timer task;                            (5)
#endif
}
```

Listing 9-5 `OSTimeTick()` pseudocode

- L9-5(1) The time tick ISR starts by calling a hook function, `OSTimeTickHook()`. The hook function allows the implementer of the µC/OS-III port to perform additional processing when a tick interrupt occurs. In turn, the tick hook can call a user-defined tick hook if its corresponding pointer, `OS_AppTimeTickHookPtr`, is non-NULL. The reason the hook is called first is to give the application immediate access to this periodic time source. This can be useful to read sensors at a regular interval (not as subject to jitter), update Pulse Width Modulation (PWM) registers, and more.
- L9-5(2) If µC/OS-III is configured for the Deferred Post Method, µC/OS-III reads the current timestamp and defers the call to signal the tick task by placing an appropriate entry in the interrupt queue. The tick task will thus be signaled by the Interrupt Queue Handler Task.

-
- L9-5(3) If μC/OS-III is configured for the Direct Post Method, μC/OS-III signals the tick task so that it can process the time delays and timeouts.
 - L9-5(4) μC/OS-III runs the round-robin scheduling algorithm to determine whether the time slot for the current task has expired.
 - L9-5(5) The tick task is also used as the time base for the timers (see Chapter 13, “Resource Management” on page 231).

A common misconception is that a system tick is always needed with μC/OS-III. In fact, many low-power applications may not implement the system tick because of the power required to maintain the tick list. In other words, it is not reasonable to continuously power down and power up the product just to maintain the system tick. Since μC/OS-III is a preemptive kernel, an event other than a tick interrupt can wake up a system placed in low power mode by either a keystroke from a keypad or other means. Not having a system tick means that the user is not allowed to use time delays and timeouts on system calls. This is a decision required to be made by the designer of the low-power product.

9-10 SUMMARY

μC/OS-III provides services to manage interrupts. An ISR should be short in length, and signal or send a message to a task, which is responsible for servicing the interrupting device.

ISRs that are short and do not need to signal or send a message to a task, are not required to do so. In other words, μC/OS-III allows you to have non -kernel-aware ISRs.

μC/OS-III supports processors that vector to a single ISR for all interrupting devices, or to a unique ISR for each device.

μC/OS-III supports two methods: Direct and Deferred Post. The Direct Post Method assumes that μC/OS-III critical sections are protected by disabling interrupts. The Deferred Post Method locks the scheduler when μC/OS-III accesses critical sections of code. The method used depends greatly on your interrupt response as well as the task response needs.

μC/OS-III assumes the presence of a periodic time source for applications requiring time delays and timeouts on certain services.

Chapter 10

Pend Lists (or Wait Lists)

A task is placed in a *Pend List* (also called a *Wait List*) when it is waiting on a semaphore to be signaled, a mutual exclusion semaphore to be released, an event flag group to be posted, or a message queue to be posted.

See ...	For ...	Kernel Object
Chapter 13, “Resource Management” on page 231	Semaphores Mutual Exclusion Semaphores	OS_SEM OS_MUTEX
Chapter 14, “Synchronization” on page 273	Semaphores Event Flags	OS_SEM OS_FLAG_GRP
Chapter 15, “Message Passing” on page 309	Message Queues	OS_Q

Table 10-1 **Kernel objects that have Pend Lists**

A pend list is similar to the *Ready List*, except that instead of keeping track of tasks that are ready-to-run, the pend list keeps track of tasks waiting for an object to be posted. In addition, the pend list is sorted by priority; the highest priority task waiting on the object is placed at the head of the list, and the lowest priority task waiting on the object is placed at the end of the list.

A pend list is a data structure of type OS_PEND_LIST, which consists of three fields as shown in Figure 10-1.



Figure 10-1 **Pend List**

- .NbrEntries** Contains the current number of entries in the pend list. Each entry in the pend list points to a task that is waiting for the kernel object to be posted.
- .TailPtr** Is a pointer to the last task in the list (i.e., the lowest priority task).
- .HeadPtr** Is a pointer to the first task in the list (i.e., the highest priority task).

Figure 10-2 indicates that each kernel object using a pend list contains the same three fields at the beginning of the kernel object that we called an **OS_PEND_OBJ**. Notice that the first field is always a “Type” which allows µC/OS-III to know if the kernel object is a semaphore, a mutual exclusion semaphore, an event flag group, or a message queue object.

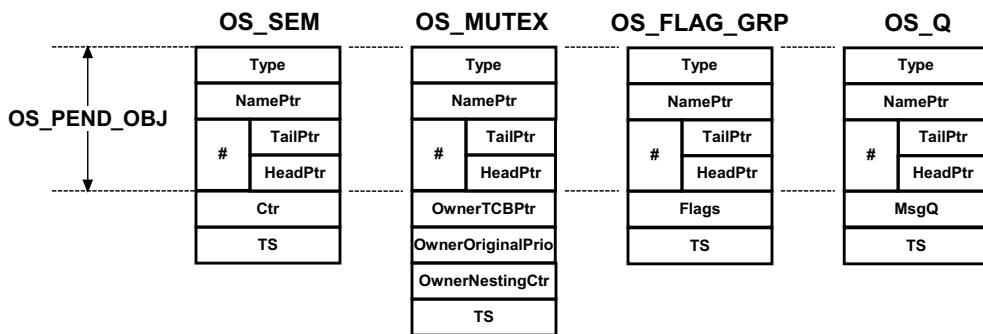


Figure 10-2 **OS_PEND_OBJ** at the beginning of certain kernel objects

Table 10-2 shows that the “Type” field of each of the above objects is initialized to contain four ASCII characters when the respective object is created. This allows the user to identify these objects when performing a memory dump using a debugger.

Kernel Object	Type
Semaphore	'S' 'E' 'M' 'A'
Mutual Exclusion Semaphore	'M' 'U' 'T' 'X'
Event Flag Group	'F' 'L' 'A' 'G'
Message Queue	'Q' 'U' 'E' 'U'

Table 10-2 Kernel objects with initialized “Type” field

A pend list does not actually point to a task's OS_TCB, but instead points to OS_PEND_DATA objects as shown in Figure 10-3. Also, an OS_PEND_DATA structure is allocated dynamically on the current task's stack when a task is placed on a pend list. This implies that a task stack needs to be able to allocate storage for this data structure.

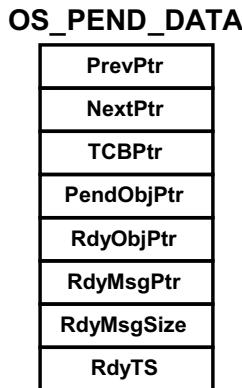


Figure 10-3 Pend Data

- .PrevPtr** Is a pointer to an OS_PEND_DATA entry in the pend list. This pointer points to a higher or equal priority task waiting on the kernel object.
- .NextPtr** Is a pointer to an OS_PEND_DATA entry in the pend list. This pointer points to a lower or equal priority task waiting on the kernel object.
- .TCBPtr** Is a pointer to the OS_TCB of the task waiting on the pend list.
- .PendObjPtr** Is a pointer to the kernel object that the task is pending on. In other words, this pointer can point to an OS_SEM, OS_MUTEX, OS_FLAG_GRP or OS_Q by using an OS_PEND_OBJ as the common data structure.
- .RdyObjPtr** Is a pointer to the kernel object that is ready if the task actually waits for multiple kernel objects. See Chapter 16, “Pending On Multiple Objects” on page 333 for more on this.

- .RdyMsgPtr Is a pointer to the message posted through `OSQPost()` if the task is pending on multiple kernel objects. Again, see Chapter 16, “Pending On Multiple Objects” on page 333.
- .RdyTS Is a timestamp of when the kernel object was posted. This is used when a task pends on multiple kernel objects as described in Chapter 16, “Pending On Multiple Objects” on page 333.

Figure 10-4 shows how all data structures connect to each other when tasks are inserted in a pend list. This drawing assumes that there are two tasks waiting on a semaphore.

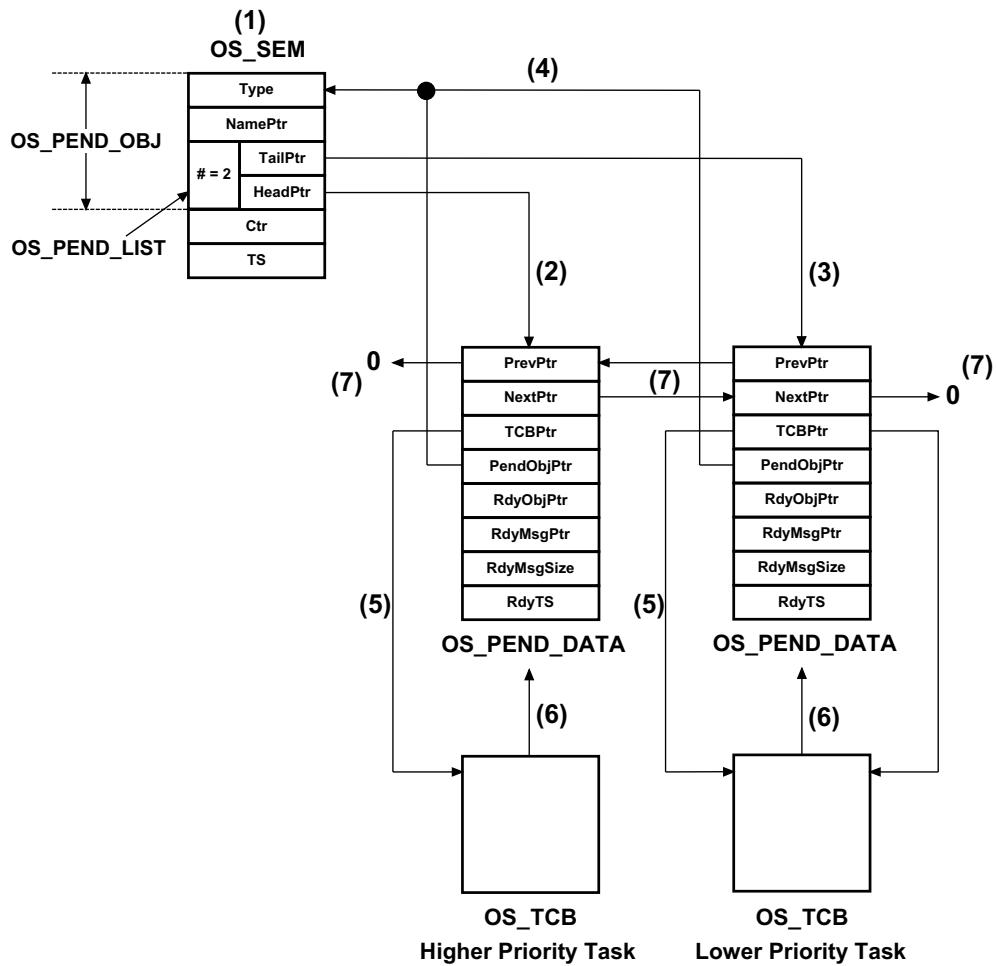


Figure 10-4 Pend Data

- F10-4(1) The **OS_SEM** data type contains an **OS_PEND_OBJ**, which in turn contains an **OS_PEND_LIST**. The **.NbrEntries** field in the pend list indicates that there are two tasks waiting on the semaphore.
- F10-4(2) The **.HeadPtr** field of the pend list points to the **OS_PEND_DATA** structure associated with the highest priority task waiting on the semaphore.
- F10-4(3) The **.TailPtr** field of the pend list points to the **OS_PEND_DATA** structure associated with the lowest priority task waiting on the semaphore.
- F10-4(4) Both **OS_PEND_DATA** structures in turn point back to the **OS_SEM** data structure. The pointers think they are pointing to an **OS_PEND_OBJ**. We know that the **OS_PEND_OBJ** is a semaphore by examining the **.Type** field of the **OS_PEND_OBJ**. **.Type** will contain the four (4) ASCII characters ‘S’, ‘E’, ‘M’ and ‘A’.
- F10-4(5) Each **OS_PEND_DATA** structure points to its respective **OS_TCB**. In other words, we know which task is pending on the semaphore.
- F10-4(6) Each task points back to the **OS_PEND_DATA** structure.
- F10-4(7) Finally, the **OS_PEND_DATA** structure forms a doubly linked list so that the µC/OS-III can easily add or remove entries in this list.

Although this may seem complex, the reasoning will become apparent in Chapter 16, “Pending On Multiple Objects” on page 333. For now, you should assume that all of the links are necessary.

Table 10-3 shows the functions that µC/OS-III uses to manipulate entries in a pend list. These functions are internal to µC/OS-III and the application code must never call them. The code is found in **os_core.c**.

Function	Description
OS_PendListChangePrio()	Change the priority of a task in a pend list
OS_PendListInit()	Initialize a pend list
OS_PendListInsertHead()	Insert an OS_PEND_DATA at the head of the pend list
OS_PendListInsertPrio()	Insert an OS_PEND_DATA in priority order in the pend list
OS_PendListRemove()	Remove multiple OS_PEND_DATA from the pend list
OS_PendListRemove1()	Remove single OS_PEND_DATA from the pend list

Table 10-3 Pend List access functions

10-1 SUMMARY

μ C/OS-III keeps track of tasks waiting for semaphores, mutual exclusion semaphores, event flag groups and message queues using pend lists.

A pend list consists of a data structure of type OS_PEND_LIST. The pend list is further encapsulated into another data type called an OS_PEND_OBJ.

Tasks are not directly linked to the pend list but instead are linked through an intermediate data structure called an OS_PEND_DATA which is allocated on the stack of the task waiting on the kernel object.

Application code must not access pend lists, since these are internal to μ C/OS-III.

Chapter

11

Time Management

μ C/OS-III provides time-related services to the application programmer.

In Chapter 9, “Interrupt Management” on page 175, it was established that μ C/OS-III generally requires (as do most kernels) that the user provide a periodic interrupt to keep track of time delays and timeouts. This periodic time source is called a clock tick and should occur between 10 and 1000 times per second, or Hertz (see `OS_CFG_TICK_RATE_HZ` in `os_cfg_app.h`). The actual frequency of the clock tick depends on the desired tick resolution of the application. However, the higher the frequency of the ticker, the higher the overhead.

μ C/OS-III provides a number of services to manage time as summarized in Table 11-1, and the code is found in `os_time.c`.

Function Name	Operation
<code>OSTimeDly()</code>	Delay execution of a task for “n” ticks
<code>OSTimeDlyHMSM()</code>	Delay a task for a user specified time in HH:MM:SS.mmm
<code>OSTimeDlyResume()</code>	Resume a delayed task
<code>OSTimeGet()</code>	Obtain the current value of the tick counter
<code>OSTimeSet()</code>	Set the tick counter to a new value
<code>OSTimeTick()</code>	Signal the occurrence of a clock tick

Table 11-1 Time Services API summary

The application programmer should refer to Appendix A, “ μ C/OS-III API Reference” on page 443 for a detailed description of these services.

11-1 OSTimeDly()

A task calls this function to suspend execution until some time expires. The calling function will not execute until the specified time expires. This function allows three modes: relative, periodic and absolute.

Listing 11-1 shows how to use `OSTimeDly()` in relative mode.

```
void MyTask (void *p_arg)
{
    OS_ERR err;
    :
    :
    while (DEF_ON) {
        :
        :
        OSTimeDly(2,          (1)
                  OS_OPT_TIME_DLY,      (2)
                  &err);                (3)
        /* Check "err" */      (4)
        :
        :
    }
}
```

Listing 11-1 `OSTimeDly()` - Relative

- L11-1(1) The first argument specifies the amount of time delay (in number of ticks) from when the function is called. For the example in L11-1, if the tick rate (`OS_CFG_TICK_RATE_HZ` in `os_cfg_app.h`) is set to 1000 Hz, the user is asking to suspend the current task for approximately 2 milliseconds. However, the value is not accurate since the count starts from the next tick which could occur almost immediately. This will be explained shortly.
- L11-1(2) Specifying `OS_OPT_TIME_DLY` indicates that the user wants to use “relative” mode.
- L11-1(3) As with most µC/OS-III services an error return value will be returned. The example should return `OS_ERR_NONE` because the arguments are all valid.

- L11-1(4) You should always check the error code returned by µC/OS-III. If “err” does not contain `OS_ERR_NONE`, `OSTimeDly()` did not perform the intended work. For example, another task could remove the time delay suspension by calling `OSTimeDlyResume()` and when `MyTask()` returns, it would not have returned because the time had expired.

As mentioned above, the delay is not accurate. Refer to Figure 11-1 and its description below to understand why.

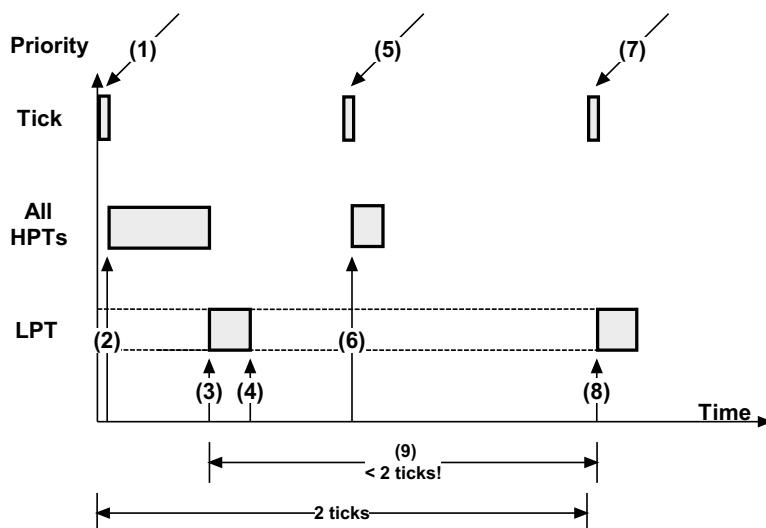



Figure 11-1 `OSTimeDly()` - Relative

- F11-1(1) We get a tick interrupt and µC/OS-III services the ISR.
- F11-1(2) At the end of the ISR, all Higher Priority Tasks (HPTs) execute. The execution time of HPTs is unknown and can vary.
- F11-1(3) Once all HPTs have executed, µC/OS-III runs the task that has called `OSTimeDly()` as shown in L11-1. For the sake of discussion, it is assumed that this task is a lower priority task (LPT).

-
- F11-1(4) The task calls `OSTimedly()` and specifies to delay for two ticks in “relative” mode. At this point, µC/OS-III places the current task in the tick list where it will wait for two ticks to expire. The delayed task consumes zero CPU time while waiting for the time to expire.
 - F11-1(5) The next tick occurs. If there are HPTs waiting for this particular tick, µC/OS-III will schedule them to run at the end of the ISR.
 - F11-1(6) The HPTs execute.
 - F11-1(7) The next tick interrupt occurs. This is the tick that the LPT was waiting for and will now be made ready-to-run by µC/OS-III.
 - F11-1(8) Since there are no HPTs to execute on this tick, µC/OS-III switches to the LPT.
 - F11-1(9) Given the execution time of the HPTs, the time delay is not exactly two ticks, as requested. In fact, it is virtually impossible to obtain a delay of exactly the desired number of ticks. You might ask for a delay of two ticks, but the very next tick could occur almost immediately after calling `OSTimedly()`! Just imagine what might happen if all HPTs took longer to execute and pushed (3) and (4) further to the right. In this case, the delay would actually appear as one tick instead of two.

`OSTimedly()` can also be called with the `OS_OPT_TIME_PERIODIC` option as shown in Listing 11-2. This option allows delaying the task until the tick counter reaches a certain periodic match value and thus ensures that the spacing in time is always the same as it is not subject to CPU load variations.

µC/OS-III determines the “match value” of `OSTickCtr` to determine when the task will need to wake up based on the desired period. This is shown in Figure 11-2. µC/OS-III checks to ensure that if the match is computed such that it represents a value that has already gone by then, the delay will be zero.

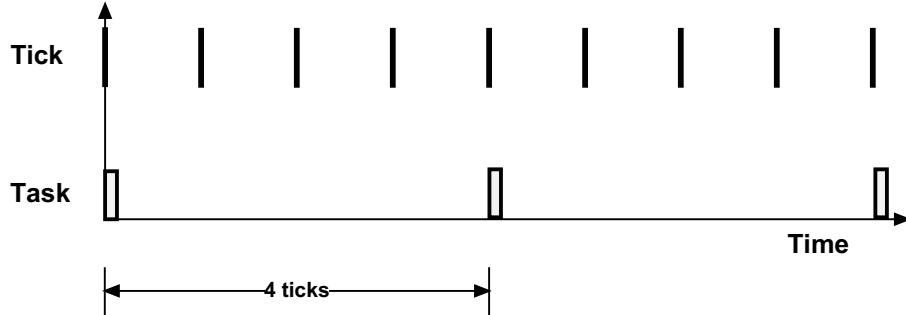Figure 11-2 **OSTimeDly()** - Periodic

```
void MyTask (void *p_arg)
{
    OS_ERR err;
    :
    :
    while (DEF_ON) {
        OSTimeDly(4,                               (1)
                  OS_OPT_TIME_PERIODIC,          (2)
                  &err);
        /* Check "err" */                   (3)
        :
        :
    }
}
```

Listing 11-2 **OSTimeDly()** - Periodic

- L11-2(1) The first argument specifies the period for the task to execute, specifically every four ticks. Of course, if the task is a low-priority task, μC/OS-III only schedules and runs the task based on its priority relative to what else needs to be executed.
- L11-2(2) Specifying `OS_OPT_TIME_PERIODIC` indicates that the task is to be ready-to-run when the tick counter reaches the desired period from the previous call.
- L11-2(3) You should always check the error code returned by μC/OS-III.

Relative and Periodic modes might not look different, but they are. In Relative mode, it is possible to miss one of the ticks when the system is heavily loaded, missing a tick or more on occasion. In Periodic mode, the task may still execute later, but it will always be synchronized to the desired number of ticks. In fact, Periodic mode is the preferred mode to use to implement a time-of-day clock.

Finally, you can use the absolute mode to perform a specific action at a fixed time after power up. For example, turn off a light 10 seconds after the product powers up. In this case, you would specify `OS_OPT_TIME_MATCH` while “`dly`” actually corresponds to the desired value of `OSTickCtr` you want to reach.

To summarize, the task will wake up when `OSTickCtr` reaches the following value:

Value of “opt”	Task wakes up when
<code>OS_OPT_TIME_DLY</code>	<code>OSTickCtr + dly</code>
<code>OS_OPT_TIME_PERIODIC</code>	<code>OSTCBCurPtr->TickCtrPrev + dly</code>
<code>OS_OPT_TIME_MATCH</code>	<code>dly</code>

11-2 OSTimeDlyHMSM()

A task may call this function to suspend execution until some time expires by specifying the length of time in a more user-friendly way. Specifically, you can specify the delay in hours, minutes, seconds, and milliseconds (thus the **HMSM**). This function only works in “Relative” mode.

Listing 11-3 indicates how to use **OSTimeDlyHMSM()**.

```
void MyTask (void *p_arg)
{
    OS_ERR err;
    :
    :
    while (DEF_ON) {
        :
        :
        OSTimeDlyHMSM(0,          (1)
                      0,
                      1,
                      0,
                      OS_OPT_TIME_HMSM_STRICT,   (2)
                      &err);                  (3)
        /* Check "err" */
        :
        :
    }
}
```

11

Listing 11-3 **OSTimeDlyHMSM()**

- L11-3(1) The first four arguments specify the amount of time delay (in hours, minutes, seconds, and milliseconds) from this point in time. In the above example, the task should delay for 1 second. The resolution greatly depends on the tick rate. For example, if the tick rate (**OS_CFG_TICK_RATE_HZ** in **os_cfg_app.h**) is set to 1000 Hz there is technically a resolution of 1 millisecond. If the tick rate is 100 Hz then the delay of the current task is in increments of 10 milliseconds. Again, given the relative nature of this call, the actual delay may not be accurate.

-
- L11-3(2) Specifying `OS_OPT_TIME_HMSM_STRICT` verifies that the user strictly passes valid values for hours, minutes, seconds and milliseconds. Valid hours are 0 to 99, valid minutes are 0 to 59, valid seconds are 0 to 59, and valid milliseconds are 0 to 999.

If specifying `OS_OPT_TIME_HMSM_NON_STRICT`, the function will accept nearly any value for hours (between 0 to 999), minutes (from 0 to 9999), seconds (any value, up to 65,535), and milliseconds (any value, up to 4,294,967,295). `OSTimeDlyHMSM(203, 101, 69, 10000)` may be accepted. Whether or not this makes sense is a different story.

The reason hours is limited to 999 is that time delays typically use 32-bit values to keep track of ticks. If the tick rate is set at 1000 Hz then, it is possible to only track 4,294,967 seconds, which corresponds to 1,193 hours, and therefore 999 is a reasonable limit.

- L11-3(3) As with most µC/OS-III services the user will receive an error return value. The example should return `OS_ERR_NONE` since the arguments in L11-3 are all valid. Refer to Appendix A, “µC/OS-III API Reference” on page 443 for a list of possible error codes.

Even though µC/OS-III allows for very long delays for tasks, it is actually not recommended to delay tasks for a long time. The reason is that there is no indication that the task is actually “alive” unless it is possible to monitor the amount of time remaining for the delay. It is better to have the task wake up approximately every minute or so, and have it “tell you” that it is still ok.

`OSTimeDly()` is often used to create periodic tasks (tasks that execute periodically). For example, it is possible to have a task that scans a keyboard every 50 milliseconds and another task that reads analog inputs every 10 milliseconds, etc.

11-3 OSTimeDlyResume()

A task can resume another task that called `OSTimeDly()` or `OSTimeDlyHMSM()` by calling `OSTimeDlyResume()`. Listing 11-4 shows how to use `OSTimeDlyResume()`. The task that delayed itself will not know that it was resumed, but will think that the delay expired. Because of this, use this function with great care.

```
OS_TCB MyTaskTCB;

void MyTask (void *p_arg)
{
    OS_ERR err;
    :
    :
    while (DEF_ON) {
        :
        :
        OSTimeDly(10,
                  OS_OPT_TIME_DLY,
                  &err);
        /* Check "err" */
        :
        :
    }
}

void MyOtherTask (void *p_arg)
{
    OS_ERR err;
    :
    :
    while (DEF_ON) {
        :
        :
        OSTimeDlyResume(&MyTaskTCB,
                         &err);
        /* Check "err" */
        :
        :
    }
}
```

Listing 11-4 `OSTimeDlyResume()`

11-4 OSTimeSet() AND OSTimeGet()

μ C/OS-III increments a tick counter every time a tick interrupt occurs. This counter allows the application to make coarse time measurements and have some notion of time (after power up).

`OSTimeGet()` allows the user to take a snapshot of the tick counter. You can use this value to delay a task for a specific number of ticks and repeat this periodically without losing track of time.

`OSTimeSet()` allows the user to change the current value of the tick counter. Although μ C/OS-III allows for this, it is recommended to use this function with great care.

11-5 OSTimeTick()

The tick Interrupt Service Routine (ISR) must call this function every time a tick interrupt occurs. μ C/OS-III uses this function to update time delays and timeouts used by other system calls. `OSTimeTick()` is considered an internal function to μ C/OS-III.

11-6 SUMMARY

μ C/OS-III provides services to applications so that tasks can suspend their execution for user-defined time delays. Delays are either specified by a number of clock ticks or hours, minutes, seconds, and milliseconds.

Application code can resume a delayed task by calling `OSTimeDlyResume()`. However, its use is not recommended because resumed task will not know that they were resumed as opposed to the time delay expired.

μ C/OS-III keeps track of the number of ticks that occurred since power up or since the number of ticks counter was last changed by `OSTimeSet()`. The counter may be read by the application code using `OSTimeGet()`.

Chapter 12

Timer Management

μ C/OS-III provides timer services to the application programmer and code to handle timers is found in `os_tmr.c`. Timer services are enabled when setting `OS_CFG_TMR_EN` to 1 in `os_cfg.h`.

Timers are down counters that perform an *action* when the counter reaches zero. The user provides the action through a *callback* function (or simply *callback*). A callback is a user-declared function that will be called when the timer expires. The callback can be used to turn a light on or off, start a motor, or perform other actions. However, it is important to never make blocking calls within a callback function (i.e., call `OSTimeDly()`, `OSTimeDlyHMSM()`, `OS???Pend()`, or anything that causes the timer task to block or be deleted).

Timers are useful in protocol stacks (retransmission timers, for example), and can also be used to poll I/O devices at predefined intervals.

An application can have any number of timers (limited only by the amount of RAM available). Timer services (i.e. functions) in μ C/OS-III start with the `OSTmr???`() prefix, and the services available to the application programmer are described in Appendix A, “ μ C/OS-III API Reference” on page 443.

The resolution of all the timers managed by μ C/OS-III is determined by the configuration constant: `OS_CFG_TMR_TASK_RATE_HZ`, which is expressed in Hertz (Hz). So, if the timer task (described later) rate is set to 10, all timers have a resolution of 1/10th of a second (ticks in the diagrams to follow). In fact, this is the typical recommended value for the timer task. Timers are to be used with “coarse” granularity.

μ C/OS-III provides a number of services to manage timers as summarized in Table 12-1.

Function Name	Operation
OSTmrCreate()	Create and specify the operating mode of the timer.
OSTmrDel()	Delete a timer.
OSTmrRemainGet()	Obtain the remaining time left before the timer expires.
OSTmrStart()	Start (or restart) a timer.
OSTmrStateGet()	Obtain the current state of a timer.
OSTmrStop()	Stop the countdown process of a timer.

Table 12-1 Timer API summary

A timer needs to be created before it can be used. You create a timer by calling `OSTmrCreate()` and specify a number of arguments to this function based on how the timer is to operate. Once the timer operation is specified, its operating mode cannot be changed unless the timer is deleted and recreated. The function prototype for `OSTmrCreate()` is shown below as a quick reference:

```
void OSTmrCreate (OS_TMR          *p_tmr,           /* Pointer to timer      */
                  CPU_CHAR        *p_name,          /* Name of timer, ASCII */
                  OS_TICK         dly,             /* Initial delay        */
                  OS_TICK         period,          /* Repeat period        */
                  OS_OPT          opt,             /* Options              */
                  OS_TMR_CALLBACK_PTR p_callback, /* Fnct to call at 0   */
                  void            *p_callback_arg,/* Arg. to callback    */
                  OS_ERR          *p_err);        /* Error code           */
```

Once created, a timer can be started (or restarted) and stopped as often as is necessary. Timers can be created to operate in one of three modes: One-shot, Periodic (no initial delay), and Periodic (with initial delay).

12-1 ONE-SHOT TIMERS

As its name implies, a one-shot timer will countdown from its initial value, call the callback function when it reaches zero, and stop. Figure 12-1 shows a timing diagram of this operation. The countdown is initiated by calling `OSTmrStart()`. At the completion of the time delay, the callback function is called, assuming a callback function was provided when the timer was created. Once completed, the timer does not do anything unless restarted by calling `OSTmrStart()`, at which point the process starts over.

You terminate the countdown process of a timer (before it reaches zero) by calling `OSTmrStop()`. In this case, you can specify that the callback function be called or not.

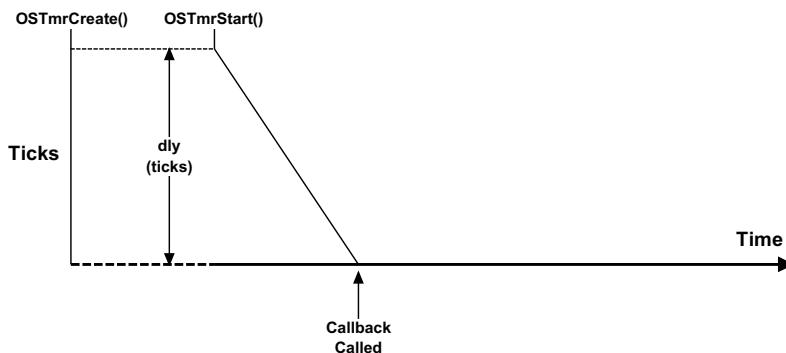


Figure 12-1 One Shot Timers ($dly > 0$, period == 0)

As shown in Figure 12-2, a one-shot timer can be retriggered by calling `OSTmrStart()` before the timer reaches zero. This feature can be used to implement watchdogs and similar safeguards.

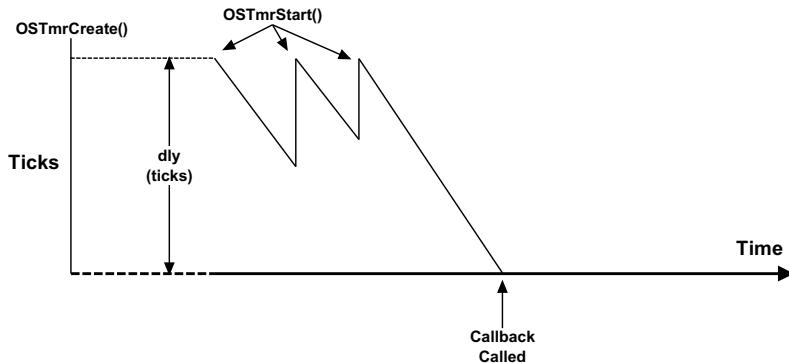
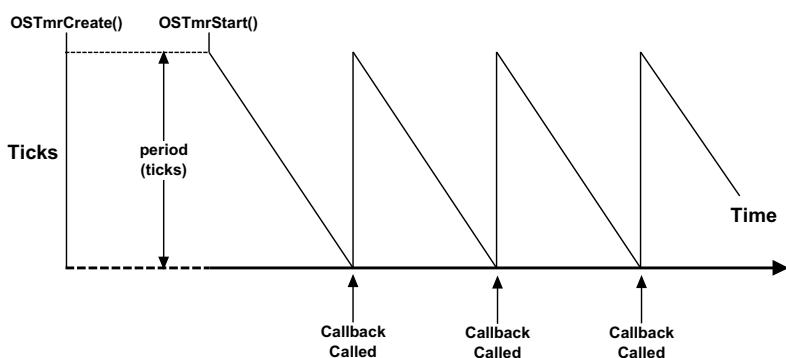


Figure 12-2 Retriggering a One Shot Timer

12-2 PERIODIC (NO INITIAL DELAY)

As indicated in Figure 12-3, timers can be configured for periodic mode. When the countdown expires, the callback function is called, the timer is automatically reloaded, and the process is repeated. If specifying a delay of zero (i.e., `dly == 0`) when the timer is created and, when started, the timer immediately uses the “`period`” as the reload value. You can call `OSTmrStart()` at any point in the countdown to restart the process.

Figure 12-3 Periodic Timers (`dly == 0, period > 0`)

12-3 PERIODIC (WITH INITIAL DELAY)

As shown in Figure 12-4, timers can be configured for periodic mode with an initial delay that is different than its period. The first countdown count comes from the “dly” argument passed in the `OSTmrCreate()` call, and the reload value is the “period”. You can call `OSTmrStart()` to restart the process including the initial delay.

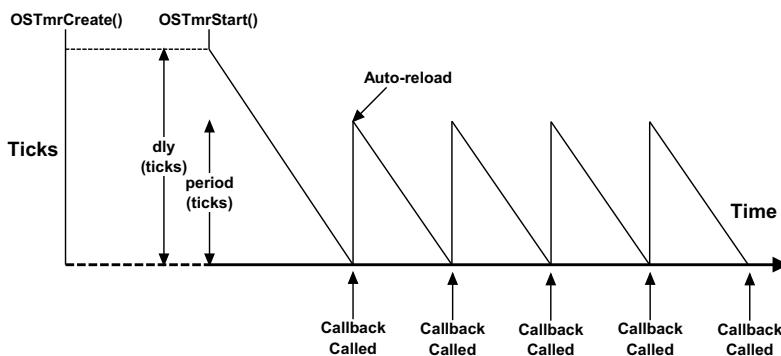


Figure 12-4 Periodic Timers ($dly > 0$, $period > 0$)

12-4 TIMER MANAGEMENT INTERNALS

12-4-1 TIMER MANAGEMENT INTERNALS - TIMERS STATES

Figure 12-5 shows the state diagram of a timer.

Tasks can call `OSTmrStateGet()` to find out the state of a timer. Also, at any time during the countdown process, the application code can call `OSTmrRemainGet()` to find out how much time remains before the timer reaches zero (0). The value returned is expressed in “timer ticks.” If timers are decremented at a rate of 10 Hz then a count of 50 corresponds to 5 seconds. If the timer is in the stop state, the time remaining will correspond to either the initial delay (one shot or periodic with initial delay), or the period if the timer is configured for periodic without initial delay.

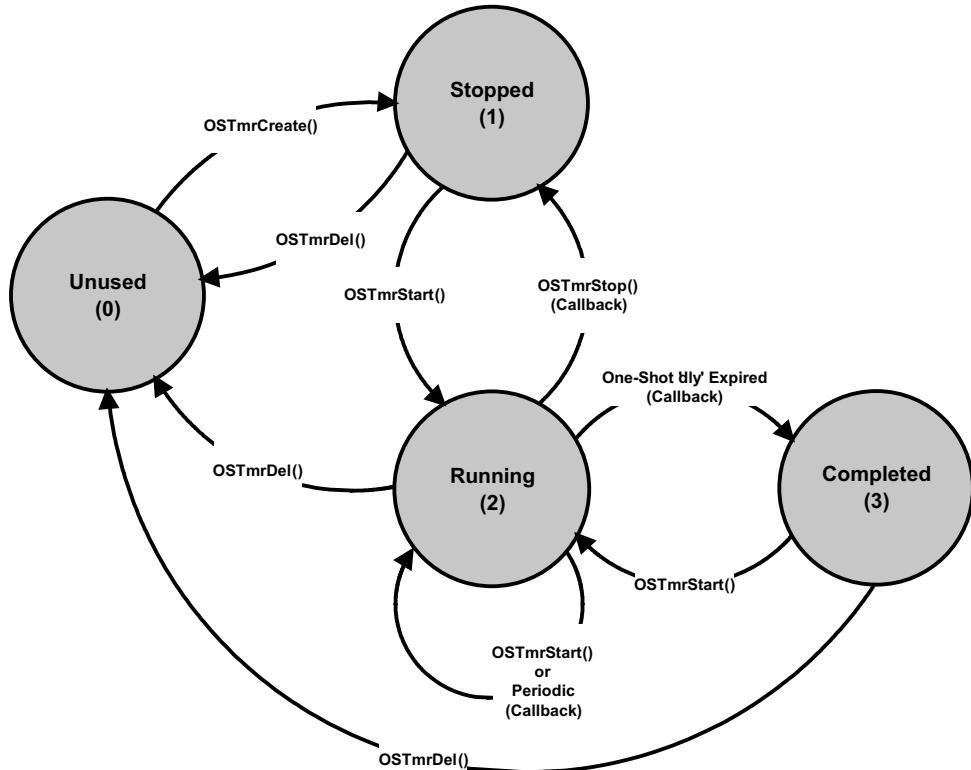


Figure 12-5 Timer State Diagram

- F12-5(0) The “Unused” state is a timer that has not been created or has been “deleted.” In other words, μC/OS-III does not know about this timer.
- F12-5(1) When creating a timer or calling `OSTmrStop()`, the timer is placed in the “stopped” state.
- F12-5(2) A timer is placed in running state when calling `OSTmrStart()`. The timer stays in that state unless it’s stopped, deleted, or completes its one shot.
- F12-5(3) The “Completed” state is the state a one-shot timer is in when its delay expires.

12-4-2 TIMER MANAGEMENT INTERNALS - OS_TMR

A timer is a kernel object as defined by the `OS_TMR` data type (see `os.h`) as shown in Listing 12-1.

The services provided by μC/OS-III to manage timers are implemented in the file `os_tmr.c`. Timer services are enabled at compile time by setting the configuration constant `OS_CFG_TMR_EN` to 1 in `os_cfg.h`.

```
typedef struct os_tmr OS_TMR;                                (1)

struct os_tmr {
    OS_OBJ_TYPE      Type;          (2)
    CPU_CHAR        *NamePtr;       (3)
    OS_TMR_CALLBACK_PTR CallbackPtr; (4)
    void            *CallbackPtrArg; (5)
    OS_TMR          *NextPtr;       (6)
    OS_TMR          *PrevPtr;
    OS_TICK          Match;         (7)
    OS_TICK          Remain;        (8)
    OS_TICK          Dly;           (9)
    OS_TICK          Period;        (10)
    OS_OPT           Opt;           (11)
    OS_STATE         State;         (12)
};
```

Listing 12-1 **OS_TMR** data type

- L12-1(1) In μC/OS-III, all structures are given a data type. In fact, all data types start with “`OS_`” and are all uppercase. When a timer is declared, you simply use `OS_TMR` as the data type of the variable used to declare the timer.
- L12-1(2) The structure starts with a “`Type`” field, which allows it to be recognized by μC/OS-III as a timer. Other kernel objects will also have a “`Type`” as the first member of the structure. If a function is passed a kernel object, μC/OS-III is able to confirm that it is passed the proper data type (assuming `OS_CFG_OBJ_TYPE_CHK_EN` is set to 1 in `os_cfg.h`). For example, if passing a message queue (`OS_Q`) to a timer service (for example `OSTmrStart()`) then μC/OS-III will be able to recognize that an invalid object was passed, and return an error code accordingly.

- L12-1(3) Each kernel object can be given a name for easier recognition by debuggers or µC/Probe. This member is simply a pointer to an ASCII string which is assumed to be NUL terminated.
- L12-1(4) The **.CallbackPtr** member is a pointer to a function that is called when the timer expires. If a timer is created and passed a **NULL** pointer, a callback would not be called when the timer expires.
- L12-1(5) If there is a non-**NULL** **.CallbackPtr** then the application code could have also specified that the callback be called with an argument when the timer expires. This is the argument that would be passed in this call.
- L12-1(6) **.NextPtr** and **.PrevPtr** are pointers used to link a timer in a doubly linked list. These are described later.
- L12-1(7) A timer expires when the timer manager variable **OSTmrTickCtr** reaches the value stored in a timer's **.Match** field. This is also described later.
- L12-1(8) The **.Remain** field contains the amount of time remaining for the timer to expire. This value is updated once per **OS_CFG_TMR_WHEEL_SIZE** (see **os_cfg_app.h**) that the timer task executes (described later). The value is expressed in multiples of **1/OS_CFG_TMR_TASK_RATE_HZ** of a second (see **os_cfg_app.h**).
- L12-1(9) The **.Dly** field contains the one-shot time when the timer is configured (i.e., created) as a one-shot timer and the initial delay when the timer is created as a periodic timer. The value is expressed in multiples of **1/OS_CFG_TMR_TASK_RATE_HZ** of a second (see **os_cfg_app.h**).
- L12-1(10) The **.Period** field is the timer period when the timer is created to operate in periodic mode. The value is expressed in multiples of **1/OS_CFG_TMR_TASK_RATE_HZ** of a second (see **os_cfg_app.h**).
- L12-1(11) The **.Opt** field contains options that are passed to **OSTmrCreate()**.
- L12-1(12) The **.State** field represents the current state of the timer (see Figure 12-5).

Even if the internals of the `OS_TMR` data type are understood, the application code should never access any of the fields in this data structure directly. Instead, you should always use the Application Programming Interfaces (APIs) provided with µC/OS-III.

12-4-3 TIMER MANAGEMENT INTERNALS - TIMER TASK

`OS_TmrTask()` is a task created by µC/OS-III (assumes setting `OS_CFG_TMR_EN` to 1 in `os_cfg.h`) and its priority is configurable by the user through µC/OS-III's configuration file `os_cfg_app.h` (see `OS_CFG_TMR_TASK_PRIO`). `OS_TmrTask()` is typically set to a medium priority.

`OS_TmrTask()` is a periodic task and uses the same interrupt source used to generate clock ticks. However, timers are generally updated at a slower rate (i.e., typically 10 Hz or so) and thus, the timer tick rate is divided down in software. If the tick rate is 1000 Hz and the desired timer rate is 10 Hz then the timer task will be signaled every 100th tick interrupt as shown in Figure 12-6.

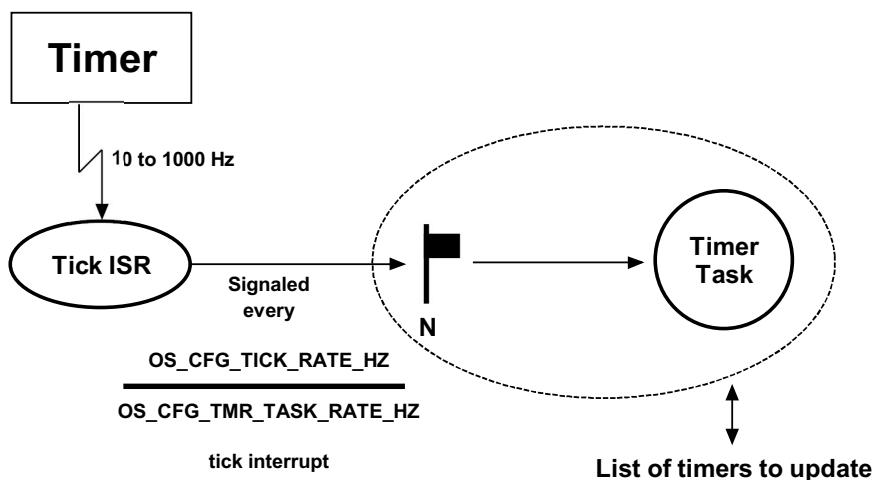


Figure 12-6 Tick ISR and Timer Task relationship

Figure 12-7 shows timing diagram associated with the timer management task.

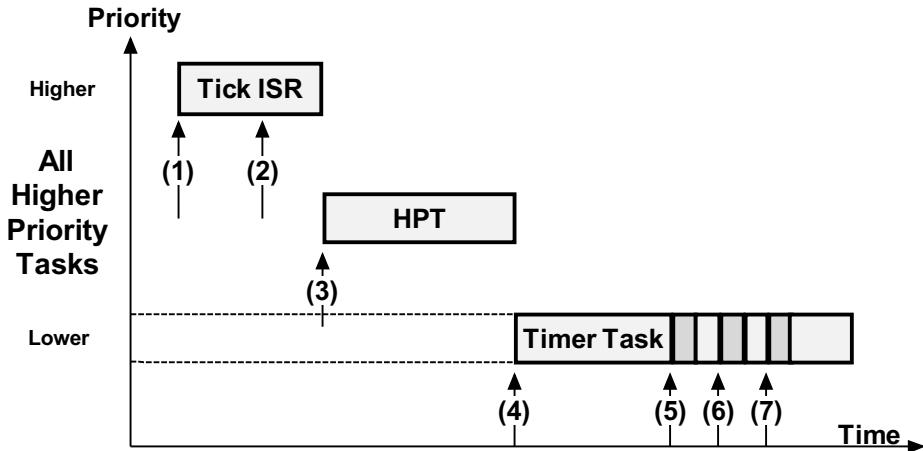


Figure 12-7 Timing Diagram

- F12-7(1) The tick ISR occurs and assumes interrupts are enabled and executes.
- F12-7(2) The tick ISR signals the tick task that it is time for it to update timers.
- F12-7(3) The tick ISR terminates, however there might be higher priority tasks that need to execute (assuming the timer task has a lower priority). Therefore, µC/OS-III runs the higher priority task(s).
- F12-7(4) When all higher priority tasks have executed, µC/OS-III switches to the timer task and determines that there are three timers that expired.
- F12-7(5) The callback for the first timer is executed.
- F12-7(6) The callback for the second expired timer is executed.
- F12-7(7) The callback for the third expired timer is executed.

There are a few interesting things to notice:

- Execution of the callback functions is performed within the context of the timer task. This means that the application code will need to make sure there is sufficient stack space for the timer task to handle these callbacks.

- The callback functions are executed one after the other based on the order they are found in the timer list.
- The execution time of the timer task greatly depends on how many timers expire and how long each of the callback functions takes to execute. Since the callbacks are provided by the application code they have a large influence on the execution time of the timer task.
- The timer callback functions must never wait on events because this would delay the timer task for excessive amounts of time, if not forever.
- Callbacks are called with the scheduler locked, so you should ensure that callbacks execute as quickly as possible.

12-4-4 TIMER MANAGEMENT INTERNALS - TIMER LIST

μ C/OS-III might need to literally maintain hundreds of timers (if an application requires that many). The timer list management needs to be implemented such that it does not take too much CPU time to update the timers. The timer list works similarly to a tick list as shown in Figure 12-8.

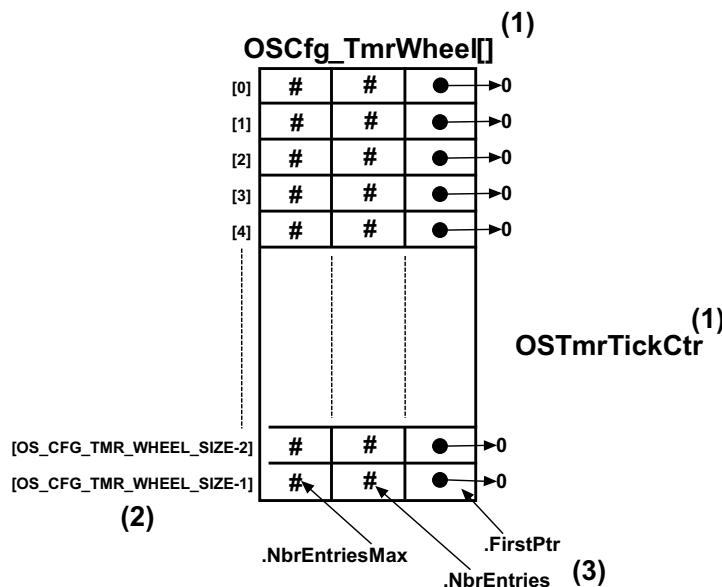


Figure 12-8 Empty Timer List

-
- 12
- F12-8(1) The timer list consists of a table (`OSCfg_TmrWheel[]`, declared in `os_cfg_app.c`) and a counter (`OSTmrTickCtr`, declared on `os.h`).
 - F12-8(2) The table contains up to `OS_CFG_TMR_WHEEL_SIZE` entries, which is a compile time configuration value (see `os_cfg_app.h`). The number of entries depends on the amount of RAM available to the processor and the maximum number of timers in the application. A good starting point for `OS_CFG_TMR_WHEEL_SIZE` might be: `#Timers/4`. It is not recommended to make `OS_CFG_TMR_WHEEL_SIZE` an even multiple of the timer task rate. In other words, if the timer task is 10 Hz, avoid setting `OS_CFG_TMR_WHEEL_SIZE` to 10 or 100 (use 11 or 101 instead). Also, use prime numbers for the timer wheel size. Although it is not really possible to plan at compile time what will happen at run time, ideally the number of timers waiting in each entry of the table is distributed uniformly.
 - F12-8(3) Each entry in the table contains three fields: `.NbrEntriesMax`, `.NbrEntries` and `.FirstPtr`. `.NbrEntries` indicates how many timers are linked to this table entry. `.NbrEntriesMax` keeps track of the highest number of entries in the table. Finally, `.FirstPtr` contains a pointer to a doubly linked list of timers (through the tasks `OS_TMR`) belonging into the list at that table position.

`OSTmrTickCtr` is incremented by `OS_TmrTask()` every time the tick ISR signals the task.

Timers are inserted in the timer list by calling `OSTmrStart()`. However, a timer must be created before it can be used.

An example to illustrate the process of inserting a timer in the timer list is as follows. Let's assume that the timer list is completely empty, `OS_CFG_TMR_WHEEL_SIZE` is configured to 9, and the current value of `OSTmrTickCtr` is 12 as shown in Figure 12-9. A timer is placed in the timer list when calling `OSTmrStart()`, and assumes that the timer was created with a delay of 1 and that this timer will be a one-shot timer as follows:

```

OS_TMR  MyTmr1;
OS_TMR  MyTmr2;

void MyTmrCallbackFnct1 (void *p_arg)
{
    /* Do something when timer #1 expires */
}

void MyTmrCallbackFnct2 (void *p_arg)
{
    /* Do something when timer #2 expires */
}

void MyTask (void *p_arg)
{
    OS_ERR  err;

    while (DEF_ON) {
        :
        OSTmrCreate((OS_TMR          *)&MyTmr1,
                    (OS_CHAR          *)"My Timer #1",
                    (OS_TICK          )1,
                    (OS_TICK          )0,
                    (OS_OPT           )OS_OPT_TMR_ONE_SHOT,
                    (OS_TMR_CALLBACK_PTR)MyTmrCallbackFnct1,
                    (void             *)0,
                    (OS_ERR          *)&err);
        /* Check 'err' */
        OSTmrStart ((OS_TMR *)MyTmr1,
                    (OS_ERR *)&err);
        /* Check "err" */
        // Continues in the next code listing!
    }
}

```

12

Listing 12-2 Creating and Starting a timer

Since `OSTmrTickCtr` has a value of 12, the timer will expire when `OSTmrTickCtr` reaches 13, or during the next time the timer task is signaled. Timers are inserted in the `OSCfg_TmrWheel[]` table using the following equation:

```

MatchValue           = OSTmrTickCtr + dly
Index into OSCfg_TmrWheel[] = MatchValue % OS_CFG_TMR_WHEEL_SIZE

```

Where “**dly**” (in this example) is the value passed in the third argument of **OSTmrCreate()** (i.e., 1 in this example). Again, using the example, we arrive at the following:

```

MatchValue           = 12 + 1
Index into OSCfg_TickWheel[] = 13 % 9

```

or,

```

MatchValue           = 13
Index into OSCfg_TickWheel[] = 4

```

Because of the “circular” nature of the table (a modulo operation using the size of the table), the table is referred to as a timer wheel, and each entry is a spoke in the wheel.

The timer is entered at index 4 in the timer wheel, **OSCfg_TmrWheel[]**. In this case, the **OS_TMR** is placed at the head of the list (i.e., pointed to by **OSCfg_TmrWheel[4].FirstPtr**), and the number of entries at index 4 is incremented (i.e., **OSCfg_TmrWheel[4].NbrEntries** will be 1). “**MatchValue**” is placed in the **OS_TMR** field **.Match**. Since this is the first timer inserted in the timer list at index 4, the **.NextPtr** and **.PrevPtr** both point to **NULL**.

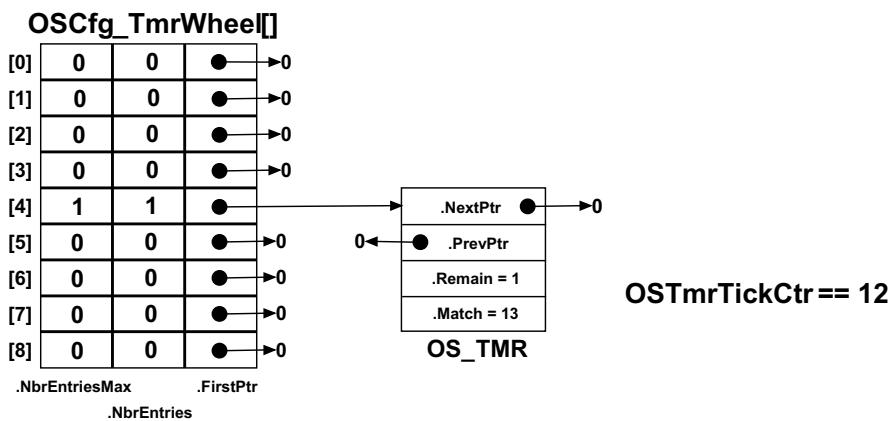


Figure 12-9 Inserting a timer in the timer list

The code below shows creating and starting another timer. This is performed “before” the timer task is signaled.

```

// Continuation of code from previous code listing.
:
:
OSTmrCreate((OS_TMR          *)&MyTmr2,
              (OS_CHAR        *)"My Timer #2",
              (OS_TICK         )10,
              (OS_TICK         )0,
              (OS_OPT          )OS_OPT_TMR_ONE_SHOT,
              (OS_TMR_CALLBACK_PTR)MyTmrCallbackFnct2,
              (void           *)0,
              (OS_ERR          *)&err);
/* Check 'err' */
OSTmrStart ((OS_TMR *)&MyTmr,
               (OS_ERR *)&err);
/* Check 'err' */
}
}

```

Listing 12-3 Creating and Starting a timer - continued

μ C/OS-III will calculate the match value and index as follows:

```

MatchValue      = 12 + 10
Index into OSCfg_TmrWheel[] = 22 % 9

```

or,

```

MatchValue      = 22
Index into OSCfg_TickWheel[] = 4

```

The “second timer” will be inserted at the same table entry as shown in Figure 12-10, but sorted so that the timer with the least amount of time remaining before expiration is placed at the head of the list, and the timer with the longest to wait at the end.

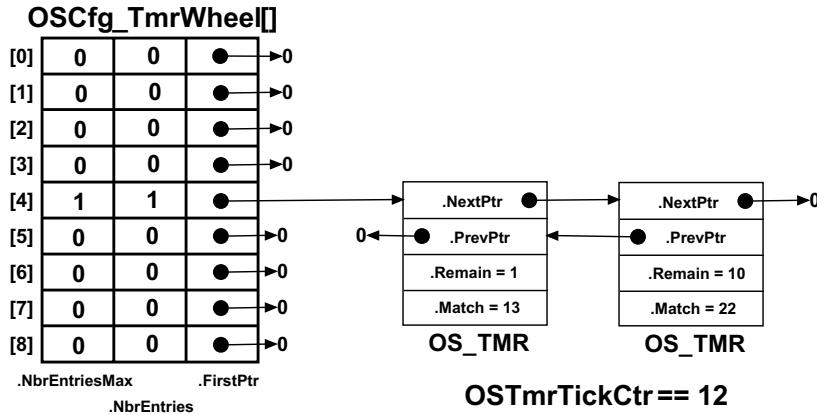


Figure 12-10 Inserting a second timer in the tick list

When the timer task executes (see `OS_TmrTask()` in `os_tmr.c`), it starts by incrementing `OSTmrTickCtr` and determines which table entry (i.e., spoke) it needs to update. Then, if there are timers in the list at this entry (i.e., `.FirstPtr` is not `NULL`), each `OS_TMR` is examined to determine whether the `.Match` value “matches” `OSTmrTickCtr` and, if so, the `OS_TMR` is removed from the list and `OS_TmrTask()` calls the timer callback function, assuming one was defined when the timer was created. The search through the list terminates as soon as `OSTmrTickCtr` does not match the timer’s `.Match` value. In other words, there is no point in looking any further in the list since the list is already sorted.

Note that `OS_TmrTask()` does most of its work with the scheduler locked. However, because the list is sorted, and the search through the list terminates as soon as there no longer is a match, the critical section should be fairly short.

12-5 SUMMARY

Timers are down counters that perform an action when the counter reaches zero. The action is provided by the user through a callback function.

μ C/OS-III allows application code to create any number of timers (limited only by the amount of RAM available).

The callback functions are executed in the context of the timer task with the scheduler locked. You must keep callback functions as short and as fast as possible and do not have the callbacks make blocking calls.

Chapter 13

Resource Management

This chapter will discuss services provided by µC/OS-III to manage shared resources. A shared resource is typically a variable (static or global), a data structure, table (in RAM), or registers in an I/O device.

When protecting a shared resource it is preferred to use mutual exclusion semaphores, as will be described in this chapter. Other methods are also presented.

Tasks can easily share data when all tasks exist in a single address space and can reference global variables, pointers, buffers, linked lists, ring buffers, etc. Although sharing data simplifies the exchange of information between tasks, it is important to ensure that each task has exclusive access to the data to avoid contention and data corruption.

For example, when implementing a module that performs a simple time-of-day algorithm in software, the module obviously keeps track of hours, minutes and seconds. The `TimeOfDay()` task may appear as shown in Listing 13-1.

Imagine if this task was preempted by another task because an interrupt occurred, and, the other task was more important than the `TimeOfDay()` task) after setting the Minutes to 0. Now imagine what will happen if this higher priority task wants to know the current time from the time-of-day module. Since the Hours were not incremented prior to the interrupt, the higher-priority task will read the time incorrectly and, in this case, it will be incorrect by a whole hour.

The code that updates variables for the `TimeOfDay()` task must treat all of the variables indivisibly (or atomically) whenever there is possible preemption. Time-of-day variables are considered shared resources and any code that accesses those variables must have exclusive access through what is called a critical section. µC/OS-III provides services to protect shared resources and enables the easy creation of critical sections.

```
CPU_INT08U Hours;
CPU_INT08U Minutes;
CPU_INT08U Seconds;

void TimeOfDay (void *p_arg)
{
    OS_ERR err;

    (void)&p_arg;
    while (DEF_ON) {
        OSTimeDlyHMSM(0,
                      0,
                      1,
                      0,
                      OS_OPT_TIME_HMSM_STRICT,
                      &err);
        /* Examine "err" to make sure the call was successful */
        Seconds++;
        if (Seconds > 59) {
            Seconds = 0;
            Minutes++;
            if (Minutes > 59) {
                Minutes = 0;
                Hours++;
                if (Hours > 23) {
                    Hours = 0;
                }
            }
        }
    }
}
```

Listing 13-1 Faulty Time-Of-Day clock task

The most common methods of obtaining exclusive access to shared resources and to create *critical sections* are:

- disabling interrupts
- disabling the scheduler
- using semaphores
- using mutual exclusion semaphores (a.k.a. a mutex)

The mutual exclusion mechanism used depends on how fast the code will access a shared resource, as shown in Table 13-1.

Resource Sharing Method	When should you use?
Disable/Enable Interrupts	<p>When access to shared resource is very quick (reading from or writing to few variables) and access is faster than μC/OS-III's interrupt disable time.</p> <p>It is highly recommended to not use this method as it impacts interrupt latency.</p>
Locking/Unlocking the Scheduler	<p>When access time to the shared resource is longer than μC/OS-III's interrupt disable time, but shorter than μC/OS-III's scheduler lock time.</p> <p>Locking the scheduler has the same effect as making the task that locks the scheduler the highest-priority task.</p> <p>It is recommended not to use this method since it defeats the purpose of using μC/OS-III. However, it is a better method than disabling interrupts, as it does not impact interrupt latency.</p>
Semaphores	<p>When all tasks that need to access a shared resource do not have deadlines. This is because semaphores may cause unbounded priority inversions (described later). However, semaphore services are slightly faster (in execution time) than mutual-exclusion semaphores.</p>
Mutual Exclusion Semaphores	<p>This is the preferred method for accessing shared resources, especially if the tasks that need to access a shared resource have deadlines.</p> <p>μC/OS-III's mutual exclusion semaphores have a built-in priority inheritance mechanism, which avoids unbounded priority inversions. However, mutual exclusion semaphore services are slightly slower (in execution time) than semaphores since the priority of the owner may need to be changed, which requires CPU processing.</p>

Table 13-1 Resource sharing

13-1 DISABLE/ENABLE INTERRUPTS

The easiest and fastest way to gain exclusive access to a shared resource is by disabling and enabling interrupts, as shown in the pseudo-code in Listing 13-2.

```
Disable Interrupts;  
Access the resource;  
Enable Interrupts;
```

Listing 13-2 Disabling and Enabling Interrupts

μC/OS-III uses this technique (as do most, if not all, kernels) to access certain internal variables and data structures, ensuring that these variables and data structures are manipulated atomically. However, disabling and enabling interrupts are actually CPU-related functions rather than OS-related functions and functions in CPU-specific files are provided to accomplish this (see the `cpu.h` file of the processor being used). The services provided in the CPU module are called μC/CPU. Each different target CPU architecture has its own set of μC/CPU-related files.

```
void YourFunction (void)  
{  
    CPU_SR_ALLOC();          (1)  
  
    CPU_CRITICAL_ENTER();     (2)  
    Access the resource;      (3)  
    CPU_CRITICAL_EXIT();     (4)  
}
```

Listing 13-3 Using CPU macros to disable and enable interrupts

- L13-3(1) The `CPU_SR_ALLOC()` macro is required when the other two macros that disable/enable interrupts are used. This macro simply allocates storage for a local variable to hold the value of the current interrupt disable status of the CPU. If interrupts are already disabled we do not want to enable them upon exiting the critical section.

- L13-3(2) `CPU_CRITICAL_ENTER()` saves the current state of the CPU interrupt disable flag(s) in the local variable allocated by `CPU_SR_ALLOC()` and disables all maskable interrupts.
- L13-3(3) The critical section of code is then accessed without fear of being changed by either an ISR or another task because interrupts are disabled. In other words, this operation is now atomic.
- L13-3(4) `CPU_CRITICAL_EXIT()` restores the previously saved interrupt disable status of the CPU from the local variable.

`CPU_CRITICAL_ENTER()` and `CPU_CRITICAL_EXIT()` are always used in pairs. Interrupts should be disabled for as short a time as possible as disabling interrupts impacts the response of the system to interrupts. This is known as interrupt latency. Disabling and enabling is used only when changing or copying a few variables.

13

Note that this is the only way that a task can share variables or data structures with an ISR.

μ C/CPU provides a way to actually measure interrupt latency.

When using μ C/OS-III, interrupts may be disabled for as much time as μ C/OS-III does, without affecting *interrupt latency*. Obviously, it is important to know how long μ C/OS-III disables interrupts, which depends on the CPU used.

Although this method works, you should avoid disabling interrupts as it affects the responsiveness of the system to real-time events.

13-2 LOCK/UNLOCK

If the task does not share variables or data structures with an ISR, you can disable and enable µC/OS-III's scheduler while accessing the resource, as shown in Listing 13-4.

```
void YourFunction (void)
{
    OS_ERR err();           (1)

    OSSchedLock(&err);      (2)
    Access the resource;    (3)
    OSSchedUnlock(&err);   (4)
}
```

Listing 13-4 Accessing a resource with the scheduler locked

Using this method, two or more tasks share data without the possibility of contention. Note that while the scheduler is locked, interrupts are enabled and if an interrupt occurs while in the critical section, the ISR is executed immediately. At the end of the ISR, the kernel always returns to the interrupted task even if a higher priority task is made ready-to-run by the ISR. Since the ISR returns to the interrupted task, the behavior of the kernel is similar to that of a non-preemptive kernel (while the scheduler is locked).

`OSSchedLock()` and `OSSchedUnlock()` can be nested up to 250 levels deep. The scheduler is invoked only when `OSSchedUnlock()` is called the same number of times the application called `OSSchedLock()`.

After the scheduler is unlocked, µC/OS-III performs a context switch if a higher priority task is ready-to-run.

µC/OS-III will not allow the user to make blocking calls when the scheduler is locked. If the application were able to make blocking calls, the application would most likely fail.

Although this method works well, you can avoid disabling the scheduler as it defeats the purpose of having a preemptive kernel. Locking the scheduler makes the current task the highest priority task.

13-3 SEMAPHORES

A semaphore was originally a mechanical signaling mechanism. The railroad industry used the device to provide a form of mutual exclusion for railroads tracks shared by more than one train. In this form, the semaphore signaled trains by closing a set of mechanical arms to block a train from a section of track that was currently in use. When the track became available, the arm would swing up and the waiting train would then proceed.

The notion of using a semaphore in software as a means of mutual exclusion was invented by the Dutch computer scientist Edsger Dijkstra in 1959. In computer software, a semaphore is a protocol mechanism offered by most multitasking kernels. Semaphores, originally used to control access to shared resources, but now they are used for synchronization as described in Chapter 14, “Synchronization” on page 273. However, it is useful to describe how semaphores can be used to share resources. The pitfalls of semaphores will be discussed in a later section.

A semaphore was originally a “lock mechanism” and code acquired the key to this lock to continue execution. Acquiring the key means that the executing task has permission to enter the section of otherwise locked code. Entering a section of locked code causes the task to wait until the key becomes available.

Typically, two types of semaphores exist: binary semaphores and counting semaphores. As its name implies, a binary semaphore can only take two values: 0 or 1. A counting semaphore allows for values between 0 and 255, 65,535, or 4,294,967,295, depending on whether the semaphore mechanism is implemented using 8, 16, or 32 bits, respectively. For μC/OS-III, the maximum value of a semaphore is determined by the data type `OS_SEM_CTR` (see `os_type.h`), which can be changed as needed. Along with the semaphore’s value, μC/OS-III also keeps track of tasks waiting for the semaphore’s availability.

Only tasks are allowed to use semaphores when semaphores are used for sharing resources; ISRs are not allowed.

A semaphore is a kernel object defined by the `OS_SEM` data type, which is defined by the structure `os_sem` (see `os.h`). The application can have any number of semaphores (limited only by the amount of RAM available).

There are a number of operations the application is able to perform on semaphores, summarized in Table 13-2. In this chapter, only three functions used most often are discussed: `OSSemCreate()`, `OSSemPend()`, and `OSSemPost()`. Other functions are described in Appendix A, “μC/OS-III API Reference” on page 443. When semaphores are used for sharing resources, every semaphore function must be called from a task and never from an ISR. The same limitation does not apply when using semaphores for signaling, as described later in Chapter 13.

Function Name	Operation
<code>OSSemCreate()</code>	Create a semaphore.
<code>OSSemDel()</code>	Delete a semaphore.
<code>OSSemPend()</code>	Wait on a semaphore.
<code>OSSemPendAbort()</code>	Abort the wait on a semaphore.
<code>OSSemPost()</code>	Release or signal a semaphore.
<code>OSSemSet()</code>	Force the semaphore count to a desired value.

Table 13-2 **Semaphore API summary**

13-3-1 BINARY SEMAPHORES

A task that wants to acquire a resource must perform a Wait (or Pend) operation. If the semaphore is available (the semaphore value is greater than 0), the semaphore value is set to 0, and the task continues execution (owning the resource). If the semaphore's value is 0, the task performing a Wait on the semaphore is placed in a waiting list. µC/OS-III allows a timeout to be specified. If the semaphore is not available within a certain amount of time, the requesting task is made ready-to-run, and an error code (indicating that a timeout has occurred) is returned to the caller.

A task releases a semaphore by performing a Signal (or Post) operation. If no task is waiting for the semaphore, the semaphore value is simply set to 1. If there is at least one task waiting for the semaphore, the highest-priority task waiting on the semaphore is made ready-to-run, and the semaphore value is not incremented. If the readied task has a higher priority than the current task (the task releasing the semaphore), a context switch occurs and the higher-priority task resumes execution. The current task is suspended until it again becomes the highest-priority task that is ready-to-run.

The operations described above are summarized using the pseudo-code shown in Listing 13-5.

```
OS_SEM  MySem;                                (1)

void  main (void)
{
    OS_ERR  err;
    :
    :
    OSInit(&err);
    :
    OSSemCreate(&MySem,                      (2)
                "My Semaphore",          (3)
                1,                      (4)
                &err);                  (5)
    /* Check "err" */
    :
    /* Create task(s) */
    :
    OSStart(&err);
    (void)err;
}
```

Listing 13-5 Using a semaphore to access a shared resource

- L13-5(1) The application must declare a semaphore as a variable of type `OS_SEM`. This variable will be referenced by other semaphore services.
- L13-5(2) You create a semaphore by calling `OSSemCreate()` and pass the address to the semaphore allocated in (1). The semaphore must be created before it can be used by other tasks. Here, the semaphore is initialized in startup code (i.e., `main ()`), however it could also be initialized by a task (but it must be initialized before it is used).
- L13-5(3) You can assign an ASCII name to the semaphore, which can be used by debuggers or µC/Probe to easily identify the semaphore. Storage for the ASCII characters is typically in ROM, which is typically more plentiful than RAM. If it is necessary to change the name of the semaphore at runtime, you can store the characters in an array in RAM and simply pass the address of the array to `OSSemCreate()`. Of course, the array must be NUL terminated.
- L13-5(4) You specify the initial value of the semaphore. You should initialize the semaphore to 1 when the semaphore is used to access a single shared resource (as in this example).
- L13-5(5) `OSSemCreate()` returns an error code based on the outcome of the call. If all the arguments are valid, `err` will contain `OS_ERR_NONE`. Refer to the description of `OSSemCreate()` in Appendix A, “µC/OS-III API Reference” on page 443 for a list of other error codes and their meaning.

```

void Task1 (void *p_arg)
{
    OS_ERR err;
    CPU_TS ts;

    while (DEF_ON) {
        :
        OSSemPend(&MySem,                      (1)
                   0,                         (2)
                   OS_OPT_PEND_BLOCKING,      (3)
                   &ts,                      (4)
                   &err);                    (5)

        switch (err) {
            case OS_ERR_NONE:
                Access Shared Resource;          (6)
                OSSemPost(&MySem,                 (7)
                           OS_OPT_POST_1,         (8)
                           &err);                  (9)
                /* Check "err" */
                break;

            case OS_ERR_PEND_ABORT:
                /* The pend was aborted by another task */
                break;

            case OS_ERR_OBJ_DEL:
                /* The semaphore was deleted */
                break;

            default:
                /* Other errors */
        }
        :
    }
}

```

Listing 13-6 Using a semaphore to access a shared resource

- L13-6(1) The task pends (or waits) on the semaphore by calling `OSSemPend()`. The application must specify the desired semaphore to wait upon, and the semaphore must have been previously created.
- L13-6(2) The next argument is a timeout specified in number of clock ticks. The actual timeout depends on the tick rate. If the tick rate (see `os_cfg_app.h`) is set to 1000, a timeout of 10 ticks represents 10 milliseconds. Specifying a timeout of zero (0) means waiting forever for the semaphore.

-
- 13
- L13-6(3) The third argument specifies how to wait. There are two options: `OS_OPT_PEND_BLOCKING` and `OS_OPT_PEND_NON_BLOCKING`. The blocking option means that if the semaphore is not available, the task calling `OSSemPend()` will wait until the semaphore is posted or until the timeout expires. The non-blocking option indicates that if the semaphore is not available, `OSSemPend()` will return immediately and not wait. This last option is rarely used when using a semaphore to protect a shared resource.
 - L13-6(4) When the semaphore is posted, μC/OS-III reads a “timestamp” and returns this timestamp when `OSSemPend()` returns. This feature allows the application to know “when” the post happened and the semaphore was released. At this point, `OS_TS_GET()` is read to get the current timestamp and you can compute the difference, indicating the length of the wait.
 - L13-6(5) `OSSemPend()` returns an error code based on the outcome of the call. If the call is successful, `err` will contain `OS_ERR_NONE`. If not, the error code will indicate the reason for the error. See Appendix A, “μC/OS-III API Reference” on page 443 for a list of possible error code for `OSSemPend()`. Checking for error return values is important since other tasks might delete or otherwise abort the pend. However, it is not a recommended practice to delete kernel objects at run time as the action may cause serious problems.
 - L13-6(6) The resource can be accessed when `OSSemPend()` returns, if there are no errors.
 - L13-6(7) When finished accessing the resource, you simply call `OSSemPost()` and specify the semaphore to be released.
 - L13-6(8) `OS_OPT_POST_1` indicates that the semaphore is signaling a single task, if there are many tasks waiting on the semaphore. In fact, you should always specify this option when a semaphore is used to access a shared resource.
 - L13-6(9) As with most μC/OS-III functions, you specify the address of a variable that will receive an error message from the call.

```
void Task2 (void *p_arg)
{
    OS_ERR err;
    CPU_TS ts;

    while (DEF_ON) {
        :
        OSSemPend(&MySem,                               (1)
                   0,
                   OS_OPT_PEND_BLOCKING,
                   &ts,
                   &err);
        switch (err) {
            case OS_ERR_NONE:
                Access Shared Resource;
                OSSemPost(&MySem,
                           OS_OPT_POST_1,
                           &err);
                /* Check "err" */
                break;

            case OS_ERR_PEND_ABORT:
                /* The pend was aborted by another task */
                break;

            case OS_ERR_OBJ_DEL:
                /* The semaphore was deleted */
                break;

            default:
                /* Other errors */
        }
        :
    }
}
```

Listing 13-7 Using a semaphore to access a shared resource

- L13-7(1) Another task wanting to access the shared resource needs to use the same procedure to access the shared resource.

Semaphores are especially useful when tasks share I/O devices. Imagine what would happen if two tasks were allowed to send characters to a printer at the same time. The printer would contain interleaved data from each task. For instance, the printout from Task 1 printing “I am Task 1,” and Task 2 printing “I am Task 2,” could result in “I Ia amm T Tasask k1 2”. In this case, you can use a semaphore and initialize it to 1 (i.e., a binary semaphore). The rule is simple: to access the printer each task must first obtain the resource’s semaphore. Figure 13-1 shows tasks competing for a semaphore to gain exclusive access to the printer. Note that a key, indicating that each task must obtain this key to use the printer, represents the semaphore symbolically.

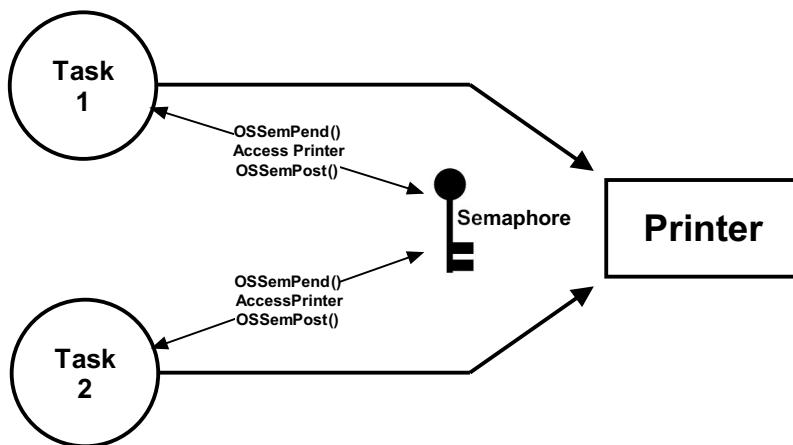


Figure 13-1 Using a semaphore to access a printer

The above example implies that each task knows about the existence of the semaphore to access the resource. It is almost always better to encapsulate the critical section and its protection mechanism. Each task would therefore not know that it is acquiring a semaphore when accessing the resource. For example, an RS-232C port is used by multiple tasks to send commands and receive responses from a device connected at the other end as shown in Figure 13-2.

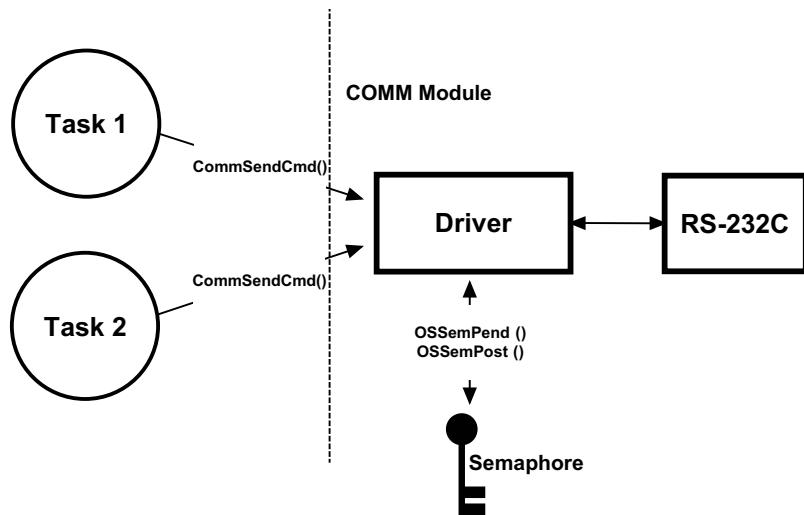


Figure 13-2 Hiding a semaphore from a task

The function `CommSendCmd()` is called with three arguments: the ASCII string containing the command, a pointer to the response string from the device, and finally, a timeout in case the device does not respond within a certain amount of time. The pseudo-code for this function is shown in Listing 13-8.

```

APP_ERR CommSendCmd (CPU_CHAR *cmd,
                     CPU_CHAR *response,
                     OS_TICK   timeout)
{
    Acquire serial port's semaphore;
    Send "cmd" to device;
    Wait for response with "timeout";
    if (timed out) {
        Release serial port's semaphore;
        return (error code);
    } else {
        Release serial port's semaphore;
        return (no error);
    }
}

```

Listing 13-8 Encapsulating the use of a semaphore

Each task that needs to send a command to the device must call this function. The semaphore is assumed to be initialized to 1 (i.e., available) by the communication driver initialization routine. The first task that calls `CommSendCmd()` acquires the semaphore, proceeds to send the command, and waits for a response. If another task attempts to send a command while the port is busy, this second task is suspended until the semaphore is released. The second task appears simply to have made a call to a normal function that will not return until the function performs its duty. When the semaphore is released by the first task, the second task acquires the semaphore and is allowed to use the RS-232C port.

13-3-2 COUNTING SEMAPHORES

A counting semaphore is used when elements of a resource can be used by more than one task at the same time. For example, a counting semaphore is used in the management of a buffer pool, as shown in Figure 13-3. Let's assume that the buffer pool initially contains 10 buffers. A task obtains a buffer from the buffer manager by calling `BufReq()`. When the buffer is no longer needed, the task returns the buffer to the buffer manager by calling `BufRel()`. The pseudo-code for these functions is shown in Listing 13-9.

The buffer manager satisfies the first 10 buffer requests because the semaphore is initialized to 10. When all buffers are used, a task requesting a buffer is suspended until a buffer becomes available. You use µC/OS-III's `OSMemGet()` and `OSMemPut()` (see Chapter 17, “Memory Management” on page 343) to obtain a buffer from the buffer pool. When a task is finished with the buffer it acquired, the task calls `BufRel()` to return the buffer to the buffer manager and the buffer is inserted into the linked list before the semaphore is signaled. By encapsulating the interface to the buffer manager in `BufReq()` and `BufRel()`, the caller does not need to be concerned with actual implementation details.

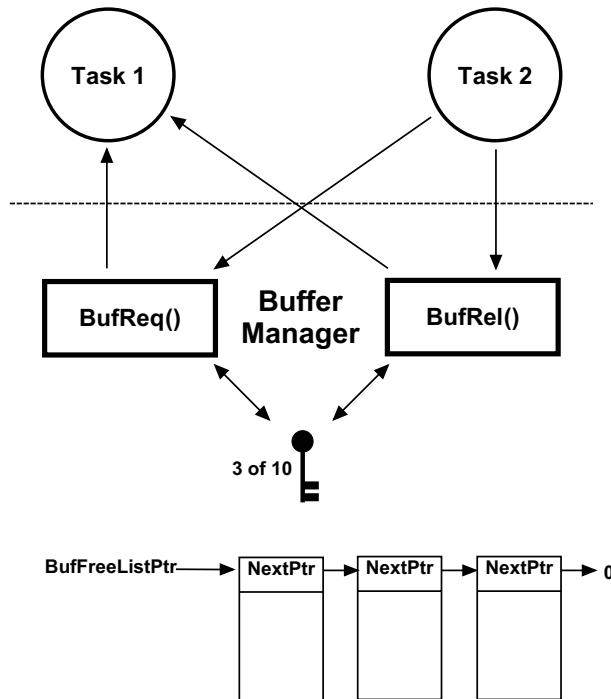


Figure 13-3 Using a counting semaphore

```

BUF *BufReq (void)
{
    BUF *ptr;

    Wait on semaphore;
    ptr = OSMemGet(...); /* Get a buffer */
    return (ptr);
}

void BufRel (BUF *ptr)
{
    OSMemPut(..., (void *)ptr, ...); /* Return the buffer */
    Signal semaphore;
}

```

Listing 13-9 Buffer management using a semaphore.

Note that the details of creating the memory partition are removed since this is discussed in Chapter 17, “Memory Management” on page 343. The semaphore is used here to extend the memory management capabilities of µC/OS-III, and to provide it with a blocking mechanism. However, only tasks can make `BufReq()` and `BufRel()` calls.

13-3-3 NOTES ON SEMAPHORES

Using a semaphore to access a shared resource does not increase interrupt latency. If an ISR or the current task makes a higher priority task ready-to-run while accessing shared data, the higher priority task executes immediately.

An application may have as many semaphores as required to protect a variety of different resources. For example, one semaphore may be used to access a shared display, another to access a shared printer, another for shared data structures, and another to protect a pool of buffers, etc. However, it is preferable to use semaphores to protect access to I/O devices rather than memory locations.

Semaphores are often overused. The use of a semaphore to access a simple shared variable is overkill in most situations. The overhead involved in acquiring and releasing the semaphore consumes valuable CPU time. You can perform the job more efficiently by disabling and enabling interrupts, however there is an indirect cost to disabling interrupts: even higher priority tasks that do not share the specific resource are blocked from using the CPU. Suppose, for instance, that two tasks share a 32-bit integer variable. The first task increments the variable, while the second task clears it. When considering how long a processor takes to perform either operation, it is easy to see that a semaphore is not required to gain exclusive access to the variable. Each task simply needs to disable interrupts before performing its operation on the variable and enable interrupts when the operation is complete. A semaphore should be used if the variable is a floating-point variable and the microprocessor does not support hardware floating-point operations. In this case, the time involved in processing the floating-point variable may affect interrupt latency if interrupts are disabled.

Semaphores are subject to a serious problem in real-time systems called priority inversion, which is described in section 13-3-5 “Priority Inversions” on page 254.

13-3-4 SEMAPHORE INTERNALS (FOR RESOURCE SHARING)

As previously mentioned, a semaphore is a kernel object as defined by the `OS_SEM` data type, which is derived from the structure `os_sem` (see `os.h`) as shown in Listing 13-10.

The services provided by μC/OS-III to manage semaphores are implemented in the file `os_sem.c`. Semaphore services are enabled at compile time by setting the configuration constant `OS_CFG_SEM_EN` to 1 in `os_cfg.h`.

```
typedef struct os_sem OS_SEM;           (1)

struct os_sem {
    OS_OBJ_TYPE      Type;            (2)
    CPU_CHAR         *NamePtr;        (3)
    OS_PEND_LIST     PendList;       (4)
    OS_SEM_CTR       ctr;            (5)
    CPU_TS           TS;             (6)
};
```

Listing 13-10 `OS_SEM` data type

- L13-10(1) In μC/OS-III, all structures are given a data type. All data types start with “`OS_`” and are uppercase. When a semaphore is declared, you simply use `OS_SEM` as the data type of the variable used to declare the semaphore.
- L13-10(2) The structure starts with a “Type” field, which allows it to be recognized by μC/OS-III as a semaphore. Other kernel objects will also have a “`.Type`” as the first member of the structure. If a function is passed a kernel object, μC/OS-III will confirm that it is being passed the proper data type (assuming `OS_CFG_OBJ_TYPE_CHK_EN` is set to 1 in `os_cfg.h`). For example, if you pass a message queue (`OS_Q`) to a semaphore service (for example `OSSemPend()`), μC/OS-III will recognize that an invalid object was passed, and return an error code accordingly.
- L13-10(3) Each kernel object can be given a name for easier recognition by debuggers or μC/Probe. This member is simply a pointer to an ASCII string, which is assumed to be NUL terminated.

L13-10(4) Since it is possible for multiple tasks to wait (or pend) on a semaphore, the semaphore object contains a pend list as described in Chapter 10, “Pend Lists (or Wait Lists)” on page 197.

L13-10(5) A semaphore contains a counter. As explained above, the counter can be implemented as either an 8-, 16- or 32-bit value, depending on how the data type `os_SEM_CTR` is declared in `os_type.h`.

μ C/OS-III does not make a distinction between binary and counting semaphores. The distinction is made when the semaphore is created. If creating a semaphore with an initial value of 1, it is a binary semaphore. When creating a semaphore with a value > 1, it is a counting semaphore. In the next chapter, you will discover that a semaphore is more often used as a signaling mechanism and therefore, the semaphore counter is initialized to zero.

L13-10(6) A semaphore contains a timestamp used to indicate the last time the semaphore was posted. μ C/OS-III assumes the presence of a free-running counter that allows the application to make time measurements. When the semaphore is posted, the free-running counter is read and the value is placed in this field, which is returned when `OSSemPend()` is called. The value of this field is more useful when a semaphore is used as a signaling mechanism (see Chapter 14, “Synchronization” on page 273), as opposed to a resource-sharing mechanism.

Even if the user understands the internals of the `os_SEM` data type, the application code should never access any of the fields in this data structure directly. Instead, you should always use the APIs provided with μ C/OS-III.

As previously mentioned, semaphores must be created before they can be used by an application.

A task waits on a semaphore before accessing a shared resource by calling `OSSemPend()` as shown in Listing 13-11 (see Appendix A, “ μ C/OS-III API Reference” on page 443 for details regarding the arguments).

```

OS_SEM  MySem;

void MyTask (void *p_arg)
{
    OS_ERR  err;
    CPU_TS  ts;

    :
    while (DEF_ON) {
        :
        OSSemPend(&MySem,           /* (1) Pointer to semaphore          */
                   10,                /* Wait up until this time for the semaphore */
                   OS_OPT_PEND_BLOCKING, /* Option(s)                         */
                   &ts,               /* Returned timestamp of when sem. was released */
                   &err);             /* Pointer to Error returned         */

        :
        /* Check "err" */          /* (2)                                */
        :
        OSSemPost(&MySem,          /* (3) Pointer to semaphore          */
                  OS_OPT_POST_1,   /* Option(s) ... always OS_OPT_POST_1 */
                  &err);            /* Pointer to Error returned         */
        /* Check "err" */
        :
        :
    }
}

```

Listing 13-11 Pending on and Posting to a Semaphore

- L13-11(1) When called, `OSSemPend()` starts by checking the arguments passed to this function to make sure they have valid values (assuming `OS_CFG_ARG_CHK_EN` is set to 1 in `os_cfg.h`).

If the semaphore counter (`.Ctr` of `OS_SEM`) is greater than zero, the counter is decremented and `OSSemPend()` returns. If `OSSemPend()` returns without error, then the task now owns the shared resource.

If the semaphore counter is zero, then another task owns the semaphore, and the calling task will need to wait for the semaphore to be released. If you specify `OS_OPT_PEND_NON_BLOCKING` as the option (the application does not want the task to block), `OSSemPend()` returns immediately to the caller and the

returned error code indicates that the semaphore is unavailable. You use this option if the task does not want to wait for the resource to be available, and would prefer to do something else and check back later.

If you specify the `OS_OPT_PEND_BLOCKING` option, the calling task will be inserted in the list of tasks waiting for the semaphore to become available. The task is inserted in the list by priority order and therefore, the highest priority task waiting on the semaphore is at the beginning of the list.

If you specify a non-zero timeout, the task will also be inserted in the tick list. A zero value for a timeout indicates that the user is willing to wait forever for the semaphore to be released. Most of the time, you would specify an infinite timeout when using the semaphore in resource sharing. Adding a timeout may temporarily break a deadlock, however, there are better ways of preventing deadlock at the application level (e.g., never hold more than one semaphore at the same time; resource ordering; etc.).

Assuming blocking, the scheduler is called since the current task is no longer able to run (it is waiting for the semaphore to be released). The scheduler will then run the next highest-priority task that is ready-to-run.

When the semaphore is released and the task that called `OSSemPend()` is again the highest-priority task, μC/OS-III examines the task status to determine the reason why `OSSemPend()` is returning to its caller. The possibilities are:

- 1) The semaphore was given to the waiting task. This is the preferred outcome.
- 2) The pend was aborted by another task
- 3) The semaphore was not posted within the specified timeout
- 4) The semaphore was deleted

When `OSSemPend()` returns, the caller is notified of the above outcome through an appropriate error code.

-
- L13-11(2) If `OSSemPend()` returns with `err` set to `OS_ERR_NONE`, your code can assume that it now has access to the resource.

If `err` contains anything else, `OSSemPend()` either timed out (if the timeout argument was non-zero), the pend was aborted by another task, or the semaphore was deleted by another task. It is always important to examine the returned error code and not assume that everything went well.

- L13-11(3) When the task is finished accessing the resource, it needs to call `OSSemPost()` and specify the same semaphore. Again, `OSSemPost()` starts by checking the arguments passed to this function to make sure there are valid values (assuming `OS_CFG_ARG_CHK_EN` is set to 1 in `os_cfg.h`).

`OSSemPost()` then calls `OS_TS_GET()` to obtain the current timestamp so it can place that information in the semaphore to be used by `OSSemPend()`. This feature is not as useful when semaphores are used to share resources as it is when used as a signaling mechanism.

`OSSemPost()` checks to see if any tasks are waiting for the semaphore. If not, `OSSemPost()` simply increments `p_sem->Ctr`, saves the timestamp in the semaphore, and returns.

If there are tasks waiting for the semaphore to be released, `OSSemPost()` extracts the highest-priority task waiting for the semaphore. This is a fast operation as the pend list is sorted by priority order.

When calling `OSSemPost()`, it is possible to specify as an option to not call the scheduler. This means that the post is performed, but the scheduler is not called even if a higher priority task waits for the semaphore to be released. This allows the calling task to perform other post functions (if needed) and make all posts take effect simultaneously without the possibility of context switching in between each post.

13-3-5 PRIORITY INVERSIONS

Priority inversion is a problem in real-time systems, and occurs only when using a priority-based preemptive kernel. Figure 13-4 illustrates a priority-inversion scenario. Task H (high priority) has a higher priority than Task M (medium priority), which in turn has a higher priority than Task L (low priority).

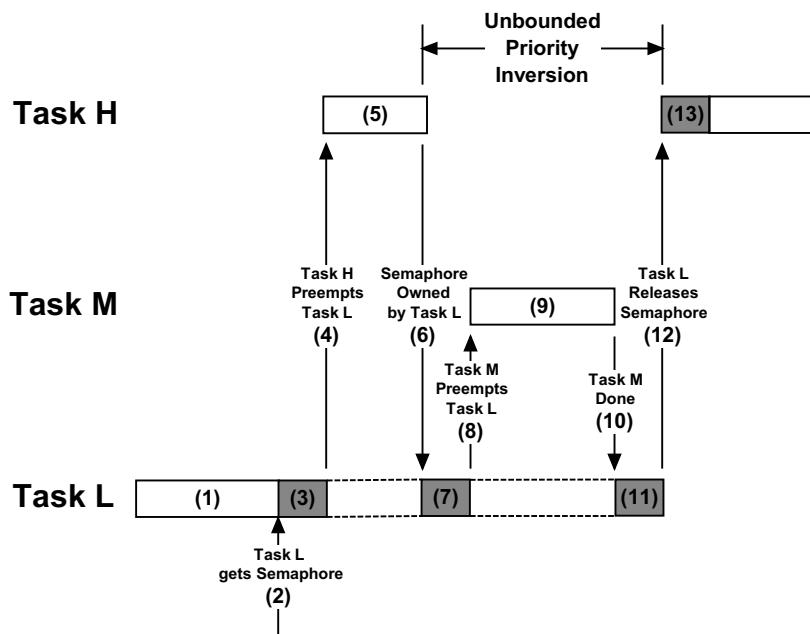


Figure 13-4 Unbounded priority Inversion

- F13-4(1) Task H and Task M are both waiting for an event to occur and Task L is executing.
- F13-4(2) At some point, Task L acquires a semaphore, which it needs before it can access a shared resource.
- F13-4(3) Task L performs operations on the acquired resource.
- F13-4(4) The event that Task H was waiting for occurs, and the kernel suspends Task L and start executing Task H since Task H has a higher priority.

-
- F13-4(5) Task H performs computations based on the event it just received.
 - F13-4(6) Task H now wants to access the resource that Task L currently owns (i.e., it attempts to get the semaphore that Task L owns). Because Task L owns the resource, Task H is placed in a list of tasks waiting for the semaphore to be available.
 - F13-4(7) Task L is resumed and continues to access the shared resource.
 - F13-4(8) Task L is preempted by Task M since the event that Task M was waiting for occurred.
 - F13-4(9) Task M handles the event.
 - F13-4(10) When Task M completes, the kernel relinquishes the CPU back to Task L.
 - F13-4(11) Task L continues accessing the resource.
 - F13-4(12) Task L finally finishes working with the resource and releases the semaphore. At this point, the kernel knows that a higher-priority task is waiting for the semaphore, and a context switch takes place to resume Task H.
 - F13-4(13) Task H has the semaphore and can access the shared resource.

So, what happened here is that the priority of Task H has been reduced to that of Task L since it waited for the resource that Task L owned. The trouble begins when Task M preempted Task L, further delaying the execution of Task H. This is called an *unbounded priority inversion*. It is unbounded because any medium priority can extend the time Task H has to wait for the resource. Technically, if all medium-priority tasks have known worst-case periodic behavior and bounded execution times, the priority inversion time is computable. This process, however, may be tedious and would need to be revised every time the medium priority tasks change.

This situation can be corrected by raising the priority of Task L, only during the time it takes to access the resource, and restore the original priority level when the task is finished. The priority of Task L should be raised up to the priority of Task H. In fact, μC/OS-III contains a special type of semaphore that does just that and is called a mutual-exclusion semaphore.

13-4 MUTUAL EXCLUSION SEMAPHORES (MUTEX)

μ C/OS-III supports a special type of binary semaphore called a mutual exclusion semaphore (also known as a mutex) that eliminates unbounded priority inversions. Figure 13-5 shows how priority inversions are bounded using a Mutex.

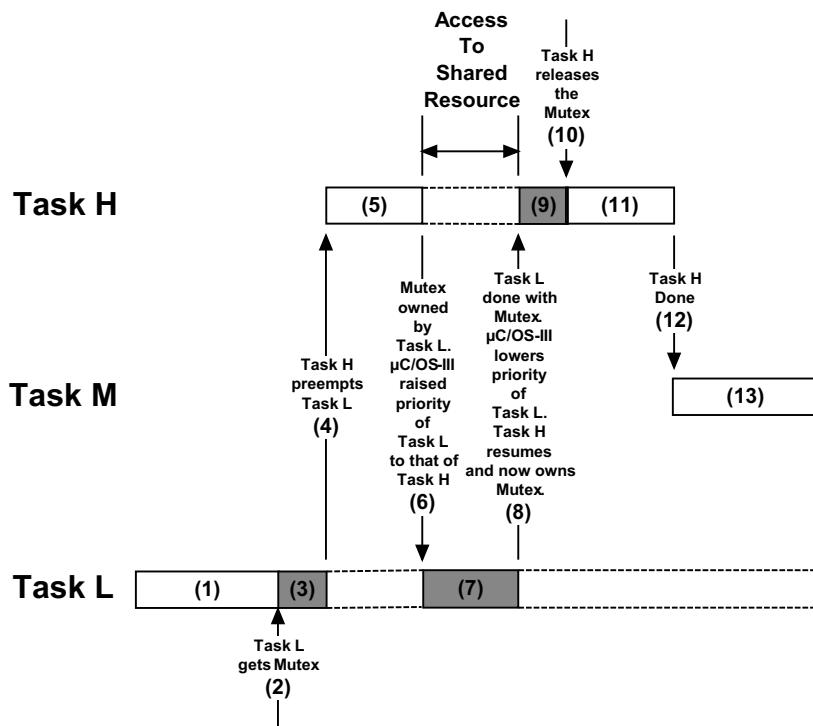


Figure 13-5 Using a mutex to share a resource

- F13-5(1) Task H and Task M are both waiting for an event to occur and Task L is executing.
- F13-5(2) At some point, Task L acquires a mutex, which it needs before it is able to access a shared resource.
- F13-5(3) Task L performs operations on the acquired resource.
- F13-5(4) The event that Task H waited for occurs and the kernel suspends Task L and begins executing Task H since Task H has a higher priority.

- F13-5(5) Task H performs computations based on the event it just received.
- F13-5(6) Task H now wants to access the resource that Task L currently owns (i.e., it attempts to get the mutex from Task L). Given that Task L owns the resource, μ C/OS-III raises the priority of Task L to the same priority as Task H to allow Task L to finish with the resource and prevent Task L from being preempted by medium-priority tasks.
- F13-5(7) Task L continues accessing the resource, however it now does so while it is running at the same priority as Task H. Note that Task H is not actually running since it is waiting for Task L to release the mutex. In other words, Task H is in the mutex wait list.
- F13-5(8) Task L finishes working with the resource and releases the mutex. μ C/OS-III notices that Task L was raised in priority and thus lowers Task L to its original priority. After doing so, μ C/OS-III gives the mutex to Task H, which was waiting for the mutex to be released.
- F13-5(9) Task H now has the mutex and can access the shared resource.
- F13-5(10) Task H is finished accessing the shared resource, and frees up the mutex.
- F13-5(11) There are no higher-priority tasks to execute, therefore Task H continues execution.
- F13-5(12) Task H completes and decides to wait for an event to occur. At this point, μ C/OS-III resumes Task M, which was made ready-to-run while Task H or Task L were executing. Task M was made ready-to-run because an interrupt (not shown in figure 13-5) occurred which Task M was waiting for.
- F13-5(13) Task M executes.

Note that there is no priority inversion, only resource sharing. Of course, the faster Task L accesses the shared resource and frees up the mutex, the better.

μ C/OS-III implements full-priority inheritance and therefore if a higher priority requests the resource, the priority of the owner task will be raised to the priority of the new requestor.

A mutex is a kernel object defined by the `OS_MUTEX` data type, which is derived from the structure `os_mutex` (see `os.h`). An application may have an unlimited number of mutexes (limited only by the RAM available).

Only tasks are allowed to use mutual exclusion semaphores (ISRs are not allowed).

μC/OS-III enables the user to nest ownership of mutexes. If a task owns a mutex, it can own the same mutex up to 250 times. The owner must release the mutex an equivalent number of times. In several cases, an application may not be immediately aware that it called `OSMutexPend()` multiple times, especially if the mutex is acquired again by calling a function as shown in Listing 13-12.

```
OS_MUTEX          MyMutex;
SOME_STRUCT      MySharedResource;

void  MyTask (void *p_arg)
{
    OS_ERR  err;
    CPU_TS  ts;

    :
    while (DEF_ON) {
        OSMutexPend((OS_MUTEX *)&MyMutex,                      (1)
                     (OS_TICK     )0,
                     (OS_OPT      )OS_OPT_PEND_BLOCKING,
                     (CPU_TS     *)&ts,
                     (OS_ERR     *)&err);
        /* Check 'err'                                         */
        /* Acquire shared resource if no error                 */
        MyLibFunction();                                      (3)
        OSMutexPost((OS_MUTEX *)&MyMutex,                      (7)
                     (OS_OPT     )OS_OPT_POST_NONE,
                     (OS_ERR     *)&err);
        /* Check "err"                                       */
    }
}
```

```

void MyLibFunction (void)
{
    OS_ERR err;
    CPU_TS ts;

    OSMutexPend((OS_MUTEX *)&MyMutex,                               (4)
                 (OS_TICK) 0,
                 (OS_OPT) OS_OPT_PEND_BLOCKING,
                 (CPU_TS *) &ts,
                 (OS_ERR *) &err);
    /* Check "err" */                                         */
    /* Access shared resource if no error */                  (5)
    OSMutexPost((OS_MUTEX *)&MyMutex,                         (6)
                 (OS_OPT) OS_OPT_POST_NONE,
                 (OS_ERR *) &err);
    /* Check "err" */                                         */
}

```

13

Listing 13-12 Nesting calls to OSMutexPend()

- L13-12(1) A task starts by pending on a mutex to access shared resources. `OSMutexPend()` sets a nesting counter to 1.
- L13-12(2) You should check the error return value. If no errors exist, `MyTask()` owns `MySharedResource`.
- L13-12(3) A function is called that will perform additional work.
- L13-12(4) The designer of `MyLibFunction()` knows that, to access `MySharedResource`, it must acquire the mutex. Since the calling task already owns the mutex, this operation should not be necessary. However, `MyLibFunction()` could have been called by yet another function that might not need access to `MySharedResource`. μC/OS-III allows nested mutex pends, so this is not a problem. The mutex nesting counter is thus incremented to 2.
- L13-12(5) `MyLibFunction()` can access the shared resource.

-
- L13-12(6) The mutex is released and the nesting counter is decremented back to 1. Since this indicates that the mutex is still owned by the same task, nothing further needs to be done, and `OSMutexPost()` simply returns. `MyLibFunction()` returns to its caller.
 - L13-12(7) The mutex is released again and, this time, the nesting counter is decremented back to 0 indicating that other tasks can now acquire the mutex.

You should always check the return value of `OSMutexPend()` (and any kernel call) to ensure that the function returned because you properly obtained the mutex, and not because the return from `OSMutexPend()` was caused by the mutex being deleted, or because another task called `OSMutexPendAbort()` on this mutex.

As a general rule, do not make function calls in critical sections. All mutual exclusion semaphore calls should be in the leaf nodes of the source code (e.g., in the low level drivers that actually touches real hardware or in other reentrant function libraries).

There are a number of operations that can be performed on a mutex, as summarized in Table 13-3. However, in this chapter, we will only discuss the three functions that are most often used: `OSMutexCreate()`, `OSMutexPend()`, and `OSMutexPost()`. Other functions are described in Appendix A, “ μ C/OS-III API Reference” on page 443.

Function Name	Operation
<code>OSMutexCreate()</code>	Create a mutex.
<code>OSMutexDel()</code>	Delete a mutex.
<code>OSMutexPend()</code>	Wait on a mutex.
<code>OSMutexPendAbort()</code>	Abort the wait on a mutex.
<code>OSMutexPost()</code>	Release a mutex.

Table 13-3 Mutex API summary

13-4-1 MUTUAL EXCLUSION SEMAPHORE INTERNALS

A mutex is a kernel object defined by the `OS_MUTEX` data type, which is derived from the structure `os_mutex` (see `os.h`) as shown in Listing 13-13:

```
typedef struct os_mutex OS_MUTEX;           (1)

struct os_mutex {
    OS_OBJ_TYPE      Type;                  (2)
    CPU_CHAR         *NamePtr;              (3)
    OS_PEND_LIST     PendList;              (4)
    OS_TCB           *OwnerTCBPtr;          (5)
    OS_PRIO          OwnerOriginalPrio;    (6)
    OS_NESTING_CTR   OwnerNestingCtr;     (7)
    CPU_TS            TS;                   (8)
};
```

13

Listing 13-13 `OS_MUTEX` data type

- L13-13(1) In μC/OS-III, all structures are given a data type. All data types begin with “`OS_`” and are uppercase. When a mutex is declared, you simply use `OS_MUTEX` as the data type of the variable used to declare the mutex.
- L13-13(2) The structure starts with a “Type” field, which allows it to be recognized by μC/OS-III as a mutex. Other kernel objects will also have a “`.Type`” as the first member of the structure. If a function is passed a kernel object, μC/OS-III will be able to confirm that it is being passed the proper data type (assuming `OS_CFG_OBJ_TYPE_CHK_EN` is set to 1 in `os_cfg.h`). For example, if passing a message queue (`OS_Q`) to a mutex service (for example `OSMutexPend()`), μC/OS-III will recognize that the application passed an invalid object and return an error code accordingly.
- L13-13(3) Each kernel object can be given a name to make them easier to recognize by debuggers or μC/Probe. This member is simply a pointer to an ASCII string, which is assumed to be `NUL` terminated.
- L13-13(4) Because it is possible for multiple tasks to wait (or pend on a mutex), the mutex object contains a pend list as described in Chapter 10, “Pend Lists (or Wait Lists)” on page 197.

-
- L13-13(5) If the mutex is owned by a task, it will point to the `OS_TCB` of that task.
- L13-13(6) If the mutex is owned by a task, this field contains the “original” priority of the task that owns the mutex. This field is required in case the priority of the task must be raised to a higher priority to prevent unbounded priority inversions.
- L13-13(7) μC/OS-III allows a task to “acquire” the same mutex multiple times. In order for the mutex to be released, the owner must release the mutex the same number of times that it was acquired. Nesting can be performed up to 250-levels deep.
- L13-13(8) A mutex contains a timestamp, used to indicate the last time it was released. μC/OS-III assumes the presence of a free-running counter that allows applications to make time measurements. When the mutex is released, the free-running counter is read and the value is placed in this field, which is returned when `OSMutexPend()` returns.

Application code should never access any of the fields in this data structure directly. Instead, you should always use the APIs provided with μC/OS-III.

A mutual exclusion semaphore (mutex) must be created before it can be used by an application. Listing 13-14 shows how to create a mutex.

```
OS_MUTEX  MyMutex;                                (1)

void  MyTask (void *p_arg)
{
    OS_ERR  err;
    :
    :
    OSMutexCreate(&MyMutex,                      (2)
                  "My Mutex",                   (3)
                  &err);                      (4)
    /* Check "err" */
    :
    :
}
```

Listing 13-14 Creating a mutex

- L13-14(1) The application must declare a variable of type `OS_MUTEX`. This variable will be referenced by other mutex services.
- L13-14(2) You create a mutex by calling `OSMutexCreate()` and pass the address to the mutex allocated in L13-14(1).
- L13-14(3) You can assign an ASCII name to the mutex, which can be used by debuggers or µC/Probe to easily identify this mutex. There are no practical limits to the length of the name since µC/OS-III stores a pointer to the ASCII string, and not to the actual characters that makes up the string.
- L13-14(4) `OSMutexCreate()` returns an error code based on the outcome of the call. If all the arguments are valid, `err` will contain `OS_ERR_NONE`.

Note that since a mutex is always a binary semaphore, there is no need to initialize a mutex counter.

A task waits on a mutual exclusion semaphore before accessing a shared resource by calling `OSMutexPend()` as shown in Listing 13-15 (see Appendix A, “µC/OS-III API Reference” on page 443 for details regarding the arguments).

```

OS_MUTEX  MyMutex;

void MyTask (void *p_arg)
{
    OS_ERR  err;
    CPU_TS  ts;
    :
    while (DEF_ON) {
        :
        OSMutexPend(&MyMutex,           /* (1) Pointer to mutex          */
                     10,                  /* Wait up until this time for the mutex   */
                     OS_OPT_PEND_BLOCKING, /* Option(s)                         */
                     &ts,                /* Timestamp of when mutex was released   */
                     &err);              /* Pointer to Error returned            */
        :
        /* Check "err"                   (2)                      */
        :
        OSMutexPost(&MyMutex,          /* (3) Pointer to mutex          */
                    OS_OPT_POST_NONE,
                    &err);              /* Pointer to Error returned            */
        /* Check "err"                   */
        :
        :
    }
}

```

Listing 13-15 Pending (or waiting) on a Mutual Exclusion Semaphore

- L13-15(1) When called, `OSMutexPend()` starts by checking the arguments passed to this function to make sure they have valid values. This assumes that `OS_CFG_ARG_CHK_EN` is set to 1 in `os_cfg.h`.

If the mutex is available, `OSMutexPend()` assumes the calling task is now the owner of the mutex and stores a pointer to the task's `OS_TCB` in `p_mutex->OwnerTCPPtr`, saves the priority of the task in `p_mutex->OwnerOriginalPrio`, and sets a mutex nesting counter to 1. `OSMutexPend()` then returns to its caller with an error code of `OS_ERR_NONE`.

If the task that calls `OSMutexPend()` already owns the mutex, `OSMutexPend()` simply increments a nesting counter. Applications can nest calls to `OSMutexPend()` up to 250-levels deep. In this case, the error returned will indicate `OS_ERR_MUTEX_OWNER`.

If the mutex is already owned by another task and `OS_OPT_PEND_NON_BLOCKING` is specified, `OSMutexPend()` returns since the task is not willing to wait for the mutex to be released by its owner.

If the mutex is owned by a lower-priority task, μC/OS-III will raise the priority of the owner to match the priority of the current task.

If you specify `OS_OPT_PEND_BLOCKING` as the option, the calling task will be inserted in the list of tasks waiting for the mutex to be available. The task is inserted in the list by priority order and thus, the highest priority task waiting on the mutex is at the beginning of the list.

If you further specify a non-zero timeout, the task will also be inserted in the tick list. A zero value for a timeout indicates a willingness to wait forever for the mutex to be released.

The scheduler is then called since the current task is no longer able to run (it is waiting for the mutex to be released). The scheduler will then run the next highest-priority task that is ready-to-run.

When the mutex is finally released and the task that called `OSMutexPend()` is again the highest-priority task, a task status is examined to determine the reason why `OSMutexPend()` is returning to its caller. The possibilities are:

- 1) The mutex was given to the waiting task. This is the desired outcome.
- 2) The pend was aborted by another task.
- 3) The mutex was not posted within the specified timeout.
- 4) The mutex was deleted.

When `OSMutexPend()` returns, the caller is notified of the outcome through an appropriate error code.

-
- L13-15(2) If `OSMutexPend()` returns with `err` set to `OS_ERR_NONE`, assume that the calling task now owns the resource and can proceed with accessing it. If `err` contains anything else, then `OSMutexPend()` either timed out (if the timeout argument was non-zero), the pend was aborted by another task, or the mutex was deleted by another task. It is always important to examine returned error codes and not assume everything went as planned.

If “`err`” is `OS_ERR_MUTEX_NESTING`, then the caller attempted to pend on the same mutex.

- L13-15(3) When your task is finished accessing the resource, it must call `OSMutexPost()` and specify the same mutex. Again, `OSMutexPost()` starts by checking the arguments passed to this function to make sure they contain valid values (Assuming `OS_CFG_ARG_CHK_EN` is set to 1 in `os_cfg.h`).

`OSMutexPost()` now calls `OS_TS_GET()` to obtain the current timestamp and place that information in the mutex, which will be used by `OSMutexPend()`.

`OSMutexPost()` decrements the nesting counter and, if still non-zero, `OSMutexPost()` returns to the caller. In this case, the current owner has not fully released the mutex. The error code will be `OS_ERR_MUTEX_NESTING`.

If there are no tasks waiting for the mutex, `OSMutexPost()` sets `p_mutex->OwnerTCBPtr` to a `NULL` pointer and clears the mutex nesting counter.

If μC/OS-III had to raise the priority of the mutex owner, it is returned to its original priority at this time.

The highest-priority task waiting on the mutex is then extracted from the pend list and given the mutex. This is a fast operation since the pend list is sorted by priority.

If the option to `OSMutexPost()` is not `OS_OPT_POST_NO_SCHED` then, the scheduler is called to see if the new mutex owner has a higher priority than the current task. If so, μC/OS-III will switch context to the new mutex owner.

You should note that you should only acquire one mutex at a time. In fact, it's highly recommended that when you acquire a mutex, you don't acquire any other kernel objects.

13-5 SHOULD YOU USE A SEMAPHORE INSTEAD OF A MUTEX?

A semaphore can be used instead of a mutex if none of the tasks competing for the shared resource have deadlines to be satisfied.

However, if there are deadlines to meet, you should use a mutex prior to accessing shared resources. Semaphores are subject to unbounded priority inversions, while mutex are not.

13-6 DEADLOCKS (OR DEADLY EMBRACE)

A *deadlock*, also called a *deadly embrace*, is a situation in which two tasks are each unknowingly waiting for resources held by the other.

Assume Task T1 has exclusive access to Resource R1 and Task T2 has exclusive access to Resource R2 as shown in the pseudo-code of Listing 13-16.

```
void T1 (void *p_arg)
{
    while (DEF_ON) {
        Wait for event to occur;          (1)
        Acquire M1;                      (2)
        Access R1;                      (3)
        :
        :
        \----- Interrupt!            (4)
        :
        :
        Acquire M2;                  (8)
        Access R2;                  (9)
    }
}
```

```
void T2 (void *p_arg)
{
    while (DEF_ON) {
        Wait for event to occur;          (5)
        Acquire M2;                      (6)
        Access R2;
        :
        :
        Acquire M1;                      (7)
        Access R1;
    }
}
```

Listing 13-16 Deadlock problem

- L13-16(1) Assume that the event that task T1 is waiting for occurs and T1 is now the highest priority task that must execute.
- L13-16(2) Task T1 executes and acquires Mutex M1.
- L13-16(3) Resource R1 is accessed.
- L13-16(4) An interrupt occurs causing the CPU to switch to task T2 since T2 has a higher priority than task T1.
- L13-16(5) The ISR is the event that task T2 was waiting for and therefore T2 resumes execution.
- L13-16(6) Task T2 acquires mutex M2 and is able to access resource R2.
- L13-16(7) Task T2 tries to acquire mutex M1, but μC/OS-III knows that mutex M1 is owned by another task.
- L13-16(8) μC/OS-III switches back to task T1 because Task T2 can no longer continue. It needs mutex M1 to access resource R1.
- L13-16(9) Task T1 now tries to access mutex M2 but, unfortunately, mutex M2 is owned by task T2. At this point, the two tasks are deadlocked, neither one can continue because each owns a resource that the other one wants.

Techniques used to avoid deadlocks are for tasks to:

- Acquire all resources before proceeding
- Always acquire resources in the same order
- Use timeouts on pend calls

μ C/OS-III allows the calling task to specify a timeout when acquiring a mutex. This feature allows a deadlock to be broken, but the same deadlock may then recur later, or many times later. If the mutex is not available within a certain period of time, the task requesting the resource resumes execution. μ C/OS-III returns an error code indicating that a timeout occurred. A return error code prevents the task from thinking it has properly obtained the resource.

The pseudo-code avoids deadlocks by first acquiring all resources as shown in Listing 13-17.

```
void T1 (void *p_arg)
{
    while (DEF_ON) {
        Wait for event to occur;
        Acquire M1;
        Acquire M2;
        Access R1;
        Access R2;
    }
}

void T2 (void *p_arg)
{
    while (DEF_ON) {
        Wait for event to occur;
        Acquire M1;
        Acquire M2;
        Access R1;
        Access R2;
    }
}
```

Listing 13-17 **Deadlock avoidance – acquire all first and in the same order**

The pseudo-code to acquire all of the mutexes in the same order is shown in Listing 13-18. This is similar to the previous example, except that it is not necessary to acquire all the mutexes first, only to make sure that the mutexes are acquired in the same order for both tasks.

```
void T1 (void *p_arg){  
    while (DEF_ON) {  
        Wait for event to occur;  
        Acquire M1;  
        Access R1;  
        Acquire M2;  
        Access R2;  
    }  
}  
  
void T2 (void *p_arg)  
{  
    while (DEF_ON) {  
        Wait for event to occur;  
        Acquire M1;  
        Access R1;  
        Acquire M2;  
        Access R2;  
    }  
}
```

Listing 13-18 **Deadlock avoidance – acquire in the same order**

13-7 SUMMARY

The mutual exclusion mechanism used depends on how fast code will access the shared resource, as shown in Table 13-4.

Resource Sharing Method	When should you use?
Disable/Enable Interrupts	<p>When access to shared resource is very quick (reading from or writing to just a few variables) and the access is actually faster than µC/OS-III's interrupt disable time.</p> <p>It is highly recommended to not use this method as it impacts interrupt latency.</p>
Locking/Unlocking the Scheduler	<p>When access time to the shared resource is longer than µC/OS-III's interrupt disable time, but shorter than µC/OS-III's scheduler lock time.</p> <p>Locking the scheduler has the same effect as making the task that locks the scheduler the highest priority task.</p> <p>It is recommended to not use this method since it defeats the purpose of using µC/OS-III. However, it's a better method than disabling interrupts as it does not impact interrupt latency.</p>
Semaphores	<p>When all tasks that need to access a shared resource do not have deadlines. This is because semaphores can cause unbounded priority inversions. However, semaphore services are slightly faster (in execution time) than mutual exclusion semaphores.</p>
Mutual Exclusion Semaphores	<p>This is the preferred method for accessing shared resources, especially if the tasks that need to access a shared resource have deadlines.</p> <p>Remember that mutual exclusion semaphores have a built-in priority inheritance mechanism, which avoids unbounded priority inversions.</p> <p>However, mutual exclusion semaphore services are slightly slower (in execution time) than semaphores, because the priority of the owner may need to be changed, which requires CPU processing.</p>

Table 13-4 Resource sharing summary

Chapter

14

Synchronization

This chapter focuses on how tasks can synchronize their activities with Interrupt Service Routines (ISRs), or other tasks.

When an ISR executes, it can signal a task telling the task that an event of interest has occurred. After signaling the task, the ISR exits and, depending on the signaled task priority, the scheduler is run. The signaled task may then service the interrupting device, or otherwise react to the event. Servicing interrupting devices from task level is preferred whenever possible, since it reduces the amount of time that interrupts are disabled and the code is easier to debug.

There are two basic mechanisms for synchronizations in µC/OS-III: semaphores and event flags.

14-1 SEMAPHORES

As defined in Chapter 13, “Resource Management” on page 231, a semaphore is a protocol mechanism offered by most multitasking kernels. Semaphores were originally used to control access to shared resources. However, better mechanisms exist to protect access to shared resources, as described in Chapter 12. Semaphores are best used to synchronize an ISR to a task, or synchronize a task with another task as shown in Figure 14-1.

Note that the semaphore is drawn as a flag to indicate that it is used to signal the occurrence of an event. The initial value for the semaphore is typically zero (0), indicating the event has not yet occurred.

The value “N” next to the flag indicates that the semaphore can accumulate *events* or *credits*. An ISR (or a task) can post (or signal) multiple times to a semaphore and the semaphore will remember how many times it was posted. It is possible to initialize the semaphore with a value other than zero, indicating that the semaphore initially contains that number of events.

Also, the small hourglass close to the receiving task indicates that the task has an option to specify a timeout. This timeout indicates that the task is willing to wait for the semaphore to be signaled (or posted to) within a certain amount of time. If the semaphore is not signaled within that time, μC/OS-III resumes the task and returns an error code indicating that the task was made ready-to-run because of a timeout and not the semaphore was signaled.

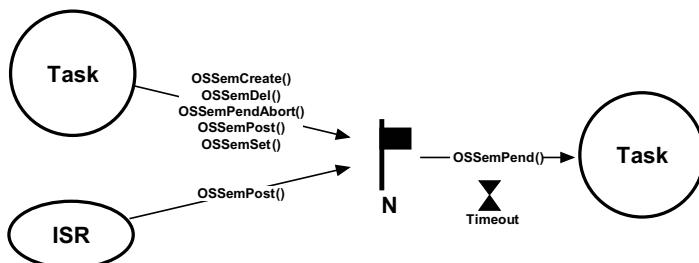


Figure 14-1 μC/OS-III Semaphore Services

There are a number of operations to perform on semaphores as summarized in Table 14-1 and Figure 14-1. However, in this chapter, we will only discuss the three functions used most often: `OSSemCreate()`, `OSSemPend()`, and `OSSemPost()`. The other functions are described in Appendix A, “μC/OS-III API Reference” on page 443. Also note that every semaphore function is callable from a task, but only `OSSemPost()` can be called by an ISR.

Function Name	Operation
<code>osSemCreate()</code>	Create a semaphore.
<code>osSemDel()</code>	Delete a semaphore.
<code>osSemPend()</code>	Wait on a semaphore.
<code>osSemPendAbort()</code>	Abort the wait on a semaphore.
<code>osSemPost()</code>	Signal a semaphore.
<code>osSemSet()</code>	Force the semaphore count to a desired value.

Table 14-1 **Semaphore API summary**

When used for synchronization, a semaphore keeps track of how many times it was signaled using a counter. The counter can take values between 0 and 255, 65,535, or 4,294,967,295, depending on whether the semaphore mechanism is implemented using 8, 16, or 32 bits, respectively. For μC/OS-III, the maximum value of a semaphore is determined by the data type `OS_SEM_CTR` (see `os_type.h`), which is changeable, as needed (assuming access to μC/OS-III's source code). Along with the semaphore's value, μC/OS-III keeps track of tasks waiting for the semaphore to be signaled.

14-1-1 UNILATERAL RENDEZ-VOUS

Figure 14-2 shows that a task can be synchronized with an ISR (or another task) by using a semaphore. In this case, no data is exchanged, however there is an indication that the ISR or the task (on the left) has occurred. Using a semaphore for this type of synchronization is called a unilateral rendez-vous.

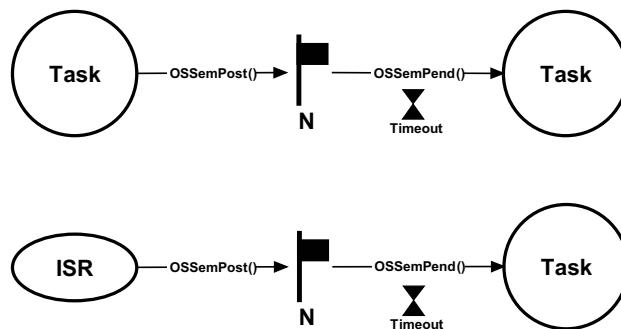


Figure 14-2 Unilateral Rendezvous

A unilateral rendez-vous is used when a task initiates an I/O operation and waits (i.e., call `OSSemPend()`) for the semaphore to be signaled (posted). When the I/O operation is complete, an ISR (or another task) signals the semaphore (i.e., calls `OSSemPost()`), and the task is resumed. This process is also shown on the timeline of Figure 14-3 and described below. The code for the ISR and task is shown in Listing 14-1.

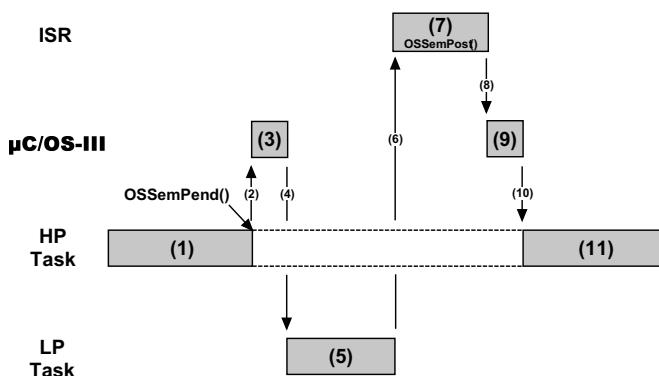


Figure 14-3 Unilateral Rendezvous, Timing Diagram

- F14-3(1) A high priority task is executing. The task needs to synchronize with an ISR (i.e., wait for the ISR to occur) and call `OSSemPend()`.
- F14-3(2)
- F14-3(3)
- F14-3(4) Since the ISR has not occurred, the task will be placed in the waiting list for the semaphore until the event occurs. The scheduler in μC/OS-III will then select the next most important task and context switch to that task.
- F14-3(5) The low-priority task executes.
- F14-3(6) The event that the original task was waiting for occurs. The lower-priority task is immediately preempted (assuming interrupts are enabled), and the CPU vectors to the interrupt handler for the event.
- F14-3(7)
- F14-3(8) The ISR handles the interrupting device and then calls `OSSemPost()` to signal the semaphore. When the ISR completes, μC/OS-III is called (i.e. `OSIntExit()`).
- F14-3(9)
- F14-3(10) μC/OS-III notices that a higher-priority task is waiting for this event to occur and context switches back to the original task.
- F14-3(11) The original task resumes execution immediately after the call to `OSSemPend()`.

```
OS_SEM  MySem;

void MyISR (void)
{
    OS_ERR  err;

    /* Clear the interrupting device */
    OSSemPost(&MySem,                      (7)
              OS_OPT_POST_1,
              &err);
    /* Check "err" */
}

void MyTask (void *p_arg)
{
    OS_ERR  err;
    CPU_TS  ts;
    :
    :
    while (DEF_ON) {
        OSSemPend(&MySem,                  (1)
                  10,
                  OS_OPT_PEND_BLOCKING,
                  &ts,
                  &err);
        /* Check "err" */                (11)
        :
        :
    }
}
```

Listing 14-1 Pending (or waiting) on a Semaphore

A few interesting things are worth noting about this process. First, the task does not need to know about the details of what happens behind the scenes. As far as the task is concerned, it called a function (`OSSemPend()`) that will return when the event it is waiting for occurs. Second, μC/OS-III maximizes the use of the CPU by selecting the next most important task, which executes until the ISR occurs. In fact, the ISR may not occur for many milliseconds and, during that time, the CPU will work on other tasks. As far as the task that is waiting for the semaphore is concerned, it does not consume CPU time while it is waiting. Finally, the task waiting for the semaphore will execute immediately after the event occurs (assuming it is the most important task that needs to run).

14-1-2 CREDIT TRACKING

As previously mentioned, a semaphore “remembers” how many times it was signaled (or posted to). In other words, if the ISR occurs multiple times before the task waiting for the event becomes the highest-priority task, the semaphore will keep count of the number of times it was signaled. When the task becomes the highest priority ready-to-run task, it will execute without blocking as many times as there were ISRs signaled. This is called *Credit Tracking* and is illustrated in Figure 14-4 and described below.

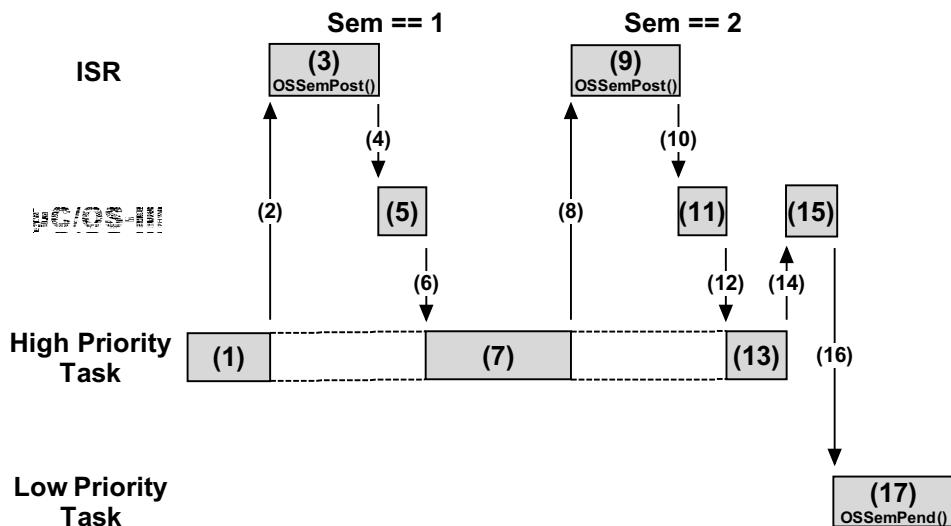


Figure 14-4 **Semaphore Credit Tracking**

F14-4(1) A high-priority task is executing.

F14-4(2)

F14-4(3) An event meant for a lower-priority task occurs which preempts the task (assuming interrupts are enabled). The ISR executes and posts the semaphore. At this point the semaphore count is 1.

F14-4(4)

F14-4(5)

F14-4(6) μ C/OS-III is called at the end of the ISR to see if the ISR caused a higher-priority task to be ready-to-run. Since the ISR was an event that a lower-priority task was waiting for, μ C/OS-III will resume execution of the higher-priority task at the exact point where it was interrupted.

F14-4(7) The high-priority task is resumed and continues execution.

F14-4(8)

F14-4(9) The interrupt occurs a second time. The ISR executes and posts the semaphore. At this point the semaphore count is 2.

F14-4(10)

F14-4(11)

F14-4(12) μ C/OS-III is called at the end of the ISR to see if the ISR caused a higher-priority task to be ready-to-run. Since the ISR was an event that a lower-priority task was waiting for, μ C/OS-III resumes execution of the higher-priority task at the exact point where it was interrupted.

F14-4(13)

F14-4(14) The high-priority task resumes execution and actually terminates the work it was doing. This task will then call one of the μ C/OS-III services to wait for “its” event to occur.

F14-4(15)

F14-4(16) μ C/OS-III will then select the next most important task, which happens to be the task waiting for the event and will context switch to that task.

F14-4(17) The new task executes and will know that the ISR occurred twice since the semaphore count is two. The task will handle this accordingly.

14-1-3 MULTIPLE TASKS WAITING ON A SEMAPHORE

It is possible for more than one task to wait on the same semaphore, each with its own timeout as illustrated in Figure 14-5.

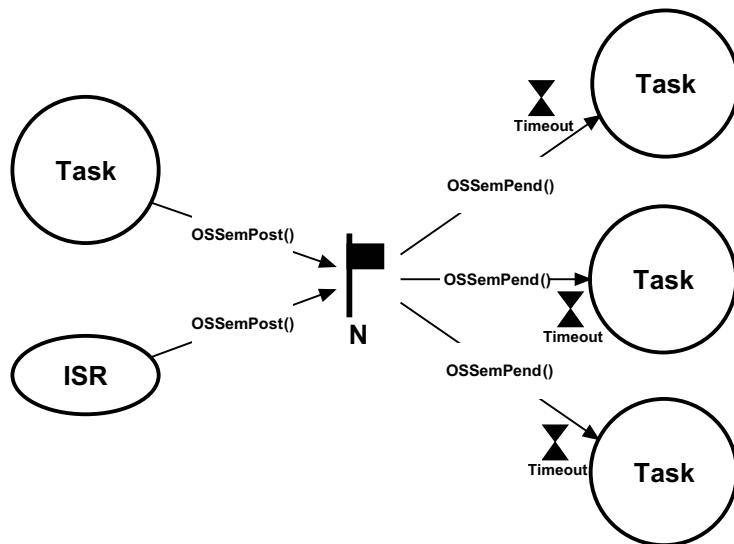


Figure 14-5 Multiple Tasks waiting on a Semaphore

14

When the semaphore is signaled (whether by an ISR or task), μC/OS-III makes the highest-priority task waiting on the semaphore ready-to-run. However, it is also possible to specify that all tasks waiting on the semaphore be made ready-to-run. This is called *broadcasting* and is accomplished by specifying `OS_OPT_POST_ALL` as an option when calling `OSSemPost()`. If any of the waiting tasks has a higher priority than the previously running task, μC/OS-III will execute the highest-priority task made ready by `OSSemPost()`.

Broadcasting is a common technique used to synchronize multiple tasks and have them start executing at the same time. However, some of the tasks that we want to synchronize might not be waiting for the semaphore. It is fairly easy to resolve this problem by combining semaphores and event flags. This will be described after examining event flags.

14-1-4 SEMAPHORE INTERNALS (FOR SYNCHRONIZATION)

Note that some of the material presented in this section is also contained in Chapter 13, “Resource Management” on page 231, as semaphores were also discussed in that chapter. However, the material presented here will be applicable to semaphores used for synchronization and thus will differ somewhat.

A counting semaphore allows values between 0 and 255, 65,535, or 4,294,967,295, depending on whether the semaphore mechanism is implemented using 8, 16, or 32 bits, respectively. For μC/OS-III, the maximum value of a semaphore is determined by the data type `OS_SEM_CTR` (see `os_type.h`), which can be changed as needed. Along with the semaphore’s value, μC/OS-III keeps track of tasks waiting for the semaphore’s availability.

The application programmer can create an unlimited number of semaphores (limited only by available RAM). Semaphore services in μC/OS-III start with the `OSSem???`() prefix, and services available to the application programmer are described in Appendix A, “μC/OS-III API Reference” on page 443. Semaphore services are enabled at compile time by setting the configuration constant `OS_CFG_SEM_EN` to 1 in `os_cfg.h`.

Semaphores must be created before they can be used by the application. Listing 14-3 shows how to create a semaphore.

As previously mentioned, a semaphore is a kernel object as defined by the `OS_SEM` data type, which is derived from the structure `os_sem` (see `os.h`) as shown in Listing 14-2. The services provided by μC/OS-III to manage semaphores are implemented in the file `os_sem.c`.

```
typedef struct os_sem OS_SEM;                      (1)

struct os_sem {
    OS_OBJ_TYPE      Type;                (2)
    CPU_CHAR         *NamePtr;             (3)
    OS_PEND_LIST    PendList;            (4)
    OS_SEM_CTR       Ctr;                 (5)
    CPU_TS           TS;                  (6)
};
```

Listing 14-2 `OS_SEM` data type

-
- L14-2(1) In μC/OS-III, all structures are given a data type. In fact, all data types start with “**OS_**” and are all uppercase. When a semaphore is declared, simply use **OS_SEM** as the data type of the variable used to declare the semaphore.
- L14-2(2) The structure starts with a “**Type**” field, which allows it to be recognized by μC/OS-III as a semaphore. In other words, other kernel objects will also have a “**Type**” as the first member of the structure. If a function is passed a kernel object, μC/OS-III will confirm that it is being passed the proper data type (assuming **OS_CFG_OBJ_TYPE_CHK_EN** is set to 1 in **os_cfg.h**). For example, if passing a message queue (**OS_Q**) to a semaphore service (for example **OSSemPend()**), μC/OS-III will recognize that an invalid object was passed, and return an error code accordingly.
- L14-2(3) Each kernel object can be given a name to make them easier to be recognized by debuggers or μC/Probe. This member is simply a pointer to an ASCII string, which is assumed to be **NUL** terminated.
- L14-2(4) Since it is possible for multiple tasks to be waiting (or pending) on a semaphore, the semaphore object contains a pend list as described in Chapter 10, “Pend Lists (or Wait Lists)” on page 197.
- L14-2(5) A semaphore contains a counter. As explained above, the counter can be implemented as either an 8-, 16- or 32-bit value, depending on how the data type **OS_SEM_CTR** is declared in **os_type.h**. μC/OS-III keeps track of how many times the semaphore is signaled with this counter and this field is typically initialized to zero by **OSSemCreate()**.
- L14-2(6) A semaphore contains a time stamp, which is used to indicate the last time the semaphore was signaled (or posted to). μC/OS-III assumes the presence of a free-running counter that allows the application to make time measurements. When the semaphore is signaled, the free-running counter is read and the value is placed in this field, which is returned when **OSSemPend()** is called. This value allows the application to determine either when the signal was performed, or how long it took for the task to get control of the CPU from the signal. In the latter case, you should call **OS_TS_GET()** to determine the current timestamp and compute the difference.

Even for users who understand the internals of the `OS_SEM` data type, the application code should never access any of the fields in this data structure directly. Instead, you should always use the APIs provided with μC/OS-III.

Semaphores must be created before they can be used by an application. Listing 14-3 shows how to create a semaphore.

```
OS_SEM  MySem;                                (1)

void  MyCode (void)
{
    OS_ERR  err;
    :
    OSSemCreate(&MySem,                      (2)
                "My Semaphore",          (3)
                (OS_SEM_CTR)0,           (4)
                &err);                  (5)
    /* Check "err" */
    :
}
```

Listing 14-3 **Creating a Semaphore**

- L14-3(1) The application must declare a variable of type `OS_SEM`. This variable will be referenced by other semaphore services.
- L14-3(2) You create a semaphore by calling `OSSemCreate()` and pass the address to the semaphore allocated in L14-3(1).
- L14-3(3) You can assign an ASCII name to the semaphore, which can be used by debuggers or μC/Probe to easily identify this semaphore.
- L14-3(4) You need to initialize the semaphore to zero (0) when using a semaphore as a signaling mechanism.
- L14-3(5) `OSSemCreate()` returns an error code based on the outcome of the call. If all arguments are valid, `err` will contain `OS_ERR_NONE`.

`OSSemCreate()` performs a check on the arguments passed to this function (assuming `OS_CFG_ARG_CHK_EN` is set to 1 in `os_cfg.h`) and only initializes the contents of the variable of type `OS_SEM` used for signaling.

A task waits for a signal from an ISR or another task by calling `OSSemPend()` as shown in Listing 14-4 (see Appendix A, “`μC/OS-III API Reference`” on page 443 for details regarding the arguments).

```
void MyTask (void *p_arg)
{
    OS_ERR err;
    CPU_TS ts;
    :
    while (DEF_ON) {
        OSSemPend(&MySem,          (1)
                  0,
                  OS_OPT_PEND_BLOCKING,
                  &ts,
                  &err);
        /* Check "err" */           (2)
        :
    }
}
```

Listing 14-4 Pending (or waiting) on a Semaphore

- L14-4(1) When called, `OSSemPend()` starts by checking the arguments passed to this function to make sure they have valid values (assuming `OS_CFG_OBJ_TYPE_CHK_EN` is set to 1 in `os_cfg.h`).

If the semaphore counter (`.Ctr` of `OS_SEM`) is greater than zero, the counter is decremented and `OSSemPend()` returns, which indicates that the signal occurred. This is the outcome that the caller expects.

If the semaphore counter is zero, this indicates that the signal has not occurred and the calling task might need to wait for the semaphore to be released. If you specify `OS_OPT_PEND_NON_BLOCKING` as the option (the task is not to block), `OSSemPend()` returns immediately to the caller and the returned error code will indicate that the signal did not occur.

If you specify `OS_OPT_PEND_BLOCKING` as the option, the calling task will be inserted in the list of tasks waiting for the semaphore to be signaled. The task is inserted in the list by priority order with the highest priority task waiting on the semaphore at the beginning of the list as shown in Figure 14-6.

If you further specify a non-zero timeout, the task will also be inserted in the tick list. A zero value for a timeout indicates that the calling task is willing to wait forever for the semaphore to be signaled.

The scheduler is then called since the current task is not able to run (it is waiting for the semaphore to be signaled). The scheduler will then run the next highest-priority task that is ready-to-run.

When the semaphore is signaled and the task that called `OSSemPend()` is again the highest-priority task, a task status is examined to determine the reason why `OSSemPend()` is returning to its caller. The possibilities are:

- 1) The semaphore was signaled which is the desired outcome
- 2) The pend was aborted by another task
- 3) The semaphore was not signaled within the specified timeout
- 4) The semaphore was deleted

When `OSSemPend()` returns, the caller is notified of the above outcome through an appropriate error code.

- L14-4(2) If `OSSemPend()` returns with `err` set to `OS_ERR_NONE`, you can assume that the semaphore was signaled and the task can proceed with servicing the ISR or task that caused the signal. If `err` contains anything else, `OSSemPend()` either timed out (if the timeout argument was non-zero), the pend was aborted by another task, or the semaphore was deleted by another task. It is always important to examine returned error code and not assume everything went as expected.

To signal a task (either from an ISR or a task), simply call `OSSemPost()` as shown in Listing 14-5.

```

OS_SEM  MySem;

void MyISR (void)
{
    OS_ERR  err;
    :
    OSSemPost(&MySem,           (1)
              OS_OPT_POST_1,      (2)
              &err);            (3)
    /* Check "err" */
    :
    :
}

```

Listing 14-5 **Posting (or signaling) a Semaphore**

- L14-5(1) Your task signals (or posts to) the semaphore by calling `OSSemPost()`. You specify the semaphore to post by passing its address. The semaphore must have been previously created.
- L14-5(2) The next argument specifies how the task wants to post. There are a number of options to choose from.

When you specify `OS_OPT_POST_1`, you are indicating that you want to post to only one task (in case there are multiple tasks waiting on the semaphore). The task that will be made ready-to-run will be the highest-priority task waiting on the semaphore. If there are multiple tasks at the same priority, only one of them will be made ready-to-run. As shown in Figure 14-6, tasks waiting are in priority order (HPT means High Priority Task and LPT means Low Priority Task). So, it is a fast operation to extract the HPT from the list.

If specifying `OS_OPT_POST_ALL`, all tasks waiting on the semaphore will be posted and made ready-to-run.

The calling task can “add” the option `OS_OPT_POST_NO_SCHED` to either of the two previous options to indicate that the scheduler is not to be called at the end of `OSSemPost()`, possibly because additional postings will be performed, and rescheduling should only take place when finished. This means that the signal is performed, but the scheduler is not called even if a higher-priority task

was waiting for the semaphore to be signaled. This allows the calling task to perform other post functions (if needed) and make all the posts take effect simultaneously. Note that `OS_OPT_POST_NO_SCHED` is “additive,” meaning that it can be used with either of the previous options. You can thus specify:

```
OS_OPT_POST_1
OS_OPT_POST_ALL
OS_OPT_POST_1 + OS_OPT_POST_NO_SCHED
OS_OPT_POST_ALL + OS_OPT_POST_NO_SCHED
```

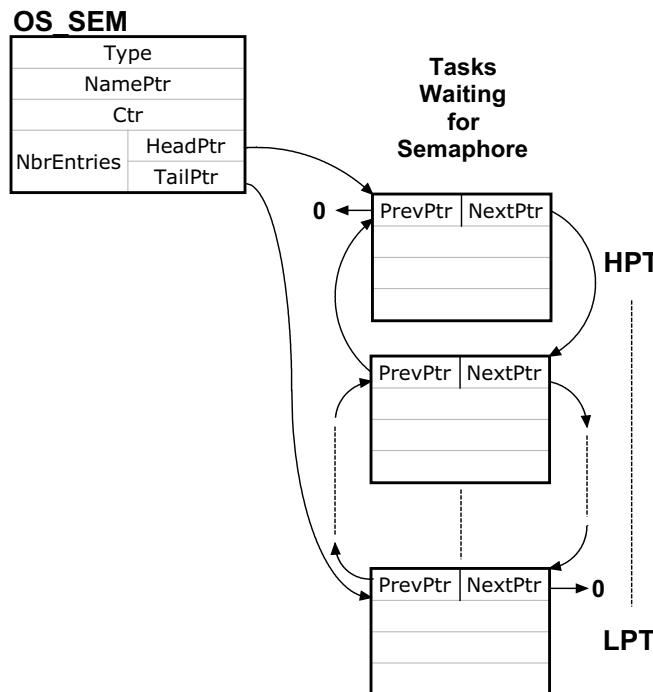


Figure 14-6 Tasks waiting for semaphore

- L14-5(3) `OSSemPost()` returns an error code based on the outcome of the call. If the call was successful, `err` will contain `OS_ERR_NONE`. If not, the error code will indicate the reason for the error (see Appendix A, “μC/OS-III API Reference” on page 443 for a list of possible error codes for `OSSemPost()`).

14-2 TASK SEMAPHORE

Signaling a task using a semaphore is a very popular method of synchronization and, in µC/OS-III, each task has its own built-in semaphore. This feature not only simplifies code, but is also more efficient than using a separate semaphore object. The semaphore, which is built into each task, is shown in Figure 14-7.

Task semaphore services in µC/OS-III start with the `OSTaskSem???`() prefix, and the services available to the application programmer are described in Appendix A, “µC/OS-III API Reference” on page 443. Task semaphores are built into µC/OS-III and cannot be disabled at compile time as can other services. The code for task semaphores is found in `os_task.c`.

You can use this feature if your code knows which task to signal when the event occurs. For example, if you receive an interrupt from an Ethernet controller, you can signal the task responsible for processing the received packet as it is preferable to perform this processing using a task instead of the ISR.

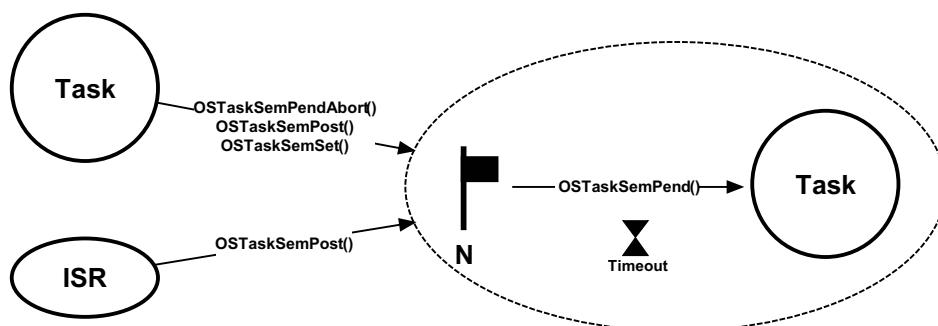


Figure 14-7 Semaphore built-into a Task

There is a variety of operations to perform on task semaphores, summarized in Table 14-2.

Function Name	Operation
<code>OSTaskSemPend()</code>	Wait on a task semaphore.
<code>OSTaskSemPendAbort()</code>	Abort the wait on a task semaphore.
<code>OSTaskSemPost()</code>	Signal a task.
<code>OSTaskSemSet()</code>	Force the semaphore count to a desired value.

Table 14-2 Task Semaphore API summary

14-2-1 PENDING (i.e., WAITING) ON A TASK SEMAPHORE

When a task is created, it automatically creates an internal semaphore with an initial value of zero (0). Waiting on a task semaphore is quite simple, as shown in Listing 14-6.

```
void MyTask (void *p_arg)
{
    OS_ERR  err;
    CPU_TS  ts;
    :
    while (DEF_ON) {
        OSTaskSemPend(10,           (1)
                      OS_OPT_PEND_BLOCKING, (2)
                      &ts,                  (3)
                      &err);                (4)
        /* Check "err" */
        :
        :
    }
}
```

Listing 14-6 Pending (or waiting) on Task's internal semaphore

- L14-6(1) A task pends (or waits) on the task semaphore by calling `OSTaskSemPend()`. There is no need to specify which task, as the current task is assumed. The first argument is a timeout specified in number of clock ticks. The actual timeout obviously depends on the tick rate. If the tick rate (see `os_cfg_app.h`) is set to 1000, a timeout of 10 ticks represents 10 milliseconds. Specifying a timeout of zero (0) means that the task will wait forever for the task semaphore.
- L14-6(2) The second argument specifies how to pend. There are two options: `OS_OPT_PEND_BLOCKING` and `OS_OPT_PEND_NON_BLOCKING`. The blocking option means that, if the task semaphore has not been signaled (or posted to), the task will wait until the semaphore is signaled, the pend is aborted by another task or, until the timeout expires.
- L14-6(3) When the semaphore is signaled, μC/OS-III reads a “timestamp” and places it in the receiving task’s `OS_TCB`. When `OSTaskSemPend()` returns, the value of the timestamp is placed in the local variable “`ts`”. This feature captures “when” the signal actually happened. You can `call OS_TS_GET()` to read the current timestamp and compute the difference. This establishes how long it took for the task to receive the signal from the posting task or ISR.

- L14-6(4) `OSTaskSemPend()` returns an error code based on the outcome of the call. If the call was successful, `err` will contain `OS_ERR_NONE`. If not, the error code will indicate the reason of the error (see Appendix A, “μC/OS-III API Reference” on page 443 for a list of possible error code for `OSTaskSemPend()`).

14-2-2 POSTING (i.e., SIGNALING) A TASK SEMAPHORE

An ISR or a task signals a task by calling `OSTaskSemPost()`, as shown in Listing 14-7.

```
OS_TCB MyTaskTCB;

void MyISR (void *p_arg)
{
    OS_ERR err;
    :
    OSTaskSemPost(&MyTaskTCB,          (1)
                  OS_OPT_POST_NONE,   (2)
                  &err);            (3)
    /* Check "err" */
    :
    :
}
```

14

Listing 14-7 Posting (or signaling) a Semaphore

- L14-7(1) A task posts (or signals) the task by calling `OSTaskSemPost()`. It is necessary to pass the address of the desired task's `OS_TCB` and of course, the task must exist.
- L14-7(2) The next argument specifies how the user wants to post. There are only two choices.

Specify `OS_OPT_POST_NONE`, which indicates the use of the default option of calling the scheduler after posting the semaphore.

Or, specify `OS_OPT_POST_NO_SCHED` to indicate that the scheduler is not to be called at the end of `OSTaskSemPost()`, possibly because there will be additional postings, and rescheduling would take place when finished (the last post would not specify this option).

- L14-7(3) `OSTaskSemPost()` returns an error code based on the outcome of the call. If the call was successful, `err` will contain `OS_ERR_NONE`. If not, the error code will indicate the reason of the error (see Appendix A, “ μ C/OS-III API Reference” on page 443 for a list of possible error codes for `OSTaskSemPost()`).

14-2-3 BILATERAL RENDEZ-VOUS

Two tasks can synchronize their activities by using two task semaphores, as shown in Figure 14-8, and is called a *bilateral rendez-vous*. A bilateral rendez-vous is similar to a unilateral rendez-vous, except that both tasks must synchronize with one another before proceeding. A bilateral rendez-vous cannot be performed between a task and an ISR because an ISR cannot wait on a semaphore.

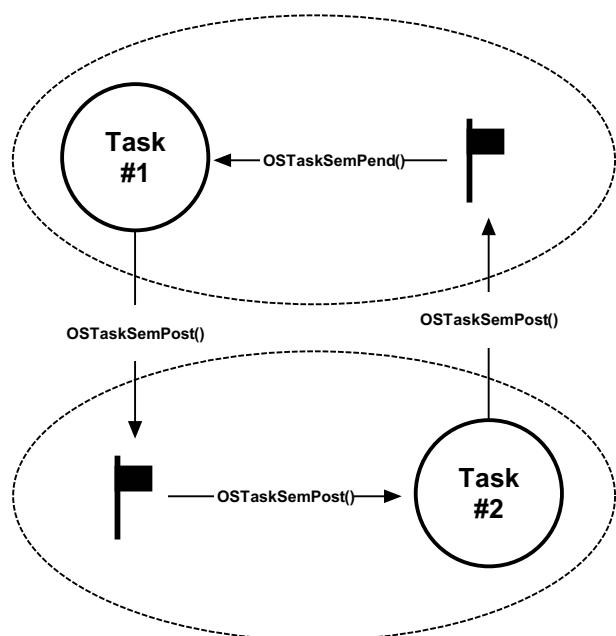


Figure 14-8 Bilateral Rendezvous

The code for a bilateral rendez-vous is shown in Listing 14-8. Of course, a bilateral rendez-vous can use two separate semaphores, but the built-in task semaphore makes setting up this type of synchronization quite straightforward.

```
OS_TCB  MyTask1_TCB;
OS_TCB  MyTask2_TCB;

void Task1 (void *p_arg)
{
    OS_ERR  err;
    CPU_TS  ts;

    while (DEF_ON) {
        :
        OSTaskSemPost(&MyTask2_TCB,           (1)
                      OS_OPT_POST_NONE,
                      &err);
        /* Check 'err' */
        OSTaskSemPend(0,                     (2)
                      OS_OPT_PEND_BLOCKING,
                      &ts,
                      &err);
        /* Check 'err' */
        :
    }
}

void Task2 (void *p_arg)
{
    OS_ERR  err;
    CPU_TS  ts;

    while (DEF_ON) {
        :
        OSTaskSemPost(&MyTask1_TCB,           (3)
                      OS_OPT_POST_NONE,
                      &err);
        /* Check 'err' */
        OSTaskSemPend(0,                     (4)
                      OS_OPT_PEND_BLOCKING,
                      &ts,
                      &err);
        /* Check 'err' */
        :
    }
}
```

Listing 14-8 Tasks synchronizing their activities

-
- L14-8(1) Task #1 is executing and signals Task #2's semaphore.
 - L14-8(2) Task #1 pends on its internal semaphore to synchronize with Task #2. Because Task #2 has not executed yet, Task #1 is blocked waiting on its semaphore to be signaled. μC/OS-III context switches to Task #2.
 - L14-8(3) Task #2 executes, and signals Task #1's semaphore.
 - L14-8(4) Since it has already been signaled, Task #2 is now synchronized to Task #1. If Task #1 is higher in priority than Task #2, μC/OS-III will switch back to Task #1. If not, Task #2 continues execution.

14-3 EVENT FLAGS

Event flags are used when a task needs to synchronize with the occurrence of multiple events. The task can be synchronized when any of the events have occurred, which is called disjunctive synchronization (logical OR). A task can also be synchronized when all events have occurred, which is called conjunctive synchronization (logical AND). Disjunctive and conjunctive synchronization are shown in Figure 14-9.

The application programmer can create an unlimited number of event flag groups (limited only by available RAM). Event flag services in μC/OS-III start with the `OSFlag???`() prefix. The services available to the application programmer are described in Appendix A, “μC/OS-III API Reference” on page 443.

The code for event flag services is found in the file `os_flag.c`, and is enabled at compile time by setting the configuration constant `OS_CFG_FLAG_EN` to 1 in `os_cfg.h`.

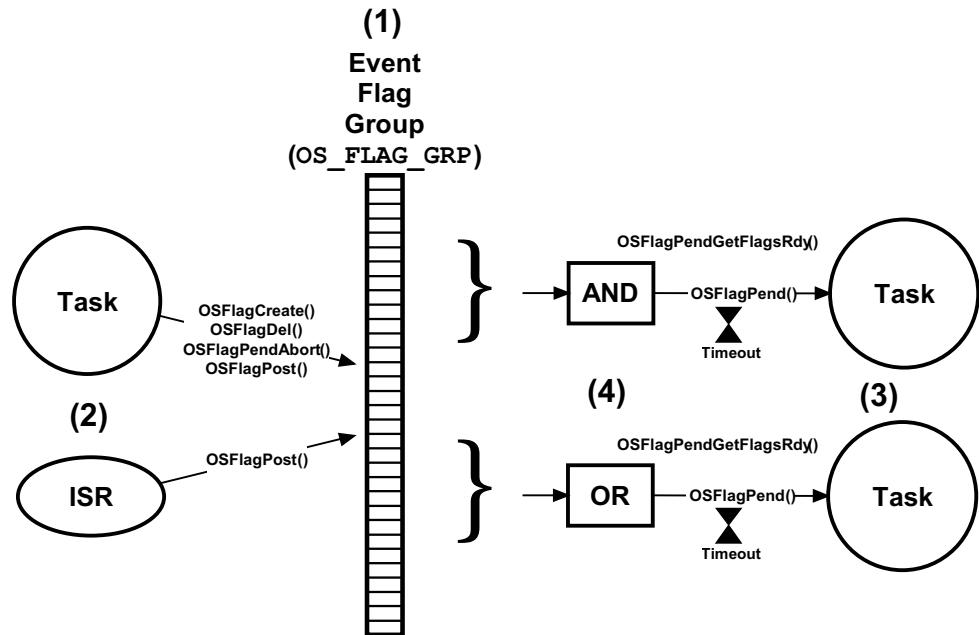


Figure 14-9 Event Flags

- F14-9(1) A μC/OS-III “event flag group” is a kernel object of type `OS_FLAG_GRP` (see `os.h`), and consists of a series of bits (8-, 16- or 32-bits, based on the data type `OS_FLAGS` defined in `os_type.h`). The event flag group also contains a list of tasks waiting for some (or all) of the bits to be set (1) or clear (0). An event flag group must be created before it can be used by tasks and ISRs. You need to create event flags prior to starting μC/OS-III, or by a startup task in the application code.
- F14-9(2) Tasks or ISRs can post to event flags. In addition, only tasks can create, delete, and stop other task from pending on event flag groups.
- F14-9(3) A task can wait (i.e., pend) on any number of bits in an event flag group (i.e., a subset of all the bits). As with all μC/OS-III pend calls, the calling task can specify a timeout value such that if the desired bits are not posted within a specified amount of time (in ticks), the pending task is resumed and informed about the timeout.

- F14-9(4) The task can specify whether it wants to wait for “any” subset of bits (OR) to be set (or clear), or wait for “all” bits in a subset of bit (AND) to be set (or clear).

There are a number of operations to perform on event flags, as summarized in Table 14-3.

Function Name	Operation
OSFlagCreate()	Create an event flag group
OSFlagDel()	Delete an event flag group
OSFlagPend()	Pend (i.e., wait) on an event flag group
OSFlagPendAbort()	Abort waiting on an event flag group
OSFlagPendGetFlagsRdy()	Get flags that caused task to become ready
OSFlagPost()	Post flag(s) to an event flag group

Table 14-3 **Event Flags API summary**

14-3-1 USING EVENT FLAGS

When a task or an ISR posts to an event flag group, all tasks that have their wait conditions satisfied will be resumed.

It's up to the application to determine what each bit in an event flag group means and it is possible to use as many event flag groups as needed. In an event flag group you can, for example, define that bit #0 indicates that a temperature sensor is too low, bit #1 may indicate a low battery voltage, bit #2 could indicate that a switch was pressed, etc. The code (tasks or ISRs) that detects these conditions would set the appropriate event flag by calling `OSFlagPost()` and the task(s) that would respond to those conditions would call `OSFlagPend()`.

Listing 14-9 shows how to use event flags.

```

#define      TEMP_LOW    (OS_FLAGS)0x0001          (1)
#define      BATT_LOW    (OS_FLAGS)0x0002
#define      SW_PRESSED  (OS_FLAGS)0x0004

OS_FLAG_GRP  MyEventFlagGrp;                  (2)

void main (void)
{
    OS_ERR  err;

    OSInit(&err);
    :
    OSFlagCreate(&MyEventFlagGrp,                (3)
                 "My Event Flag Group",
                 (OS_FLAGS)0,
                 &err);
    /* Check 'err' */
    :
    OSStart(&err);
}

void  MyTask (void *p_arg)                    (4)
{
    OS_ERR  err;
    CPU_TS  ts;

    while (DEF_ON) {
        OSFlagPend(&MyEventFlagGrp,              (5)
                     TEMP_LOW + BATT_LOW,
                     (OS_TICK )0,
                     (OS_OPT)OS_OPT_PEND_FLAG_SET_ANY,
                     &ts,
                     &err);
        /* Check 'err' */
        :
    }
}

```

```
void MyISR (void)                                (6)
{
    OS_ERR err;
    :
    OSFlagPost(&MyEventFlagGrp,                  (7)
                BAT_LOW,
                (OS_OPT)OS_OPT_POST_FLAG_SET,
                &err);
    /* Check 'err' */
    :
}
```

Listing 14-9 Using Event Flags

- 14
- L14-9(1) You need to define some bits in the event flag group.
 - L14-9(2) You have to declare an object of type `OS_FLAG_GRP`. This object will be referenced in all subsequent µC/OS-III calls that apply to this event flag group. For the sake of discussions, assume that event flags are declared to be 16-bits in `os_type.h` (i.e., of type `CPU_INT16U`).
 - L14-9(3) Event flag groups must be “created” before they can be used. The best place to do this is in your startup code as it ensures that no tasks, or ISR, will be able to use the event flag group until µC/OS-III is started. In other words, the best place is to create the event flag group is in `main()`. In the example, the event flag was given a name and all bits start in their cleared state (i.e., all zeros).
 - L14-9(4) You can assume here that the application created “`MyTask()`” which will be pending on the event flag group.
 - L14-9(5) To pend on an event flag group, you call `OSFlagPend()` and pass it the address of the desired event flag group.

The second argument specifies which bits the task will be waiting to be set (assuming the task is triggered by set bits instead of cleared bits).

You also need to specify how long to wait for these bits to be set. A timeout value of zero (0) indicates that the task will wait forever. A non-zero value indicates the number of ticks the task will wait until it is resumed if the desired bits are not set.

Specifying `OS_OPT_FLAG_SET_ANY` indicates that the task will wake up if either of the two bits specified is set.

A timestamp is read and saved when the event flag group is posted to. This timestamp can be used to determine the response time to the event.

`OSFlagPend()` performs a number of checks on the arguments passed (i.e., did you pass `NULL` pointers, invalid options, etc.), and returns an error code based on the outcome of the call (assuming `OS_CFG_ARG_CHK_EN` is set to 1 in `os_cfg.h`). If the call was successful “`err`” will be set to `OS_ERR_NONE`.

- L14-9(6) An ISR (it can also be a task) is setup to detect when the battery voltage of the product goes low (assuming the product is battery operated). The ISR signals the task, letting the task perform whatever corrective action is needed.
- L14-9(7) The desired event flag group is specified in the post call as well as which flag the ISR is setting. The third option specifies that the error condition will be “flagged” as a set bit. Again, the function sets “`err`” based on the outcome of the call.

Event flags are generally used for two purposes: status and transient events. Typically you would use different event flag groups to handle each of these as shown in Listing 14-10.

Tasks or ISRs can report status information such as a temperature that has exceeded a certain value, that RPM is zero on an engine or motor, or there is fuel in the tank, and more. This status information cannot be “consumed” by the tasks waiting for these events, because the status is managed by other tasks or ISRs. Event flags associated with status information are monitored by other task by using non-blocking wait calls.

Tasks will report transient events such as a switch was pressed, an object was detected by a motion sensor, an explosion occurred, etc. The task that responds to these events will typically block waiting for any of those events to occur and “consume” the event.

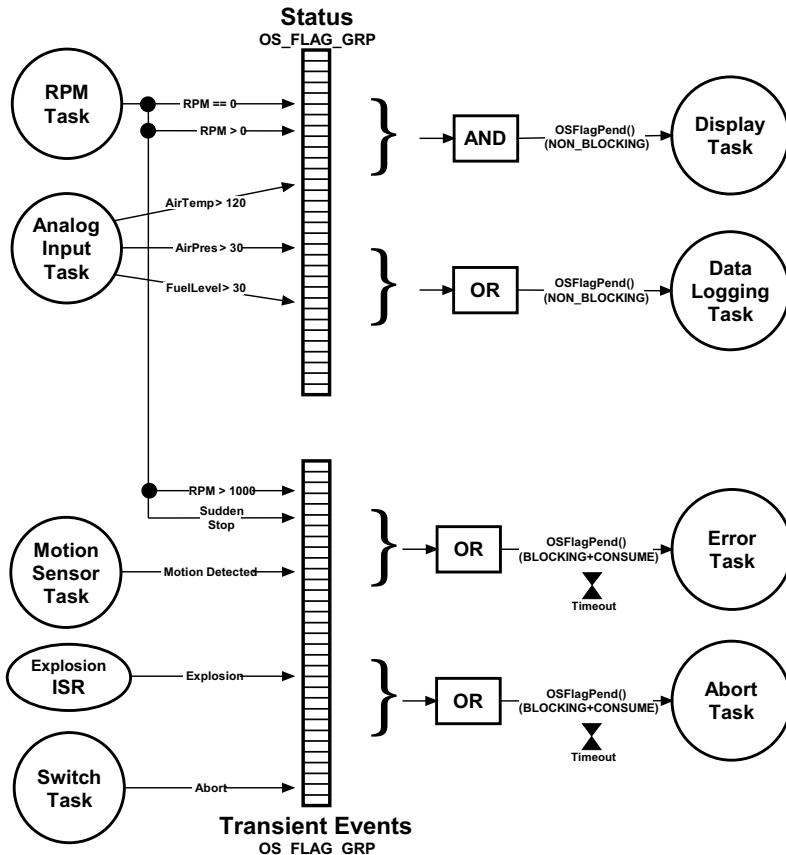


Figure 14-10 Event Flags used for Status and Transient Events

14-3-2 EVENT FLAGS INTERNALS

The application programmer can create an unlimited number of event flag groups (limited only by available RAM). Event flag services in μC/OS-III start with `OSFlag` and the services available to the application programmer are described in Appendix A, “μC/OS-III API Reference” on page 443. Event flag services are enabled at compile time by setting the configuration constant `OS_CFG_FLAG_EN` to 1 in `os_cfg.h`.

An event flag group is a kernel object as defined by the `OS_FLAG_GRP` data type, which is derived from the structure `os_flag_grp` (see `os.h`) as shown in Listing 14-10.

The services provided by μC/OS-III to manage event flags are implemented in the file `os_flag.c`.

```

typedef struct os_flag_grp OS_FLAG_GRP; (1)

struct os_flag_grp {
    OS_OBJ_TYPE      Type;          (2)
    CPU_CHAR        *NamePtr;       (3)
    OS_PEND_LIST    PendList;      (4)
    OS_FLAGS         Flags;         (5)
    CPU_TS           TS;           (6)
};

```

Listing 14-10 **OS_FLAG_GRP** data type

- L14-10(1) In μC/OS-III, all structures are given a data type. In fact, all data types start with “OS_” and are uppercase. When an event flag group is declared, you simply use **OS_FLAG_GRP** as the data type of the variable used to declare the event flag group.
- L14-10(2) The structure starts with a “**Type**” field, which allows it to be recognized by μC/OS-III as an event flag group. In other words, other kernel objects will also have a “**Type**” as the first member of the structure. If a function is passed a kernel object, μC/OS-III will be able to confirm that it is being passed the proper data type (assuming **OS_CFG_OBJ_TYPE_CHK_EN** is set to 1 in **os_cfg.h**). For example, if passing a message queue (**OS_Q**) to an event flag service (for example **OSFlagPend()**), μC/OS-III will be able to recognize that an invalid object was passed, and return an error code accordingly.
- L14-10(3) Each kernel object can be given a name to make them easier to be recognized by debuggers or μC/Probe. This member is simply a pointer to an ASCII string, which is assumed to be **NUL** terminated.
- L14-10(4) Because it is possible for multiple tasks to be waiting (or pending) on an event flag group, the event flag group object contains a pend list as described in Chapter 10, “Pend Lists (or Wait Lists)” on page 197.
- L14-10(5) An event flag group contains a series of flags (i.e., bits), and this member contains the current state of these flags. The flags can be implemented using either an 8-, 16- or 32-bit value depending on how the data type **OS_FLAGS** is declared in **os_type.h**.

- L14-10(6) An event flag group contains a timestamp used to indicate the last time the event flag group was posted to. μC/OS-III assumes the presence of a free-running counter that allows users to make time measurements. When the event flag group is posted to, the free-running counter is read and the value is placed in this field, which is returned when `OSFlagPend()` is called. This value allows an application to determine either when the post was performed, or how long it took for your code to obtain control of the CPU from the post. In the latter case, you can call `OS_TS_GET()` to determine the current timestamp and compute the difference.

Even if the user understands the internals of the `OS_FLAG_GRP` data type, application code should never access any of the fields in this data structure directly. Instead, you should always use the APIs provided with μC/OS-III.

Event flag groups must be created before they can be used by an application as shown in Listing 14-11.

14

```
OS_FLAG_GRP  MyEventFlagGrp;                      (1)

void  MyCode (void)
{
    OS_ERR  err;
    :
    OSFlagCreate(&MyEventFlagGrp,                  (2)
                 "My Event Flag Group",          (3)
                 (OS_FLAGS)0,                  (4)
                 &err);                      (5)
    /* Check 'err' */
    :
}
```

Listing 14-11 Creating a Event Flag Group

- L14-11(1) The application must declare a variable of type `OS_FLAG_GRP`. This variable will be referenced by other event flag services.
- L14-11(2) You create an event flag group by calling `OSFlagCreate()` and pass the address to the event flag group allocated in (1).

- L14-11(3) You can assign an ASCII name to the event flag group, which can be used by debuggers or µC/Probe to easily identify this event flag group. µC/OS-III stores a pointer to the name so there is no practical limit to its size, except that the ASCII string needs to be **NUL** terminated.
- L14-11(4) You initialize the flags inside the event flag group to zero (0) unless the task and ISRs signal events with bits cleared instead of bits set. If using cleared bits, you should initialize all the bits to ones (1).
- L14-11(5) **OSFlagCreate()** returns an error code based on the outcome of the call. If all the arguments are valid, **err** will contain **OS_ERR_NONE**.

A task waits for one or more event flag bits either from an ISR or another task by calling **OSFlagPend()** as shown in Listing 14-12 (see Appendix A, “µC/OS-III API Reference” on page 443 for details regarding the arguments).

```

14

OS_FLAG_GRP MyEventFlagGrp;

void MyTask (void *p_arg)
{
    OS_ERR   err;
    CPU_TS   ts;
    OS_FLAGS which_flags;
    :
    while (DEF_ON) {
        :
        which_flags = OSFlagPend(&MyEventFlagGrp, /* (1) Pointer to event flag group */
                               (OS_FLAGS)0x0F, /* Which bits to wait on */
                               10, /* Maximum time to wait */
                               OS_OPT_PEND_BLOCKING +
                               OS_OPT_PEND_FLAG_SET_ANY, /* Option(s) */
                               &ts, /* Timestamp of when posted to */
                               &err); /* Pointer to Error returned */
        /* Check "err" */                                (2)
        :
        :
    }
}
```

Listing 14-12 Pending (or waiting) on an Event Flag Group

-
- L14-12(1) When called, `OSFlagPend()` starts by checking the arguments passed to this function to ensure they have valid values (assuming `OS_CFG_ARG_CHK_EN` is set to 1 in `os_cfg.h`). If the bits the task is waiting for are set (or cleared depending on the option), `OSFlagPend()` returns and indicate which flags satisfied the condition. This is the outcome that the caller expects.

If the event flag group does not contain the flags that the caller is looking for, the calling task might need to wait for the desired flags to be set (or cleared). If you specify `OS_OPT_PEND_NON_BLOCKING` as the option (the task is not to block), `OSFlagPend()` returns immediately to the caller and the returned error code indicates that the bits have not been set (or cleared).

If you specify `OS_OPT_PEND_BLOCKING` as the option, the calling task will be inserted in the list of tasks waiting for the desired event flag bits. The task is not inserted in priority order but simply inserted at the beginning of the list. This is done because whenever bits are set (or cleared), it is necessary to examine all tasks in this list to see if their desired bits have been satisfied.

If you further specify a non-zero `timeout`, the task will also be inserted in the tick list. A zero value for a `timeout` indicates that the calling task is willing to wait forever for the desired bits.

The scheduler is then called since the current task is no longer able to run (it is waiting for the desired bits). The scheduler will run the next highest-priority task that is ready-to-run.

When the event flag group is posted to and the task that called `OSFlagPend()` has its desired bits set or cleared, a task status is examined to determine the reason why `OSFlagPend()` is returning to its caller. The possibilities are:

- 1) The desired bits were set (or cleared)
- 2) The pend was aborted by another task
- 3) The bits were not set (or cleared) within the specified timeout
- 4) The event flag group was deleted

When `OSFlagPend()` returns, the caller is notified of the above outcome through an appropriate error code.

- L14-12(2) If `OSFlagPend()` returns with `err` set to `OS_ERR_NONE`, you can assume that the desired bits were set (or cleared) and the task can proceed with servicing the ISR or task that created those events. If `err` contains anything else, `OSFlagPend()` either timed out (if the timeout argument was non-zero), the pend was aborted by another task or, the event flag group was deleted by another task. It is always important to examine the returned error code and not assume everything went as planned.

To set (or clear) event flags (either from an ISR or a task), you simply call `OSFlagPost()`, as shown in Listing 14-13.

```
OS_FLAG_GRP MyEventFlagGrp;

void MyISR (void)
{
    OS_ERR     err;
    OS_FLAGS   flags_cur;
    :
    flags_cur = OSFlagPost(&MyEventFlagGrp,          (1)
                          (OS_FLAGS)0x0C,           (2)
                          OS_OPT_POST_FLAG_SET,   (3)
                          &err);                  (4)

    /* Check 'err' */
    :
    :
}
```

14

Listing 14-13 Posting flags to an Event Flag Group

- L14-13(1) A task posts to the event flag group by calling `OSFlagPost()`. Specify the desired event flag group to post by passing its address. Of course, the event flag group must have been previously created. `OSFlagPost()` returns the current value of the event flags in the event flag group after the post has been performed.
- L14-13(2) The next argument specifies which bit(s) the ISR (or task) will be setting or clearing in the event flag group.

-
- L14-13(3) You can specify `OS_OPT_POST_FLAG_SET` or `OS_OPT_POST_FLAG_CLR`.

If you specify `OS_OPT_POST_FLAG_SET`, the bits specified in the second arguments will set the corresponding bits in the event flag group. For example, if `MyEventFlagGrp.Flags` contains `0x03`, the code in Listing 14-13 will change `MyEventFlagGrp.Flags` to `0x0F`.

If you specify `OS_OPT_POST_FLAG_CLR`, the bits specified in the second arguments will clear the corresponding bits in the event flag group. For example, if `MyEventFlagGrp.Flags` contains `0x0F`, the code in Listing 14-13 will change `MyEventFlagGrp.Flags` to `0x03`.

When calling `OSFlagPost()` you can specify as an option (i.e., `OS_OPT_POST_NO_SCHED`) to not call the scheduler. This means that the post is performed, but the scheduler is not called even if a higher-priority task was waiting for the event flag group. This allows the calling task to perform other post functions (if needed) and make all the posts take effect simultaneously.

- L14-13(4) `OSFlagPost()` returns an error code based on the outcome of the call. If the call was successful, `err` will contain `OS_ERR_NONE`. If not, the error code will indicate the reason of the error (see Appendix A, “*μC/OS-III API Reference*” on page 443 for a list of possible error codes for `OSFlagPost()`).

14-4 SYNCHRONIZING MULTIPLE TASKS

Synchronizing the execution of multiple tasks by broadcasting to a semaphore is a commonly used technique. It may be important to have multiple tasks start executing at the same time. Obviously, on a single processor, only one task will actually execute at one time. However, the start of their execution will be synchronized to the same time. This is called a multiple task rendez-vous. However, some of the tasks synchronized might not be waiting for the semaphore when the broadcast is performed. It is fairly easy to resolve this problem by combining semaphores and event flags, as shown in Figure 14-11. For this to work properly, the task on the left needs to have a lower priority than the tasks waiting on the semaphore.

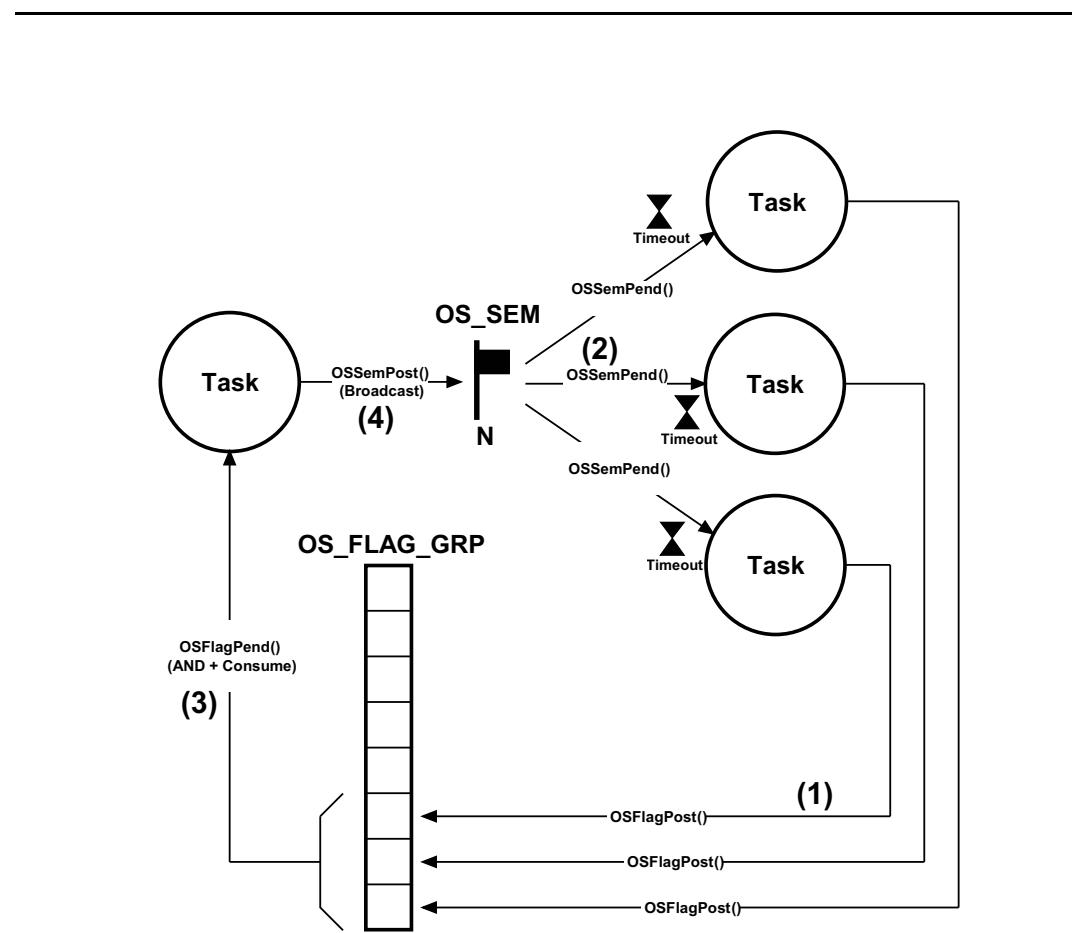


Figure 14-11 Multiple Task Rendezvous

- F14-11(1) Each task that needs to synchronize at the rendez-vous needs to set an event flag bit (and specify **OS_OPT_POST_NO_SCHED**).
- F14-11(2) The task needs to wait for the semaphore to be signaled.
- F14-11(3) The task that will be broadcasting must wait for “all” of the event flags corresponding to each task to be set.
- F14-11(4) When all waiting tasks are ready, the task that will synchronize the waiting task issues a broadcast to the semaphore.

14-5 SUMMARY

Three methods are presented to allow an ISR or a task to signal one or more tasks: semaphores, task semaphores, and event flags.

Both semaphores and task semaphores contain a counter allowing them to perform credit tracking and accumulate the occurrence of events. If an ISR or task needs to signal a single task (as opposed to multiple tasks when the event occurs), it makes sense to use a task semaphore since it prevents the user from having to declare an external semaphore object. Also, task semaphore services are slightly faster (in execution time) than semaphores.

Event flags are used when a task needs to synchronize with the occurrence of one or more events. However, event flags cannot perform credit tracking since a single bit (as opposed to a counter) represents each event.

Chapter 15

Message Passing

It is sometimes necessary for a task or an ISR to communicate information to another task. This information transfer is called *inter-task* communication. Information can be communicated between tasks in two ways: through global data, or by sending messages.

As seen in Chapter 13, “Resource Management” on page 231, when using global variables, each task or ISR must ensure that it has exclusive access to variables. If an ISR is involved, the only way to ensure exclusive access to common variables is to disable interrupts. If two tasks share data, each can gain exclusive access to variables either by disabling interrupts, locking the scheduler, using a semaphore, or preferably, using a mutual-exclusion semaphore. Note that a task can only communicate information to an ISR by using global variables. A task is not aware when a global variable is changed by an ISR, unless the ISR signals the task, or the task polls the contents of a variable periodically.

Messages can either be sent to an intermediate object called a *message queue*, or directly to a task since in μC/OS-III, each task has its own built-in message queue. You can use an external message queue if multiple tasks are to wait for messages. You would send a message directly to a task if only one task will process the data received.

When a task waits for a message to arrive, it does not consume CPU time.

15-1 MESSAGES

A message consists of a pointer to data, a variable containing the size of the data being pointed to, and a timestamp indicating when the message was sent. The pointer can point to a data area or even a function. Obviously, the sender and the receiver must agree as to the contents and the meaning of the message. In other words, the receiver of the message will need to know the meaning of the message received to be able to process it. For example, an Ethernet controller receives a packet and sends a pointer to this packet to a task that knows how to handle the packet.

The message contents must always remain in scope since the data is actually sent by reference instead of by value. In other words, data sent is not copied. You might consider using dynamically allocated memory as described in Chapter 17, “Memory Management” on page 343. Alternatively, you can pass a pointer to a global variable, a global data structure, a global array, or a function, etc.

15-2 MESSAGE QUEUES

A message queue is a kernel object allocated by the application. In fact, you can allocate any number of message queues. The only limit is the amount of RAM available.

There are a number of operations that the user can perform on message queues, summarized in Figure 15-1. However, an ISR can only call `OSQPost()`. A message queue must be created before sending messages through it.

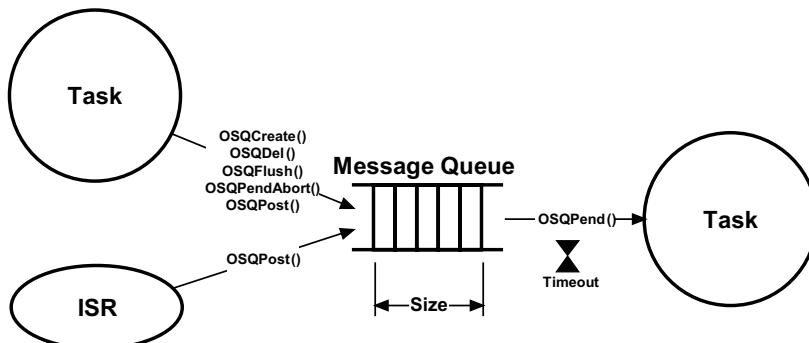


Figure 15-1 Operations on message queue

Message queues are drawn as a first-in, first-out pipe (FIFO). However, with µC/OS-III, it is possible to post messages in last-in, first-out order (LIFO). The LIFO mechanism is useful when a task or an ISR must send an “urgent” message to a task. In this case, the message bypasses all other messages already in the message queue. The size of the message queue is configurable at run-time.

The small hourglass close to the receiving task (F15-1) indicates that the task has an option to specify a timeout. This timeout indicates that the task is willing to wait for a message to be sent to the message queue within a certain amount of time. If the message is not sent within that time, µC/OS-III resumes the task and returns an error code indicating that the task was made ready-to-run because of a timeout, and not because the message was received. It is possible to specify an infinite timeout and indicate that the task is willing to wait forever for the message to arrive.

The message queue also contains a list of tasks waiting for messages to be sent to the message queue. Multiple tasks can wait on a message queue as shown in Figure 15-2. When a message is sent to the message queue, the highest priority task waiting on the message queue receives the message. Optionally, the sender can *broadcast* a message to all tasks waiting on the message queue. In this case, if any of the tasks receiving the message from the broadcast has a higher priority than the task sending the message (or interrupted task, if the message is sent by an ISR), µC/OS-III will run the highest-priority task that is waiting. Notice that not all tasks must specify a timeout; some tasks may want to wait forever.

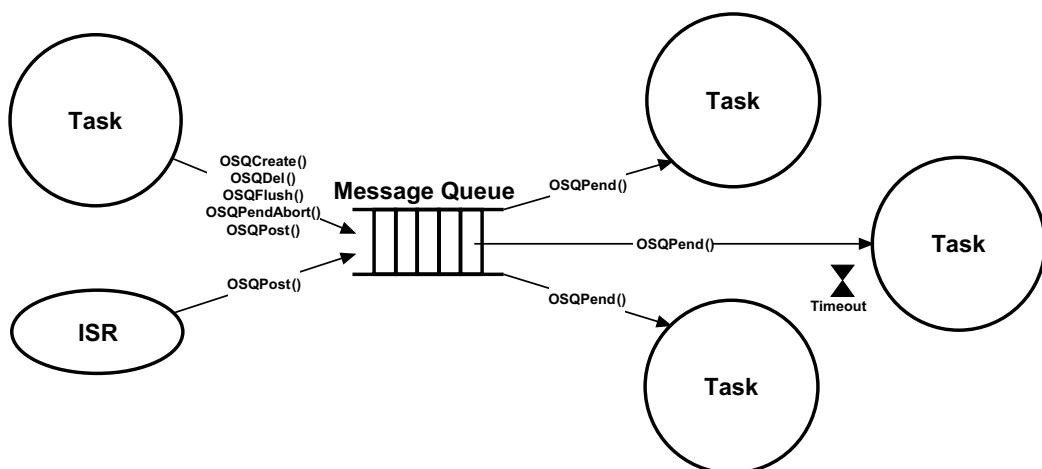


Figure 15-2 Multiple tasks waiting on a message queue

15-3 TASK MESSAGE QUEUE

It is fairly rare to find applications where multiple tasks wait on a single message queue. Because of this, a message queue is built into each task and the user can send messages directly to a task without going through an external message queue object. This feature not only simplifies the code but, is also more efficient than using a separate message queue object. The message queue that is built into each task is shown in Figure 15-3.

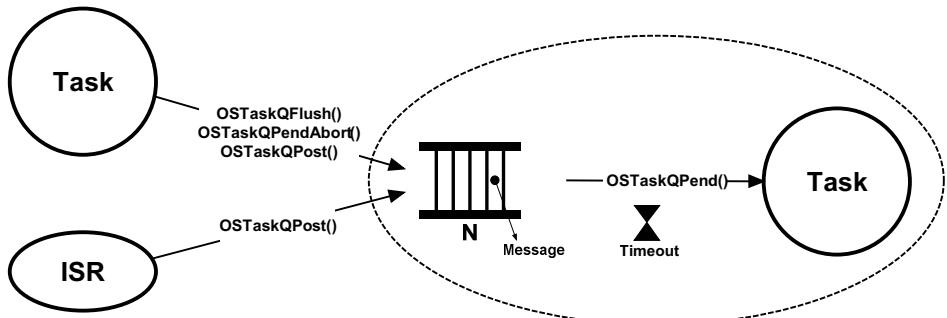


Figure 15-3 Task message queue

Task message queue services in µC/OS-III start with the `OSTaskQ???`() prefix, and services available to the application programmer are described in Appendix A, “µC/OS-III API Reference” on page 443. Setting `OS_CFG_TASK_Q_EN` in `os_cfg.h` enables task message queue services. The code for task message queue management is found in `os_task.c`.

You use this feature if the code knows which task to send the message(s) to. For example, if receiving an interrupt from an Ethernet controller, you can send the address of the received packet to the task that will be responsible for processing the received packet.

15-4 BILATERAL RENDEZ-VOUS

Two tasks can synchronize their activities by using two message queues, as shown in Figure 15-4. This is called a *bilateral rendez-vous* and works the same as with semaphores except that both tasks may send messages to each other. A bilateral rendez-vous cannot be performed between a task and an ISR since an ISR cannot wait on a message queue.

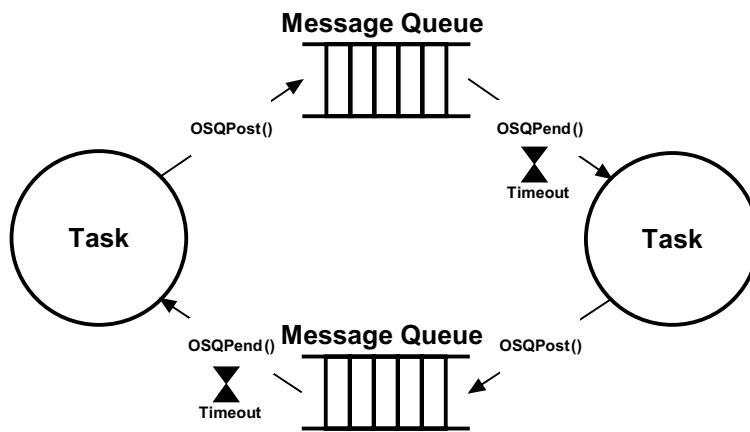


Figure 15-4 Bilateral Rendez-vous

In a bilateral rendez-vous, each message queue holds a maximum of one message. Both message queues are initially created empty. When the task on the left reaches the rendez-vous point, it sends a message to the top message queue and waits for a message to arrive on the bottom message queue. Similarly, when the task on the right reaches its rendez-vous point, it sends a message to the message queue on the bottom and waits for a message to arrive on the top message queue.

Figure 15-5 shows how to use task-message queues to perform a bilateral rendez-vous.

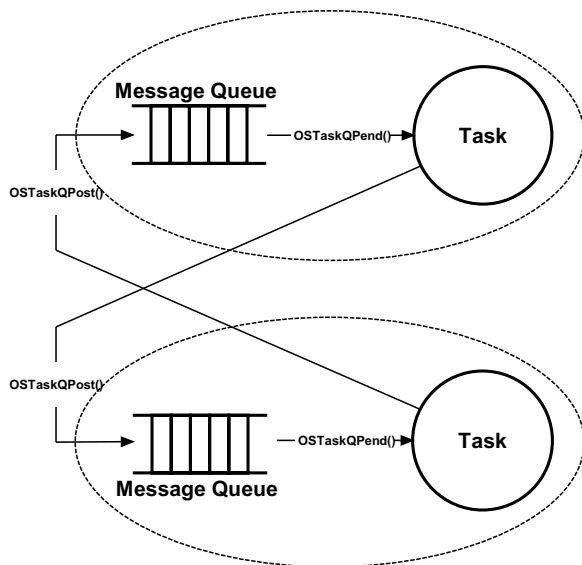


Figure 15-5 Figure Bilateral Rendez-vous with task message queues

15-5 FLOW CONTROL

Task-to-task communication often involves data transfer from one task to another. One task produces data while the other *consumes* it. However, data processing takes time and consumers might not consume data as fast as it is produced. In other words, it is possible for the producer to overflow the message queue if a higher-priority task preempts the consumer. One way to solve this problem is to add flow control in the process as shown in Figure 15-6.

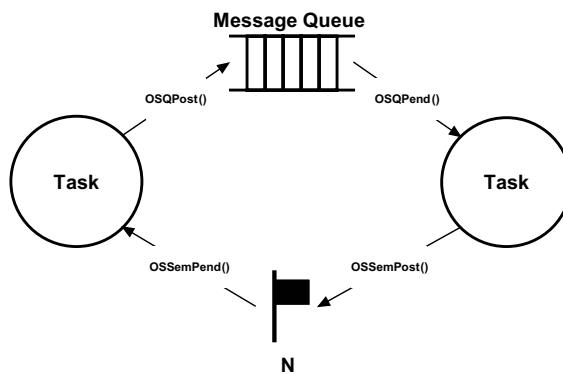


Figure 15-6 Producer and consumer tasks with flow control

Here, a counting semaphore is used, initialized with the number of allowable messages that can be sent by the consumer. If the consumer cannot queue more than 10 messages, the counting semaphore contains a count of 10.

As shown in the pseudo code of Listing 15-1, the producer must wait on the semaphore before it is allowed to send a message. The consumer waits for messages and, when processed, signals the semaphore.

```
Producer Task:  
    Pend on Semaphore;  
    Send message to message queue;  
  
Consumer Task:  
    Wait for message from message queue;  
    Signal the semaphore;
```

Listing 15-1 Producer and consumer flow control

Combining the task message queue and task semaphores (see Chapter 14, “Synchronization” on page 273), it is easy to implement flow control as shown in Figure 15-7. In this case, however, `OSTaskSemSet()` must be called immediately after creating the task to set the value of the task semaphore to the same value as the maximum number of allowable messages in the task message queue.

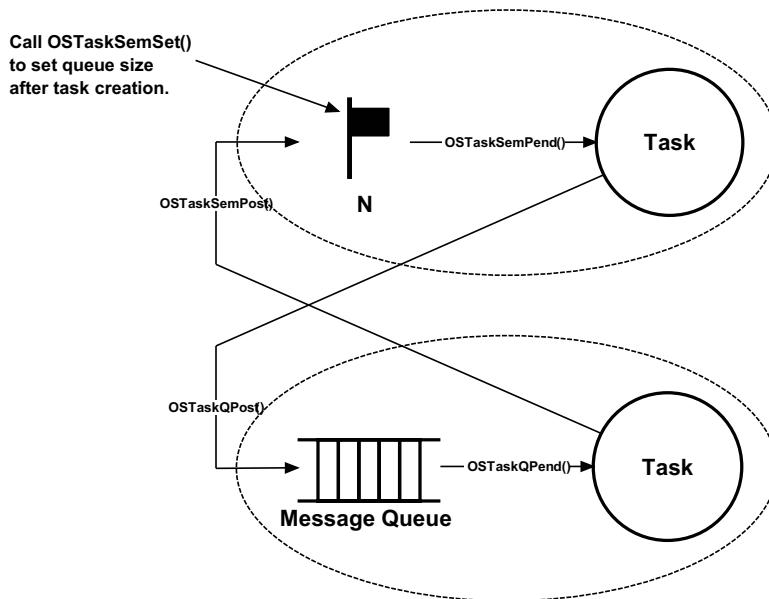


Figure 15-7 Flow control with task semaphore and task message queue

15-6 KEEPING THE DATA IN SCOPE

The messages sent typically point to data structures, variables, arrays, tables, etc. However, it is important to realize that the data must remain static until the receiver of the data completes its processing of the data. Once sent, the sender must not touch the sent data. This seems obvious, however it is easy to forget.

One possibility is to use the fixed-size memory partition manager provided with µC/OS-III (see Chapter 17, “Memory Management” on page 343) to dynamically allocate and free memory blocks used to pass the data. Figure 15-8 shows an example. For sake of illustration, assume that a device is sending data bytes to the UART in packets using some protocol. In this case, the first byte of a packet is unique and the end-of-packet byte is also unique.

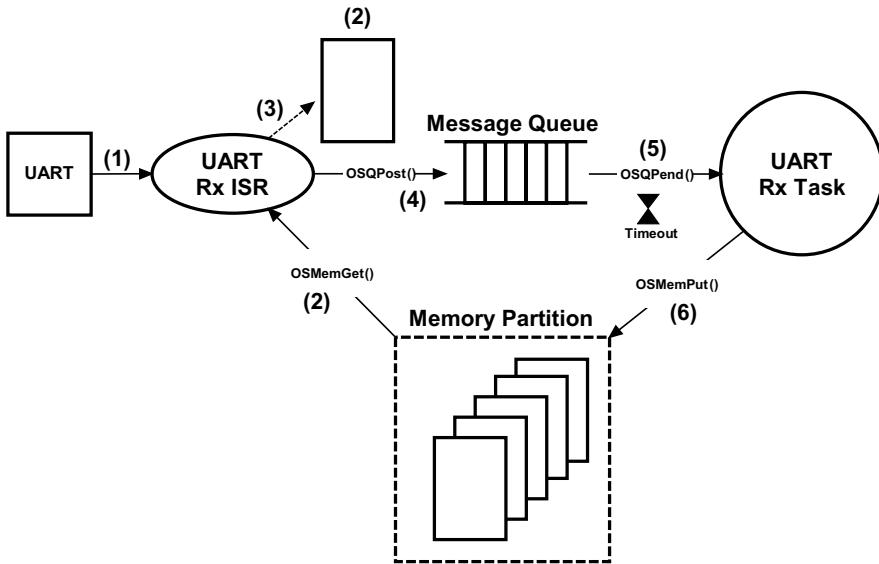


Figure 15-8 Using memory partitions for message contents

- F15-8(1) Here, a UART generates an interrupt when characters are received.
- F15-8(2) The pseudo-code in Listing 15-2 shows what the UART ISR code might look like. There are a lot of details omitted for sake of simplicity. The ISR reads the byte received from the UART and sees if it corresponds to a start of packet. If it is, a buffer is obtained from the memory partition.
- F15-8(3) The received byte is then placed in the buffer.
- F15-8(4) If the data received is an end-of-packet byte, you would simply post the address of the buffer to the message queue so that the task can process the received packet.
- F15-8(5) If the message sent makes the UART task the highest priority task, µC/OS-III will switch to that task at the end of the ISR instead of returning to the interrupted task. The task retrieves the packet from the message queue. Note that the `OSQPend()` call also returns the number of bytes in the packet and a time stamp indicating when the message was sent.

- F15-8(6) When the task is finished processing the packet, the buffer is returned to the memory partition it came from by calling `OSMemPut()`.

```
void  UART_ISR (void)
{
    OS_ERR  err;

    RxData = Read byte from UART;
    if (RxData == Start of Packet) {           /* See if we need a new buffer */
        RxDataPtr = OSMemGet(&UART_MemPool,      /* Yes
                                                    &err);
        *RxDataPtr++ = RxData;
        RxDataCtr   = 1;
    } if (RxData == End of Packet byte) {       /* See if we got a full packet */
        *RxDataPtr++ = RxData;
        RxDataCtr++;
        OSQPost((OS_Q      *)&UART_Q,
                 (void      *)RxDataPtr,
                 (OS_MSG_SIZE)RxDataCtr,
                 (OS_OPT     )OS_OPT_POST_FIFO,
                 (OS_ERR     *)&err);
        RxDataPtr = NULL;                      /* Don't point to sent buffer */
        RxDataCtr = 0;
    } else; {
        *RxDataPtr++ = RxData;                /* Save the byte received */
        RxDataCtr++;
    }
}
```

Listing 15-2 **UART ISR Pseudo-code**

15-7 USING MESSAGE QUEUES

Table 15-1 shows a summary of message-queue services available from µC/OS-III. Refer to Appendix A, “µC/OS-III API Reference” on page 443 for a full description on their use.

Function Name	Operation
OSQCreate()	Create a message queue.
OSQDel()	Delete a message queue.
OSQFlush()	Empty the message queue.
OSQPend()	Wait for a message.
OSQPendAbort()	Abort waiting for a message.
OSQPost()	Send a message through a message queue.

Table 15-1 Message queue API summary

Table 15-2 is a summary of task message queue services available from µC/OS-III. Refer to Appendix A, “µC/OS-III API Reference” on page 443, for a full description of their use.

Function Name	Operation
OSTaskQPend()	Wait for a message.
OSTaskQPendAbort()	Abort the wait for a message.
OSTaskQPost()	Send a message to a task.
OSTaskQFlush()	Empty the message queue.

Table 15-2 Task message queue API summary

Figure 15-9 shows an example of using a message queue when determining the speed of a rotating wheel.

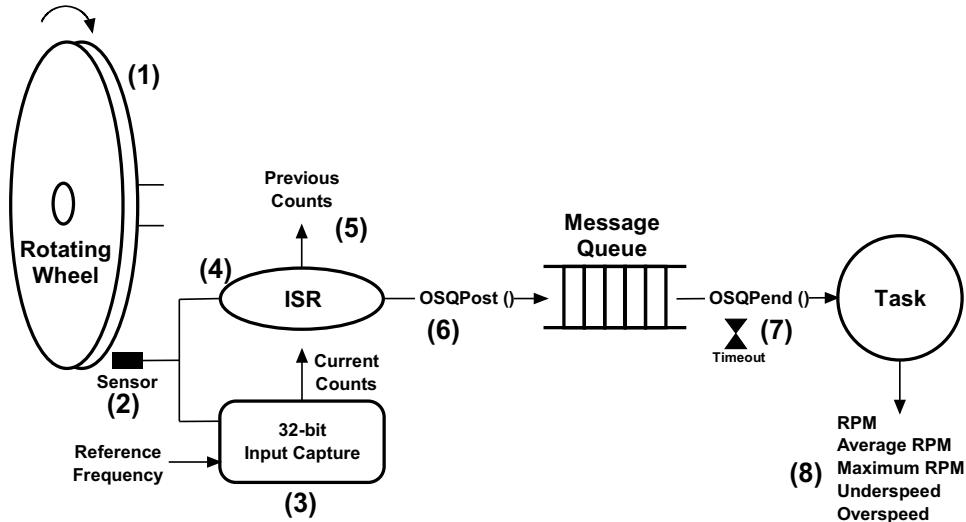


Figure 15-9 Measuring RPM

- F15-9(1) The goal is to measure the RPM of a rotating wheel.
- F15-9(2) A sensor is used to detect the passage of a hole in the wheel. In fact, to receive additional resolution, the wheel could contain multiple holes that are equally spaced.
- F15-9(3) A 32-bit input capture register is used to capture the value of a free-running counter when the hole is detected.
- F15-9(4) An interrupt is generated when the hole is detected. The ISR reads the current count of the input capture register and subtracts the value of the previous capture to determine the time it took for one rotation (assuming only a single hole).

```

Delta Counts      = Current Counts - Previous Counts;
Previous Counts = Current Counts;
  
```

F15-9(5)

F15-9(6) The delta counts are sent to a message queue. Since a message is actually a pointer, if the pointer is 32-bits wide on the processor in use, you can simply cast the 32-bit delta counts to a pointer and send this through the message queue. A safer and more portable approach is to dynamically allocate storage to hold the delta counts using a memory block from µC/OS-III's memory management services (see Chapter 17, "Memory Management" on page 343) and send the address of the allocated memory block. The counts read are then saved in 'Previous Counts' to be used on the next interrupt.

F15-9(7) When the message is sent, the RPM measurement task wakes up and computes the RPM as follows:

```
RPM = 60 * Reference Frequency / Delta Counts;
```

The user may specify a timeout on the pend call and the task will wake up if a message is not sent within the timeout period. This allows the user to easily detect that the wheel is not rotating and therefore, the RPM is 0.

15

F15-9(8) Along with computing RPM, the task can also compute average RPM, maximum RPM, and whether the speed is above or below thresholds, etc.

A few interesting things are worth noting about the above example. First, the ISR is very short; it reads the input capture and post the delta counts to the task so it can computer the time-consuming math. Second, with the timeout on the pend, it is easy to detect that the wheel is stopped. Finally, the task can perform additional calculations and can further detect such errors as the wheel spinning too fast or too slow. In fact, the task can notify other tasks about these errors, if needed.

Listing 15-3 shows how to implement the RPM measurement example using µC/OS-III's message queue services. Some of the code is pseudo-code, while the calls to µC/OS-III services are actual calls with their appropriate arguments.

```
OS_Q          RPM_Q;                                (1)
CPU_INT32U   DeltaCounts;
CPU_INT32U   CurrentCounts;
CPU_INT32U   PreviousCounts;

void main (void)
{
    OS_ERR  err ;
    :
    OSInit(&err) ;                                (2)
    :
    OSQCreate((OS_Q      *)&RPM_Q,
              (CPU_CHAR *)"My Queue",
              (OS_MSG_QTY)10,
              (OS_ERR    *)&err);
    :
    OSStart(&err);
}

void RPM_ISR (void)                                (3)
{
    OS_ERR  err;

    Clear the interrupt from the sensor;
    CurrentCounts = Read the input capture;
    DeltaCounts   = CurrentCounts - PreviousCounts;
    PreviousCounts = CurrentCounts;
    OSQPost((OS_Q      *)&RPM_Q,                      (4)
             (void      *)DeltaCounts,
             (OS_MSG_SIZE)sizeof(void *),
             (OS_OPT     )OS_OPT_POST_FIFO,
             (OS_ERR    *)&err);
}
```

```

void RPM_Task (void *p_arg)
{
    CPU_INT32U    delta;
    OS_ERR        err;
    OS_MSG_SIZE   size;
    CPU_TS        ts;

    DeltaCounts    = 0;
    PreviousCounts = 0;
    CurrentCounts  = 0;
    while (DEF_ON) {
        delta = (CPU_INT32U)OSQPend((OS_Q          *) &RPM_Q,           (5)
                                      (OS_TICK      )OS_CFG_TICK_RATE_HZ * 10,
                                      (OS_OPT       )OS_OPT_PEND_BLOCKING,
                                      (OS_MSG_SIZE *) &size,
                                      (CPU_TS       *) &ts,
                                      (OS_ERR       *) &err);

        if (err == OS_ERR_TIMEOUT) {                                (6)
            RPM = 0;
        } else {
            if (delta > 0u) {
                RPM = 60 * Reference Frequency / delta;           (7)
            }
        }
        Compute average RPM;                                     (8)
        Detect maximum RPM;
        Check for overspeed;
        Check for underspeed;
        :
        :
    }
}

```

Listing 15-3 Pseudo-code of RPM measurement

- L15-3(1) Variables are declared. Notice that it is necessary to allocate storage for the message queue itself.
- L15-3(2) You need to call `OSInit()` and create the message queue before it is used. The best place to do this is in startup code.

-
- L15-3(3) The RPM ISR clears the sensor interrupt and reads the value of the 32-bit input capture. Note that it is possible to read RPM if there is only a 16-bit input capture. The problem with a 16-bit input capture is that it is easy for it to overflow, especially at low RPMs.

The RPM ISR also computes delta counts directly in the ISR. It is just as easy to post the current counts and let the task compute the delta. However, the subtraction is a fast operation and does not significantly increase ISR processing time.

- L15-3(4) The code then sends the delta counts to the RPM task, which is responsible for computing the RPM and perform additional computations. Note that the message gets lost if the queue is full when the user attempts to post. This happens if data is generated faster than it is processed. Unfortunately, it is not possible to implement flow control in the example because we are dealing with an ISR.
- L15-3(5) The RPM task starts by waiting for a message from the RPM ISR by pending on the message queue. The third argument specifies the timeout. In this case, ten seconds worth of timeout is specified. However, the value chosen depends on the requirements of an application.

Also notice that the `ts` variable contains the timestamp of when the post was completed. You can determine the time it took for the task to respond to the message received by calling `OS_TS_GET()`, and subtract the value of `ts`:

```
response_time = OS_TS_GET() - ts;
```

- L15-3(6) If a timeout occurs, you can assume the wheel is no longer spinning.
- L15-3(7) The RPM is computed from the delta counts received, and from the reference frequency of the free-running counter.

- L15-3(8) Additional computations are performed as needed. In fact, messages can be sent to different tasks in case error conditions are detected. The messages would be processed by the other tasks. For example, if the wheel spins too fast, another task can initiate a shutdown on the device that is controlling the wheel speed.

In Listing 15-4, `OSQPost()` and `OSQPend()` are replaced with `OSTaskQPost()` and `OSTaskQPend()` for the RPM measurement example. Notice that the code is slightly simpler to use and does not require creating a separate message queue object. However, when creating the RPM task, it is important to specify the size of the message queue used by the task and compile the application code with `OS_CFG_TASK_Q_EN` set to 1. The differences between using message queues and the task's message queue will be explained.

```

OS_TCB      RPM_TCB;                                (1)
OS_STK      RPM_Stk[1000];
CPU_INT32U  DeltaCounts ;
CPU_INT32U  CurrentCounts ;
CPU_INT32U  PreviousCounts ;

void main (void)
{
    OS_ERR  err ;
    :
    OSInit(&err) ;
    :
    void  OSTaskCreate ((OS_TCB      *)&RPM_TCB,           (2)
                        (CPU_CHAR     *)"RPM Task",
                        (OS_TASK_PTR )RPM_Task,
                        (void        *)0,
                        (OS_PRIO      )10,
                        (CPU_STK      *)&RPM_Stk[0],
                        (CPU_STK_SIZE )100,
                        (CPU_STK_SIZE )1000,
                        (OS_MSG_QTY   )10,
                        (OS_TICK      )0,
                        (void        *)0,
                        (OS_OPT       )(OS_OPT_TASK_STK_CHK + OS_OPT_TASK_STK_CLR),
                        (OS_ERR       *)&err);
    :
    OSStart(&err);
}

```

```

void RPM_ISR (void)
{
    OS_ERR err;

    Clear the interrupting from the sensor;
    CurrentCounts = Read the input capture;
    DeltaCounts = CurrentCounts - PreviousCounts;
    PreviousCounts = CurrentCounts;
    OSTaskQPost((OS_TCB *) &RPM_TCB,
                (void *)DeltaCounts,
                (OS_MSG_SIZE)sizeof(DeltaCounts),
                (OS_OPT)OS_OPT_POST_FIFO,
                (OS_ERR *)&err);
}

void RPM_Task (void *p_arg)
{
    CPU_INT32U delta;
    OS_ERR err;
    OS_MSG_SIZE size;
    CPU_TS ts;

    DeltaCounts = 0;
    PreviousCounts = 0;
    CurrentCounts = 0;
    while (DEF_ON) {
        delta = (CPU_INT32U)OSTaskQPend((OS_TICK)OS_CFG_TICK_RATE * 10,      (4)
                                         (OS_OPT)OS_OPT_PEND_BLOCKING,
                                         (OS_MSG_SIZE *)&size,
                                         (CPU_TS *)&ts,
                                         (OS_ERR *)&err);

        if (err == OS_ERR_TIMEOUT) {
            RPM = 0;
        } else {
            if (delta > 0u) {
                RPM = 60 * ReferenceFrequency / delta;
            }
        }
        Compute average RPM;
        Detect maximum RPM;
        Check for overspeed;
        Check for underspeed;
        :
        :
    }
}

```

(3)

Listing 15-4 Pseudo-code of RPM measurement

- L15-4(1) Instead of declaring a message queue, it is important to know the `OS_TCB` of the task that will be receiving messages.
- L15-4(2) The RPM task is created and a queue size of 10 entries is specified. Of course, hard-coded values should not be specified in a real application, but instead, you should use `#defines`. Fixed numbers are used here for sake of illustration.
- L15-4(3) Instead of posting to a message queue, the ISR posts the message directly to the task, specifying the address of the `OS_TCB` of the task. This is known since the `OS_TCB` is allocated when creating the task.
- L15-4(4) The RPM task starts by waiting for a message from the RPM ISR by calling `OSTaskQPend()`. This is an inherent call so it is not necessary to specify the address of the `OS_TCB` to pend on as the current task is assumed. The second argument specifies the timeout. Here, ten seconds worth of timeout is specified, which corresponds to 6 RPM.

15-8 CLIENTS AND SERVERS

Another interesting use of message queues is shown in Figure 15-10. Here, a task (the server) is used to monitor error conditions that are sent to it by other tasks or ISRs (clients). For example, a client detects whether the RPM of the rotating wheel has been exceeded, another client detects whether an over-temperature exists, and yet another client detects that a user pressed a shutdown button. When the clients detect error conditions, they send a message through the message queue. The message sent indicates the error detected, which threshold was exceeded, the error code that is associated with error conditions, or even suggests the address of a function that will handle the error, and more.

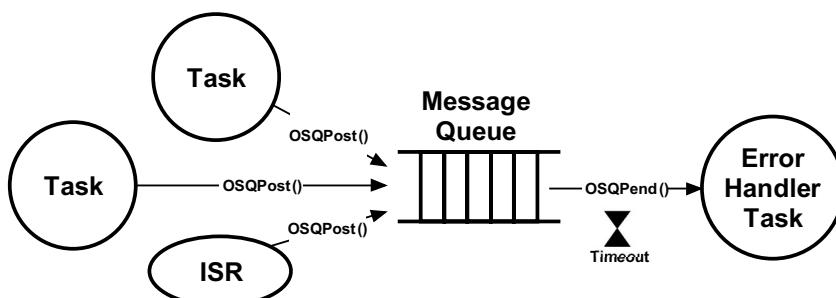


Figure 15-10 Clients and Servers

15-9 MESSAGE QUEUES INTERNALS

As previously described, a message consists of a pointer to actual data, a variable indicating the size of the data being pointed to and a timestamp indicating when the message was actually sent. When sent, a message is placed in a data structure of type `OS_MSG`, shown in Figure 15-11.

The sender and receiver are unaware of this data structure since everything is hidden through the APIs provided by μC/OS-III.

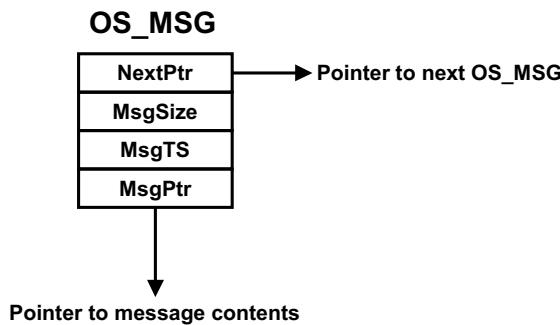


Figure 15-11 `OS_MSG` structure

μC/OS-III maintains a pool of free `OS_MSGs`. The total number of available messages in the pool is determined by the value of `OS_CFG_MSG_POOL_SIZE` found in `os_cfg_app.h`. When μC/OS-III is initialized, `OS_MSGs` are linked in a single linked list as shown in Figure 15-12. Notice that the free list is maintained by a data structure of type `OS_MSG_POOL`, which contains four (4) fields: `.NextPtr`, which points to the free list; `.NbrFree`, which contains the number of free `OS_MSGs` in the pool, `.NbrUsed`, which contains the number of `OS_MSGs` allocated to the application and, `.NbrUsedMax` which detects the maximum number of messages allocated to the application.

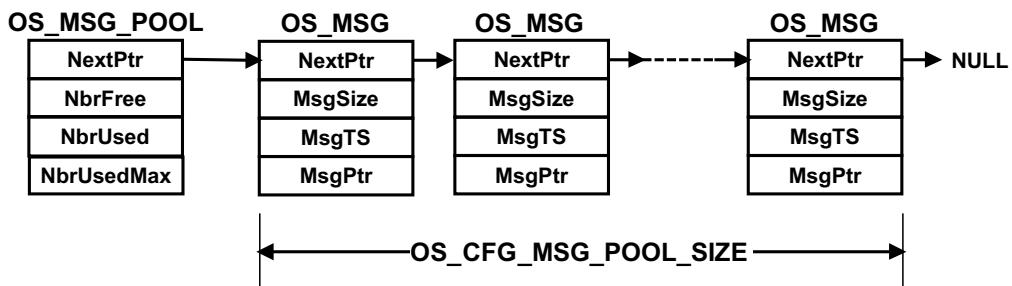


Figure 15-12 Pool of free `OS_MSGs`

Messages are queued using a data structure of type `OS_MSG_Q`, as shown in Figure 15-13.

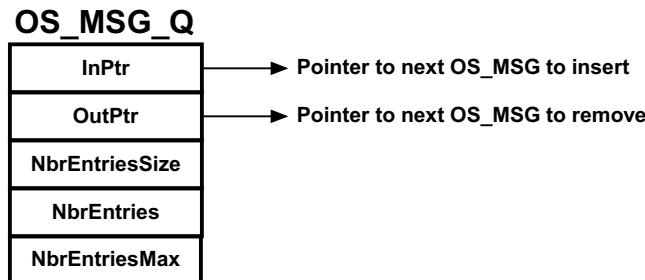


Figure 15-13 `OS_MSG_Q` structure

- .InPtr** This field contains a pointer to where the next `OS_MSG` will be inserted in the queue. In fact, the `OS_MSG` will be inserted “after” the `OS_MSG` pointed to.
- .OutPtr** This field contains a pointer to where the next `OS_MSG` will be extracted.
- .NbrEntriesSize** This field contains the maximum number of `OS_MSGs` that the queue will hold. If an application attempts to send a message and the **.NbrEntries** matches this value, the queue is considered to be full and the `OS_MSG` will not be inserted.
- .NbrEntries** This field contains the current number of `OS_MSGs` in the queue.
- .NbrEntriesMax** This field contains the highest number of `OS_MSGs` existing in the queue at any given time.

A number of internal functions are used by μC/OS-III to manipulate the free list and messages. Specifically, `OS_MsgQPut()` inserts an `OS_MSG` in an `OS_MSG_Q`, `OS_MsgQGet()` extracts an `OS_MSG` from an `OS_MSG_Q`, and `OS_MsgQFreeAll()` returns all `OS_MSGs` in an `OS_MSG_Q` to the pool of free `OS_MSGs`. There are other `OS_MsgQ??()` functions in `os_msg.c` that are used during initialization.

Figure 15-14 shows an example of an OS_MSG_Q when four OS_MSGs are inserted.

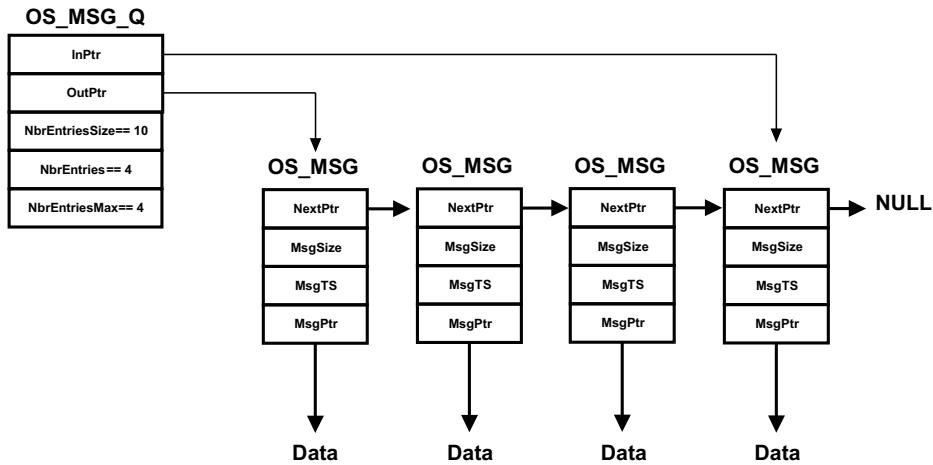


Figure 15-14 OS_MSG_Q with four OS_MSGs

OS_MSG_Qs are used inside two additional data structures: OS_Q and OS_TCB. Recall that an OS_Q is declared when creating a message queue object. An OS_TCB is a task control block and, as previously mentioned, each OS_TCB can have its own message queue when the configuration constant OS_CFG_TASK_Q_EN is set to 1 in `os_cfg.h`. Figure 15-15 shows the contents of an OS_Q and partial contents of an OS_TCB containing an OS_MSG_Q. The OS_MSG_Q data structure is shown as an “exploded view” to emphasize the structure within the structure.

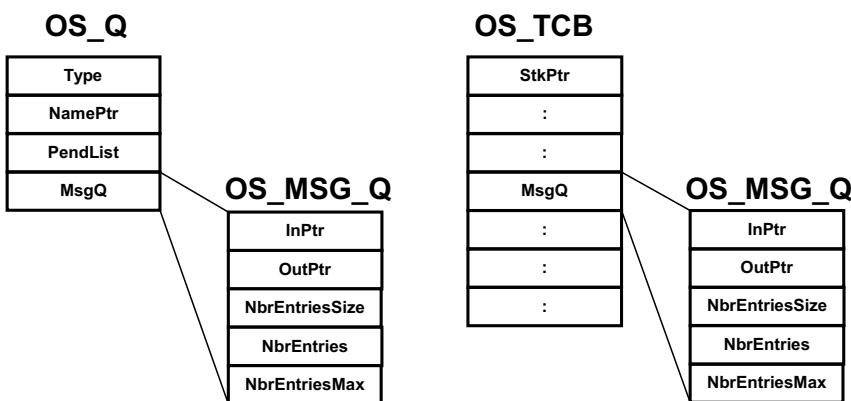


Figure 15-15 OS_Q and OS_TCB each contain an OS_MSG_Q

15-10 SUMMARY

Message queues are useful when a task or an ISR needs to send data to another task. The data sent must remain in scope as it is actually sent by reference instead of by value. In other words, the data sent is not copied.

The task waiting for the data will not consume CPU time while waiting for a message to be sent to it.

If it is known which task is responsible for servicing messages sent by producers, then you should use task message queue (i.e., `OSTaskQ???`()) services since they are simple and fast. Task message queue services are enabled when `OS_CFG_TASK_Q_EN` is set to 1 in `os_cfg.h`.

If multiple tasks must wait for messages from the same message queue, you need to allocate an `OS_Q` and have the tasks wait for messages to be sent to the queue. Alternatively, you can broadcast special messages to all tasks waiting on a message queue. Regular message queue services are enabled when `OS_CFG_Q_EN` is set to 1 in `os_cfg.h`.

Messages are sent using an `OS_MSG` data structure obtained by µC/OS-III from a pool. You need to set the maximum number of messages that can be sent to a message queue, or as many messages as are available in the pool.

Chapter 16

Pending On Multiple Objects

In Chapter 10, “Pend Lists (or Wait Lists)” on page 197 we saw how multiple tasks can pend (or wait) on a single kernel object such as a semaphore, mutual exclusion semaphore, event flag group, or message queue. In this chapter, we will see how tasks can pend on multiple objects. However, µC/OS-III only allows for pend on multiple semaphores and/or message queues. In other words, it is not possible to pend on multiple event flag groups or mutual exclusion semaphores.

As shown in Figure 16-1, a task can pend on any number of semaphores or message queues at the same time. The first semaphore or message queue posted will make the task ready-to-run and compete for CPU time with other tasks in the ready list. As shown, a task pends on multiple objects by calling `OSPendMulti()` and specifies an optional timeout value. The timeout applies to all of the objects. If none of the objects are posted within the specified timeout, the task resumes with an error code indicating that the pend timed out.

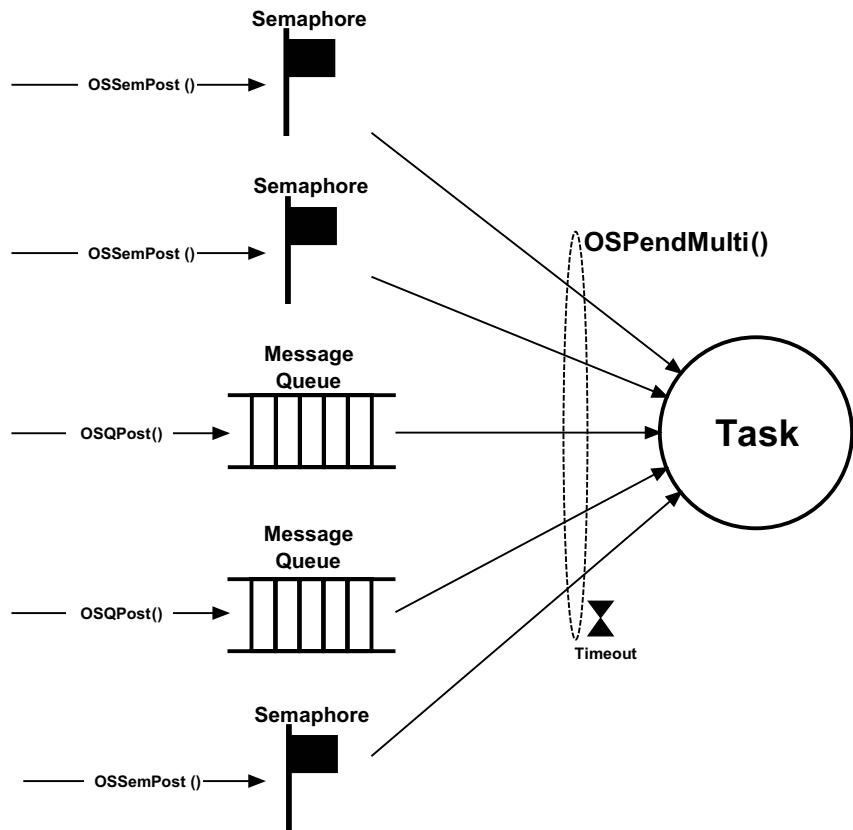
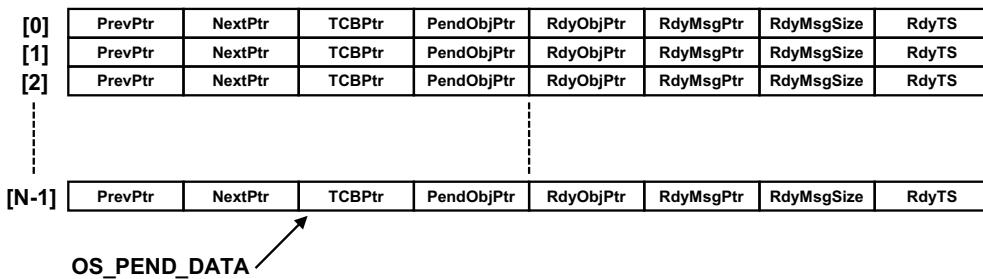


Figure 16-1 Task pending on multiple objects

Table 16-1 shows the function prototype of **OSPendMulti()** and Figure 16-2 shows an array of **OS_PEND_DATA** elements.

```
OS_OBJ_QTY OSPendMulti(OS_PEND_DATA *p_pend_data_tbl,          (1)
                      OS_OBJ_QTY   tbl_size,           (2)
                      OS_TICK      timeout,          (3)
                      OS_OPT       opt,              (4)
                      OS_ERR       *p_err);         (5)
```

Table 16-1 **OSPendMulti()** prototypeFigure 16-2 Array of **OS_PEND_DATA**

16

- L16-0(1) **OSPendMulti()** is passed an array of **OS_PEND_DATA** elements. The caller must instantiate an array of **OS_PEND_DATA**. The size of the array depends on the total number of kernel objects that the task wants to pend on. For example, if the task wants to pend on three semaphores and two message queues then the array contains five **OS_PEND_DATA** elements as shown below:

```
OS_PEND_DATA my_pend_multi_tbl[5];
```

The calling task needs to initialize the **.PendObjPtr** of each element of the array to point to each of the objects to be pended on. For example:

```

OS_SEM  MySem1;
OS_SEM  MySem2;
OS_SEM  MySem3;
OS_Q    MyQ1;
OS_Q    MyQ2;

void  MyTask (void)
{
    OS_ERR      err;
    OS_PEND_DATA my_pend_multi_tbl[5];
    :
    while (DEF_ON) {
        :
        my_pend_multi_tbl[0].PendObjPtr = (OS_PEND_OBJ)&MySem1;      (6)
        my_pend_multi_tbl[1].PendObjPtr = (OS_PEND_OBJ)&MySem2;
        my_pend_multi_tbl[2].PendObjPtr = (OS_PEND_OBJ)&MySem3;
        my_pend_multi_tbl[3].PendObjPtr = (OS_PEND_OBJ)&MyQ1;
        my_pend_multi_tbl[4].PendObjPtr = (OS_PEND_OBJ)&MyQ2;
        OSPendMulti((OS_PEND_DATA *)&my_pend_multi_tbl[0],
                    (OS_OBJ_QTY) 5,
                    (OS_TICK)    0,
                    (OS_OPT)     )OS_OPT_PEND_BLOCKING,
                    (OS_ERR)    *)&err);
        /* Check 'err' */
        :
    }
}

```

- L16-0(2) This argument specifies the size of the `OS_PEND_DATA` table. In the above example, this is 5.
- L16-0(3) You specify whether or not to timeout in case none of the objects are posted within a certain amount of time. A non-zero value indicates the number of ticks to timeout. Specifying zero indicates the task will wait forever for any of the objects to be posted.
- L16-0(4) The “`opt`” argument specifies whether to wait for objects to be posted (you would set `opt` to `OS_OPT_PEND_BLOCKING`) or, not block if none of the objects have already been posted (you would set `opt` to `OS_OPT_PEND_NON_BLOCKING`).

- F16-2(1) As with most μC/OS-III function calls, you specify the address of a variable that will receive an error code based on the outcome of the function call. See Appendix A, “μC/OS-III API Reference” on page 443 for a list of possible error codes. As always, it is highly recommended to examine the error return code.
- F16-2(2) Note that all objects are cast to **OS_PEND_OBJ** data types.

When called, **OSPendMulti()** first starts by validating that all of the objects specified in the **OS_PEND_DATA** table are either an **OS_SEM** or an **OS_Q**. If not, an error code is returned.

Next, **OSPendMulti()** goes through the **OS_PEND_DATA** table to see if any of the objects have already posted. If so, **OSPendMulti()** fills the following fields in the table: **.RdyObjPtr**, **.RdyMsgPtr**, **.RdyMsgSize** and **.RdyTS**.

- **.RdyObjPtr** is a pointer to the object if the object has been posted. For example, if the first object in the table is a semaphore and the semaphore has been posted to, **my_pend_multi_tbl[0].RdyObjPtr** is set to **my_pend_multi_tbl[0].PendObjPtr**.
- **.RdyMsgPtr** is a pointer to a message if the object in the table at this entry is a message queue and a message was received from the message queue.
- **.RdyMsgSize** is the size of the message received if the object in the table at this entry is a message queue and a message was received from the message queue.
- **.RdyTS** is the timestamp of when the object posted. This allows the user to know when a semaphore or message queue was posted.

If there are no objects posted, then **OSPendMulti()** places the current task in the wait list of all the objects that it is pending on. This is a complex and tedious process for **OSPendMulti()** since there can be other tasks in the pend list of some of these objects we are pending on.

To indicate how tricky things get, Figure 16-3 is an example of a task pending on two semaphores.

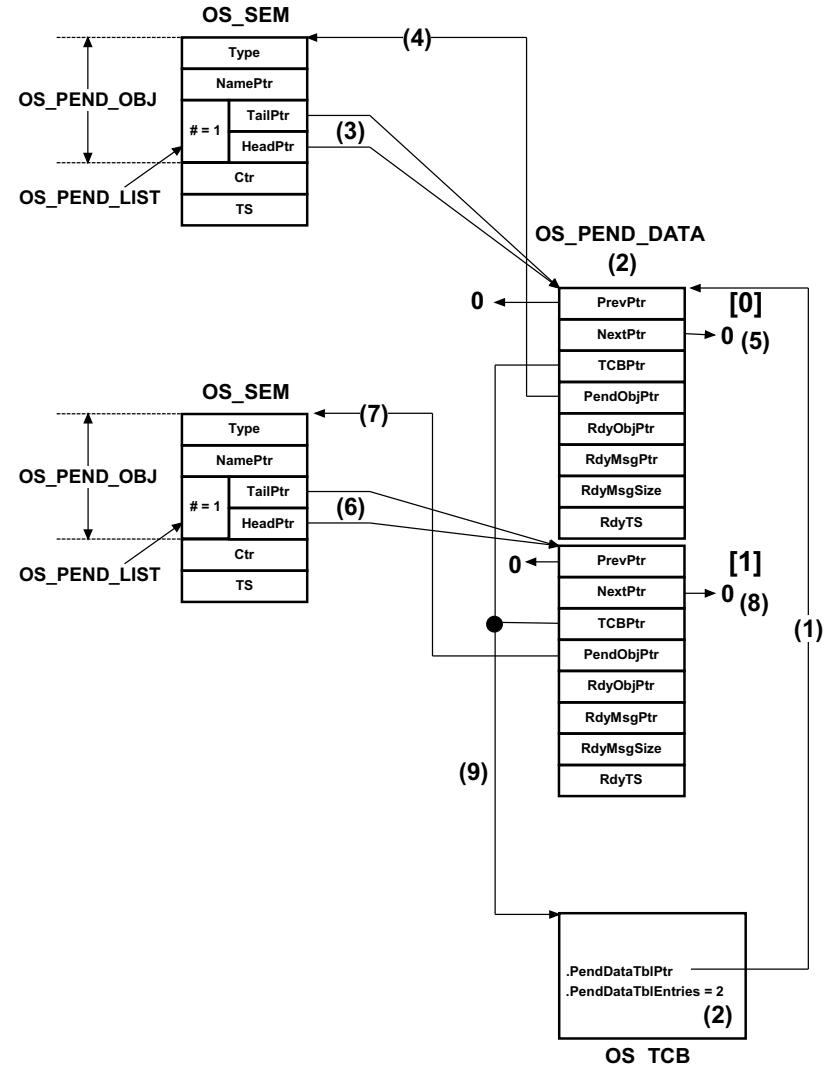


Figure 16-3 Task pending on two semaphores

- F16-3(1) A pointer to the base address of the **OS_PEND_DATA** table is placed in the **OS_TCB** of the task placed in the pend list of the two semaphores.
- F16-3(2) The number of entries in the **OS_PEND_DATA** table is also placed in the **OS_TCB**. Again, this task is waiting on two semaphores and therefore there are two entries in the table.

- F16-3(3) The first semaphore is linked to the first entry in the **OS_PEND_DATA** array.
- F16-3(4) Entry [0] of the **OS_PEND_DATA** table is linked to the semaphore object specified by that entry's **.PendObjPtr**. This pointer was specified by the caller of **OSPendingMulti()**.
- F16-3(5) Since there is only one task in the pend list of the semaphore, the **.PrevPtr** and **.NextPtr** are pointing to **NULL**.
- F16-3(6) The second semaphore points to the second entry in the **OS_PEND_DATA** table.
- F16-3(7) The second entry in the **OS_PEND_DATA** array points to the second semaphore. This pointer was specified by the caller of **OSPendingMulti()**.
- F16-3(8) The second semaphore only has one entry in its pend list. Therefore the **.PrevPtr** and **.NextPtr** both point to **NULL**.
- F16-3(9) **OSPendingMulti()** links back each **OS_PEND_DATA** entry to the task that is waiting on the two semaphores.

Figure 16-4 is a more complex example where one task is pending on two semaphores while another task also pends on one of the two semaphores. The examples presented so far only show semaphores, but they could be combinations of semaphores and message queues.

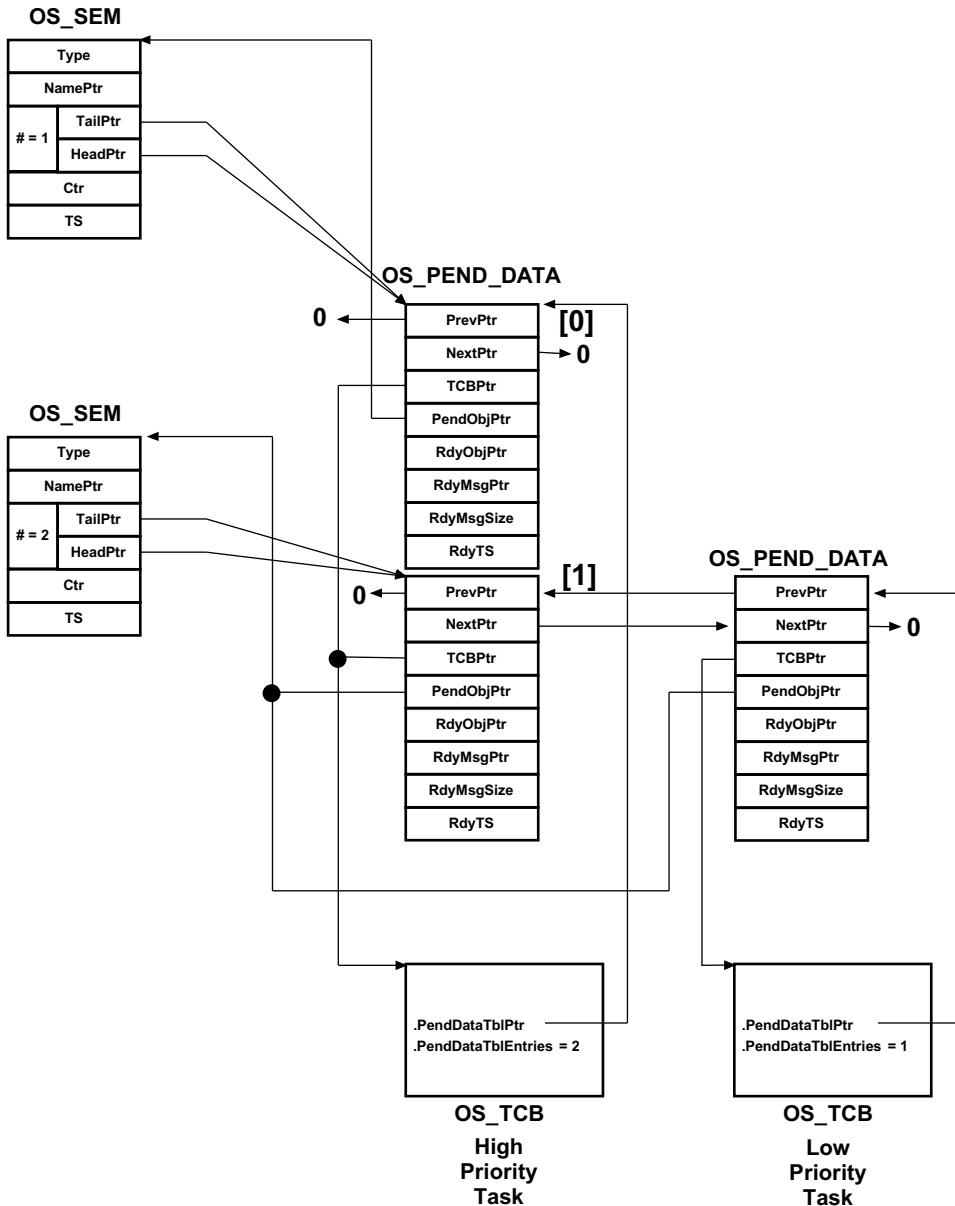


Figure 16-4 Tasks pending on semaphores

When either an ISR or a task signals or sends a message to one of the objects that the task is pending on, `OSPendMulti()` returns, indicating in the `OS_PEND_DATA` table which object was posted. This is done by only filling in “one” of the `.RdyObjPtr` entries, the one that corresponds to the object posted.

Only one of the entries in the `OS_PEND_DATA` table will have a `.RdyObjPtr` with a non-NULL value while all the other entries have the `.RdyObjPtr` set to NULL. Going back to the case where a task waits on five semaphores and two message queues, if the first message queue is posted while the task is pending on all those objects, the `OS_PEND_DATA` table will be as shown in Figure 16-5.

	<code>.PrevPtr</code>	<code>.NextPtr</code>	<code>.TCBPtr</code>	<code>.PendObjPtr</code>	<code>.RdyObjPtr</code>	<code>.RdyMsgPtr</code>	<code>.RdyMsgSize</code>	<code>.RdyTS</code>
[0]	0	0	TCBPtr	PendObjPtr	0	0	0	0
[1]	0	0	TCBPtr	PendObjPtr	0	0	0	0
[2]	0	0	TCBPtr	PendObjPtr	0	0	0	0
[3]	0	0	TCBPtr	&MyQ1	&MyQ1	Msg Ptr	Msg Size	Timestamp
[4]	0	0	TCBPtr	PendObjPtr	0	0	0	0

Figure 16-5 Message queue #1 posted before timeout expired

16-1 SUMMARY

16

`μC/OS-III` allows tasks to pend on multiple kernel objects.

`OSPendMulti()` can only pend on multiple semaphores and message queues, not event flags and mutual-exclusion semaphores.

If the objects are already posted when `OSPendMulti()` is called, `μC/OS-III` will specify which of the objects (can be more than one) in the list of objects have already been posted.

If none of the objects are posted, `OSPendMulti()` will place the calling task in the pend list of all the desired objects. `OSPendMulti()` will return as soon as one of the objects is posted. In this case, `OSPendMulti()` will indicate which object was posted.

`OSPendMulti()` is a complex function that has potentially long critical sections.

Chapter

17

Memory Management

An application can allocate and free dynamic memory using any ANSI C compiler's `malloc()` and `free()` functions, respectively. However, using `malloc()` and `free()` in an embedded real-time system may be dangerous. Eventually, it might not be possible to obtain a single contiguous memory area due to fragmentation. Fragmentation is the development of a large number of separate free areas (i.e., the total free memory is fragmented into small, non-contiguous pieces). Execution time of `malloc()` and `free()` is generally nondeterministic given the algorithms used to locate a contiguous block of free memory large enough to satisfy a `malloc()` request.

μ C/OS-III provides an alternative to `malloc()` and `free()` by allowing an application to obtain fixed-sized memory blocks from a partition made from a contiguous memory area, as illustrated in Figure 17-1. All memory blocks are the same size, and the partition contains an integral number of blocks. Allocation and deallocation of these memory blocks is performed in constant time and is deterministic. The partition itself is typically allocated statically (as an array), but can also be allocated by using `malloc()` as long as it is never freed.

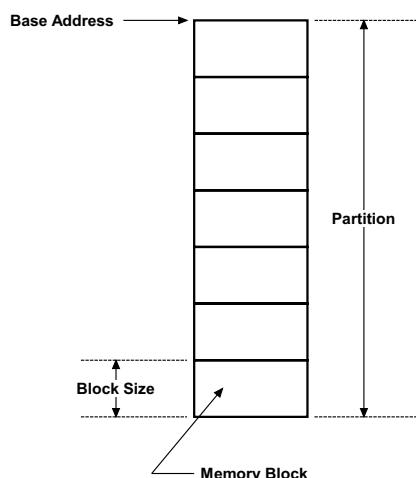


Figure 17-1 Memory Partition

As indicated in Figure 17-2, more than one memory partition may exist in an application and each one may have a different number of memory blocks and be a different size. An application can obtain memory blocks of different sizes based upon requirements. However, a specific memory block must always be returned to the partition that it came from. This type of memory management is not subject to fragmentation except that it is possible to run out of memory blocks. It is up to the application to decide how many partitions to have and how large each memory block should be within each partition.

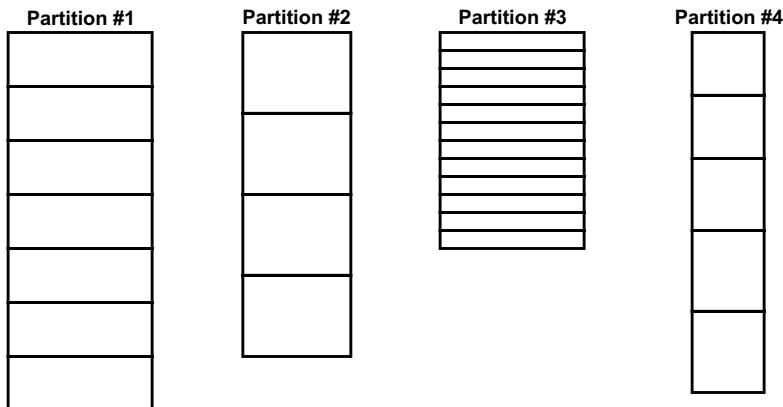


Figure 17-2 Multiple Memory Partitions

17-1 CREATING A MEMORY PARTITION

Before using a memory partition, it must be created. This allows µC/OS-III to know something about the memory partition so that it can manage their allocation and deallocation. Once created, a memory partition is as shown in Figure 17-3. Calling `OSMemCreate()` creates a memory partition.

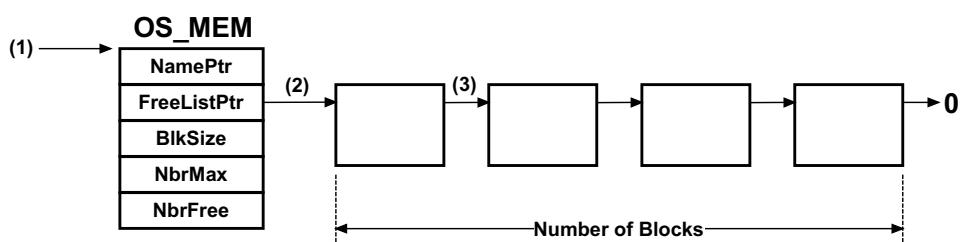


Figure 17-3 Created Memory Partition

- F17-3(1) When creating a partition, the application code supplies the address of a memory partition control block (`OS_MEM`). Typically, this memory control block is allocated from static memory, however it can also be obtained from the heap by calling `malloc()`. The application code should however never deallocate it.
- F17-3(2) `OSMemCreate()` organizes the continuous memory provided into a singly linked list and stores the pointer to the beginning of the list in the `OS_MEM` structure.
- F17-3(3) Each memory block must be large enough to hold a pointer. Given the nature of the linked list, a block needs to be able to point to the next block.

Listing 17-1 indicates how to create a memory partition with µC/OS-III.

```

OS_MEM      MyPartition;                      (1)
CPU_INT08U  MyPartitionStorage[12][100];       (2)

void main (void)                                (3)
{
    OS_ERR  err;
    :
    :
    OSInit(&err);
    :

    OSMemCreate((OS_MEM     *)&MyPartition,          (4)
                (CPU_CHAR   *)"My Partition",        (5)
                (void       *)&MyPartitionStorage[0][0], (6)
                (OS_MEM_QTY ) 12,                  (7)
                (OS_MEM_SIZE)100,                 (8)
                (OS_ERR     *)&err);            (9)

    /* Check 'err' */
    :
    :
    OSStart(&err);
}

```

Listing 17-1 **Creating a memory partition**

- L17-1(1) An application needs to allocate storage for a memory partition control block (i.e. `OS_MEM` structure). This can be a static allocation as shown here or `malloc()` can be used in the code. However, the application code must not deallocate the memory control block.
- L17-1(2) The application also needs to allocate storage for the memory that will be split into memory blocks. This can also be a static allocation or `malloc()` can be used. The same reasoning applies. Do not deallocate this storage since other tasks may rely on the existence of this storage.
- L17-1(3) Memory partition must be created before allocating and deallocating blocks from the partition. One of the best places to create memory partitions is in `main()` prior to starting the multitasking process. Of course, an application can call a function from `main()` to do this instead of actually placing the code directly in `main()`.
- L17-1(4) You pass the address of the memory partition control block to `OSMemCreate()`. You should never reference any of the internal members of the `OS_MEM` data structure. Instead, you should always use µC/OS-III's API.
- L17-1(5) You can assign a name to the memory partition. There is no limit to the length of the ASCII string as µC/OS-III saves a pointer to the ASCII string in the partition control block and not the actual characters.
- L17-1(6) You then need to pass the base address of the storage area reserved for the memory blocks.
- L17-1(7) Here, you specify how many memory blocks are available from this memory partition. Hard coded numbers are used for the sake of the illustration but you should instead use `#define` constants.
- L17-1(8) You need to specify the size of each memory block in the partition. Again, a hard coded value is used for illustration, which is not recommended in real code.
- L17-1(9) As with most µC/OS-III services, `OSMemCreate()` returns an error code indicating the outcome of the service. The call is successful if “`err`” contains `OS_ERR_NONE`.

Listing 17-2 shows how to create a memory partition with µC/OS-III, but this time, using `malloc()` to allocate storage. Do not deallocate the memory control block or the storage for the partition.

```

OS_MEM      *MyPartitionPtr;                                (1)

void main (void)
{
    OS_ERR    err;
    void     *p_storage;
    :
    OSInit(&err);
    :

    MyPartitionPtr = (OS_MEM *)malloc(sizeof(OS_MEM));          (2)
    if (MyPartitionPtr != (OS_MEM *)0) {
        p_storage = malloc(12 * 100);                          (3)
        if (p_storage != (void *)0) {
            OSMemCreate((OS_MEM    *)MyPartitionPtr,           (4)
                          (CPU_CHAR   *)"My Partition",
                          (void       *)p_storage,                  (5)
                          (OS_MEM_QTY ) 12,                      (6)
                          (OS_MEM_SIZE)100,                     (6)
                          (OS_ERR     *)&err);
            /* Check 'err' */
        }
    }
    :
    OSStart(&err);
}

```

Listing 17-2 Creating a memory partition

- L17-2(1) Instead of allocating static storage for the memory partition control block, you can assign a pointer that receives the `OS_MEM` allocated using `malloc()`.
- L17-2(2) The application allocates storage for the memory control block.
- L17-2(3) We then allocate storage for the memory partition.
- L17-2(4) A pointer is passed to the allocated memory control block to `OSMemCreate()`.

L17-2(5) The base address of the storage used for the partition is passed to `OSMemCreate()`.

L17-2(6) Finally, the number of blocks and the size of each block is passed so that `μC/OS-III` can create the linked list of 12 blocks of 100 bytes each. Again, hard coded numbers are used, but these would typically be replaced by `#defines`.

17-2 GETTING A MEMORY BLOCK FROM A PARTITION

Application code can request a memory block from a partition by calling `OSMemGet()` as shown in Listing 17-3. The code assumes that the partition was already created.

```
OS_MEM      MyPartition;                                (1)
CPU_INT08U *MyDataBlkPtr;

void MyTask (void *p_arg)
{
    OS_ERR err;

    :
    while (DEF_ON) {
        :
        MyDataBlkPtr = (CPU_INT08U *)OSMemGet((OS_MEM   *)MyPartition,    (2)
                                                (OS_ERR   *)&err);
        if (err == OS_ERR_NONE) {                                     (3)
            /* You have a memory block from the partition */
        }
        :
        :
    }
}
```

Listing 17-3 Obtaining a memory block from a partition

L17-3(1) The memory partition control block must be accessible by all tasks or ISRs that will be using the partition.

- L17-3(2) Simply call `OSMemGet()` to obtain a memory block from the desired partition. A pointer to the allocated memory block is returned. This is similar to `malloc()`, except that the memory block comes from a pool that is guaranteed to not fragment. Also, it's assumed that your application knows the size of each block so it doesn't overflow the block with data.
- L17-3(3) It is important to examine the returned error code to ensure that there are free memory blocks and that the application can start putting content in the memory blocks.

17-3 RETURNING A MEMORY BLOCK TO A PARTITION

The application code must return an allocated memory block back to the proper partition when finished. You do this by calling `OSMemPut()` as shown in Listing 17-4. The code assumes that the partition was already created.

```

OS_MEM      MyPartition;                                (1)
CPU_INT08U *MyDataBlkPtr;

void MyTask (void *p_arg)
{
    OS_ERR  err;

    :
    while (DEF_ON) {
        :
        OSMemPut((OS_MEM *) &MyPartition,           (2)
                  (void   *) MyDataBlkPtr,            (3)
                  (OS_ERR  *)&err);
        if (err == OS_ERR_NONE) {                (4)
            /* You properly returned the memory block to the partition */
        }
        :
        :
    }
}

```

17

Listing 17-4 Returning a memory block to a partition

- L17-4(1) The memory partition control block must be accessible by all tasks or ISRs that will be using the partition.

-
- L17-4(2) You simply call `OSMemPut()` to return the memory block back to the memory partition. Note that there is no check to see whether the proper memory block is being returned to the proper partition (assuming you have multiple different partitions). It is therefore important to be careful (as is necessary when designing embedded systems).
 - L17-4(3) You pass the pointer to the data area that is allocated so that it can be returned to the pool. Note that a “`void *`” is assumed.
 - L17-4(4) You would examine the returned error code to ensure that the call was successful.

17-4 USING MEMORY PARTITIONS

Memory management services are enabled at compile time by setting the configuration constant `OS_CFG_MEM_EN` to 1 in `os_cfg.h`.

There are a number of operations to perform on memory partitions as summarized in Table 13-1.

Function Name	Operation
<code>OSMemCreate()</code>	Create a memory partition.
<code>OSMemGet()</code>	Obtain a memory block from a memory partition.
<code>OSMemPut()</code>	Return a memory block to a memory partition.

Table 17-1 Memory Partition API summary

`OSMemCreate()` can only be called from task-level code, but `OSMemGet()` and `OSMemPut()` can be called by Interrupt Service Routines (ISRs).

Listing 17-4 shows an example of how to use the dynamic memory allocation feature of μC/OS-III, as well as message-passing capabilities (see Chapter 15, “Message Passing” on page 309). In this example, the task on the left reads and checks the value of analog inputs (pressures, temperatures, and voltage) and sends a message to the second task if any of the

analog inputs exceed a threshold. The message sent contains information about which channel had the error, an error code, an indication of the severity of the error, and other information.

Error handling in this example is centralized. Other tasks, or even ISRs, can post error messages to the error-handling task. The error-handling task could be responsible for displaying error messages on a monitor (a display), logging errors to a disk, or dispatching other tasks to take corrective action based on the error.

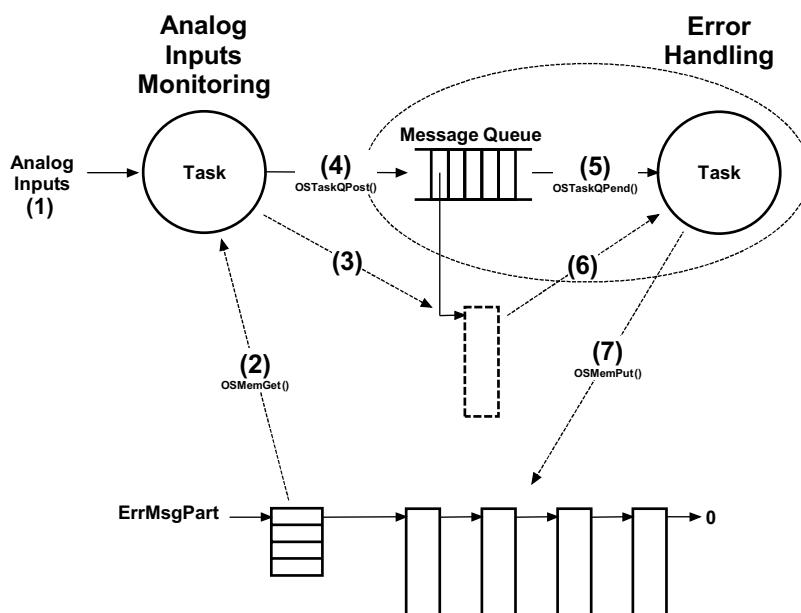


Figure 17-4 Using a Memory Partition – non blocking

- F17-4(1) The analog inputs are read by the task. The task determines that one of the inputs is outside a valid range and an error message needs to be sent to the error handler.
- F17-4(2) The task then obtains a memory block from a memory partition so that it can place information regarding the detected error.

- F17-4(3) The task writes this information to the memory block. As mentioned above, the task places the analog channel that is at fault, an error code, an indication of the severity, possible solutions, and more. There is no need to store a timestamp in the message, as time stamping is a built-in feature of µC/OS-III so the receiving task will know when the message was posted.
- F17-4(4) Once the message is complete, it is posted to the task that will handle such error messages. Of course the receiving task needs to know how the information is placed in the message. Once the message is sent, the analog input task is no longer allowed (by convention) to access the memory block since it sent it out to be processed.
- F17-4(5) The error handler task (on the right) normally pends on the message queue. This task will not execute until a message is sent to it.
- F17-4(6) When a message is received, the error handler task reads the contents of the message and performs necessary action(s). As indicated, once sent, the sender will not do anything else with the message.
- F17-4(7) Once the error handler task is finished processing the message, it simply returns the memory block to the memory partition. The sender and receiver therefore need to know about the memory partition or, the sender can pass the address of the memory partition as part of the message and the error handler task will know where to return the memory block to.

Sometimes it is useful to have a task wait for a memory block in case a partition runs out of blocks. µC/OS-III does not support pending on partitions, but it is possible to support this requirement by adding a counting semaphore (see Chapter 13, “Resource Management” on page 231) to guard the memory partition. The initial value of the counting semaphore would be set to the number of blocks in the partition. This is illustrated in Figure 17-5.

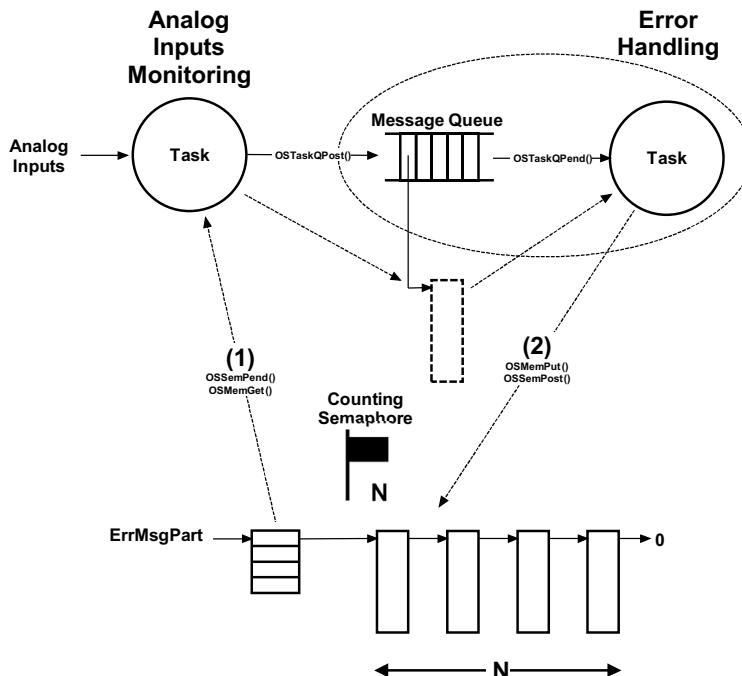


Figure 17-5 Using a Memory Partition - blocking

- F17-5(1) To obtain a memory block, your code simply obtain the semaphore by calling `OSSemPend()` and then calls `OSMemGet()` to receive the memory block.
- F17-5(2) To release a block, you simply return the memory block by calling `OSMemPut()` and then signal the semaphore by calling `OSSemPost()`.

The above operations must be performed in order.

Note that the user may call `OSMemGet()` and `OSMemPut()` from an ISR since these functions do not block and in fact, execute very quickly. However, you cannot use blocking calls from ISRs.

17-5 SUMMARY

Do not use `malloc()` and `free()` in embedded systems since they lead to fragmentation. However, it is possible to use `malloc()` to allocate memory from the heap, but do not deallocate the memory.

The application programmer can create an unlimited number of memory partitions (limited only by the amount of available RAM).

Memory partition services in µC/OS-III start with the `OSMem???`() prefix, and the services available to the application programmer are described in Appendix A, “µC/OS-III API Reference” on page 443.

Memory management services are enabled at compile time by setting the configuration constant `OS_CFG_MEM_EN` to 1 in `os_cfg.h`.

`OSMemGet()` and `OSMemPut()` can be called from ISRs.

Chapter 18

Porting µC/OS-III

This chapter describes how to adapt µC/OS-III to different processors. Adapting µC/OS-III to a microprocessor or a microcontroller is called porting. Most of µC/OS-III is written in C for portability. However, it is still necessary to write processor-specific code in C and assembly language. µC/OS-III manipulates processor registers, which can only be done using assembly language unless the C compiler supports inline assembly language extensions. Porting µC/OS-III to different processors is relatively easy as µC/OS-III was designed to be portable and, since µC/OS-III is similar to µC/OS-II, the user can start from a µC/OS-II port. In fact, this is the easiest way to do a µC/OS-III port.

If there is already a port for the processor to be used, it is not necessary to read this chapter unless, of course, there is an interest in knowing how µC/OS-III processor-specific code works.

µC/OS-III can run on a processor if it satisfies the following general requirements:

- The processor has an ANSI C compiler that generates reentrant code. In fact, the toolchain used must contain an assembler, C compiler and linker/locator. Finding such a toolchain is generally not an issue since there are a number of good toolchains available on the market.
- The processor supports interrupts and can provide an interrupt that occurs at regular intervals (typically between 10 and 1000 Hz). Most processors (especially MCUs) provide timer that can be used for this purpose. Some processors even have dedicated timers for use by an RTOS.
- Interrupts can be disabled and enabled. All current processors that we've worked with offer this. Ideally, the processor allows you to save the current state of the interrupt mask so that it can be restored.

- The processor supports a hardware stack that accommodates a fair amount of data (possibly many kilobytes).
- The processor has instructions to save and restore the stack pointer and other CPU registers, either on the stack or in memory.
- The processor has access to sufficient RAM for µC/OS-III's variables and data structures as well as internal task stacks.
- The compiler should support 32-bit data types. For some fast 32-bit processors, the compiler should also support 64-bit data types (typically “`long long`”).

Figure 18-1 shows the µC/OS-III architecture and its relationship with other software components and hardware. When using µC/OS-III in an application, the user is responsible for providing application software and the µC/OS-III configuration sections.

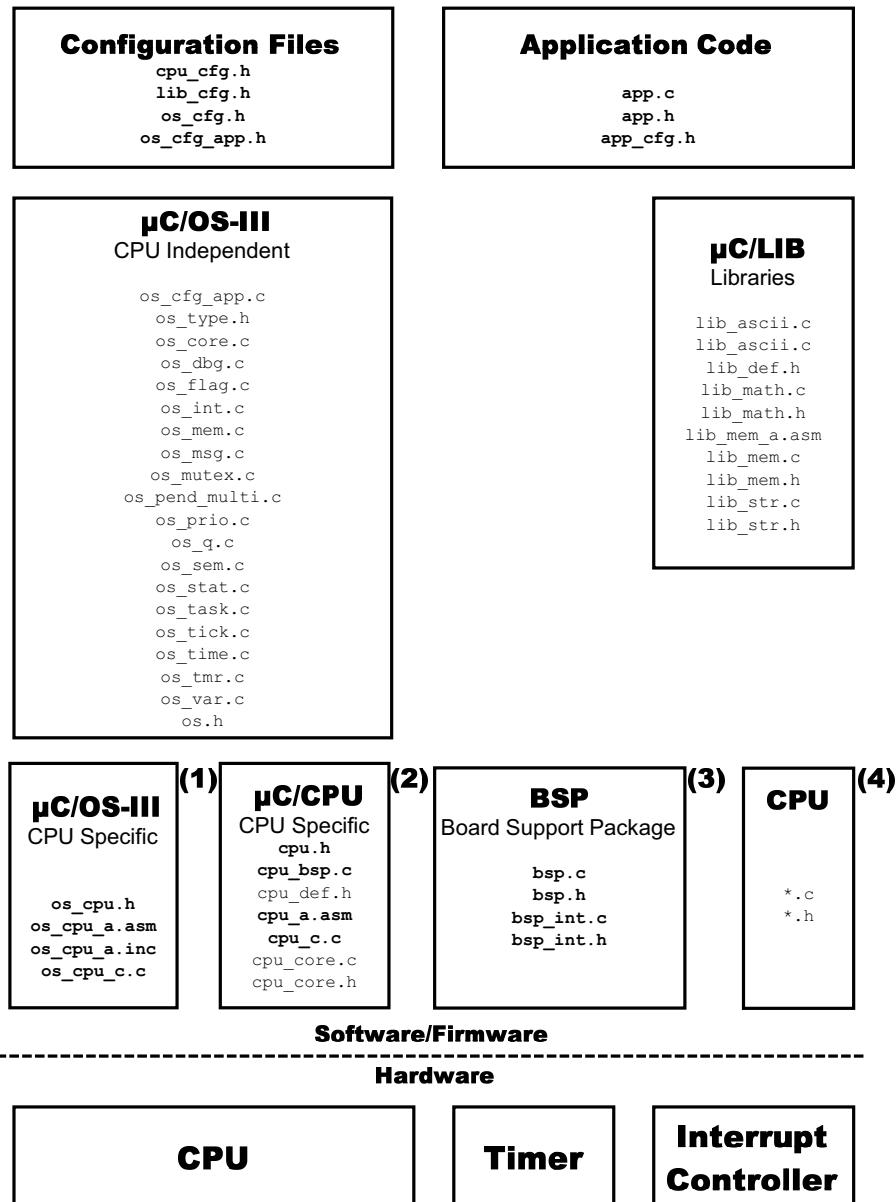


Figure 18-1 µC/OS-III architecture

- F18-1(1) The port developer is responsible for providing the **µC/OS-III CPU Specific** portion. A µC/OS-III port consists of writing or changing the contents of four kernel-specific files: `os_cpu.h`, `os_cpu_a.asm`, `os_cpu_a.inc` and `os_cpu_c.c`.

- F18-1(2) A port also involves writing or changing the contents of two CPU specific files: `cpu.h` and `cpu_a.asm`. `cpu_core.c` is generally generic and should not require modifications.
- F18-1(3) A Board Support Package (BSP) is generally necessary to interface μC/OS-III to a timer (which is used for the clock tick) and an interrupt controller.
- F18-1(4) Some semiconductor manufacturers provide source and header files to access on-chip peripherals. These are contained in CPU/MCU specific files. You generally don't need to modify any of these and thus, you can use them as-is.

Porting μC/OS-III is quite straightforward once the subtleties of the target processor and the C compiler/assembler are understood. Depending on the processor, a port consists of writing or changing between 100 and 400 lines of code, which takes a few hours to a few days to accomplish. The easiest thing to do, however, is to modify an existing port from a processor that is similar to the one intended for use.

A μC/OS-III port looks very much like a μC/OS-II port. Since μC/OS-II was ported to well over 45 different CPU architectures it is easy to start from a μC/OS-II port. Converting a μC/OS-II port to μC/OS-III takes approximately an hour. The process is described in Appendix C, “Migrating from μC/OS-II to μC/OS-III” on page 689.

A port involves three aspects: CPU, OS and board-specific code. The board-specific code is often called a *Board Support Package* (BSP) and from μC/OS-III's point of view, requires very little.

In this chapter, we'll present the steps needed to do a port from scratch. Actually, you'll be starting from *templates* files that already contain placeholders for the code you'll need to insert.

The following is the layout for this chapter:

- Conventions
- μC/CPU Port Files
- μC/OS-III Port Files
- BSP Files
- Testing a Port

18-1 CONVENTIONS

µC/CPU and µC/OS-III are provided in source form and include template files (C and assembly language) which contain instructions about what code needs to be inserted and where. Specifically, you will need to search the source files for four dollar signs (i.e., \$\$\$\$) which are used as placeholders and replace those with the necessary code.

It is assumed that assembly language code use a file extension of **.asm**. Other assembler might require that the extension be **.s** or **.src**. If that's the case with your tools, simply name the assembly language files using the proper extension.

It is assumed that comments in an assembly language file starts with a semicolon, '**;**'.

In assembly language, there are a number of 'directives' that tell the assembler how to process certain pieces of information. Below is a list of such directives and their meaning. The assembler you use may use different syntax for these directives but overall, they should work and mean the same.

- The **PUBLIC** directive indicates that you are declaring a symbol to be globally available. In other words, it's public for all files to see.
- The **EXTERN** directive indicates that the definition of a symbol is found in another file (external to this file).
- The **CODE** directive indicates that what follows needs to be linked with the rest of your executable code. In other words, we are not declaring any variables.
- The **MACRO** directive is used to define an assembly language macro. A macro is basically a series of assembly language instructions that will be replacing the macro name. In other words, when the assembler sees the macro name being invoked in your code, it will replace the macro name with the instructions that are associated with the macro. Macros are useful to avoid repeating sequences of assembly language instructions.
- The **END** directive is generally the last assembly language statement in an assembly language file. The END directive should not appear at the end of a file that defines macros because macro files are generally included in other assembly language files.

18-2 μC/CPU

μC/CPU is a module that provides CPU-specific functionality that is independent of μC/OS-III. Specifically, μC/CPU defines compiler and CPU dependent data types, the word width of the stack, whether the stack grows from high-to-low memory or from low-to-high memory, functions for disabling and enabling interrupts and more. Additional information about this module is provided in the μC/CPU User's Manual (**uC-CPU-Manual.pdf**) which is found in the `\Micrium\Software\uC-CPU\Doc` folder.

Table 18-1 shows the name of μC/CPU files and where they should be placed on the computer used to develop a μC/OS-III-based application. The file names in **bold** are files you will need to create or modify for your own port.

File	Directory
<code>cpu_bsp.c</code>	<code>\Micrium\Software\uC-CPU\BSP\Template\cpu_bsp.c</code>
<code>cpu_def.h</code>	<code>\Micrium\Software\uC-CPU\</code>
<code>cpu_cfg.h</code>	<code>\Micrium\Software\uC-CPU\CFG\Template</code>
<code>cpu_core.c</code>	<code>\Micrium\Software\uC-CPU\</code>
<code>cpu_core.h</code>	<code>\Micrium\Software\uC-CPU\</code>
<code>cpu.h</code>	<code>\Micrium\Software\uC-CPU\<processor>\<compiler></code>
<code>cpu_c.c</code>	<code>\Micrium\Software\uC-CPU\<processor>\<compiler></code>
<code>cpu_a.asm</code>	<code>\Micrium\Software\uC-CPU\<processor>\<compiler></code>

Table 18-1 μC/CPU files and directories

`<processor>` is the name of the processor that the `cpu*.*` files apply to.

`<compiler>` is the name of the toolchain (compiler, assembler, linker/locator) used. Each has its own directory because they may have different features that makes them different from one another.

18-2-1 CPU_BSP.H

This file contains skeleton functions for `CPU_TS_TmrInit()`, `CPU_TS_TmrRd()` and other time stamp related functions. You can copy this file to your Board Support Package (BSP) directory, modify its content and add it to your build.

18-2-2 CPU_DEF.H

This file should not require any changes. `cpu_def.h` declares `#define` constants that are used by Micrium software components.

18-2-3 CPU_CFG.H

This is a configuration file to be copied into the product directory and changed based on the options to exercise in µC/CPU. `cpu_cfg.h` is not considered a ‘port file’ but more an application specific file. However, it’s discussed here for completeness. The file contains `#define` constants that may need to be changed based on the desired use of µC/CPU.

CPU_CFG_NAME_EN

This `#define` determines whether you will be assigning a ‘name’ to the CPU port. This name can then be read by application code.

CPU_CFG_NAME_SIZE

This `#define` specifies the length of the ASCII string used to assign a name to the CPU.

18

CPU_CFG_TS_32_EN

This `#define` specifies whether 32-bit time stamps are available for this CPU. A 32-bit timestamp is typically the value of a free-running 32-bit counter that is used to make accurate time measurements. The application code can obtain the current value of this free-running timer at any point in time and use such value to determine when an event occurred or, measure the time difference between two events. The free-running counter is generally incremented at a fairly high rate, for example 1 MHz or more.

CPU_CFG_TS_64_EN

This **#define** specifies whether 64-bit time stamps are available for this CPU. A 64-bit timestamp is typically the value of a free-running 64-bit counter (possibly made up by counting overflows of a 32-bit counter) that is used to make accurate time measurements. The application code can obtain the current value of this free-running timer at any point in time and use such value to determine when an event occurred or, measure the time difference between two events. The free-running counter is generally incremented at a fairly high rate, for example 100 MHz or more.

CPU_CFG_TS_TMR_SIZE

This **#define** specifies the size, in number of bytes, of a timestamp. A 32-bit timestamp is 4 bytes long while a 64-bit timestamp is 8 bytes long.

CPU_CFG_INT_DIS_MEAS_EN

This **#define** specifies whether extra code will be inserted to measure interrupt disable time when the code uses `CPU_CRITICAL_ENTER()` and `CPU_CRITICAL_EXIT()`. This extra code obviously adds additional interrupt latency because of the measurement artifacts.

CPU_CFG_INT_DIS_MEAS_OVRHD_NBR

This **#define** is used to account for the interrupt disable time measurement artifacts. The value should typically be 1.

CPU_CFG_LEAD_ZEROS_ASM_PRESENT

This **#define** specifies whether or not your processor offers assembly language instructions to count the number of consecutive zeros from the left most bit position of an integer.

CPU_CFG_TRAIL_ZEROS_ASM_PRESENT

This **#define** specifies whether or not your processor offers assembly language instructions to count the number of consecutive zeros from the right most bit position of an integer.

18-2-4 CPU_CORE.C

This file is generic and does not need to be changed. However it must be included in all builds. `cpu_core.c` defines such functions as `CPU_Init()`, `CPU_CntLeadZeros()`, and code to measure maximum CPU interrupt disable time. A few functions are explained here since they are used in µC/OS-III-based applications.

CPU_Init()

`CPU_Init()` must be called before calling `OSInit()`.

CPU_CntLeadZeros()

`CPU_CntLeadZeros()` is used by the µC/OS-III scheduler to find the highest priority ready task (see Chapter 7, “Scheduling” on page 151). `cpu_core.c` implements a count leading zeros in C. However, if the processor used provides a built-in instruction to count leading zeros, define `CPU_CFG_LEAD_ZEROS_ASM_PRESENT`, and replace this function by an assembly language equivalent (in `cpu_a.asm`). It is important to properly declare `CPU_CFG_DATA_SIZE` in `cpu.h` for this function to work.

CPU_TS_TmrFreqSet()

`CPU_TS_TmrFreqSet()` is a function that needs to be called by the application code to notify µC/CPU about the increment frequency of the timer used for timestamps. In other words, if the timestamp timer is incremented at a rate of 1 MHz then your application code would need to call `CPU_TS_TmrFreqSet()` and pass 1000000.

CPU_TS_Get32()

`CPU_TS_Get32()` is a function that returns a 32-bit timestamp. The macro `OS_TS_GET()` (see `os_cpu.h`) generally maps to this function.

18-2-5 CPU_CORE.H

This header file is required by `cpu_core.c` to define function prototypes.

Table 18-2 shows the name of μC/CPU ‘template’ files you should use as a starting point should you decide to start a μC/CPU port from scratch. It’s highly recommended that you copy these files to folders that matches the layout shown in Table 18-1. You would then edit these files to build up your own μC/CPU port files. Again, refer to the μC/CPU User’s Manual (`uC-CPU-Manual.pdf`) found in `\Micrium\Software\uC-CPU\Doc`.

File	Directory
<code>cpu.h</code>	<code>\Micrium\Software\uC-CPU\Template</code>
<code>cpu_c.c</code>	<code>\Micrium\Software\uC-CPU\Template</code>
<code>cpu_a.asm</code>	<code>\Micrium\Software\uC-CPU\Template</code>

Table 18-2 μC/CPU template files

18-2-6 CPU.H

Many CPUs have different word lengths and `cpu.h` declares a series of type definitions that ensure portability. Specifically, we don’t use the C data types `int`, `short`, `long`, `char`, etc. at Micrium. Instead, clearer data types are defined. Consult your compiler documentation to determine whether the standard declarations described below need to be changed for the CPU/compiler you are using. You should note that the `typedefs` below are not all grouped together in `cpu.h` and also, `cpu.h` contains additional comments about these data types.

```

typedef      void      CPU_VOID;
typedef unsigned char   CPU_CHAR;
typedef unsigned char   CPU_BOOLEAN;
typedef unsigned char   CPU_INT08U;
typedef signed  char   CPU_INT08S;
typedef unsigned short CPU_INT16U;
typedef signed  short CPU_INT16S;
typedef unsigned int   CPU_INT32U;
typedef signed  int   CPU_INT32S;
typedef unsigned long  long CPU_INT64U;
typedef signed  long  long CPU_INT64S;
typedef      float     CPU_FP32;
typedef      double    CPU_FP64;
typedef volatile CPU_INT08U CPU_REG08;
typedef volatile CPU_INT16U CPU_REG16;
typedef volatile CPU_INT32U CPU_REG32;
typedef volatile CPU_INT64U CPU_REG64;
typedef      void      (*CPU_FNCT_VOID)(void);
typedef      void      (*CPU_FNCT_PTR )(void * );
typedef CPU_INT32U      CPU_ADDR;
typedef CPU_INT32U      CPU_DATA;
typedef CPU_DATA        CPU_ALIGN;
typedef CPU_ADDR        CPU_SIZE_T;
typedef CPU_INT32U      CPU_STK;           (1)
typedef CPU_ADDR        CPU_STK_SIZE;
typedef CPU_INT16U      CPU_ERR;
typedef CPU_INT32U      CPU_SR;            (2)
typedef CPU_INT32U      CPU_TS;            (3)

```

Listing 18-1 µC/CPU Data Types

- L18-1(1) Especially important for µC/OS-III is the definition of the **CPU_STK** data type, which sets the width of a stack entry. Specifically, is the width of data pushed to and popped from the stack 8 bits, 16 bits, 32 bits or 64 bits?
- L18-1(2) **CPU_SR** defines the data type for the processor's status register (SR) that generally holds the interrupt disable status.
- L18-1(3) The **CPU_TS** is a time stamp used to determine when an operation occurred, or to measure the execution time of code.

`cpu.h` also declares macros to disable and enable interrupts: `CPU_CRITICAL_ENTER()` and `CPU_CRITICAL_EXIT()`, respectively. The documentation in the template file explains how to declare these macros.

`cpu.h` is also where you need to define configuration constants:

CPU_CFG_ENDIAN_TYPE

This `#define` specifies whether your CPU is a little-endian machine or a big-endian machine. `cpu_def.h` offers the following choices:

```
CPU_ENDIAN_TYPE_BIG  
CPU_ENDIAN_TYPE_LITTLE
```

CPU_CFG_ADDR_SIZE

This `#define` specifies the size of an address for the processor, in number of bytes. `cpu_def.h` offers the following choices:

```
CPU_WORD_SIZE_08  
CPU_WORD_SIZE_16  
CPU_WORD_SIZE_32  
CPU_WORD_SIZE_64
```

CPU_CFG_DATA_SIZE

This `#define` specifies the ‘natural’ data width of the processor, in number of bytes. `cpu_def.h` offers the following choices:

```
CPU_WORD_SIZE_08  
CPU_WORD_SIZE_16  
CPU_WORD_SIZE_32  
CPU_WORD_SIZE_64
```

CPU_DATA_SIZE_MAX

This `#define` specifies the maximum word size of the processor, in number of bytes. `cpu_def.h` offers the following choices:

```
CPU_WORD_SIZE_08  
CPU_WORD_SIZE_16  
CPU_WORD_SIZE_32  
CPU_WORD_SIZE_64
```

CPU_CFG_STK_GROWTH

This `#define` specifies whether the stack grows from high to low memory or from low to high memory addresses. `cpu_def.h` offers the following choices:

```
CPU_STK_GROWTH_LO_TO_HI  
CPU_STK_GROWTH_HI_TO_LO
```

CPU_CFG_CRITICAL_METHOD

This `#define` establishes how interrupts will be disabled when processing critical sections. Specifically, will we simply disable interrupts when entering a critical section, irrespective of whether or not interrupts were already disabled? Will we save the status of the interrupt disable state before we disable interrupts? `cpu_def.h` offers the following choices:

```
CPU_CRITICAL_METHOD_INT_DIS_EN  
CPU_CRITICAL_METHOD_STATUS_STK  
CPU_CRITICAL_METHOD_STATUS_LOCAL
```

`cpu.h` also declares function prototypes for a number of functions found in either `cpu_c.c` or `cpu_a.asm`.

18-2-7 CPU_C.C

This is an optional file containing CPU-specific functions to set the interrupt controller, timer prescalers, and more. Most implementations will not contain this file.

18-2-8 CPU_A.ASM

This file contains assembly language code to implement such functions as disabling and enabling interrupts, a more efficient count leading zeros function, and more. At a minimum, this file should implement `CPU_SR_Save()` and `CPU_SR_Restore()`.

CPU_SR_Save()

`CPU_SR_Save()` reads the current value of the CPU status register where the current interrupt disable flag resides and returns this value to the caller. However, before returning, `CPU_SR_Save()` must disable all interrupts. `CPU_SR_Save()` is actually called by the macro `CPU_CRITICAL_ENTER()`.

CPU_SR_Restore()

`CPU_SR_Restore()` restores the CPU's status register to a previously saved value. `CPU_SR_Restore()` is called from the macro `CPU_CRITICAL_EXIT()`.

18-3 µC/OS-III PORT

Table 18-3 shows the name of µC/OS-III files and where they are typically found.

For the purpose of demonstrating how to do a port, we will assume the generic 32-bit processor as described in Chapter 8, “Context Switching” on page 165 and shown in Figure 18-2.

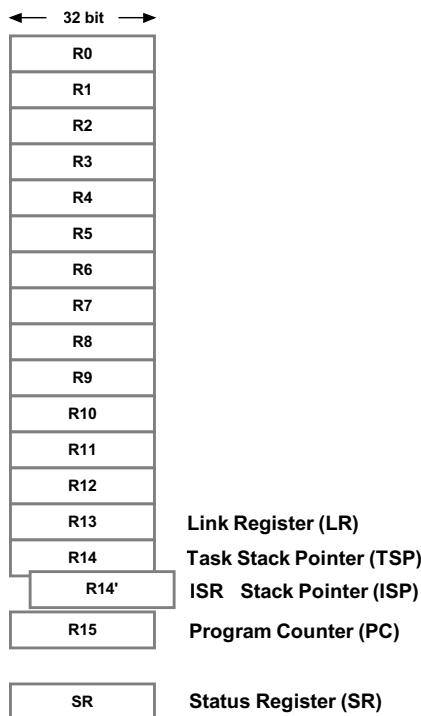


Figure 18-2 Generic 32-bit CPU

Our generic CPU contains 16 integer registers (R0 to R15), a separate ISR stack pointer, and a separate status register (SR). Every register is 32 bits wide and each of the 16 integer registers can hold either data or an address. The return address of a function call is placed in the Link Register (LR). The program counter (or instruction pointer) is R15 and there are two separate stack pointers labeled R14 and R14'. R14 represents a task stack pointer (TSP), and R14' represents an ISR stack pointer (ISP). The CPU automatically switches to the ISR stack when servicing an exception or interrupt. The task stack is accessible from an ISR (i.e., we can push

and pop elements onto the task stack when in an ISR), and the interrupt stack is also accessible from a task. The Status Register (SR) contains the interrupt mask as well as various status such as the Carry, Zero, Sign, Overflow, Parity, etc.

File	Directory
os_cpu.h	\Micrium\Software\uCOS-III\Ports\<processor>\<compiler>\
os_cpu_a.asm	\Micrium\Software\uCOS-III\Ports\<processor>\<compiler>\
os_cpu_a.inc	\Micrium\Software\uCOS-III\Ports\<processor>\<compiler>
os_cpu_c.c	\Micrium\Software\uCOS-III\Ports\<processor>\<compiler>\

Table 18-3 µC/OS-III files and directories

Here, <processor> is the name of the processor that the **os_cpu*.*** files apply to, and <compiler> is the name of the compiler that these files assume because of the different assembly language directives that different toolchain uses.

Table 18-4 shows where you can find template files that will help you create a µC/OS-III port from scratch. You would simply copy these files in a folder specific to your processor/compiler as shown in Table 18-3 and then change the contents of these files per your processor/compiler.

File	Directory
os_cpu.h	\Micrium\Software\uCOS-III\Ports\Template\
os_cpu_a.asm	\Micrium\Software\uCOS-III\Ports\Template\
os_cpu_a.inc	\Micrium\Software\uCOS-III\Ports\Template\
os_cpu_c.c	\Micrium\Software\uCOS-III\Ports\Template\

Table 18-4 µC/OS-III template files

18-3-1 OS_CPU.H

OS_TASK_SW()

`OS_TASK_SW()` is a macro that is called by `OSSched()` to perform a task-level context switch. The macro can translate directly to a call to `OSCtxSw()`, trigger a software interrupt, or a `TRAP`. If a software interrupt or TRAP is used then you would most likely need to add the address of `OSCtxSw()` in the interrupt vector table. The choice depends on the CPU architecture.

OS_TS_GET()

`OS_TS_GET()` is a macro that obtains the current time stamp. It is expected that the time stamp is type `CPU_TS`, which is typically declared as at least a 32-bit value.

OSCtxSw(), OSIntCtxSw() and OSStartHighRdy()

`os_cpu.h` declares function prototypes for `OSCtxSw()`, `OSIntCtxSw()`, `OSStartHighRdy()` and possibly other functions required by the port.

18-3-2 OS_CPU_C.C

The functions are described in Appendix A, “μC/OS-III API Reference” on page 443. `os_cpu_c.c` can declare other functions as needed by the port, however the functions described below are mandatory. These functions are already implemented in the template file but those can certainly be extended as needed. However, you should not need to change this file unless you have specific needs.

OSIdleTaskHook()

This function is called repeatedly when μC/OS-III doesn't have any task ready-to-run. The port implemented might choose to put the processor in low power mode if the product being designed is battery operated. However, it would be preferable, in this case to defer this to the application level. This can be easily accomplished by putting the processor in low power mode in a function called `App_OS_IdleTaskHook()` and let the product designed decide whether or not this product requires to place the processor in low power mode. The template file contains the following code:

```
void OSIdleTaskHook (void)
{
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppIdleTaskHookPtr != (OS_APP_HOOK_VOID)0) {
        (*OS_AppIdleTaskHookPtr)();
    }
#endif
}
```

Listing 18-2 Typical OSIdleTaskHook()

OSInitHook()

This function is called by `osInit()` as the very beginning of `osInit()`. This is done to allow the port implemented to add functionality to the port while hiding the details from the µC/OS-III user. For one thing, the port implementer could setup an ISR stack in `OSInitHook()`. The template file contains the following code:

```
void OSInitHook (void)
{
}
```

Listing 18-3 Typical OSInitHook()

OSStatTaskHook()

This function is called when the statistic task executes. This hook allows the port developer the opportunity to add his or her own statistics. The template file contains the following code:

```
void OSStatTaskHook (void)
{
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppStatTaskHookPtr != (OS_APP_HOOK_VOID)0) {
        (*OS_AppStatTaskHookPtr)();
    }
#endif
}
```

Listing 18-4 Typical OSStatTaskHook()

OSTaskCreateHook()

This function is called by **OSTaskCreate()** and is passed the address of the **OS_TCB** of the newly created task. **OSTaskCreateHook()** is called by **OSTaskCreate()** after initializing the **OS_TCB** fields and setting up the stack frame for the task. The template file contains the following code:

```
void OSTaskCreateHook (OS_TCB *p_tcb)
{
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppTaskCreateHookPtr != (OS_APP_HOOK_TCB)0) {
        (*OS_AppTaskCreateHookPtr)(p_tcb);
    }
#else
    (void)p_tcb;
#endif
}
```

Listing 18-5 Typical **OSTaskCreateHook()**

OSTaskDelHook()

This function is called by **OSTaskDel()** after the task to delete has been removed either from the ready list or a wait list. The template file contains the following code:

```
void OSTaskDelHook (OS_TCB *p_tcb)
{
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppTaskDelHookPtr != (OS_APP_HOOK_TCB)0) {
        (*OS_AppTaskDelHookPtr)(p_tcb);
    }
#else
    (void)p_tcb;
#endif
}
```

Listing 18-6 Typical **OSTaskDelHook()**

OSTaskReturnHook()

This function is called by OS_TaskReturn() if the user accidentally returns from the task code. The template file contains the following code:

```
void OSTaskReturnHook (OS_TCB *p_tcb)
{
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppTaskReturnHookPtr != (OS_APP_HOOK_TCB)0) {
        (*OS_AppTaskReturnHookPtr)(p_tcb);
    }
#else
    (void)p_tcb;
}
```

Listing 18-7 Typical OSTaskReturnHook()

OSTaskStkInit()

OSTaskStkInit() is called by **OSTaskCreate()** and is one of the most difficult port functions to create because it establishes the stack frame of every task created. The template file contains the following code:

```
CPU_STK *OSTaskStkInit (OS_TASK_PTR p_task,
                        void        *p_arg,
                        CPU_STK    *p_stk_base,
                        CPU_STK    *p_stk_limit,
                        CPU_STK_SIZE stk_size,
                        OS_OPT     opt)
{
    CPU_STK *p_stk;

    (void)opt;

    p_stk = &p_stk_base[stk_size];          (1)

    *--p_stk = (CPU_STK)0x00000000u;       (2)
    *--p_stk = (CPU_STK)p_task;           (3)
    *--p_stk = (CPU_STK)p_arg;            (4)
    *--p_stk = (CPU_STK)0x01010101u;      (5)
    *--p_stk = (CPU_STK)0x02020202u;
    *--p_stk = (CPU_STK)0x03030303u;
    *--p_stk = (CPU_STK)0x04040404u;
    *--p_stk = (CPU_STK)0x05050505u;
    *--p_stk = (CPU_STK)0x06060606u;
    *--p_stk = (CPU_STK)0x07070707u;
    *--p_stk = (CPU_STK)0x08080808u;
    *--p_stk = (CPU_STK)0x09090909u;
    *--p_stk = (CPU_STK)0x10101010u;
    *--p_stk = (CPU_STK)0x11111111u;
    *--p_stk = (CPU_STK)0x12121212u;
    *--p_stk = (CPU_STK)OS_TaskReturn;     (6)

    return (p_stk);                      (7)
}
```

Listing 18-8 Generic **OSTaskStkInit()**

- L18-8(1) You need to initialize the top-of-stack. For our ‘generic 32-bit CPU’, the top-of-stack (TOS) points at one location beyond the area reserved for the stack. This is because we will decrement the TOS pointer before storing a value into the stack.

If the stack for the processor grew from low memory to high memory, most likely you would have setup the TOS to point at the base of the memory or, `&p_stk_base[0]`.

- L18-8(2) Since we are simulating an interrupt and the stacking of registers in the same order as an ISR would place them on the stack, we start by putting the **SR** (Status Register, also called the Program Status Word) of the CPU onto the stack first.

Also, the value stored at this location must be such that, once restored into the CPU, the **SR** must enable ALL interrupts. Here we assumed that a value of **0x00000000** would do this. However, you need to check with the processor you are using to find out how this works on that processor.

- L18-8(3) The address of the task code is then placed onto the next stack location. This way, when you perform a return from interrupt (or exception) instruction the PC will automatically be loaded with the address of the task to run.

- L18-8(4) You should recall that a task is passed an argument, `p_arg`. `p_arg` is a pointer to some user define storage or function and its use is application specific. In the assumptions above, we indicated that a function called with a single argument gets this argument passed in **R0**. You will need to check the compiler documentation to determine where '`p_arg`' is placed for your processor.

- L18-8(5) The remaining registers are placed onto the stack. You will notice that we initialized the value of those registers with a hexadecimal number that corresponds to the register number. In other words, **R12** should have the value **0x12121212** when the task starts, **R11** should have the value **0x11111111** when the task starts and so on. This makes it easy to determine whether the stack frame was setup properly when you test the port. You would simply look at the register contents with a debugger and confirm that all registers have the proper values.

- L18-8(6) Here we place the return address of the task into the location where the Link Register (**LR**) will be retrieved from. In this case, we force the return address to actually be `OS_TaskReturn()` allowing µC/OS-III to catch a task that is attempting to return. You should recall that this is not allowed with µC/OS-III.

- L18-8(7) `OSTaskStkInit()` needs to return the new top-of-stack location. In this case, the top-of-stack points at the last element placed onto the stack.

Figure 18-3 shows how the stack frame looks like just before the function returns. `OSTaskCreate()` will actually save the new top-of-stack (`p_stk`) into the `OS_TCB` of the task being created.

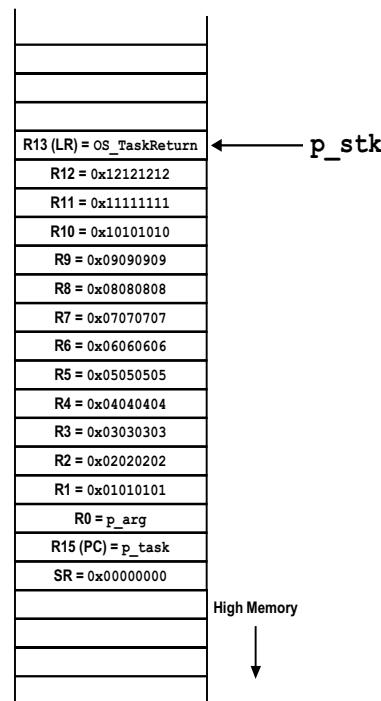


Figure 18-3 Stack frame created by `OSTaskStkInit()`

OSTaskSwHook()

The typical code for µC/OS-III's context switch hook is shown below. What OSTaskSwHook() does is highly dependent on a number of configuration options.

```

void OSTaskSwHook (void)
{
#if OS_CFG_TASK_PROFILE_EN > 0u
    CPU_TS ts;
#endif
#ifndef CPU_CFG_INT_DIS_MEAS_EN
    CPU_TS int_dis_time;
#endif

#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppTaskSwHookPtr != (OS_APP_HOOK_VOID)0) { (1)
        (*OS_AppTaskSwHookPtr)();
    }
#endif

#if OS_CFG_TASK_PROFILE_EN > 0u
    ts = OS_TS_GET(); (2)
    if (OSTCBCurPtr != OSTCBHighRdyPtr) {
        OSTCBCurPtr->CyclesDelta = ts - OSTCBHighRdyPtr->CyclesStart;
        OSTCBHighRdyPtr->CyclesTotal += (OS_CYCLES)OSTCBCurPtr->CyclesDelta;
    }

    OSTCBHighRdyPtr->CyclesStart = ts;
#endif

#ifndef CPU_CFG_INT_DIS_MEAS_EN
    int_dis_time = CPU_IntDisMeasMaxCurReset(); (3)
    if (OSTCBCurPtr->IntDisTimeMax < int_dis_time) {
        OSTCBCurPtr->IntDisTimeMax = int_dis_time;
    }
#endif

#if OS_CFG_SCHED_LOCK_TIME_MEAS_EN > 0u
    if (OSTCBCurPtr->SchedLockTimeMax < OSSchedLockTimeMaxCur) { (4)
        OSTCBCurPtr->SchedLockTimeMax = OSSchedLockTimeMaxCur;
    }
    OSSchedLockTimeMaxCur = (CPU_TS)0;
#endif
}

```

Listing 18-9 Typical OSTaskSwHook()

-
- L18-9(1) If the application code defined a hook function to be called during a context switch then this function is called first. Your application hook function can assume that `OSTCBCurPtr` points to the `OS_TCB` of the task being switched out while `OSTCBHighRdyPtr` points to the `OS_TCB` of the task being switched in.
- L18-9(2) `OSTaskSwHook()` then computes the amount of time the current task ran. However, this includes the execution time of all the ISRs that happened while the task was running.
- We then take a timestamp to mark the beginning of the task being switched in.
- L18-9(3) `OSTaskSwHook()` then stores the highest interrupt disable time into the `OS_TCB` of the task being switched out. This allows a debugger or µC/Probe to display maximum interrupt disable time on a per-task basis.
- L18-9(4) `OSTaskSwHook()` then captures the highest scheduler lock time and stores that in the `OS_TCB` of the task being switched out.

OSTimeTickHook()

This function is called by `OSTimeTick()` and is called before any other code is executed in `OSTimeTick()`. The template file contains the following code. If the application code defines an application hook function then it is called as shown.

```
void OSTimeTickHook (void)
{
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppTimeTickHookPtr != (OS_APP_HOOK_VOID)0) {
        (*OS_AppTimeTickHookPtr)();
    }
#endif
}
```

Listing 18-10 Typical OSTimeTickHook()

18-3-3 OS_CPU_A.ASM

This file contains the implementation of the following assembly language functions:

OSStartHighRdy()

This function is called by `OSStart()` to start multitasking. `OSStart()` will have determined the highest priority task (`OSTCBHighRdyPtr` will point to the `OS_TCB` of that task) that was created prior to calling `OSStart()` and will start executing that task. The pseudo code for this function is shown below (the C-like code needs to be implemented in assembly language):

```
OSStartHighRdy:
    OSTaskSwHook();
    SP = OSTCBHighRdyPtr->StkPtr;                      (1)
    OS_CTX_RESTORE                                         (2)
    Return from Interrupt/Exception;                      (3)
```

Listing 18-11 `OSStartHighRdy()` Pseudo Code

- L18-11(1) The Stack Pointer (`SP`) for the first task to execute is retrieved from the `OS_TCB` of the highest priority task that was created prior to calling `OSstart()`. Figure 18-4 shows the stack frame as pointed to by `OSTCBHighRdy->StkPtr`.
- L18-11(2) `OS_CTX_RESTORE` is a macro (see `os_cpu_a.inc`) that restores the context of the CPU (R0 through R13) from the new task's stack.
- L18-11(3) The Return from Interrupt/Exception restores the Program Counter (`PC`) and the Status Register (`SR`) in a single instruction. At this point, the task will start executing. In fact, the task will think it was called by another function and thus, will receive '`p_arg`' as its argument. Of course, the task *must not* return.

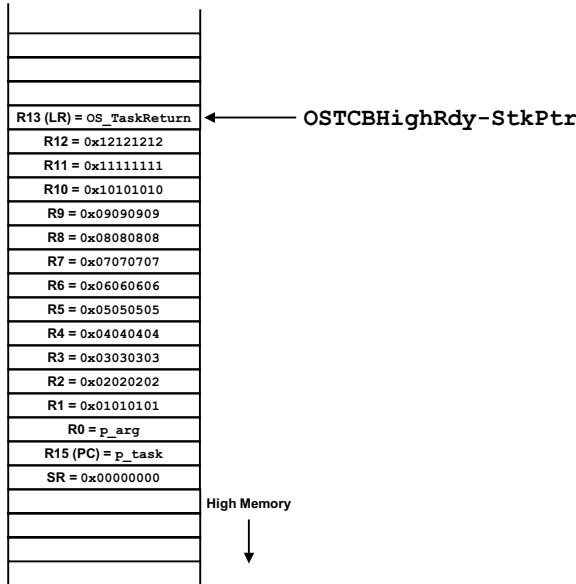


Figure 18-4 Stack Frame pointed to by OSTCBHighRdy->StkPtr

OSCtxSw()

This function implements the task level context switch which is invoked by the `OS_TASK_SW()` macro declared in `os_cpu.h`. The pseudo code for this function is shown below (the C-like code needs to be implemented in assembly language). You should also refer to Chapter 8, on page 168.

```

OSCtxSw:
    OS_CTX_SAVE                                (1)
    OSTCBCurPtr->StkPtr = SP;                  (2)
    OSTaskSwHook();                            (3)
    OSPrioCur = OSPrioHighRdy;
    OSTCBCurPtr = OSTCBHighRdyPtr;
    SP      = OSTCBCurPtr->StkPtr;            (4)
    OS_CTX_RESTORE                             (5)
    Return from Interrupt/Exception;          (6)

```

Listing 18-12 OSCtxSw() Pseudo Code

-
- L18-12(1) `OSCtxSw()` is invoked by `OS_TASK_SW()` which is typically implemented as a *software interrupt* instruction or, a *trap* instruction. These types of instructions generally simulate the behavior of an interrupt, but is synchronous with the code. `OSCtxSw()` is thus the *entry point* for this instruction. In other words, if a software interrupt or TRAP is used then you would most likely need to add the address of `OSCtxSw()` in the interrupt vector table.
 - L18-12(2) `OS_CTX_SAVE` is a macro (see `os_cpu_a.inc`) that saves the CPU context onto the current task's stack. For our generic 32-bit CPU, `OS_CTX_SAVE` would push R0 through R13 onto the stack, in that order.
 - L18-12(3) `OSCtxSw()` then needs to save the current top-of-stack pointer (i.e. R14 or SP) into the `OS_TCB` of the current task.
 - L18-12(4) The stack pointer for the new task is retrieved from the `OS_TCB` of the new current task.
 - L18-12(5) `OS_CTX_RESTORE` is a macro (see `os_cpu_a.inc`) that restores the context of the CPU from the new task's stack. For our generic 32-bit CPU, `OS_CTX_RESTORE` would pop CPU registers R13 through R0 from the stack, in that order.
 - L18-12(6) The Return from Interrupt/Exception restores the Program Counter (`PC`) and the Status Register (`SR`) in a single instruction. At this point, the new task will resume execution, exactly where it was preempted.

OSIntCtxSw()

This function implements the interrupt level context switch which is called by **OSIntExit()** (see **os_core.c**). The pseudo code for this function is shown below (the C-like code needs to be implemented in assembly language). Refer also to Chapter 8, on page 170.

```
OSIntCtxSw:                                (1)
    OSTaskSwHook();                         (1)
    OSPrioCur = OSPrioHighRdy;
    OSTCBCurPtr = OSTCBHighRdyPtr;
    SP = OSTCBCurPtr->StkPtr;              (2)
    OS_CTX_RESTORE                           (3)
    Return from Interrupt/Exception;        (4)
```

Listing 18-13 **OSIntCtxSw()** Pseudo Code

- L18-13(1) **OSIntCtxSw()** is called by **OSIntExit()** at the end of all nested ISRs. The ISR is assumed to have saved the context of the interrupted task onto that task's stack. Also, the ISR is assumed to have saved the new top-of-stack of the interrupted task into the **OS_TCB** of that task.
- L18-13(2) The stack pointer for the new task is then retrieved from the **OS_TCB** of the new current task.
- L18-13(3) **OS_CTX_RESTORE** is a macro (see **os_cpu_a.inc**) that restores the context of the CPU from the new task's stack. For our generic 32-bit CPU, **OS_CTX_RESTORE** would pop CPU registers R13 through R0 from the stack, in that order.
- L18-13(4) The Return from Interrupt/Exception restores the Program Counter (**PC**) and the Status Register (**SR**) in a single instruction. At this point, the new task will resume execution, exactly where it was preempted.

OSTickISR()

This function may or may not reside in `os_cpu_a.asm`. Its presence in `os_cpu_a.asm` depends on whether the tick ISR is generic for the CPU and, whether it needs to be implemented in assembly language. In other words, if the CPU or MCU has a dedicated timer that can be assigned for the tick ISR so that it's the same, irrespective of the target application then `OSTickISR()` can be placed in `os_cpu_a.asm`. The pseudo code for this function is shown below (the C-like code needs to be implemented in assembly language). You should note that all ISRs should be modeled after `OSTickISR()`.

```

OSTickISR:                                (1)
    OS_CTX_SAVE                         (2)
    Disable Interrupts;                  (3)
    OSIntNestingCtr++;                  (4)
    if (OSIntNestingCtr == 1) {          (5)
        OSTCBCurPtr->StkPtr = SP;
    }
    Clear tick interrupt;                (6)
    OSTimeTick();                       (7)
    OSIntExit();                        (8)
    OS_CTX_RESTORE                      (9)
    Return from Interrupt/Exception;    (10)

```

Listing 18-14 **OSTickISR() Pseudo Code**

- L18-14(1) `OSTickISR()` is generally invoked automatically by the interrupt controller when the tick interrupt occurs. Assuming again our generic 32-bit CPU, it's assumed here that the `SR` and `PC` of the interrupted task are pushed automatically onto the stack of the interrupted task.
- L18-14(2) Again, `OS_CTX_SAVE` saves the CPU context onto the current task's stack. For our generic 32-bit CPU, `OS_CTX_SAVE` would push `R0` through `R13` onto the stack, in that order.

- L18-14(3) Interrupts should be disabled here. On some processors, interrupts are automatically disabled when the processor accepts the interrupt. Some processors support multiple interrupt levels. In fact, some interrupts are allowed to make kernel calls while others are not. Typically, interrupts that do not make kernel calls (called *Non-Kernel Aware Interrupts*) would generally be high priority interrupts and kernel aware interrupts would all be grouped (in priority) below these. For example, if a processor has 16 different interrupt levels and level 0 is the lowest priority interrupt then, all kernel aware interrupts would be assigned from 0 to some number N (let's say 12) and $N+1$ to 15 would be assigned to be non-kernel aware interrupts.
- L18-14(4) `OSTickISR()` then needs to increment the interrupt nesting counter. This tells μC/OS-III that the code is servicing an interrupt. The nesting counter indicates how many levels of interrupts we are currently servicing (in case the application supports nested interrupts).
- L18-14(5) If this interrupt interrupts a task then we need to save the stack pointer of that task into the `OS_TCB` of that task.
- L18-14(6) You need to clear the interrupting device so that it doesn't re-issue the same interrupt upon returning from interrupts. This can be done here or, in the device handler (see below).
- L18-14(7) At this point, `OSTickISR()` calls `OSTimeTick()` which is responsible for notifying the tick task that a tick occurred.

If you model your ISR like `OSTickISR()` then you would call your own C function to service the interrupting device.

- L18-14(8) `OSIntExit()` is then called at the end of the ISR to notify μC/OS-III that you are done processing the ISR. μC/OS-III decrements the nesting counter and if `OSIntNestingCtr` reaches 0, μC/OS-III knows it's returning to task level code. So, if the ISR made a more important task ready-to-run (more important than the interrupted task), μC/OS-III will context switch to that task instead of returning to the interrupted task.

-
- L18-14(9) If the interrupted task is still the most important task then `OSIntExit()` returns and the ISR will need to restore the saved registers. `OS_CTX_RESTORE` does just that. For our generic 32-bit CPU, `OS_CTX_RESTORE` would pop CPU registers R13 through R0 from the stack, in that order.
 - L18-14(10) Finally, the Return from Interrupt/Exception restores the Program Counter (`PC`) and the Status Register (`SR`) in a single instruction. At this point, the interrupted task will resume execution, exactly where it was interrupted.

It is actually possible to simplify the code for `OSTickISR()` or any of your ISRs. Notice that the code at the beginning and end of the ISR is common for all ISRs. Because of that, it's possible to create two assembly language macros, `OS_ISR_ENTER` and `OS_ISR_EXIT` in `os_cpu_a.inc`. The new `OSTickISR()` code would now look as shown below:

```
OSTickISR:  
    OS_ISR_ENTER  
    Clear tick interrupt;  
    OSTimeTick();  
    OS_ISR_EXIT
```

Listing 18-15 `OSTickISR()` Pseudo Code using the `OS_ISR_ENTER` and `OS_ISR_EXIT` macros

18-3-4 OS_CPU_A.INC

This file contains the implementation of assembly language macros that are used to simplify the implementation of os_cpu_a.asm. A macro replaces many assembly language instructions with a single macro invocation.

OS_CTX_SAVE

This macro is used to save the CPU context onto the current stack. **OS_CTX_SAVE** needs to save the CPU registers in the same order as they are pushed in **OSTaskStkInit()** which is described later. **OS_CTX_SAVE** only saves the CPU registers that are not automatically saved by the CPU when the CPU accepts an interrupt. In other words, if the CPU automatically saves the **PSW** and **PC** onto the stack upon initiating an ISR then **OS_CTX_SAVE** only needs to save the remaining CPU registers.

```
OS_CTX_SAVE
    Save all the CPU registers onto the current task stack
        (in the same order as in OSTaskStkInit())
```

Listing 18-16 **OS_CTX_SAVE** macro Pseudo Code

Assuming our generic 32-bit CPU, **OS_CTX_SAVE** would be implemented as follows.

```
OS_CTX_SAVE MACRO
    PUSH R0
    PUSH R1
    PUSH R2
    PUSH R3
    PUSH R4
    PUSH R5
    PUSH R6
    PUSH R7
    PUSH R8
    PUSH R9
    PUSH R10
    PUSH R11
    PUSH R12
    PUSH R13
ENDM
```

Listing 18-17 **OS_CTX_SAVE** assuming generic 32-bit CPU

OS_CTX_RESTORE

This macro is used to reverse the process done by OS_CTX_SAVE. In other words, OS_CTX_RESTORE loads the CPU registers from the stack in the reverse order..

```
OS_CTX_RESTORE
    Restore all the CPU registers from the new task's stack
        (in the reverse order that they were in OSTaskStkInit())
```

Listing 18-18 OS_CTX_SAVE macro Pseudo Code

Assuming our generic 32-bit CPU, OS_CTX_RESTORE would be implemented as follows.

```
OS_CTX_RESTORE MACRO
    POP R13
    POP R12
    POP R11
    POP R10
    POP R9
    POP R8
    POP R7
    POP R6
    POP R5
    POP R4
    POP R3
    POP R2
    POP R1
    POP R0
ENDM
```

Listing 18-19 OS_CTX_RESTORE assuming generic 32-bit CPU

OS_ISR_ENTER

This macro allows you to simplify your assembly language ISRs. OS_ISR_ENTER is basically the first line of code you would add to the ISR. The pseudo code for OS_ISR_ENTER is shown below.

```
OS_ISR_ENTER
    OS_CTX_SAVE
    OSIntNestingCtr++;
    if (OSIntNestingCtr == 1) {
        OSTCBCurPtr->StkPtr = SP;
    }
```

Listing 18-20 OS_ISR_ENTER macro Pseudo Code

Assuming our generic 32-bit CPU, OS_ISR_ENTER would be implemented as follows. You should note that the C-like code would actually be implemented in assembly language.

```
OS_ISR_ENTER MACRO
    PUSH R0
    PUSH R1
    PUSH R2
    PUSH R3
    PUSH R4
    PUSH R5
    PUSH R6
    PUSH R7
    PUSH R8
    PUSH R9
    PUSH R10
    PUSH R11
    PUSH R12
    PUSH R13
    OSIntNestingCtr++;
    if (OSIntNestingCtr == 1) {
        OSTCBCurPtr->StkPtr = SP;
    }
ENDM
```

Listing 18-21 OS_ISR_ENTER assuming generic 32-bit CPU

OS_ISR_EXIT

This macro allows you to simplify your assembly language ISRs. OS_ISR_EXIT is basically the last line of code you would add to the ISR. The pseudo code for OS_ISR_EXIT is shown below.

```
OS_ISR_EXIT
    OSIntExit();
    OS_CTX_RESTORE
    Return from Interrupt/Exception
```

Listing 18-22 **OS_ISR_EXIT** macro Pseudo Code

Assuming our generic 32-bit CPU, OS_ISR_EXIT would be implemented as follows. You should note that the C-like code would actually be implemented in assembly language.

```
OS_ISR_EXIT MACRO
    OSIntExit();
    POP R13
    POP R12
    POP R11
    POP R10
    POP R9
    POP R8
    POP R7
    POP R6
    POP R5
    POP R4
    POP R3
    POP R2
    POP R1
    POP R0
    Return from Interrupt/Exception;
ENDM
```

Listing 18-23 **OS_ISR_EXIT** assuming generic 32-bit CPU

18-4 BOARD SUPPORT PACKAGE (BSP)

A board support package refers to code associated with the actual evaluation board or the target board used. For example, the BSP defines functions to turn LEDs on or off, reads push-button switches, initializes peripheral clocks, etc., providing nearly any functionality to multiple products/projects.

Names of typical BSP files include:

```
bsp.c  
bsp.h  
bsp_int.c  
bsp_int.h
```

All files are generally placed in a directory as follows:

```
\Micrium\Software\EvalBoards\<manufacturer>\<board_name>\<compiler>\BSP\
```

Here, <manufacturer> is the name of the evaluation board or target board manufacturer, <board_name> is the name of the evaluation or target board and <compiler> is the name of the compiler that these files assume, although most should be portable to different compilers since the BSP is typically written in C.

18-4-1 BSP.C AND BSP.H

These files normally contain functions and their definitions such as:

BSP_Init()

This function is called by application code to initialize the BSP functionality. **BSP_Init()** could initialize I/O ports, setup timers, serial ports, SPI ports and so on.

BSP_LED_On(), BSP_LED_Off() and BSP_LED_Toggle()

This code allows the user to control LEDs by referring to them as 'logical' devices as opposed to controlling ports directly from application code. **BSP_LED_On()** allows your application to turn a specific LED, **BSP_LED_Off()** turn off a specific LED and **BSP_LED_Toggle()** to change the state of a specific LED. The argument to these functions is an ID number 0..N. Each ID refers to a specific LED on the board. It's up to the BSP

implementer to define which ID corresponds to what LED. By convention, however, ID 0 refers to all LEDs. In other words, you can turn on all LEDs on the board by calling `BSP_LED_On(0)`.

BSP_PB_Rd()

`BSP_PB_Rd()` is a function that reads the state of push button switches on the board. Each push button is identified by an ID. It's up to the BSP developer to assign the IDs to the push button switches.

Note: It is up to you to decide if the functions in this file start with the prefix `BSP_`. In other words, you can use `LED_On()` and `PB_Rd()` if this is clearer to you. However, it is a good practice to encapsulate this type of functionality in a BSP type file.

CPU_TS_TmrInit()

`CPU_TS_TmrInit()` is a function that µC/CPU expects to have in order to initialize the timer that will be used for timestamps. Note that a skeleton of `CPU_TS_TmrInit()` is can be found in the template file `\Micrium\Software\uC-CPU\BSP\Template\cpu_bsp.c`.

CPU_TS_TmrRd()

`CPU_TS_TmrRd()` is responsible for reading the value of a 16-, 32- or 64-bit free-running timer. `CPU_TS_TmrRd()` returns a `CPU_TS_TMR` data type which can be configured to be either a `CPU_TS32` or a `CPU_TS64`. If a 16-bit timer is used, the implementer of this function must accumulate 16-bit values into a 32-bit accumulator in order to always have 32-bit timestamps. The timer used for timestamps must count up (0, 1, 2, 3, ...) and must rollover automatically when the maximum count for the resolution of the timer is reached. In other words, a 16-bit counter should go from `0x0000` to `0xFFFF` and then roll back to `0x0000`. Note that a skeleton of `CPU_TS_TmrRd()` is can be found in the template file `\Micrium\Software\uC-CPU\BSP\Template\cpu_bsp.c`.

18-4-2 BSP_INT.C AND BSP_INT.H

These files are typically used to declare interrupt controller related functions. For example, code that enables or disables specific interrupts from the interrupt controller, acknowledges the interrupt controller, and code to handle all interrupts if the CPU vectors to a single location when an interrupt occurs (see Chapter 9, “Interrupt Management” on page 175). The pseudo code below shows an example of the latter.

```
void  BSP_IntHandler (void)          (1)
{
    CPU_FNCT_VOID  p_isr;

    while (interrupts being asserted) {           (2)
        p_isr = Read the highest priority interrupt from the controller; (3)
        if (p_isr != (CPU_FNCT_VOID)0) {           (4)
            (*p_isr)();
        }
        Acknowledge interrupt controller;         (6)
    }
}
```

Listing 18-24 Generic Interrupt Handler

- L18-24(1) Here we assume that the handler for the interrupt controller is called from the assembly language code that saves the CPU registers upon entering an ISR (see Chapter 9, “Interrupt Management” on page 175).
- L18-24(2) The handler queries the interrupt controller to ask it for the address of the ISR that needs to be executed in response to the interrupt. Some interrupt controllers return an integer value that corresponds to the source. In this case, you would simply use this integer value as an index into a table (RAM or ROM) where those vectors are placed.
- L18-24(3) The interrupt controller is then asked to provide the highest priority interrupt pending. It is assumed here that the CPU may receive multiple simultaneous interrupts (or closely spaced interrupts), and that the interrupt controller will prioritize the interrupts received. The CPU will then service each interrupt in priority order instead of on a first-come basis. However, the scheme used greatly depends on the interrupt controller itself.

- L18-24(4) Here we check to ensure that the interrupt controller did not return a **NULL** pointer.
- L18-24(5) We then simply call the ISR associated with the interrupt device.
- L18-24(6) The interrupt controller generally needs to be acknowledged so that it knows that the interrupt presented is taken care of.

18-5 TESTING A PORT

Testing a port is fairly easy to do if you have the proper tools. Here we will assume that you have access to a good debugging tool, preferably built around an Integrated Development Environment (IDE). The debugger should allow you to load your code into your target, single step through your code, set breakpoint, examine CPU registers, look at memory contents and more.

18-5-1 CREATING A SIMPLE TEST PROJECT

At this point, you should have the µC/CPU and µC/OS-III port file created. To test the port files, you need to create a simple project. When you download and unzip the µC/OS-III source code you will have a directory structure similar to what is shown on the next page. When you see 'My' in front of a directory name it means a directory you will need to create for your tests of the port.

The filenames that are in **bold** are the files you will need to provide for the tests. As you will see, you can start with the template files provided with µC/CPU and µC/OS-III with little or no modifications.

```
\Micrium
  \Software
    \EvalBoards
      \MyBoardManufacturer
        \MyBoardName
          \MyToolsName
            \MyBSP
              bsp.c           <- Created in Section 18-4
              bsp.h           <- Created in Section 18-4
              bsp_int.c       <- Created in Section 18-4
            \MyTest          (1)
              app.c           (2)
              includes.h      (3)
              app_cfg.h       (4)
              app_vect.c      (5)
              cpu_cfg.h       (6) <- Copied from \Micrium\Software\uC-CPU\Cfg\Template
              lib_cfg.h        <- Copied from \Micrium\Software\uC-LIB\Cfg\Template
              os_app_hooks.c  <- Copied from \Micrium\Software\uCOS-III\Cfg\Template
              os_app_hooks.h  <- Copied from \Micrium\Software\uCOS-III\Cfg\Template
              os_cfg.h         (7) <- Copied from \Micrium\Software\uCOS-III\Cfg\Template
              os_cfg_app.h    <- Copied from \Micrium\Software\uCOS-III\Cfg\Template
              os_type.h        <- Copied from \Micrium\Software\uCOS-III\Source

\Micrium
  \Software
    \uC-CPU
      cpu_core.c
      cpu_core.h
      cpu_def.h
    \MyCPUName
      \MyToolsName
        cpu.h           <- Created in Section 18-2
        cpu_a.asm       <- Created in Section 18-2

\Micrium
  \Software
    \uC-LIB
      lib_ascii.c
      lib_ascii.h
      lib_def.h
      lib_math.c
      lib_math.h
      lib_mem.c
      lib_mem.h
      lib_str.c
      lib_str.h
```

```
\Micrium
  \Software
    \uC/OS-III
      \Cfg
        os_app_hooks.c
        os_app_hooks.h
        os_cfg.h
        os_cfg_app.h
      \Ports
        \MyCPUName
          \MyToolsName
            os_cpu.h           <- Created in Section 18-3
            os_cpu_a.asm      <- Created in Section 18-3
            os_cpu_a.inc      <- Created in Section 18-3
            os_cpu_c.c         (8) <- Created in Section 18-3
      \Source
        os.h
        os_cfg_app.c
        os_core.c
        os_dbg.c
        os_flag.c
        os_int.c
        os_mem.c
        os_msg.c
        os_mutex.c
        os_pend_multi.c
        os_prio.c
        os_q.c
        os_sem.c
        os_stat.c
        os_task.c
        os_tick.c
        os_time.c
        os_tmr.c
        os_type.h
        os_var.c
```

Listing 18-25 Test Code Directory Structure

L18-25(1) **MyTest** is the name of the directory that will contain the project source files.

L18-25(2) **app.c** is the test file that contains **main()** and should look as shown below.

```
/* app.c */

#include "includes.h"

void main (void)
{
    OS_ERR err;

    OSInit(&err);
    OSStart(&err);
}
```

L18-25(3) **includes.h** is a master include file that app.c and other files assume. The contents of this file should be as shown below.

```
/* includes.h */

#include <stdarg.h>
#include <stdio.h>
#include <stdlib.h>
#include <math.h>

#include <cpu.h>
#include <lib_def.h>
#include <lib_ascii.h>
#include <lib_math.h>
#include <lib_mem.h>
#include <lib_str.h>

#include <app_cfg.h>
#include <os_cfg_app.h>
#include <bsp.h>

#include <os.h>
```

L18-25(4) **app_cfg.h** must exist but should be an ‘empty’ file for now.

L18-25(5) **app_vect.c** is a file that contains the processor’s interrupt vector table. The file must exist but it is should be ‘empty’ for now.

-
- L18-25(6) The remaining files are copied from the directories shown in Listing 18-25 and should not be changed at this point.
- L18-25(7) You need to edit `os_cfg.h` and set the following `#defines` to the values shown below:

<code>OS_CFG_ISR_POST_DEFERRED_EN</code>	<code>0u</code>
<code>OS_CFG_PRIO_MAX</code>	<code>16u</code>
<code>OS_CFG_STAT_TASK_EN</code>	<code>0u</code>
<code>OS_CFG_TMR_EN</code>	<code>0u</code>
<code>OS_CFG_SCHED_ROUNDROBIN_EN</code>	<code>0u</code>

This is done to ensure that we only have two tasks in the test application, `OS_IdleTask()` and `OS_TickTask()`.

For this test, you need to add *one* line of code in `OSIdleTaskHook()` as shown in **bold** below. Once we verify `OSInit()`, `OSTaskStkInit()`, `OSCtxSw()`, `OS_CTX_SAVE` and `OS_CTX_RESTORE`, we'll remove this code:

```
void OSIdleTaskHook (void)
{
    OSTimeTick();
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppIdleTaskHookPtr != (OS_APP_HOOK_VOID)0) {
        (*OS_AppIdleTaskHookPtr)();
    }
#endif
}
```

18-5-2 VERIFYING TASK CONTEXT SWITCHES

In this section, we will verify the proper operation of the following functions/macros:

OSInit()	(os_core.c)
OSStartHighRdy()	(os_cpu_a.asm)
OSTaskStkInit()	(os_cpu_c.c)
OSCtxSw()	(os_cpu_a.asm)
OS_CTX_SAVE	(os_cpu_a.inc)
OS_CTX_RESTORE	(os_cpu_a.inc)
CPU_SR_Save()	(cpu_a.asm)
CPU_SR_Restore()	(cpu_a.asm)

Our first test is to verify that µC/OS-III gets properly initialized and that the code in `OSTaskStkInit()` properly initializes a task's stack.

Recall that our application consist of `app.c` which contains the code shown below:

```
void main (void)
{
    OS_ERR err;

    OSInit(&err);
    OSStart(&err);           <- Set a BREAKPOINT here!
}
```

STEP 1

You now need to build and download this project to your target. Building is obviously highly toolchain specific. Of course, if you encounter errors during the build, you will need to resolve those before being able to move to the next step.

Once all build errors have been resolved, you need to download the target code onto the evaluation board you selected for the tests.

STEP 2

You then need to set a breakpoint at the `OSStart()` line. In other words, have your target stop AFTER executing `OSInit()`. You should then examine the contents of ‘`err`’ and confirm that it has the value `OS_ERR_NONE` (or, 0). If you get anything other than `OS_ERR_NONE`, the error code will tell you where the problem is (see section A-20 on page 476).

STEP 3

If `err` is `OS_ERR_NONE` then you can ‘Step Into’ `OSStart()` (file `os_core.c`). You should see the following code:

```
void OSStart (OS_ERR *p_err)
{
#ifdef OS_SAFETY_CRITICAL
    if (p_err == (OS_ERR *)0) {
        OS_SAFETY_CRITICAL_EXCEPTION();
        return;
    }
#endif

    if (OSRunning == OS_STATE_OS_STOPPED) {
        OSPrioHighRdy = OS_PrioGetHighest(); (1)
        OSPrioCur = OSPrioHighRdy;
        OSTCBHighRdyPtr = OSRdyList[OSPrioHighRdy].HeadPtr; (2)
        OSTCBCurPtr = OSTCBHighRdyPtr;
        OSRunning = OS_STATE_OS_RUNNING;
        OSStartHighRdy(); (3)
        *p_err = OS_ERR_FATAL_RETURN;
    } else {
        *p_err = OS_ERR_OS_RUNNING;
    }
}
```

STEP 4

Step into the code and stop just before executing `OSStartHighRdy()`. You should confirm that `OSPriorCur` is the same value as `OS_CFG_TICK_TASK_PRIO` (see `os_cfg_app.h`) and that `OSTCBHighRdyPtr` point at `OSTickTaskTCB`. In other words, the highest priority task should be the tick task because we should only have two task created after `OSInit()` and the tick task always has a higher priority than the idle task.

STEP 5

Now, ‘Step Into’ `OSStartHighRdy()` (file `os_cpu_a.asm`). You should see the assembly language shown below.

```
OSStartHighRdy:  
    OSTaskSwHook();  
    SP = OSTCBHighRdyPtr->StkPtr;  
    OS_CTX_RESTORE  
    Return from Interrupt/Exception;
```

You can ‘Step Over’ `OSTaskSwHook()` and the code to load the stack pointer. However, you should set a breakpoint at the ‘Return from Interrupt/Exception’ instruction. Once you executed the `OS_CTX_RESTORE` macro, you should look at the CPU registers and confirm that they all have their expected value (0x12121212 for R12, 0x05050505 for R5, etc.). If not then something is not quite right with either `OSTaskStkInit()` or the `OS_CTX_RESTORE` macro. Basically, `OSTaskStkInit()` sets up the stack and `OS_CTX_RESTORE` sets up the registers based on what’s on the stack.

STEP 6

If the CPU registers appear to have their proper value then you can ‘Single Step’ and execute the ‘Return from Interrupt/Exception’ instruction. If all is well, you should be looking at the `OS_TickTask()` code which should look something like this:

```
void OS_TickTask (void *p_arg)
{
    OS_ERR err;
    CPU_TS ts;

    p_arg = p_arg;
    while (DEF_ON) {
        (void)OSTaskSemPend((OS_TICK) 0,
                            (OS_OPT) OS_OPT_PEND_BLOCKING,
                            (&CPU_TS) &ts,
                            (&OS_ERR) &err);
        if (err == OS_ERR_NONE) {                                     <- Set a BREAKPOINT here!
            if (OSRunning == OS_STATE_OS_RUNNING) {
                OS_TickListUpdate();
            }
        }
    }
}
```

If the debugger doesn’t show you this code then it’s possible that the `PC` and `PSW` are not properly setup on the task stack by `OSTaskStkInit()`.

If you end up in `OS_TickTask()` your code for `OSTaskStkInit()` and the macro `OS_CTX_RESTORE` is correct.

You should now set a breakpoint on the line following `OSTaskSemPend()`.

STEP 7

You need to set another breakpoint in `OSCtxSw()` as shown below.

```
OSCtxSw:  
    OS_CTX_SAVE                                <- Set a BREAKPOINT here!  
    OSTCBCurPtr->StkPtr = SP;  
    OSTaskSwHook();  
    OSPrioCur = OSPrioHighRdy;  
    OSTCBCurPtr = OSTCBHighRdyPtr;  
    SP = OSTCBCurPtr->StkPtr;  
    OS_CTX_RESTORE  
    Return from Interrupt/Exception;
```

You can now run the code at full speed. Because of the breakpoint in `OSCtxSw()`, the debugger should stop and show you the code for `OSCtxSw()`.

Basically, what's happening here is that `OS_TickTask()` will be waiting for the tick ISR to signal the task that a tick has expired. Since we haven't setup the tick interrupt (not yet anyway), `OS_TickTask()` would never get to execute. However, I had you modify the idle task hook to simulate signaling the tick task so µC/OS-III will eventually switch back to this code. In the meantime, µC/OS-III will switch to the next task that's ready-to-run. This happens to be the idle task. We'll be following the code until we get to `OS_IdleTask()`.

STEP 8

You can 'Step Over' `OS_CTX_SAVE` and verify that the stack (pointed to by `SP`) contains the value of the CPU registers saved in the same order as they are in `OSTaskStkInit()`. In fact, you can verify this when context switches back out of the idle task in just a few more steps.

STEP 9

'Step Into' the code one more time and verify that the `SP` was saved in `OSTickTaskTCB.StkPtr`.

STEP 10

'Step Into' the code and stop just before executing the 'Return from Interrupt/Exception' instruction. At this point, the CPU registers should contain the proper register values (similar to what we had when we restored the CPU registers for `OSTickTask()` (but this time it's for `OS_IdleTask()`).

STEP 11

'Step Into' the return from interrupt/exception instruction and the CPU should now jump into the idle task (`os_core.c`) as shown below. You should then set a breakpoint as shown.

```
void OS_IdleTask (void *p_arg)
{
    CPU_SR_ALLOC();

    p_arg = p_arg;
    while (DEF_ON) {
        CPU_CRITICAL_ENTER();                                <- Set a BREAKPOINT here!
        OSIdleTaskCtr++;
#if OS_CFG_STAT_TASK_EN > 0u
        OSStatTaskCtr++;
#endif
        CPU_CRITICAL_EXIT();

        OSIdleTaskHook();
    }
}
```

STEP 12

'Step Into' the idle task and then, 'Step Into' `OSIdleTaskHook()`. Recall that I had you modify the idle task hook as shown below. What we're doing here is simulate the occurrence of the tick interrupt.

```
void OSIdleTaskHook (void)
{
    OSTimeTick();
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppIdleTaskHookPtr != (OS_APP_HOOK_VOID)0) {
        (*OS_AppIdleTaskHookPtr)();
    }
#endif
}
```

STEP 13

Have your debugger run the code at full speed. You should actually hit the breakpoint in `OSCtxSw()` as shown below. What happened here is that µC/OS-III signaled the tick task and since the tick task is more important than the idle task, µC/OS-III is switching back to the tick task.

```
OSCtxSw:                                     <- BREAKPOINT here.
    OS_CTX_SAVE
    OSTCBCurPtr->StkPtr = SP;
    OSTaskSwHook();
    OSPrioCur = OSPrioHighRdy;
    OSTCBCurPtr = OSTCBHighRdyPtr;
    SP = OSTCBCurPtr->StkPtr;
    OS_CTX_RESTORE
    Return from Interrupt/Exception;
```

STEP 14

You can run the target at full speed and the debugger should bring you back at the breakpoint in `OS_TickTask()`.

If you were to repeatedly run the target at full speed, your debugger should now stop at the following places:

```
OSCtxSw()
OS_IdleTask()
OSCtxSw()
OS_TickTask()
OSCtxSw()
OS_IdleTask()
OSCtxSw()
etc.
```

18-5-3 VERIFYING INTERRUPT CONTEXT SWITCHES

In this section, we will verify the proper operation of the following functions/macros:

OSTickISR()	(os_cpu_a.asm)
OSIntCtxSw()	(os_cpu_a.asm)
OS_ISR_ENTER	(os_cpu_a.inc)
OS_ISR_EXIT	(os_cpu_a.inc)
CPU_INT_EN()	(cpu.h)
CPU_IntEn()	(cpu_a.asm)

You can now remove the code we added in `OSIdleTaskHook()`. The code should now be as shown below.

```
void OSIdleTaskHook (void)
{
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppIdleTaskHookPtr != (OS_APP_HOOK_VOID)0) {
        (*OS_AppIdleTaskHookPtr)();
    }
#endif
}
```

You should now setup the tick interrupt in `main()` (`app.c`) as shown below.

```
/* app.c */

#include "includes.h"

void main (void)
{
    OS_ERR err;

    OSInit(&err);
    /* (1) Install interrupt vector for OSTickISR() */ 
    /* (2) Initialize the tick timer to generate interrupts every millisecond */
    CPU_INT_EN();      /* (3) Enable interrupts */ 
    OSStart(&err);
}
```

- L18-25(8) You need to setup the interrupt vector for the tick ISR. Where this is done greatly depends on the CPU architecture. On some processors, you would simply insert a pointer to `OSTickISR()` in the interrupt vector table while on others, you would need to call a function to install the vector in a RAM table.
- L18-25(9) You can setup the timer you will use to generate interrupts here. You need to make sure that the interrupt will not occur immediately but instead 1 millisecond after the timer is initialized. You may recall that I told you to always initialize the tick interrupt from the first task that executes when we start multitasking. However, since we are testing the port, it's safe to initialize the timer here since we have control over when the first interrupt will actually occur.
- L18-25(10) This macro is used to enable global CPU interrupts. It's assumed that the startup code runs with interrupts disabled and thus, those need to be explicitly enabled.

At this point, you need to remove all breakpoints you inserted to test the task level context switch code and insert the following breakpoints. You should note that the C-like code should actually be replaced with assembly language instructions for your processor.

```
18  
OSIntCtxSw:                                     <- Set BREAKPOINT here!  
    OSTaskSwHook();  
    OSPrioCur  = OSPrioHighRdy;  
    OSTCBCurPtr = OSTCBHighRdyPtr;  
    SP         = OSTCBCurPtr->StkPtr;  
    OS_CTX_RESTORE  
    Return from Interrupt/Exception;  
  
OSTickISR:                                     <- Set BREAKPOINT here!  
    OS_ISR_ENTER  
    Clear tick interrupt;  
    OSTimeTick();  
    OS_ISR_EXIT
```

STEP 1

Reset the CPU and run the code until you hit the first breakpoint. If you properly initialized the tick timer then you should be looking at the `OSTickISR()` code. If not, you need to determine why you are not getting the tick interrupt.

If the tick interrupt is properly setup then you should verify that it is pointing at `OSIdleTaskTCB` since your application should have been looping around the idle task until the tick interrupt occurred.

STEP 2

You should step into the `OSTickISR()` code and verify that `OS_ISR_ENTER` increments `OSIntNestingCtr` (you should be able to look at that variable with the debugger and notice that it should have a value of 1). Also, you should verify that the current `SP` is saved in `OSTCBCurPtr->StkPtr` (it should be the same as `OSIdleTaskTCB.StkPtr`).

STEP 3

You should now step through the code that clears the tick interrupt and verify that it's doing the proper thing.

STEP 4

You can now ‘Step Over’ the call to `OSTimeTick()`. `OSTimeTick()` basically signals the tick task and thus makes it ready-to-run. Instead of returning from interrupt from `OSTickISR()`, µC/OS-III will instead exit through `OSIntCtxSw()` because the tick ISR has a higher priority than the idle task.

18

STEP 5

You should now ‘Step Into’ the code for `OS_ISR_EXIT` and ‘Step Over’ `OSIntExit()` (`os_core.c`). `OSIntExit()` should not return to its caller but instead, call `OSIntCtxSw()` (`os_cpu_a.asm`) as shown below. At this point, `OSTCBHighRdyPtr` should point at `OSTickTaskTCB`.

```
OSIntCtxSw:  
    OSTaskSwHook();  
    OSPrioCur    = OSPrioHighRdy;  
    OSTCBCurPtr = OSTCBHighRdyPtr;  
    SP          = OSTCBCurPtr->StkPtr;  
    OS_CTX_RESTORE  
    Return from Interrupt/Exception;
```

STEP 6

Before going any further in the code, you should set a breakpoint in `OS_TickTask()` (`os_tick.c`) as shown below.

```
void  OS_TickTask (void  *p_arg)  
{  
    OS_ERR  err;  
    CPU_TS  ts;  
  
    p_arg = p_arg;  
    while (DEF_ON) {  
        (void)OSTaskSemPend((OS_TICK )0,           <- Set BREAKPOINT here!  
                            (OS_OPT  )OS_OPT_PEND_BLOCKING,  
                            (CPU_TS  *)&ts,  
                            (OS_ERR  *)&err);  
        if (err == OS_ERR_NONE) {  
            if (OSRunning == OS_STATE_OS_RUNNING) {  
                OS_TickListUpdate();  
            }  
        }  
    }  
}
```

STEP 7

You should then go back to `os_cpu_a.asm` and ‘Step Into’ the code for `OS_CTX_RESTORE` and then execute the Return from Interrupt/Exception instruction.

This should cause the code to context switch into `OS_TickTask()`. In fact, you will be in the context of `OS_TickTask()` but you will not be in the `OS_TickTask()` code itself. This is because µC/OS-III is actually returning to the point where it invoked the scheduler to

switch to the idle task. µC/OS-III is simply returning to that point. You can step through code to see the path µC/OS-III is taking. However, this corresponds to quite a few lines of code. It's probably simpler to simply run the CPU at full speed and have the debugger stop when you hit the breakpoint in `OS_TickTask()`.

If you were to repeatedly run the target at full speed, your debugger should now stop at the following breakpoints:

```
OSTickISR()  
OSIntCtxSw()  
OS_TickTask()  
OSTickISR()  
OSIntCtxSw()  
etc.
```

At this point, the port tests are complete. You should be able to use the µC/OS-III port in your target application.

18-6 SUMMARY

A port involves three aspects: CPU, OS and board specific (BSP) code.

µC/OS-III port consists of writing or changing the contents of four kernel specific files: `os_cpu.h`, `os_cpu_a.asm`, `os_cpu_a.inc` and `os_cpu_c.c`.

It is also necessary to write or change the content of three CPU specific files: `cpu.h`, `cpu_a.asm` and `cpu_c.c`.

Finally, you can create or change a Board Support Package (BSP) for the evaluation board or target board being used.

A µC/OS-III port is similar to a µC/OS-II port, therefore you can start from one of the many µC/OS-II ports already available (see Appendix C, “Migrating from µC/OS-II to µC/OS-III” on page 689).

Chapter 19

Run-Time Statistics

μ C/OS-III performs substantial run-time statistics that can be displayed by kernel-aware debuggers and/or μ C/Probe. Specifically, it is possible to ascertain the total number of context switches, maximum interrupt disable time, maximum scheduler lock time, CPU usage, stack space used on a per-task basis, the RAM used by μ C/OS-III, and much more.

No other real-time kernel provides as much run-time information as μ C/OS-III. This information is quite useful during debugging as it provides a sense of how well an application is running and the resources being used.

μ C/OS-III also provides information about the configuration of the system. Specifically, the amount of RAM used by μ C/OS-III, including all internal variables and task stacks.

The μ C/OS-III variables described in this chapter should be displayed and never changed.

19-1 GENERAL STATISTICS – RUN-TIME

The following is a list of μC/OS-III variables that are not associated to any specific task:

TICK WHEEL

OSCfg_TickWheel[i].NbrEntries

The tick wheel contains up to OS_CFG_TICK_WHEEL_SIZE “spokes” (see `os_cfg_app.h`), and each spoke contains the `.NbrEntries` field, which holds the current number of entries in that spoke.

OSCfg_TickWheel[i].NbrEntriesMax

The `.NbrEntriesMax` field holds the maximum (i.e., peak) number of entries in a spoke.

TIMER WHEEL

OSCfg_TmrWheel[i].NbrEntries

The tick wheel contains up to OS_CFG_TMR_WHEEL_SIZE “spokes” (see `os_cfg_app.h`), and each spoke contains the `.NbrEntries` field, which holds the current number of entries in that spoke.

OSCfg_TmrWheel[i].NbrEntriesMax

The `.NbrEntriesMax` field holds the maximum (i.e., peak) number of entries in a spoke.

INTERRUPTS

OSIntNestingCtr

This variable contains the interrupt nesting level. 1 means servicing the first level of interrupt nesting, 2 means the interrupt was interrupted by another interrupt, etc.

OSIntDisTimeMax

This variable contains the maximum interrupt disable time (in CPU_TS units).

INTERRUPT QUEUE

OSIntQNbrEntries

This variable indicates the current number of entries in the interrupt handler queue.

OSIntQovfCtr

This variable shows the number of attempts to post a message from an interrupt to the interrupt handler queue, and there was not enough room to place the post call. In other words, how many times an interrupt was not being able to be serviced by its corresponding task. This value should always be 0 if the interrupt handler queue is sized large enough. If the value is non-zero, you should increase the size of the interrupt handler queue. A non-zero value may also indicate that the processor is not fast enough.

OSIntQTaskTimeMax

This variable contains the maximum execution time of the Interrupt Queue Handler Task (in **CPU_TS** units). The total time also includes the time of any ISR that occurred while the Interrupt Handler task was running.

NUMBER OF KERNEL OBJECTS**OSFlagQty**

This variable indicates the number of event flag groups created. This variable is only declared if **OS_CFG_FLAG_EN** is set to 1 in **os_cfg.h**.

OSMemQty

This variable indicates the number of fixed-sized memory partitions created by the application. This variable is only declared if **OS_CFG_MEM_EN** is set to 1 in **os_cfg.h**.

OSMutexQty

This variable indicates the number of mutual exclusion semaphores created by the application. This variable is only declared if **OS_CFG_MUTEX_EN** is set to 1 in **os_cfg.h**.

OSSemQty

This variable indicates the number of semaphores created by your application. This variable is only declared if **OS_CFG_SEM_EN** is set to 1 in **os_cfg.h**.

OSTaskQty

The variable contains the total number of tasks created in the application.

OSTmrQty

This variable indicates the number of timers created by the application. It is only declared if **OS_CFG_TMR_EN** is set to 1 in **os_cfg.h**.

MESSAGE POOL

OSMsgPool.NbrFree

The variable indicates the number of free OS_MSGs in the message pool. This number should never be zero since that indicate that the application is no longer able to send messages. This variable is only declared if OS_CFG_Q_EN is set to 1, or OS_CFG_TASK_Q_EN is set to 1 in os_cfg.h.

OSMsgPool.NbrUsed

This variable indicates the number of OS_MSGs currently used by the application. This variable is only declared if OS_CFG_Q_EN is set to 1, or OS_CFG_TASK_Q_EN is set to 1 in os_cfg.h.

OSMsgPool.NbrUsedMax

This variable indicates the maximum (i.e. peak) number of OS_MSGs that was ever used by the application. This variable is only declared if OS_CFG_Q_EN is set to 1, or OS_CFG_TASK_Q_EN is set to 1 in os_cfg.h.

READY LIST

OSRdyList[i].NbrEntries

These variable are used to examine how many entries there are in the ready list at each priority.

SCHEDULER

OSSchedLockTimeMax

This variable indicates the maximum amount of time the scheduler was locked irrespective of which task did the locking. It represents the global scheduler lock time. This value is expressed in CPU_TS units. The variable is only declared if OS_CFG_SCHED_LOCK_TIME_MEAS_EN is set to 1 in os_cfg.h.

OSSchedLockTimeMaxCur

This variable indicates the maximum amount of time the scheduler was locked. This value is expressed in CPU_TS units and is reset by the context switch code so that it can track the scheduler lock time on a per-task basis. This variable is only declared if OS_CFG_SCHED_LOCK_TIME_MEAS_EN is set to 1 in os_cfg.h.

OSSchedLockNestingCtr

This variable keeps track of the nesting level of the scheduler lock.

OSSchedRoundRobinEn

When set to 1, this variable indicates that round robin scheduling is enabled.

STATISTICS TASK

OSStatTaskCPUUsage

This variable indicates the CPU usage of the application expressed as a percentage (multiplied by 100). A value of 1000 indicates that 10.00% of the CPU is used, while 90.00% of the time the CPU is idling. This variable is only declared if `OS_CFG_STAT_TASK_EN` is set to 1 in `os_cfg.h`.

OSStatTaskCtr

This variable contains a counter that is incremented every time the idle task infinite loop runs. This variable is only declared if `OS_CFG_STAT_TASK_EN` is set to 1 in `os_cfg.h`.

OSStatTaskCtrMax

This variable contains the maximum number of times the idle task loop runs in 0.1 second. This value is used to measure the CPU usage of the application. This variable is only declared if `OS_CFG_STAT_TASK_EN` is set to 1 in `os_cfg.h`.

OSStatTaskTimeMax

This variable contains the maximum execution time of the statistic task (in `CPU_TS` units). It is only declared if `OS_CFG_STAT_TASK_EN` is set to 1 in `os_cfg.h`. The total time also includes the time of any ISR that occurred while the statistic task was running.

TICK TASK

OSTickCtr

This variable is incremented every time the tick task executes.

OSTickTaskTimeMax

This variable contains the maximum execution time of the tick task (in `CPU_TS` units). The total time also includes the time of any ISR that occurred while the tick task was running.

TIMER TASK

OSTmrCtr

This variable is incremented every time the timer task executes.

OSTmrTaskTimeMax

This variable contains the maximum execution time of the timer task (in CPU_TS units). It is only declared if OS_CFG_TMR_EN is set to 1 in os_cfg.h. The total time also includes the time of any ISR that occurred while the timer task was running.

MISCELLANEOUS

OSIdleTaskCtr

This variable contains a counter that is incremented every time the idle task infinite loop runs.

OSRunning

When non-zero, this variable indicates that multitasking has started.

OSTaskCtxSwCtr

This variable accumulates the number of context switches performed by µC/OS-III.

19-2 PER-TASK STATISTICS – RUN-TIME

μ C/OS-III maintains statistics for each task at run-time. This information is saved in the task's `OS_TCB`.

.CPUUsage

This variable keeps track of CPU usage of the task (multiplied by 100). For example if the task's `.CPUUsage` is 200 then the task consumes 2.00% of total CPU usage.

The variable is only declared when `OS_CFG_TASK_PROFILE_EN` is set to 1 in `os_cfg.h`.

.CtxSwCtr

This variable keeps track of the number of times a task is context switched-in. This variable should increment. If it does not increment, the task is not running. At a minimum, the counter should at least have a value of one since a task is always created ready-to-run. However, if higher priority tasks prevent the task from ever running, the value would be 0.

This variable is only declared when `OS_CFG_TASK_PROFILE_EN` is set to 1 in `os_cfg.h`.

.IntDisTimeMax

This variable keeps track of the maximum interrupt disable time of a task (in `CPU_TS` units). This variable shows how each task affects interrupt latency.

The variable is only declared when `CPU_CFG_INT_DIS_MEAS_EN` in `cpu_cfg.h` is set to 1.

.MsgQ.NbrEntries

This variable indicates the number of entries currently waiting in the message queue of a task. This variable is only declared when `OS_CFG_TASK_Q_EN` is set to 1 in `os_cfg.h`.

.MsgQ.NbrEntriesMax

This variable indicates the maximum number of entries placed in the message queue of a task. This variable is only declared when `OS_CFG_TASK_Q_EN` is set to 1 in `os_cfg.h`.

.MsgQ.NbrEntriesSize

This variable indicates the maximum number of entries that a task message queue is able to accept before it is full.

This variable is only declared when `OS_CFG_TASK_Q_EN` is set to 1 in `os_cfg.h`.

.MsgQ.PendTime

This variable indicates the amount of time it took for a task or an ISR to send a message to the task (in `CPU_TS` units).

The variable is only declared when `OS_CFG_TASK_PROFILE_EN` is set to 1 in `os_cfg.h`.

.MsgQ.PendTimeMax

This variable indicates the maximum amount of time it took for a task or an ISR to send a message to the task (in `CPU_TS` units).

This variable is only declared when `OS_CFG_TASK_PROFILE_EN` is set to 1 in `os_cfg.h`.

.PendOn

This variable indicates what a task is pending on if the task is in a pend state. Possible values are:

- | | |
|---|---|
| 0 | Nothing |
| 1 | Pending on an event flag group |
| 2 | Pending on the task's message queue |
| 3 | Pending on multiple objects |
| 4 | Pending on a mutual exclusion semaphore |
| 5 | Pending on a message queue |
| 6 | Pending on a semaphore |
| 7 | Pending on a task's semaphore |

.Prio

This corresponds to the priority of the task. This might change at run time depending on whether or not the task owns a mutual exclusion semaphore, or the user changes the priority of the task by calling `OSTaskChangePrio()`.

.SchedLockTimeMax

This variable keeps track of the maximum time a task locks the scheduler (in `CPU_TS` units). This variable allows the application to see how each task affects task latency. The variable is declared only when `OS_CFG_SCHED_LOCK_TIME_MEAS_EN` is set to 1 in `os_cfg.h`.

.SemPendTime

This variable indicates the amount of time it took for a task or ISR to signal the task (in CPU_TS units).

This variable is only declared when OS_CFG_TASK_PROFILE_EN is set to 1 in os_cfg.h.

.SemPendTimeMax

This variable indicates the maximum amount of time it took for a task or an ISR to signal the task (in CPU_TS units).

This variable is only declared when OS_CFG_TASK_PROFILE_EN is set to 1 in os_cfg.h.

.State

This variable indicates the current state of a task. The possible values are:

0	Ready
1	Delayed
2	Pending
3	Pending with Timeout
4	Suspended
5	Delayed and Suspended
6	Pending and Suspended
7	Pending, Delayed and Suspended

.StkFree

This variable indicates the amount of stack space (in number of stack entries) unused by a task. This value is determined by the statistic task if OS_CFG_TASK_STAT_STK_CHK_EN is set to 1 in os_cfg.h.

.StkUsed

This variable indicates the maximum stack usage (in number of stack entries) of a task. This value is determined by the statistic task if OS_CFG_TASK_STAT_STK_CHK_EN is set to 1 in os_cfg.h.

.TickRemain

This variable indicates the amount of time left (in clock ticks) until a task time delay expires, or the task times out waiting on a kernel object such as a semaphore, message queue, or other.

19-3 KERNEL OBJECT – RUN-TIME

It is possible to examine the run-time values of certain kernel objects as described below.

SEMAPHORES

.NamePtr

This is a pointer to an ASCII string used to provide a name to the semaphore. The ASCII string can have any length as long as it is NUL terminated.

.PendList.NbrEntries

Each semaphore contains a wait list of tasks waiting for the semaphore to be signaled. The variable represents the number of entries in the wait list.

.Ctr

This variable represents the current count of the semaphore.

.TS

This variable contains the timestamp of when the semaphore was last signaled.

MUTUAL EXCLUSION SEMAPHORES

.NamePtr

This is a pointer to an ASCII string used to provide a name to the mutual exclusion semaphore. The ASCII string can have any length as long as it is NUL terminated.

.PendList.NbrEntries

Each mutual exclusion semaphore contains a list of tasks waiting for the semaphore to be released. The variable represents the number of entries in the wait list.

.OwnerOriginalPrio

This variable holds the original priority of the task that owns the mutual exclusion semaphore.

.OwnerTCBPtr->Prio

Dereferencing the pointer to the OS_TCB of the mutual exclusion semaphore owner allows the application to determine whether a task priority was changed.

.OwnerNestingCtr

This variable indicates how many times the owner of the mutual exclusion semaphore requested the semaphore.

.TS

This variable contains the timestamp of when the mutual exclusion semaphore was last released.

MESSAGE QUEUES

.NamePtr

This is a pointer to an ASCII string used to provide a name to the message queue. The ASCII string can have any length, as long as it is **NUL** terminated.

.PendList.NbrEntries

Each message queue contains a wait list of tasks waiting for messages to be sent to the queue. The variable represents the number of entries in the wait list.

.MsgQ.NbrEntries

This variable represents the number of messages currently in the message queue.

.MsgQ.NbrEntriesMax

This variable represents the maximum number of messages ever placed in the message queue.

.MsgQ.NbrEntriesSize

This variable represents the maximum number of messages that can be placed in the message queue.

EVENT FLAGS

.NamePtr

This is a pointer to an ASCII string used to provide a name to the event flag group. The ASCII string can have any length, as long as it is **NUL** terminated.

.PendList.NbrEntries

Each event flag group contains a wait list of tasks waiting for event flags to be set or cleared. This variable represents the number of entries in the wait list.

.Flags

This variable contains the current value of the event flags in an event flag group.

.TS

This variable contains the timestamp of when the event flag group was last posted.

MEMORY PARTITIONS

.NamePtr

This is a pointer to an ASCII string that is used to provide a name to the memory partition. The ASCII string can have any length as long as it is **NUL** terminated.

.BlkSize

This variable contains the block size (in bytes) for the memory partition.

.NbrMax

This variable contains the maximum number of memory blocks belonging to the memory partition.

.NbrFree

This variable contains the number of memory blocks that are available from memory partition. The number of memory blocks in use is given by:

$$\text{.NbrMax} - \text{.NbrFree}$$

19-4 OS_DBG.C – STATIC

`os_dbg.c` is provided in µC/OS-III as some debuggers are not able to read the values of `#define` constants. Specifically, `os_dbg.c` contains ROM variables initialized to `#define` constants so that users can read them with any debugger.

Below is a list of ROM variables provided in `os_dbg.c`, along with their descriptions. These variables use approximately 100 bytes of code space.

The application code can examine these variables and you do not need to access them in a critical region as they reside in code space and are therefore not changeable.

ROM Variable	Data Type	Value
<code>OSDbg_DbgeEn</code>	<code>CPU_INT08U</code>	<code>OS_CFG_DBG_EN</code>

When 1, this variable indicates that ROM variables in `os_dbg.c` will be compiled. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
<code>OSDbg_ArgChkEn</code>	<code>CPU_INT08U</code>	<code>OS_CFG_ARG_CHK_EN</code>

When 1, this variable indicates that run-time argument checking is enabled. This means that µC/OS-III will check the validity of the values of arguments passed to functions. The feature is enabled in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_AppHooksEn	CPU_INT08U	OS_CFG_APP_HOOKS_EN

When 1, the variable indicates whether application hooks will be available to the application programmer, and the pointers listed below are declared. This value is set in `os_cfg.h`.

```
OS_AppTaskCreateHookPtr;
OS_AppTaskDelHookPtr;
OS_AppTaskReturnHookPtr;
OS_AppIdleTaskHookPtr;
OS_AppStatTaskHookPtr;
OS_AppTaskSwHookPtr;
OS_AppTimeTickHookPtr;
```

ROM Variable	Data Type	Value
OSDbg_EndiannessTest	CPU_INT32U	0x12345678

This variable allows a kernel awareness debugger or µC/Probe to determine the endianness of the CPU. This is easily done by looking at the lowest address in memory where this variable is saved. If the value is 0x78 then the CPU is a little endian machine. If it's 0x12, it is a big endian machine.

ROM Variable	Data Type	Value
OSDbg_CalledFromISRChkEn	CPU_INT08U	OS_CFG_CALLED_FROM_ISR_CHK_EN

When 1, this variable indicates that µC/OS-III will perform run-time checking to see if a function that is not supposed to be called from an ISR, is called from an ISR. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_FlagEn	CPU_INT08U	OS_CFG_FLAG_EN

When 1, this variable indicates that µC/OS-III's event flag services are available to the application programmer. This value is set in **os_cfg.h**.

ROM Variable	Data Type	Value
OSDbg_FlagDelEn	CPU_INT08U	OS_CFG_FLAG_DEL_EN

When 1, this variable indicates that the **OSFlagDel()** function is available to the application programmer. This value is set in **os_cfg.h**.

ROM Variable	Data Type	Value
OSDbg_FlagModeClrEn	CPU_INT08U	OS_CFG_FLAG_MODE_CLR_EN

When 1, this variable indicates that you can either clear or set flags when posting and pending on event flags. This value is set in **os_cfg.h**.

ROM Variable	Data Type	Value
OSDbg_FlagPendAbortEn	CPU_INT08U	OS_CFG_FLAG_PEND_ABORT_EN

When 1, this variable indicates that the **OSFlagPendAbort()** function is available to the application programmer. This value is set in **os_cfg.h**.

ROM Variable	Data Type	Value
OSDbg_FlagGrpSize	CPU_INT16U	sizeof(OS_FLAG_GRP)

This variable indicates the memory footprint (in RAM) of an event flag group (in bytes). This data type is declared in **os.h**.

ROM Variable	Data Type	Value
OSDbg_FlagWidth	CPU_INT16U	sizeof(OS_FLAGS)

This variable indicates the word width (in bytes) of event flags. If event flags are declared as CPU_INT08U, this variable will be 1, if declared as a CPU_INT16U, this variable will be 2, etc. This OS_FLAGS data type is declared in `os_type.h`.

ROM Variable	Data Type	Value
OSDbg_IntQ	CPU_INT16U	sizeof(OS_INT_Q)

This variable indicates the size (in bytes) of the OS_INT_Q data type, which is used to queue up deferred posts. The value of this variable is zero if OS_CFG_ISR_POST_DEFERRED_EN is 0 in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_ISRPostDeferredEn	CPU_INT08U	OS_CFG_ISR_POST_DEFERRED_EN

When 1, this variable indicates that an ISR will defer posts to task-level code. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_MemEn	CPU_INT08U	OS_CFG_MEM_EN

When 1, this variable indicates that μC/OS-III's memory management services are available to the application. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_MemSize	CPU_INT16U	sizeof(OS_MEM)

This variable indicates the RAM footprint (in bytes) of a memory partition control block, OS_MEM.

ROM Variable	Data Type	Value
OSDbg_MsgEn	CPU_INT08U	OS_MSG_EN

When 1, this variable indicates that the application either enabled message queues, or task message queues, or both. This value is set in `os_cfg.h` by ORing the value of `OS_CFG_Q_EN` and `OS_CFG_TASK_Q_EN`.

ROM Variable	Data Type	Value
OSDbg_MsgSize	CPU_INT16U	sizeof(OS_MSG)

This variable indicates the RAM footprint (in bytes) of an `OS_MSG` data structure.

ROM Variable	Data Type	Value
OSDbg_MsgPoolSize	CPU_INT16U	sizeof(OS_MSG_POOL)

This variable indicates the RAM footprint (in bytes) of an `OS_MSG_POOL` data structure.

ROM Variable	Data Type	Value
OSDbg_MsgQSize	CPU_INT16U	sizeof(OS_MSG_Q)

This variable indicates the RAM footprint (in number of bytes) of an `OS_MSG_Q` data type.

ROM Variable	Data Type	Value
OSDbg_MutexEn	CPU_INT08U	OS_CFG_MUTEX_EN

When 1, this variable indicates that μC/OS-III's mutual exclusion semaphore management services are available to the application. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_MutexDelEn	CPU_INT08U	OS_CFG_MUTEX_DEL_EN

When 1, this variable indicates that the function `OSMutexDel()` is available to the application. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_MutexPendAbortEn	CPU_INT08U	OS_CFG_MUTEX_PEND_ABORT_EN

When 1, the variable indicates that the function `OSMutexPendAbort()` is available to the application. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_MutexSize	CPU_INT16U	sizeof(OS_MUTEX)

This variable indicates the RAM footprint (in number of bytes) of an `OS_MUTEX` data type.

ROM Variable	Data Type	Value
OSDbg_ObjTypeChkEn	CPU_INT08U	OS_CFG_OBJ_TYPE_CHK_EN

When 1, this variable indicates that µC/OS-III will check for valid object types at run time. µC/OS-III will make sure the application is accessing a semaphore if calling `OSSem???`() functions, accessing a message queue when calling `OSQ???`() functions, etc. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_PendMultiEn	CPU_INT08U	OS_CFG_PEND_MULTI_EN

When 1, this variable indicates that µC/OS-III's service to pend on multiple objects (semaphores or message queues) is available to the application. This value is set in `os_cfg.h`.

OS Variables

ROM Variable	Data Type	Value
OSDbg_PendDataSize	CPU_INT16U	sizeof(OS_PEND_DATA)

This variable indicates the RAM footprint (in bytes) of an OS_PEND_DATA data type.

ROM Variable	Data Type	Value
OSDbg_PendListSize	CPU_INT16U	sizeof(OS_PEND_LIST)

This variable indicates the RAM footprint (in bytes) of an OS_PEND_LIST data type.

ROM Variable	Data Type	Value
OSDbg_PendObjSize	CPU_INT16U	sizeof(OS_PEND_OBJ)

This variable indicates the RAM footprint (in bytes) of an OS_PEND_OBJ data type.

ROM Variable	Data Type	Value
OSDbg_PrioMax	CPU_INT16U	OS_CFG_PRIO_MAX

This variable indicates the maximum number of priorities that the application will support.

ROM Variable	Data Type	Value
OSDbg_PtrSize	CPU_INT16U	sizeof(void *)

This variable indicates the size (in bytes) of a pointer.

ROM Variable	Data Type	Value
OSDbg_QEn	CPU_INT08U	OS_CFG_Q_EN

When 1, this variable indicates that µC/OS-III's message queue services are available to the application. This value is set in **os_cfg.h**.

ROM Variable	Data Type	Value
OSDbg_QDelEn	CPU_INT08U	OS_CFG_Q_DEL_EN

When 1, this variable indicates that the function `OSQDel()` is available to the application. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_QFlushEn	CPU_INT08U	OS_CFG_Q_FLUSH_EN

When 1, this variable indicates that the function `OSQFlush()` is available to the application. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_QPendingAbortEn	CPU_INT08U	OS_CFG_Q_PEND_ABORT_EN

When 1, this variable indicates that the function `OSQPendAbort()` is available to the application. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_QSize	CPU_INT16U	

This variable indicates the RAM footprint (in number of bytes) of an `OS_Q` data type.

ROM Variable	Data Type	Value
OSDbg_SchedRoundRobinEn	CPU_INT08U	OS_CFG_SCHED_ROUND_ROBIN_EN

When 1, this variable indicates that the `μC/OS-III` round-robin scheduling feature is available to the application. This value is set in `os_cfg.h`.

ROM Variables

ROM Variable	Data Type	Value
OSDbg_SemEn	CPU_INT08U	OS_CFG_SEM_EN

When 1, this variable indicates that µC/OS-III's semaphore management services are available to the application. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_SemDelEn	CPU_INT08U	OS_CFG_SEM_DEL_EN

When 1, this variable indicates that the function `OSSemDel()` is available to the application. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_SemPendAbortEn	CPU_INT08U	OS_CFG_SEM_PEND_ABORT_EN

When 1, this variable indicates that the function `OSSemPendAbort()` is available to the application. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_SemSetEn	CPU_INT08U	OS_CFG_SEM_SET_EN

When 1, this variable indicates that the function `OSSemSet()` is available to the application. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_SemSize	CPU_INT16U	sizeof(OS_SEM)

This variable indicates the RAM footprint (in bytes) of an `OS_SEM` data type.

ROM Variable	Data Type	Value
OSDbg_RdyList	CPU_INT16U	sizeof(OS_RDY_LIST)

This variable indicates the RAM footprint (in bytes) of the OS_RDY_LIST data type.

ROM Variable	Data Type	Value
OSDbg_RdyListSize	CPU_INT32U	sizeof(OSRdyList)

This variable indicates the RAM footprint (in bytes) of the ready list.

ROM Variable	Data Type	Value
OSDbg_StkWidth	CPU_INT08U	sizeof(CPU_STK)

This variable indicates the word size of a stack entry (in bytes). If a stack entry is declared as CPU_INT08U, this value will be 1, if a stack entry is declared as CPU_INT16U, the value will be 2, etc.

ROM Variable	Data Type	Value
OSDbg_StatTaskEn	CPU_INT08U	OS_CFG_STAT_TASK_EN

When 1, this variable indicates that µC/OS-III's statistic task is enabled. This value is set in os_cfg.h.

ROM Variable	Data Type	Value
OSDbg_StatTaskStkChkEn	CPU_INT08U	OS_CFG_STAT_TASK_STK_CHK_EN

When 1, this variable indicates that µC/OS-III will perform run-time stack checking by walking the stack of each task to determine the usage of each. This value is set in os_cfg.h.

ROM Variable	Data Type	Value
OSDbg_TaskChangePrioEn	CPU_INT08U	OS_CFG_TASK_CHANGE_PRIO_EN

When 1, this variable indicates that the function `OSTaskChangePrio()` is available to the application. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_TaskDelEn	CPU_INT08U	OS_CFG_TASK_DEL_EN

When 1, this variable indicates that the function `OSTaskDel()` is available to the application. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_TaskQEn	CPU_INT08U	OS_CFG_TASK_Q_EN

When 1, this variable indicates that `OSTaskQ???` services are available to the application. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_TaskQPendAbortEn	CPU_INT08U	OS_CFG_TASK_Q_PEND_ABORT_EN

When 1, this variable indicates that the function `OSTaskQPendAbort()` is available to the application. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_TaskProfileEn	CPU_INT08U	OS_CFG_TASK_PROFILE_EN

When 1, this variable indicates that task profiling is enabled, and that μC/OS-III will perform run-time performance measurements on a per-task basis. Specifically, when 1, μC/OS-III will keep track of how many context switches each task makes, how long a task disables interrupts, how long a task locks the scheduler, and more. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_TaskRegTblSize	CPU_INT16U	OS_CFG_TASK_REG_TBL_SIZE

This variable indicates how many entries each task register table can accept.

ROM Variable	Data Type	Value
OSDbg_TaskSemPendAbortEn	CPU_INT08U	OS_CFG_TASK_SEM_PEND_ABORT_EN

When 1, this variable indicates that the function `OSTaskSemPendAbort()` is available to the application. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_TaskSuspendEn	CPU_INT08U	OS_CFG_TASK_SUSPEND_EN

When 1, this variable indicates that the function `OSTaskSuspend()` is available to the application. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_TCBSize	CPU_INT16U	sizeof(OS_TCB)

This variable indicates the RAM footprint (in bytes) of an `OS_TCB` data structure.

ROM Variable	Data Type	Value
OSDbg_TickSpokeSize	CPU_INT16U	sizeof(OS_TICK_SPOKE)

This variable indicates the RAM footprint (in bytes) of an `OS_TICK_SPOKE` data structure.

ROM Variable	Data Type	Value
OSDbg_TimeDlyHMSMEn	CPU_INT08U	OS_CFG_TIME_DLY_HMSM_EN

When 1, this variable indicates that the function `OSTimeDlyHMSM()` is available to the application. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_TimeDlyResumeEn	CPU_INT08U	OS_CFG_TIME_DLY_RESUME_EN

When 1, this variable indicates that the function `OSTimeDlyResume()` is available to the application. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_TmrEn	CPU_INT08U	OS_CFG_TMR_EN

When 1, this variable indicates that `OSTmr???` services are available to the application. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_TmrDelEn	CPU_INT08U	OS_CFG_TMR_DEL_EN

When 1, this variable indicates that the function `OSTmrDel()` is available to the application. This value is set in `os_cfg.h`.

ROM Variable	Data Type	Value
OSDbg_TmrSize	CPU_INT16U	sizeof(OS_TMR)

This variable indicates the RAM footprint (in bytes) of an `OS_TMR` data structure.

ROM Variable	Data Type	Value
OSDdbg_TmrSpokeSize	CPU_INT16U	sizeof(OS_TMR_SPOKE)

This variable indicates the RAM footprint (in bytes) of an OS_TMR_SPOKE data structure.

ROM Variable	Data Type	Value
OSDdbg_VersionNbr	CPU_INT16U	OS_VERSION

This variable indicates the current version of μC/OS-III multiplied by 10000. For example version 3.02.00 will show as 30200.

ROM Variable	Data Type	Value
OSDdbg_DataSize	CPU_INT32U	Size of all RAM variables

This variable indicates the RAM footprint (in bytes) of the internal μC/OS-III variables for the current configuration.

19-5 OS_CFG_APP.C – STATIC

As with `os_dbg.c`, `os_cfg_app.c` defines a number of ROM variables. These variables, however, reflect the run-time configuration of an application. Specifically, the user will be able to know the RAM footprint (in bytes) of μC/OS-III task stacks, the message pool, and more.

Below is a list of ROM variables provided in `os_app_cfg.c`, along with their descriptions. These variables represent approximately 100 bytes of code space.

Application code can examine these variables and the application does not need to access them in a critical region since they reside in code space and are therefore not changeable.

ROM Variable	Data Type	Value
--------------	-----------	-------

OSCfg_IdleTaskStkSizeRAM CPU_INT32U sizeof(OSCfg_IdleTaskStk)

This variable indicates the RAM footprint (in bytes) of the µC/OS-III idle task stack.

ROM Variable	Data Type	Value
OSCfg_IntQSizeRAM	CPU_INT32U	sizeof(OSCfg_IntQ)

This variable indicates the RAM footprint (in bytes) of the µC/OS-III interrupt handler task queue.

ROM Variable	Data Type	Value
OSCfg_IntQTaskStkSizeRAM	CPU_INT32U	sizeof(OSCfg_IntQTaskStk)

This variable indicates the RAM footprint (in bytes) of the µC/OS-III interrupt queue handler task stack.

ROM Variable	Data Type	Value
OSCfg_ISRStkSizeRAM	CPU_INT32U	sizeof(OSCfg_ISRStk)

This variable indicates the RAM footprint (in bytes) of the dedicated Interrupt Service Routine (ISR) stack.

ROM Variable	Data Type	Value
OSCfg_MsgPoolSizeRAM	CPU_INT32U	sizeof(OSCfg_MsgPool)

This variable indicates the RAM footprint (in bytes) of the message pool.

ROM Variable	Data Type	Value
OSCfg_StatTaskStkSizeRAM	CPU_INT32U	sizeof(OSCfg_StatTaskStk)

This variable indicates the RAM footprint (in bytes) of the µC/OS-III statistic task stack.

ROM Variable	Data Type	Value
OSCfg_TickTaskStkSizeRAM	CPU_INT32U	sizeof(OSCfg_TickTaskStk)

This variable indicates the RAM footprint (in bytes) of the µC/OS-III tick task stack.

ROM Variable	Data Type	Value
OSCfg_TickWheelSizeRAM	CPU_INT32U	sizeof(OSCfg_TickWheel)

This variable indicates the RAM footprint (in bytes) of the tick wheel.

ROM Variable	Data Type	Value
OSCfg_TmrWheelSizeRAM	CPU_INT32U	sizeof(OSCfg_TmrWheel)

This variable indicates the RAM footprint (in bytes) of the timer wheel.

ROM Variable	Data Type	Value
OSCfg_DataSizeRAM	CPU_INT32U	Total of all configuration RAM

This variable indicates the RAM footprint (in bytes) of all of the configuration variables declared in `os_cfg_app.c`.

19-6 SUMMARY

This chapter presented a number of variables that can be read by a debugger and/or µC/Probe.

These variables provide run-time and compile-time (static) information regarding µC/OS-III-based applications. The µC/OS-III variables allow users to monitor RAM footprint, task stack usage, context switches, CPU usage, the execution time of many operations, and more.

The application must never change (i.e., write to) any of these variables.

Appendix

A

μ C/OS-III API Reference

This chapter provides a reference to μ C/OS-III services. Each of the user-accessible kernel services is presented in alphabetical order. The following information is provided for each entry:

- A brief description of the service
- The function prototype
- The filename of the source code
- The `#define` constant required to enable code for the service
- A description of the arguments passed to the function
- A description of returned value(s)
- Specific notes and warnings regarding use of the service
- One or two examples of how to use the function

Most μ C/OS-III API functions return an error code. In fact, when present, the error return value is done through the last argument of the API function, as a pointer to an error code. These error codes should be checked by the application to ensure that the μ C/OS-III function performed its operation as expected. Also, some of the error codes are conditional based on configuration constants. For example, argument checking error codes are returned only if `OS_CFG_ARG_CHK_EN` is set to 1 in `os_cfg.h`.

The next few pages summarizes most of the services provided by μ C/OS-III. The function calls in bold are commonly used.

A-1 Task Management


void OSTaskChangePrio (OS_TCB *p_tcb, OS_PRIO prio_new, OS_ERR *p_err);	
void OSTaskCreate (OS_TCB *p_tcb, CPU_CHAR *p_name, OS_TASK_PTR p_task, void *p_arg, OS_PRIO prio, CPU_STK *p_stk_base, CPU_STK_SIZE stk_limit, CPU_STK_SIZE stk_size, OS_MSG_QTY q_size, OS_TICK time_quanta, void *p_ext, OS_OPT opt, OS_ERR *p_err);	Values for "opt": OS_OPT_TASK_NONE OS_OPT_TASK_STK_CHK OS_OPT_TASK_STK_CLR OS_OPT_TASK_SAVE_FP
void OSTaskDel (OS_TCB *p_tcb, OS_ERR *p_err);	
OS_REG OSTaskRegGet (OS_TCB *p_tcb, OS_REG_ID id, OS_ERR *p_err);	
void OSTaskRegSet (OS_TCB *p_tcb, OS_REG_ID id, OS_REG value, OS_ERR *p_err);	
void OSTaskResume (OS_TCB *p_tcb, OS_ERR *p_err);	
void OSTaskSuspend (OS_TCB *p_tcb, OS_ERR *p_err);	
void OSTaskStkChk (OS_TCB *p_tcb, CPU_STK_SIZE *p_free, CPU_STK_SIZE *p_used, OS_ERR *p_err);	

```
void
OSTaskTimeQuantaSet (OS_TCB      *p_tcb,
                      OS_TICK     time_quanta,
                      OS_ERR      *p_err);
```

A-2 Time Management


void OSTimeDly (OS_TICK dly, OS_OPT opt, OS_ERR *p_err);	
void OSTimeDlyHMSM (CPU_INT16U hours, CPU_INT16U minutes, CPU_INT16U seconds CPU_INT32U milli, OS_OPT opt, OS_ERR *p_err);	Values for "opt": OS_OPT_TIME_HMSM_STRICT OS_OPT_TIME_HMSM_NON_STRICT
void OSTimeDlyResume (OS_TCB *p_tcb, OS_ERR *p_err);	
OS_TICK OSTimeGet (OS_ERR *p_err);	
void OSTimeSet (OS_TICK ticks, OS_ERR *p_err);	

A-3 Mutual Exclusion Semaphores – Resource Management

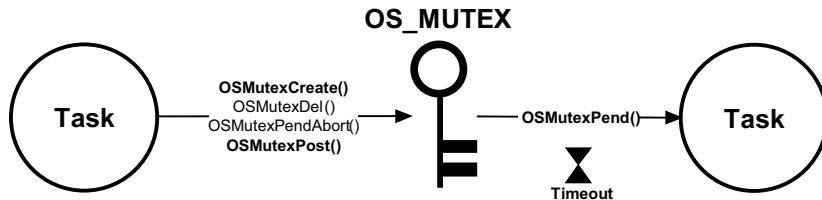


<pre>void OSMutexCreate (OS_MUTEX *p_mutex, CPU_CHAR *p_name, OS_ERR *p_err);</pre>	
<pre>void OSMutexDel (OS_MUTEX *p_mutex, OS_OPT opt, OS_ERR *p_err);</pre>	Values for "opt": OS_OPT_DEL_NO_PEND OS_OPT_DEL_ALWAYS
<pre>void OSMutexPend (OS_MUTEX *p_mutex, OS_TICK timeout, OS_OPT opt, CPU_TS *p_ts, OS_ERR *p_err);</pre>	Values for "opt": OS_OPT_PEND_BLOCKING OS_OPT_PEND_NON_BLOCKING
<pre>OS_OBJ_QTY OSMutexPendAbort (OS_MUTEX *p_mutex, OS_OPT opt, OS_ERR *p_err);</pre>	Values for "opt": OS_OPT_PEND_ABORT_1 OS_OPT_PEND_ABORT_ALL OS_OPT_POST_NO_SCHED (additive)
<pre>void OSMutexPost (OS_MUTEX *p_mutex, OS_OPT opt, OS_ERR *p_err);</pre>	Values for "opt": OS_OPT_POST_NONE OS_OPT_POST_NO_SCHED

A-4 Event Flags – Synchronization

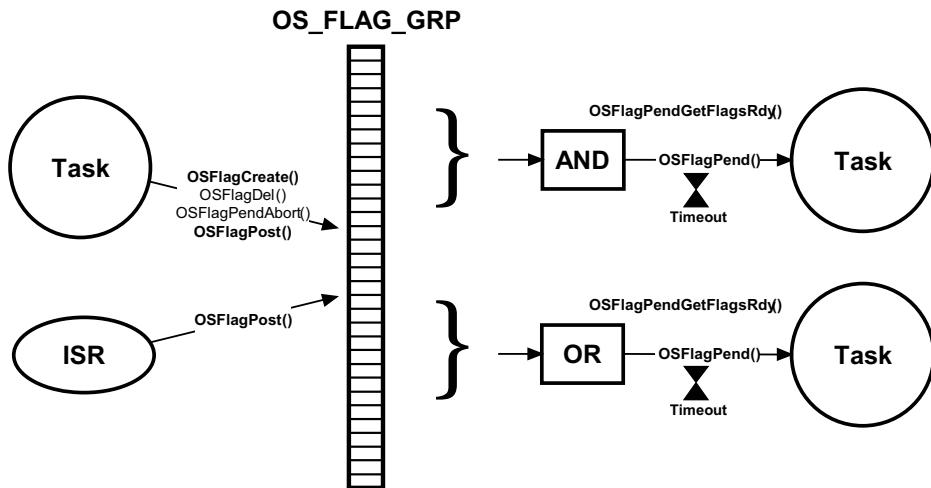


void OSFlagCreate	(OS_FLAG_GRP *p_grp, CPU_CHAR *p_name, OS_FLAGS flags, OS_ERR *p_err);	
OS_OBJ_QTY OSFlagDel	(OS_FLAG_GRP *p_grp, OS_OPT opt, OS_ERR *p_err);	Values for "opt": OS_OPT_DEL_NO_PEND OS_OPT_DEL_ALWAYS
OS_FLAGS OSFlagPend	(OS_FLAG_GRP *p_grp, OS_FLAGS flags, OS_TICK timeout, OS_OPT opt, CPU_TS *p_ts, OS_ERR *p_err);	Values for "opt": OS_OPT_PEND_FLAG_CLR_ALL OS_OPT_PEND_FLAG_CLR_ANY OS_OPT_PEND_FLAG_SET_ALL OS_OPT_PEND_FLAG_SET_ANY
OS_OBJ_QTY OSFlagPendAbort	(OS_FLAG_GRP *p_grp, OS_OPT opt, OS_ERR *p_err);	Values for "opt": OS_OPT_PEND_ABORT_1 OS_OPT_PEND_ABORT_ALL OS_OPT_POST_NO_SCHED (additive)
OS_FLAGS OSFlagPendGetFlagsRdy	(OS_ERR *p_err);	
OS_FLAGS OSFlagPost	(OS_FLAG_GRP *p_grp, OS_FLAGS flags, OS_OPT opt, OS_ERR *p_err);	Values for "opt": OS_OPT_POST_FLAG_SET OS_OPT_POST_FLAG_CLR

A-5 Semaphores – Synchronization

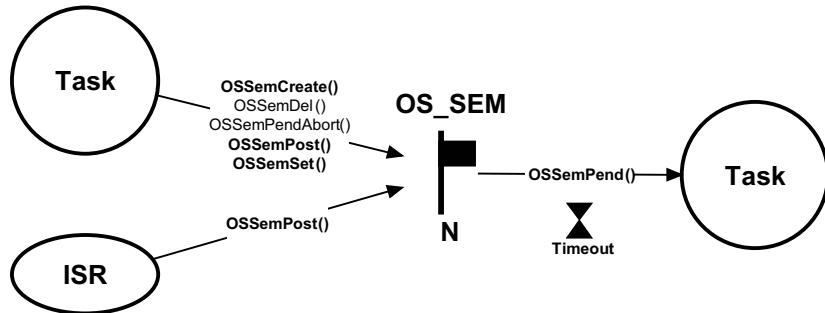


<pre>void OSSemCreate (OS_SEM *p_sem, CPU_CHAR *p_name, OS_SEM_CTR cnt, OS_ERR *p_err);</pre>	
<pre>OS_OBJ_QTY OSSemDel (OS_SEM *p_sem, OS_OPT opt, OS_ERR *p_err);</pre>	Values for "opt": OS_OPT_DEL_NO_PEND OS_OPT_DEL_ALWAYS
<pre>OS_SEM_CTR OSSemPend (OS_SEM *p_sem, OS_TICK timeout, OS_OPT opt, CPU_TS *p_ts, OS_ERR *p_err);</pre>	Values for "opt": OS_OPT_PEND_BLOCKING OS_OPT_PEND_NON_BLOCKING
<pre>OS_OBJ_QTY OSSemPendAbort (OS_SEM *p_sem, OS_OPT opt, OS_ERR *p_err);</pre>	Values for "opt": OS_OPT_PEND_ABORT_1 OS_OPT_PEND_ABORT_ALL OS_OPT_POST_NO_SCHED (additive)
<pre>void OSSemPost (OS_SEM *p_sem, OS_OPT opt, OS_ERR *p_err);</pre>	Values for "opt": OS_OPT_POST_1 OS_OPT_POST_ALL OS_OPT_POST_NO_SCHED (additive)
<pre>void OSSemSet (OS_SEM *p_sem, OS_SEM_CTR cnt, OS_ERR *p_err);</pre>	

A-6 Task Semaphores – Synchronization

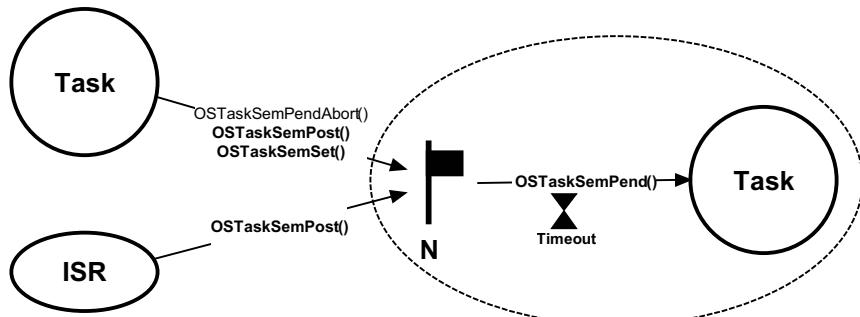


<code>OS_SEM_CTR OSTaskSemPend (OS_TCB timeout, OS_OPT opt, CPU_TS *p_ts, OS_ERR *p_err);</code>	Values for "opt": OS_OPT_PEND_BLOCKING OS_OPT_PEND_NON_BLOCKING
<code>CPU_BOOLEAN OSTaskSemPendAbort (OS_TCB *p_tcb, OS_OPT opt, OS_ERR *p_err);</code>	Values for "opt": OS_OPT_POST_NONE OS_OPT_POST_NO_SCHED
<code>OS_SEM_CTR OSTaskSemPost (OS_TCB *p_tcb, OS_OPT opt, OS_ERR *p_err);</code>	Values for "opt": OS_OPT_POST_NONE OS_OPT_POST_NO_SCHED
<code>OS_SEM_CTR OSTaskSemSet (OS_TCB *p_tcb, OS_SEM_CTR cnt, OS_ERR *p_err);</code>	

A-7 Message Queues – Message Passing

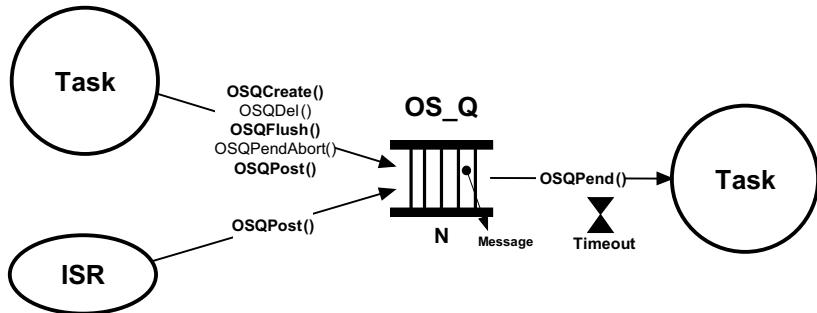


<pre>void OSQCreate (OS_Q *p_q, CPU_CHAR *p_name, OS_MSG_QTY max_qty, OS_ERR *p_err);</pre>	Values for "opt": OS_OPT_DEL_NO_PEND OS_OPT_DEL_ALWAYS
<pre>OS_OBJ_QTY OSQDel (OS_Q *p_q, OS_OPT opt, OS_ERR *p_err);</pre>	
<pre>OS_MSG_QTY OSQFlush (OS_Q *p_q, OS_ERR *p_err);</pre>	
<pre>void * OSQPend (OS_Q *p_q, OS_TICK timeout, OS_OPT opt, OS_MSG_SIZE *p_msg_size, CPU_TS *p_ts, OS_ERR *p_err);</pre>	Values for "opt": OS_OPT_PEND_BLOCKING OS_OPT_PEND_NON_BLOCKING
<pre>OS_OBJ_QTY OSQPendAbort (OS_Q *p_q, OS_OPT opt, OS_ERR *p_err);</pre>	Values for "opt": OS_OPT_PEND_ABORT_1 OS_OPT_PEND_ABORT_ALL OS_OPT_POST_NO_SCHED (additive)
<pre>void OSQPost (OS_Q *p_q, void *p_void, OS_MSG_SIZE msg_size, OS_OPT opt, OS_ERR *p_err);</pre>	Values for "opt": OS_OPT_POST_ALL OS_OPT_POST_FIFO OS_OPT_POST_LIFO OS_OPT_POST_NO_SCHED (additive)

A-8 Task Message Queues – Message Passing

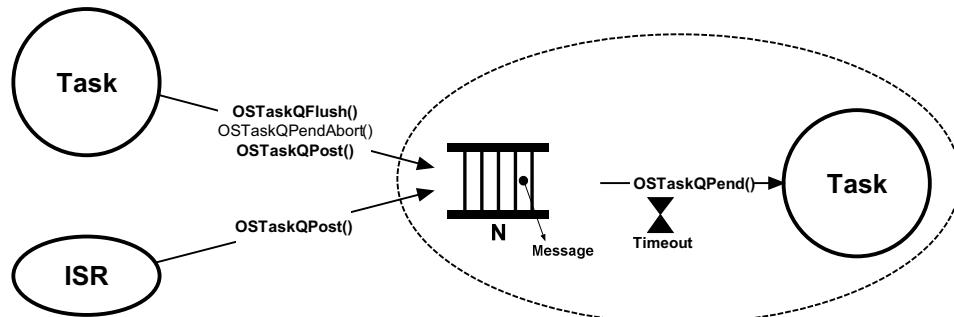

<code>OS_MSG_QTY</code>		
<code>OSTaskQFlush</code>	<code>(OS_TCB *p_tcb,</code> <code>OS_ERR *p_err);</code>	
<code>void *</code>		<code>Values for "opt":</code>
<code>OSTaskQPend</code>	<code>(OS_TICK timeout,</code> <code>OS_OPT opt,</code> <code>OS_MSG_SIZE *p_msg_size,</code> <code>CPU_TS *p_ts,</code> <code>OS_ERR *p_err);</code>	<code>OS_OPT_PEND_BLOCKING</code> <code>OS_OPT_PEND_NON_BLOCKING</code>
<code>CPU_BOOLEAN</code>		<code>Values for "opt":</code>
<code>OSTaskQPendAbort</code>	<code>(OS_TCB *p_tcb,</code> <code>OS_OPT opt,</code> <code>OS_ERR *p_err);</code>	<code>OS_OPT_POST_NONE</code> <code>OS_OPT_POST_NO_SCHED</code>
<code>void</code>		<code>Values for "opt":</code>
<code>OSTaskQPost</code>	<code>(OS_TCB *p_tcb,</code> <code>void *p_void,</code> <code>OS_MSG_SIZE msg_size,</code> <code>OS_OPT opt,</code> <code>OS_ERR *p_err);</code>	<code>OS_OPT_POST_FIFO</code> <code>OS_OPT_POST_LIFO</code> <code>OS_OPT_POST_NO_SCHED (additive)</code>


A-9 Pending on Multiple Objects

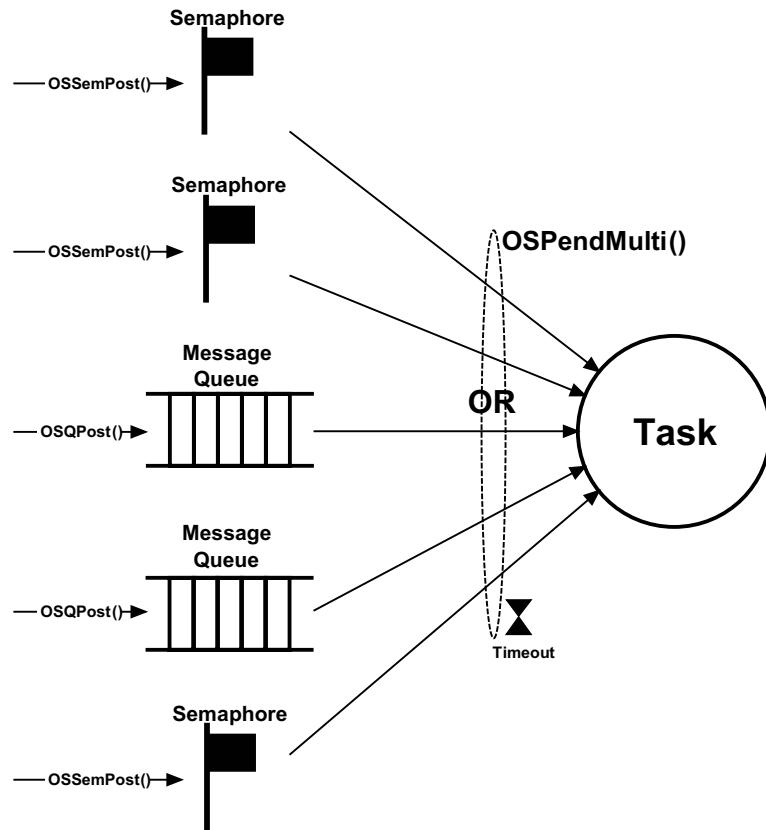

```
OS_OBJ_QTY
OSPendingMulti(OS_PEND_DATA *p_pend_data_tbl,
               OS_OBJ_QTY     tbl_size,
               OS_TICK        timeout,
               OS_OPT         opt,
               OS_ERR         *p_err);
```


Values for "opt":
 OS_OPT_PEND_BLOCKING
 OS_OPT_PEND_NON_BLOCKING

A-10 Timers

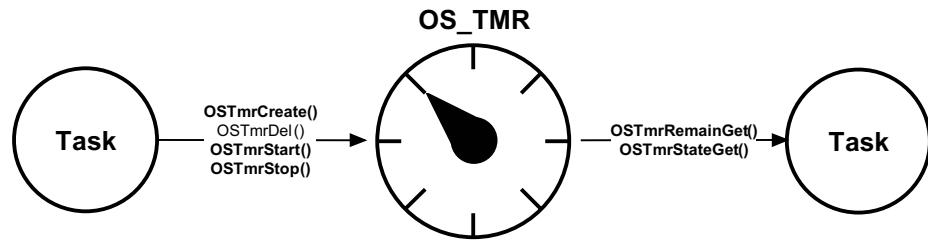

		Values for "opt": OS_OPT_TMR_ONE_SHOT OS_OPT_TMR_PERIODIC
void OSTmrCreate	(OS_TMR *p_tmr, CPU_CHAR *p_name, OS_TICK dly, OS_TICK period, OS_OPT opt, OS_TMR_CALLBACK_PTR p_callback, void *p_callback_arg, OS_ERR *p_err);	
CPU_BOOLEAN OSTmrDel	(OS_TMR *p_tmr, OS_ERR *p_err);	
OS_TICK OSTmrRemainGet	(OS_TMR *p_tmr, OS_ERR *p_err);	
OS_STATE OSTmrStateGet	(OS_TMR *p_tmr, OS_ERR *p_err);	
CPU_BOOLEAN OSTmrStart	(OS_TMR *p_tmr, OS_ERR *p_err);	
CPU_BOOLEAN OSTmrStop	(OS_TMR *p_tmr, OS_OPT opt, void *p_callback_arg, OS_ERR *p_err);	

A-11 Fixed-Size Memory Partitions – Memory Management

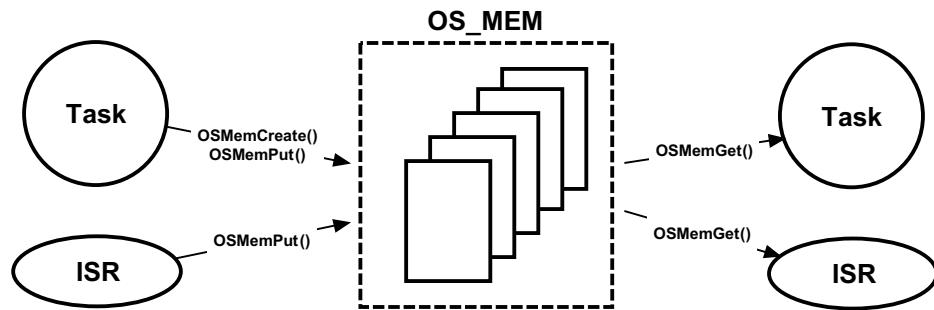

```

void
OSMemCreate (OS_MEM      *p_mem,
             CPU_CHAR    *p_name,
             void        *p_addr,
             OS_MEM_QTY   n_blk,
             OS_MEM_SIZE  blk_size,
             OS_ERR       *p_err);

void *
OSMemGet  (OS_MEM      *p_mem,
            OS_ERR      *p_err);

void
OSMemPut   (OS_MEM      *p_mem,
            void        *p_blk,
            OS_ERR      *p_err);

```

A-12 OSCtxSw()

```
void OSCTxSw (void)
```

File	Called from	Code enabled by
os_cpu_a.asm	OSSched()	N/A

`OSCtxSw()` is called from the macro `OS_TASK_SW()`, which in turn is called from `OSSched()` to perform a task-level context switch. Interrupts are disabled when `OSCtxSw()` is called.

Prior to calling `OSCtxSw()`, `OSTCBCurPtr` to point at the `OS_TCB` of the task that is being switched out, and `OSSched()` sets `OSTCBHighRdyPtr` to point at the `OS_TCB` of the task being switched in.

ARGUMENTS

None

RETURNED VALUES

None

NOTES/WARNINGS

None

EXAMPLE

The pseudocode for `OSCtxSw()` follows:

```

void OSCtxSw (void)
{
    Save all CPU registers;                                (1)
    OSTCBCurPtr->StkPtr = SP;                            (2)
    OSTaskSwHook();                                      (3)
    OSPrioCur      = OSPrioHighRdy;                      (4)
    OSTCBHighRdyPtr = OSTCBHighRdyPtr;                   (5)
    SP             = OSTCBHighRdyPtr->StkPtr;          (6)
    Restore all CPU registers;                            (7)
    Return from interrupt;                             (8)
}

```

- (1) `OSCtxSw()` must save all of the CPU registers onto the current task's stack. `OSCtxSw()` is called from the context of the task being switched out. Therefore, the CPU stack pointer is pointing to the proper stack. The user must save all of the registers in the same order as if an ISR started and all the CPU registers were saved on the stack. The stacking order should therefore match that of `OSTaskStkInit()`.
- (2) The current task's stack pointer is then saved into the current task's `OS_TCB`.
- (3) Next, `OSCtxSw()` must call `OSTaskSwHook()`.
- (4) `OSPriorityHighRdy` is copied to `OSPriorityCur`.
- (5) `OSTCBHighRdyPtr` is copied to `OSTCBCurPtr` since the current task is now the task being switched in.
- (6) The stack pointer of the new task is restored from the `OS_TCB` of the new task.
- (7) All the CPU registers from the new task's stack are restored.
- (8) Finally, `OSCtxSw()` must execute a return from interrupt instruction.

A-13 OSFlagCreate()

```
void OSFlagCreate (OS_FLAG_GRP *p_grp,
                  CPU_CHAR    *p_name,
                  OS_FLAGS     flags,
                  OS_ERR       *p_err)
```

File	Called from	Code enabled by
os_flag.c	Task or startup code	OS_CFG_FLAG_EN

`OSFlagCreate()` is used to create and initialize an event flag group. µC/OS-III allows the user to create an unlimited number of event flag groups (limited only by the amount of RAM in the system).

ARGUMENTS

p_grp This is a pointer to an event flag group that must be allocated in the application. The user will need to declare a “global” variable as shown, and pass a pointer to this variable to `OSFlagCreate()`:

```
OS_FLAG_GRP MyEventFlag;
```

p_name This is a pointer to an ASCII string used for the name of the event flag group. The name can be displayed by debuggers or by µC/Probe.

flags This contains the initial value of the flags to store in the event flag group. Typically, you would set all flags to 0 events correspond to set bits and all 1s if events correspond to cleared bits.

p_err This is a pointer to a variable that is used to hold an error code. The error code can be one of the following:

`OS_ERR_NONE` If the call is successful and the event flag group has been created.

`OS_ERR_CREATE_ISR` if `OS_CFG_CALLED_FROM_ISR_CHK_EN` set to 1 in `os_cfg.h`: If attempting to create an event flag group from an ISR, w is not allowed.

`OS_ERR_OBJ_CREATED` If the object passed has already been created.

OS_ERR_OBJ_PTR_NULL if OS_CFG_ARG_CHK_EN is set to 1 in os_cfg.h: If p_grp is a NULL pointer.

OS_ERR_ILLEGAL_CREATE_RUN_TIME if OS_SAFETY_CRITICAL_IEC61508 is defined: you called this after calling OSSafetyCriticalStart() and thus you are no longer allowed to create additional kernel objects.

RETURNED VALUES

None

NOTES/WARNINGS

Event flag groups must be created by this function before they can be used by the other event flag group services.

EXAMPLE

```
OS_FLAG_GRP EngineStatus;

void main (void)
{
    OS_ERR err;

    OSInit(&err);                                /* Initialize μC/OS-III */

    :
    :

    OSFlagCreate(&EngineStatus,
                  "Engine Status",
                  (OS_FLAGS)0,
                  &err);           /* Create a flag grp containing the engine's status */

    /* Check "err" */
    :
    :
    OSStart();                                     /* Start Multitasking */
}
```

A-14 OSFlagDel()

```
void OSFlagDel (OS_FLAG_GRP *p_grp,
                OS_OPT        opt,
                OS_ERR        *p_err);
```

File	Called from	Code enabled by
os_flag.c	Task only	OS_CFG_FLAG_EN and OS_CFG_FLAG_DEL_EN

OSFlagDel() is used to delete an event flag group. This function should be used with care since multiple tasks may be relying on the presence of the event flag group. Generally, before deleting an event flag group, first delete all of the tasks that access the event flag group. Also, it is recommended that the user not delete kernel objects at run time.

ARGUMENTS

- p_grp** is a pointer to the event flag group to delete.
- opt** specifies whether the user wants to delete the event flag group only if there are no pending tasks (**OS_OPT_DEL_NO_PEND**), or whether the event flag group should always be deleted regardless of whether or not tasks are pending (**OS_OPT_DEL_ALWAYS**). In this case, all pending task are readied.
- p_err** is a pointer to a variable used to hold an error code. The error code can be one of the following:
- | | |
|----------------------------|---|
| OS_ERR_NONE | if the call is successful and the event flag group has been deleted. |
| OS_ERR_DEL_ISR | if OS_CFG_CALLED_FROM_ISR_CHK_EN set to 1 in os_cfg.h : if the user attempts to delete an event flag group from an ISR. |
| OS_ERR_OBJ_PTR_NULL | if OS_CFG_ARG_CHK_EN is set to 1 in os_cfg.h : if p_grp is a NULL pointer. |
| OS_ERR_OBJ_TYPE | if OS_CFG_OBJ_TYPE_CHK_EN is set to 1 in os_cfg.h : if p_grp is not pointing to an event flag group. |

OS_ERR_OPT_INVALID	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if the user does not specify one of the options mentioned in the <code>opt</code> argument.
OS_ERR_TASK_WAITING	if one or more tasks are waiting on the event flag group and <code>OS_OPT_DEL_NO_PEND</code> is specified.

RETURNED VALUES

- 0 if no task was waiting on the event flag group, or an error occurs.
 > 0 if one or more tasks waiting on the event flag group are now readied and informed

NOTES/WARNINGS

You should use this call with care as other tasks might expect the presence of the event flag group.

EXAMPLE

```
OS_FLAG_GRP EngineStatusFlags;

void Task (void *p_arg)
{
    OS_ERR      err;
    OS_OBJ_QTY  qty;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        qty = osFlagDel(&EngineStatusFlags,
                         OS_OPT_DEL_ALWAYS,
                         &err);
        /* Check "err" */
        :
        :
    }
}
```

A-15 OSFlagPend()

```
OS_FLAGS OSFlagPend (OS_FLAG_GRP *p_grp,
                     OS_FLAGS      flags,
                     OS_TICK       timeout,
                     OS_OPT        opt,
                     CPU_TS        *p_ts,
                     OS_ERR        *p_err)
```

File	Called from	Code enabled by
os_flag.c	Task only	OS_CFG_FLAG_EN

OSFlagPend() allows the task to wait for a combination of conditions or events (i.e. bits) to be set (or cleared) in an event flag group. The application can wait for any condition to be set or cleared, or for all conditions to be set or cleared. If the events that the calling task desires are not available, the calling task is blocked (optional) until the desired conditions or events are satisfied, the specified timeout expires, the event flag is deleted, or the pend is aborted by another task.

ARGUMENTS

p_grp is a pointer to the event flag group.

flags is a bit pattern indicating which bit(s) (i.e., flags) to check. The bits wanted are specified by setting the corresponding bits in flags. If the application wants to wait for bits 0 and 1 to be set, specify 0x03. The same applies if you'd want to wait for the same 2 bits to be cleared (you'd still specify which bits by passing 0x03).

timeout allows the task to resume execution if the desired flag(s) is (are) not received from the event flag group within the specified number of clock ticks. A timeout value of 0 indicates that the task wants to wait forever for the flag(s). The timeout value is not synchronized with the clock tick. The timeout count begins decrementing on the next clock tick, which could potentially occur immediately.

opt specifies whether all bits are to be set/cleared or any of the bits are to be set/cleared. Here are the options:

<code>OS_OPT_PEND_FLAG_CLR_ALL</code>	Check all bits in flags to be clear (0)
<code>OS_OPT_PEND_FLAG_CLR_ANY</code>	Check any bit in flags to be clear (0)
<code>OS_OPT_PEND_FLAG_SET_ALL</code>	Check all bits in flags to be set (1)
<code>OS_OPT_PEND_FLAG_SET_ANY</code>	Check any bit in flags to be set (1)

The caller may also specify whether the flags are consumed by “adding” `OS_OPT_PEND_FLAG_CONSUME` to the **opt** argument. For example, to wait for any flag in a group and then clear the flags that satisfy the condition, you would set **opt** to:

`OS_OPT_PEND_FLAG_SET_ANY + OS_OPT_PEND_FLAG_CONSUME`

Finally, you can specify whether you want the caller to block if the flag(s) are available or not. You would then “add” the following options:

`OS_OPT_PEND_BLOCKING`
`OS_OPT_PEND_NON_BLOCKING`

Note that the **timeout** argument should be set to `0` when specifying `OS_OPT_PEND_NON_BLOCKING`, since the timeout value is irrelevant using this option. Having a non-zero value could simply confuse the reader of your code.

p_ts is a pointer to a timestamp indicating when the flags were posted, the pend was aborted, or the event flag group was deleted. Passing a `NULL` pointer (i.e., `(CPU_TS *)0`) indicates that the caller does not desire the timestamp. In other words, passing a `NULL` pointer is valid, and indicates that the caller does not need the timestamp.

A timestamp is useful when the task desires to know when the event flag group was posted or how long it took for the task to resume after the event flag group was posted. In the latter case, the user must call `OS_TS_GET()` and compute the difference between the current value of the timestamp and `*p_ts`, as shown:

```
delta = OS_TS_GET() - *p_ts;
```

`p_err` is a pointer to an error code and can be:

<code>OS_ERR_NONE</code>	No error.
<code>OS_ERR_OBJ_PTR_NULL</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_grp</code> is a NULL pointer.
<code>OS_ERR_OBJ_TYPE</code>	if <code>OS_CFG_OBJ_TYPE_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : <code>p_grp</code> is not pointing to an event flag group.
<code>OS_ERR_OPT_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : the caller specified an invalid option.
<code>OS_ERR_PEND_ABORT</code>	the wait on the flags was aborted by another task that called <code>OSFlagPendAbort()</code> .
<code>OS_ERR_PEND_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : An attempt was made to call <code>OSFlagPend()</code> from an ISR, which is not allowed.
<code>OS_ERR_SCHED_LOCKED</code>	When calling this function while the scheduler was locked.
<code>OS_ERR_PEND_WOULD_BLOCK</code>	if specifying non-blocking but the flags were not available and the call would block if the caller had specified <code>OS_OPT_PEND_BLOCKING</code> . the flags are not available within the specified amount of time.
<code>OS_ERR_TIMEOUT</code>	

RETURNED VALUES

The flag(s) that cause the task to be ready, 0 if either none of the flags are ready, or indicate an error occurred.

NOTES/WARNINGS

The event flag group must be created before it is used.

EXAMPLE

```
#define ENGINE_OIL_PRES_OK 0x01
#define ENGINE_OIL_TEMP_OK 0x02
#define ENGINE_START 0x04

OS_FLAG_GRP EngineStatus;

void Task (void *p_arg)
{
    OS_ERR err;
    OS_FLAGS value;
    CPU_TS ts;

    (void)&p_arg;
    while (DEF_ON) {
        value = OSFlagPend(&EngineStatus,
                           ENGINE_OIL_PRES_OK + ENGINE_OIL_TEMP_OK,
                           OS_FLAG_WAIT_SET_ALL + OS_FLAG_CONSUME,
                           10,
                           OS_OPT_PEND_BLOCKING,
                           &ts,
                           &err);
        /* Check "err" */
        :
        :
    }
}
```

A-16 OSFlagPendAbort()

```
OS_OBJ_QTY OSFlagPendAbort (OS_SEM *p_grp,
                           OS_OPT opt,
                           OS_ERR *p_err)
```

File	Called from	Code enabled by
os_flag.c	Task only	OS_CFG_FLAG_EN and OS_CFG_FLAG_PEND_ABORT_EN

OSFlagPendAbort() aborts and readies any tasks currently waiting on an event flag group. This function would be used by another task to fault abort the wait on the event flag group, rather than to normally signal the event flag group via **OSFlagPost()**.

ARGUMENTS

p_grp is a pointer to the event flag group for which pend(s) must be aborted.

opt determines the type of abort performed.

OS_OPT_PEND_ABORT_1	Aborts the pend of only the highest priority task waiting on the event flag group.
OS_OPT_PEND_ABORT_ALL	Aborts the pend of all the tasks waiting on the event flag group.
OS_OPT_POST_NO_SCHED	Specifies that the scheduler should not be called even if the pend of a higher priority task is aborted. Scheduling will need to occur from another function. You would use this option if the task calling OSFlagPendAbort() will perform additional pend aborts, rescheduling will take place at completion, and when multiple pend aborts are to take effect simultaneously.

<code>p_err</code>	is a pointer to a variable that holds an error code. <code>OSFlagPendAbort()</code> sets <code>*p_err</code> to one of the following:
<code>OS_ERR_NONE</code>	at least one task waiting on the event flag group was readied and informed of the aborted wait. The return value indicates the number of tasks where a wait on the event flag group was aborted.
<code>OS_ERR_OBJ_PTR_NULL</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_grp</code> is a NULL pointer.
<code>OS_ERR_OBJ_TYPE</code>	if <code>OS_CFG_OBJ_TYPE_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_grp</code> is not pointing to an event flag group.
<code>OS_ERR_OPT_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if specifying an invalid option.
<code>OS_ERR_PEND_ABORT_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : This function cannot be called from an ISR.
<code>OS_ERR_PEND_ABORT_NONE</code>	No task was aborted since no task was waiting.

RETURNED VALUE

`OSFlagPendAbort()` returns the number of tasks made ready-to-run by this function. Zero indicates that no tasks were pending on the event flag group and thus this function had no effect.

NOTES/WARNINGS

Event flag groups must be created before they are used.

EXAMPLE

```
OS_FLAG_GRP EngineStatus;

void Task (void *p_arg)
{
    OS_ERR      err;
    OS_OBJ_QTY  nbr_tasks;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        nbr_tasks = OSFlagPendAbort(&EngineStatus,
                                     OS_OPT_PEND_ABORT_ALL,
                                     &err);
        /* Check "err" */
        :
        :
    }
}
```

A-17 OSFlagPendGetFlagsRdy()

`OS_FLAGS OSFlagPendGetFlagsRdy (OS_ERR *p_err)`

File	Called from	Code enabled by
<code>os_flag.c</code>	Task only	<code>OS_CFG_FLAG_EN</code>

`OSFlagPendGetFlagsRdy()` is used to obtain the flags that caused the current task to be ready-to-run. This function allows the user to know “Who did it!”

ARGUMENTS

`p_err` is a pointer to an error code and can be:

- | | |
|------------------------------|--|
| <code>OS_ERR_NONE</code> | No error. |
| <code>OS_ERR_PEND_ISR</code> | if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : When attempting to call this function from an ISR. |

RETURNED VALUE

The value of the flags that caused the current task to become ready-to-run.

NOTES/WARNINGS

The event flag group must be created before it is used.

EXAMPLE

```
#define ENGINE_OIL_PRES_OK 0x01
#define ENGINE_OIL_TEMP_OK 0x02
#define ENGINE_START 0x04

OS_FLAG_GRP EngineStatus;

void Task (void *p_arg)
{
    OS_ERR err;
    OS_FLAGS value;
    OS_FLAGS flags_rdy;

    (void)&p_arg;
    while (DEF_ON) {
        value = OSFlagPend(&EngineStatus,
                           ENGINE_OIL_PRES_OK + ENGINE_OIL_TEMP_OK,
                           OS_FLAG_WAIT_SET_ALL + OS_FLAG_CONSUME,
                           10,
                           &err);
        /* Check "err" */
        flags_rdy = OSFlagPendGetFlagsRdy(&err);
        /* Check "err" */
        :
        :
    }
}
```

A-18 OSFlagPost()

```
OS_FLAGS OSFlagPost (OS_FLAG_GRP *p_grp,
                     OS_FLAGS flags,
                     OS_OPT opt,
                     OS_ERR *p_err)
```

File	Called from	Code enabled by
os_flag.c	Task or ISR	OS_CFG_FLAG_EN

You can set or clear event flag bits by calling `OSFlagPost()`. The bits set or cleared are specified in a bit mask (i.e., the `flags` argument). `OSFlagPost()` readies each task that has its desired bits satisfied by this call. The caller can set or clear bits that are already set or cleared.

ARGUMENTS

`p_grp` is a pointer to the event flag group.

`flags` specifies which bits to be set or cleared. If `opt` is `OS_OPT_POST_FLAG_SET`, each bit that is set in `flags` will set the corresponding bit in the event flag group. For example to set bits 0, 4, and 5, you would set `flags` to `0x31` (note that bit 0 is the least significant bit). If `opt` is `OS_OPT_POST_FLAG_CLR`, each bit that is set in `flags` will clear the corresponding bit in the event flag group. For example to clear bits 0, 4, and 5, you would specify `flags` as `0x31` (again, bit 0 is the least significant bit).

`opt` indicates whether the flags are set (`OS_OPT_POST_FLAG_SET`) or cleared (`OS_OPT_POST_FLAG_CLR`).

The caller may also “add” `OS_OPT_POST_NO_SCHED` so that µC/OS-III will not call the scheduler after the post.

`p_err` is a pointer to an error code and can be:

<code>OS_ERR_NONE</code>	the call is successful.
<code>OS_ERR_FLAG_INVALID_OPT</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if you specified an invalid option.
<code>OS_ERR_OBJ_PTR_NULL</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if the caller passed a <code>NULL</code> pointer.
<code>OS_ERR_OBJ_TYPE</code>	if <code>OS_CFG_OBJ_TYPE_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : <code>p_grp</code> is not pointing to an event flag group.

RETURNED VALUE

The new value of the event flags.

NOTES/WARNINGS

- 1 Event flag groups must be created before they are used.
- 2 The execution time of this function depends on the number of tasks waiting on the event flag group. However, the execution time is still deterministic.
- 3 Although the example below shows that we are posting from a task, `OSFlagPost()` can also be called from an ISR.

EXAMPLE

```
#define ENGINE_OIL_PRES_OK 0x01
#define ENGINE_OIL_TEMP_OK 0x02
#define ENGINE_START         0x04

OS_FLAG_GRP EngineStatusFlags;

void TaskX (void *p_arg)
{
    OS_ERR   err;
    OS_FLAGS flags;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        flags = OSFlagPost(&EngineStatusFlags,
                            ENGINE_START,
                            OS_OPT_POST_FLAG_SET,
                            &err);
        /* Check 'err' */
        :
        :
    }
}
```

A-19 OSIdleTaskHook()

```
void OSIdleTaskHook (void);
```

File	Called from	Code enabled by
os_cpu_c.c	OS_IdleTask() ONLY	N/A

This function is called by `OS_IdleTask()`.

`OSIdleTaskHook()` is part of the CPU port code and this function *must not* be called by the application code. `OSIdleTaskHook()` is used by the µC/OS-III port developer.

`OSIdleTaskHook()` runs in the context of the idle task and thus it is important to make sure there is sufficient stack space in the idle task. `OSIdleTaskHook()` *must not* make any `OS??Pend()` calls, call `OSTaskSuspend()` or `OSTimeDly??()`. In other words, this function must never be allowed to make a blocking call.

ARGUMENTS

None

RETURNED VALUE

None

NOTES/WARNINGS

- Never make blocking calls from `OSIdleTaskHook()`.
- *Do not* call this function from your application.

EXAMPLE

The code below calls an application-specific hook that the application programmer can define. The user can simply set the value of `OS_AppIdleTaskHookPtr` to point to the desired hook function which in this case is assumed to be defined in `os_app_hooks.c`. The idle task calls `OSIdleTaskHook()` which in turn calls `App_OS_IdleTaskHook()` through `OS_AppIdleTaskHookPtr`.

This feature is very useful when there is a processor that can enter low-power mode. When μC/OS-III has no other task to run, the processor can be put to sleep waiting for an interrupt to wake it up.

```
void App_OS_IdleTaskHook (void)                                /* See os_app_hooks.c      */
{
    /* Your code goes here! */
    /* Put the CPU in low power mode (optional) */
}

void App_OS_SetAllHooks (void)                                /* os_app_hooks.c          */
{
    CPU_SR_ALLOC();

    CPU_CRITICAL_ENTER();
    :
    OS_AppIdleTaskHookPtr = App_OS_IdleTaskHook;
    :
    CPU_CRITICAL_EXIT();
}

void OSIdleTaskHook (void)                                     /* See os_cpu_c.c          */
{
#if OS_CFG_APP_HOOKS_EN > 0
    if (OS_AppIdleTaskHookPtr != (OS_APP_HOOK_VOID)0) { /* Call application hook */
        (*OS_AppIdleTaskHookPtr)();
    }
#endif
}
```

A-20 OSInit()

```
void OSInit (OS_ERR *p_err);
```

File	Called from	Code enabled by
os_core.c	Startup code only	N/A

`OSInit()` initializes µC/OS-III and it must be called prior to calling any other µC/OS-III function. Including `OSStart()` which will start multitasking. `OSInit()` returns as soon as an error is detected.

ARGUMENTS

`p_err` is a pointer to an error code. Some of the error codes below are issued only if the associated feature is enabled.

<code>OS_ERR_NONE</code>	initialization was successful.
<code>OS_ERR_INT_Q</code>	if <code>OS_CFG_ISR_POST_DEFERRED_EN</code> is set to 1 in <code>os_cfg.h</code> : <code>OSCfg_IntQBasePtr</code> is <code>NULL</code> . The error is detected by <code>OS_IntQTaskInit()</code> in <code>os_int.c</code> .
<code>OS_ERR_INT_Q_SIZE</code>	if <code>OS_CFG_ISR_POST_DEFERRED_EN</code> is set to 1 in <code>os_cfg.h</code> : <code>OSCfg_IntQSize</code> must have at least 2 elements. The error is detected by <code>OS_IntQTaskInit()</code> in <code>os_int.c</code> .
<code>OS_ERR_INT_Q_STK_INVALID</code>	if <code>OS_CFG_ISR_POST_DEFERRED_EN</code> is set to 1 in <code>os_cfg.h</code> : <code>OSCfg_IntQTaskStkBasePtr</code> is <code>NULL</code> . The error is detected by <code>OS_IntQTaskInit()</code> in <code>os_int.c</code>
<code>OS_ERR_INT_Q_STK_SIZE_INVALID</code>	if <code>OS_CFG_ISR_POST_DEFERRED_EN</code> is set to 1 in <code>os_cfg.h</code> : <code>OSCfg_IntQTaskStkSize</code> is less than <code>OSCfg_StkSizeMin</code> . The error is detected by <code>OS_IntQTaskInit()</code> in <code>os_int.c</code> .

OS_ERR_MSG_POOL_EMPTY	if OS_CFG_ARG_CHK_EN and OS_CFG_Q_EN or OS_CFG_TASK_Q_EN are set to 1 in os_cfg.h: OSCfg_MsgPoolSize is zero. The error is detected by OS_MsgPoolInit() in os_msg.c.
OS_ERR_MSG_POOL_NULL_PTR	if OS_CFG_ARG_CHK_EN and OS_CFG_Q_EN or OS_CFG_TASK_Q_EN are set to 1 in os_cfg.h: OSCfg_MsgPoolBasePtr is NULL in os_msg.c. The error is detected by OS_MsgPoolInit() in os_msg.c.
OS_ERR_STAT_PRIO_INVALID	if OS_CFG_STAT_TASK_EN is set to 1 in os_cfg.h: OSCfg_StatTaskPrio is invalid. The error is detected by OS_StatTaskInit() in os_stat.c.
OS_ERR_STAT_STK_INVALID	if OS_CFG_STAT_TASK_EN is set to 1 in os_cfg.h: OSCfg_StatTaskStkBasePtr is NULL. The error is detected by OS_StatTaskInit() in os_stat.c.
OS_ERR_STAT_STK_SIZE_INVALID	if OS_CFG_STAT_TASK_EN is set to 1 in os_cfg.h: OSCfg_StatTaskStkSize is less than OSCfg_StkSizeMin. The error is detected by OS_StatTaskInit() in os_stat.c.
OS_ERR_TICK_PRIO_INVALID	if OSCfg_TickTaskPrio is invalid, The error is detected by OS_TickTaskInit() in os_tick.c.
OS_ERR_TICK_STK_INVALID	OSCfg_TickTaskStkBasePtr is NULL. The error is detected by OS_TickTaskInit() in os_tick.c.
OS_ERR_TICK_STK_SIZE_INVALID	OSCfg_TickTaskStkSize is less than OSCfg_StkSizeMin. This error was detected by OS_TickTaskInit() in os_tick.c.
OS_ERR_TMR_PRIO_INVALID	if OS_CFG_TMR_EN is set to 1 in os_cfg.h: OSCfg_TmrTaskPrio is invalid. The error is detected by see OS_TmrInit() in os_tmr.c.

OS_ERR_TMR_STK_INVALID if OS_CFG_TMR_EN is set to 1 in `os_cfg.h`: OSCfg_TmrTaskBasePtr is pointing at NULL. The error is detected by `OS_TmrInit()` in `os_tmr.c`.

OS_ERR_TMR_STK_SIZE_INVALID if OS_CFG_TMR_EN is set to 1 in `os_cfg.h`: OSCfg_TmrTaskStkSize is less than OSCfg_StkSizeMin. The error is detected by `OS_TmrInit()` in `os_tmr.c`.

RETURNED VALUES

None

NOTES/WARNINGS

- `OSInit()` must be called before `OSStart()`.
- `OSInit()` returns as soon as it detects an error in any of the sub-functions it calls. For example, if `OSInit()` encounters a problem initializing the task manager, an appropriate error code will be returned and `OSInit()` will not go any further. It is therefore important that the user checks the error code before starting multitasking.

EXAMPLE

```
void main (void)
{
    OS_ERR  err;

    :
    OSInit(&err);           /* Initialize μC/OS-III */
    /* Check "err" */
    :
    :
    OSStart(&err);          /* Start Multitasking */
    /* Check "err" */
    /* Code not supposed to end up here! */
}
```

A-21 OSInitHook()

```
void OSInitHook (void);
```

File	Called from	Code enabled by
os_cpu_c.c	OSInit()	Always enabled

`OSInitHook()` is a function that is called by µC/OS-III's initialization code, `OSInit()`. `OSInitHook()` is typically implemented by the port implementer for the processor used. This hook allows the port to be extended to do such tasks as setup exception stacks, floating-point registers, and more. `OSInitHook()` is called at the beginning of `OSInit()`, before any µC/OS-III task and data structure have been initialized.

ARGUMENTS

None

RETURNED VALUES

None

NOTES/WARNINGS

None

EXAMPLE

```
void OSInitHook (void)                                /* See os_cpu_c.c */
{
    /* Perform any initialization code necessary by the port */
}
```

A-22 OSIntCtxSw()

```
void OSIntCtxSw (void)
```

File	Called from	Code enabled by
os_cpu_a.asm	OSIntExit()	N/A

`OSIntCtxSw()` is called from `OSIntExit()` to perform a context switch when all nested interrupts have returned.

Interrupts are disabled when `OSIntCtxSw()` is called.

`OSTCBCurPtr` points at the `OS_TCB` of the task that is switched out when `OSIntCtxSw()` is called and `OSIntExit()` sets `OSTCBHighRdyPtr` to point at the `OS_TCB` of the task that is switched in.

ARGUMENTS

None

RETURNED VALUES

None

NOTES/WARNINGS

None

EXAMPLE

The pseudocode for `OSIntCtxSw()` is shown below. Notice that the code does only half of what `OSCtxSw()` did. The reason is that `OSIntCtxSw()` is called from an ISR and it is assumed that all of the CPU registers of the interrupted task were saved at the beginning of the ISR. `OSIntCtxSw()` therefore must only restore the context of the new, high-priority task.

```
void OSIntCtxSw (void)
{
    OSTaskSwHook();                                (1)
    OSPrioCur        = OSPrioHighRdy;              (2)
    OSTCBCurPtr     = OSTCBHighRdyPtr;             (3)
    SP              = OSTCBHighRdyPtr->StkPtr;   (4)
    Restore all CPU registers;                    (5)
    Return from interrupt;                      (6)
}
```

- (1) OSIntCtxSw() must call OSTaskSwHook().
- (2) OSPrioHighRdy needs to be copied to OSPrioCur.
- (3) OSTCBHighRdyPtr needs to be copied to OSTCBCurPtr because the current task will now be the new task.
- (4) The stack pointer of the new task is restored from the OS_TCB of the new task.
- (5) All the CPU registers need to be restored from the new task's stack.
- (6) A return from interrupt instruction must be executed.

A-23 OSIntEnter()

`void OSIntEnter (void);`

File	Called from	Code enabled by
<code>os_core.c</code>	ISR only	N/A

`OSIntEnter()` notifies µC/OS-III that an ISR is being processed. This allows µC/OS-III to keep track of interrupt nesting. `OSIntEnter()` is used in conjunction with `OSIntExit()`. This function is generally called at the beginning of ISRs. Note that on some CPU architectures, it must be written in assembly language (shown below in pseudo code):

```
MyISR:
    Save CPU registers;
    OSIntEnter();           /* Or, OSIntNestingCtr++ */
    :
    Process ISR;
    :
    OSIntExit();
    Restore CPU registers;
    Return from interrupt;
```

ARGUMENTS

None

RETURNED VALUES

None

NOTES/WARNINGS

- This function must not be called by task-level code.
- You can also increment the interrupt-nesting counter (`OSIntNestingCtr`) directly in the ISR to avoid the overhead of the function call/return. It is safe to increment `OSIntNestingCtr` in the ISR since interrupts are assumed to be disabled when `OSIntNestingCtr` is incremented. However, that is not true for all CPU architectures. You need to make sure that interrupts are disabled in the ISR before directly incrementing `OSIntNestingCtr`.
- It is possible to nest interrupts up to 250 levels deep.

A-24 OSIntExit()

`void OSIntExit (void);`

File	Called from	Code enabled by
<code>os_core.c</code>	ISR only	N/A

`OSIntExit()` notifies μC/OS-III that an ISR is complete. This allows μC/OS-III to keep track of interrupt nesting. `OSIntExit()` is used in conjunction with `OSIntEnter()`. When the last nested interrupt completes, `OSIntExit()` determines if a higher priority task is ready-to-run. If so, the interrupt returns to the higher priority task instead of the interrupted task.

This function is typically called at the end of ISRs as follows, and on some CPU architectures, it must be written in assembly language (shown below in pseudo code):

```
MyISR:
    Save CPU registers;
    OSIntEnter();
    :
    Process ISR;
    :
    OSIntExit();
    Restore CPU registers;
    Return from interrupt;
```

ARGUMENTS

None

RETURNED VALUE

None

NOTES/WARNINGS

This function must not be called by task-level code. Also, if you decide to directly increment `OSIntNestingCtr`, instead of calling `OSIntEnter()`, you must still call `OSIntExit()`.

A-25 OSMemCreate()

```
void OSMemCreate (OS_MEM      *p_mem,
                  CPU_CHAR     *p_name,
                  void        *p_addr,
                  OS_MEM_QTY   n_blk,
                  OS_MEM_SIZE  blk_size,
                  OS_ERR       *p_err)
```

File	Called from	Code enabled by
os_mem.c	Task or startup code	OS_CFG_MEM_EN

`OSMemCreate()` creates and initializes a memory partition. A memory partition contains a user-specified number of fixed-size memory blocks. An application may obtain one of these memory blocks and, when completed, release the block back to the same partition where the block originated.

ARGUMENTS

`p_mem` is a pointer to a memory partition control block that must be allocated in the application. It is assumed that storage will be allocated for the memory control blocks in the application. In other words, the user will declare a “global” variable as follows, and pass a pointer to this variable to `OSMemCreate()`:

```
OS_MEM MyMemPartition;
```

`p_name` is a pointer to an ASCII string to provide a name to the memory partition. The name can be displayed by debuggers or µC/Probe.

`p_addr` is the address of the start of a memory area used to create fixed-size memory blocks. Memory partitions may be created using either static arrays or `malloc()` during startup. Note that the partition *must* align on a pointer boundary. Thus, if a pointer is 16-bits wide, the partition must start on a memory location with an address that ends with 0, 2, 4, 6, 8, etc. If a pointer is 32-bits wide, the partition must start on a memory location with an address that ends in 0, 4, 8 or C. The easiest way to ensure this is to create a static array as follows:

```
void *MyMemArray[N][M]
```

You should never deallocate memory blocks that were allocated from the heap to prevent fragmentation of your heap. It is quite acceptable to allocate memory blocks from the heap as long as the user does not deallocate them.

n_{blks} contains the number of memory blocks available from the specified partition. You need to specify at least two memory blocks per partition.

blk_size specifies the size (in bytes) of each memory block within a partition. A memory block must be large enough to hold at least a pointer. Also, the size of a memory block must be a multiple of the size of a pointer. If a pointer is 32-bits wide then the block size must be 4, 8, 12, 16, 20, etc. bytes (i.e., a multiple of 4 bytes).

p_err is a pointer to a variable that holds an error code:

<code>OS_ERR_NONE</code>	if the memory partition is created successfully
<code>OS_ERR_MEM_CREATE_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if you called <code>OSMemCreate()</code> from an ISR.
<code>OS_ERR_MEM_INVALID_BLKS</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if the user does not specify at least two memory blocks per partition
<code>OS_ERR_MEM_INVALID_P_ADDR</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if specifying an invalid address (i.e., <code>p_addr</code> is a <code>NULL</code> pointer) or the partition is not properly aligned.
<code>OS_ERR_MEM_INVALID_SIZE</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if the user does not specify a block size that can contain at least a pointer variable, and if it is not a multiple of a pointer-size variable.
<code>OS_ERR_ILLEGAL_CREATE_RUN_TIME</code>	if <code>OS_SAFETY_CRITICAL_IEC61508</code> is defined: you called this after calling <code>OSSafetyCriticalStart()</code> and thus you are no longer allowed to create additional kernel objects.

RETURNED VALUE

None

NOTES/WARNINGS

Memory partitions must be created before they are used.

EXAMPLE

```
OS_MEM      CommMem;
CPU_INT32U *CommBuf[16][32];           /* 16 buffers of 32 words of 32 bits */

void main (void)
{
    OS_ERR err;

    OSInit(&err);                      /* Initialize µC/OS-III */
    :
    :
    OSMemCreate(&CommMem,
                "Comm Buffers",
                &CommBuf[0][0],
                16,
                32 * sizeof(CPU_INT32U),
                &err);
    /* Check "err" */
    :
    :
    OSStart(&err);                    /* Start Multitasking */
}
```

A-26 OSMemGet()

```
void *OSMemGet (OS_MEM *p_mem,
                OS_ERR *p_err)
```

File	Called from	Code enabled by
os_mem.c	Task or ISR	OS_CFG_MEM_EN

`OSMemGet()` obtains a memory block from a memory partition. It is assumed that the application knows the size of each memory block obtained. Also, the application must return the memory block [using `OSMemPut()`] to the same memory partition when it no longer requires it. `OSMemGet()` may be called more than once until all memory blocks are allocated.

ARGUMENTS

`p_mem` is a pointer to the desired memory partition control block.

`p_err` is a pointer to a variable that holds an error code:

<code>OS_ERR_NONE</code>	if a memory block is available and returned to the application.
<code>OS_ERR_MEM_INVALID_P_MEM</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_mem</code> is a <code>NULL</code> pointer.
<code>OS_ERR_MEM_NO_FREE_BLKS</code>	if the memory partition does not contain additional memory blocks to allocate.

RETURNED VALUE

`OSMemGet()` returns a pointer to the allocated memory block if one is available. If a memory block is not available from the memory partition, `OSMemGet()` returns a `NULL` pointer. It is up to the application to “cast” the pointer to the proper data type since `OSMemGet()` returns a `void *`.

NOTES/WARNINGS

- Memory partitions must be created before they are used.
- This is a non-blocking call and this function can be called from an ISR.

EXAMPLE

```
OS_MEM CommMem;

void Task (void *p_arg)
{
    OS_ERR      err;
    CPU_INT32U *p_msg;

    (void)&p_arg;
    while (DEF_ON) {
        p_msg = (CPU_INT32U *)OSMemGet(&CommMem,
                                         &err);
        /* Check "err" */
        :
        :
    }
}
```

A-27 OSMemPut()

```
void OSMemPut (OS_MEM *p_mem,
               void     *p_blk,
               OS_ERR   *p_err)
```

File	Called from	Code enabled by
os_mem.c	Task or ISR	OS_CFG_MEM_EN

`OSMemPut()` returns a memory block back to a memory partition. It is assumed that the user will return the memory block to the same memory partition from which it was allocated.

ARGUMENTS

`p_mem` is a pointer to the memory partition control block.

`p_blk` is a pointer to the memory block to be returned to the memory partition.

`p_err` is a pointer to a variable that holds an error code:

`OS_ERR_NONE` if a memory block is available and returned to the application.

`OS_ERR_MEM_INVALID_P_BLK` if `OS_CFG_ARG_CHK_EN` is set to 1 in `os_cfg.h`: if the user passed a `NULL` pointer for the memory block being returned to the memory partition.

`OS_ERR_MEM_INVALID_P_MEM` if `OS_CFG_ARG_CHK_EN` is set to 1 in `os_cfg.h`: if `p_mem` is a `NULL` pointer.

`OS_ERR_MEM_MEM_FULL` if returning a memory block to an already full memory partition. This would indicate that the user freed more blocks than were allocated and potentially did not return some of the memory blocks to the proper memory partition.

RETURNED VALUE

None

NOTES/WARNINGS

- Memory partitions must be created before they are used.
- You must return a memory block to the proper memory partition.
- You can call this function from an ISR or a task.

EXAMPLE

```
OS_MEM      CommMem;
CPU_INT32U *CommMsg;

void Task (void *p_arg)
{
    OS_ERR err;

    (void)&p_arg;
    while (DEF_ON) {
        OSMemPut(&CommMem,
                  (void *)CommMsg,
                  &err);
        /* Check "err" */
        :
        :
    }
}
```

A-28 OSMutexCreate()

```
void OSMutexCreate (OS_MUTEX      *p_mutex,
                    CPU_CHAR       *p_name,
                    OS_ERR         *p_err)
```

File	Called from	Code enabled by
os_mutex.c	Task or startup code	OS_CFG_MUTEX_EN

`OSMutexCreate()` is used to create and initialize a mutex. A mutex is used to gain exclusive access to a resource.

ARGUMENTS

`p_mutex` is a pointer to a mutex control block that must be allocated in the application. The user will need to declare a “global” variable as follows, and pass a pointer to this variable to `OSMutexCreate()`:

```
OS_MUTEX MyMutex;
```

`p_name` is a pointer to an ASCII string used to assign a name to the mutual exclusion semaphore. The name may be displayed by debuggers or µC/Probe.

`p_err` is a pointer to a variable that is used to hold an error code:

<code>OS_ERR_NONE</code>	if the call is successful and the mutex has been created.
--------------------------	---

<code>OS_ERR_CREATE_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if attempting to create a mutex from an ISR.
--------------------------------	--

<code>OS_ERR_OBJ_PTR_NULL</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_mutex</code> is a NULL pointer.
----------------------------------	---

<code>OS_ERR_ILLEGAL_CREATE_RUN_TIME</code>	if <code>OS_SAFETY_CRITICAL_IEC61508</code> is defined: you called this after calling <code>OSSafetyCriticalStart()</code> and thus you are no longer allowed to create additional kernel objects.
---	--

RETURNED VALUE

None

NOTES/WARNINGS

Mutexes must be created before they are used.

EXAMPLE

```
OS_MUTEX  DispMutex;

void main (void)
{
    OS_ERR  err;

    :
    OSInit(&err);                      /* Initialize μC/OS-III          */
    :
    :
    OSMutexCreate(&DispMutex,           /* Create Display Mutex          */
                  "Display Mutex",
                  &err);
    /* Check "err" */

    :
    :
    OSStart(&err);                    /* Start Multitasking           */
}
```

A-29 OSMutexDel()

```
void OSMutexDel (OS_MUTEX *p_mutex,
                 OS_OPT     opt,
                 OS_ERR     *p_err)
```

File	Called from	Code enabled by
os_mutex.c	Task only	OS_CFG_MUTEX_EN and OS_CFG_MUTEX_DEL_EN

`OSMutexDel()` is used to delete a mutex. This function should be used with care because multiple tasks may rely on the presence of the mutex. Generally speaking, before deleting a mutex, first delete all the tasks that access the mutex. However, as a general rule, do not delete kernel objects at run-time.

ARGUMENTS

`p_mutex` is a pointer to the mutex to delete.

`opt` specifies whether to delete the mutex only if there are no pending tasks (`OS_OPT_DEL_NO_PEND`), or whether to always delete the mutex regardless of whether tasks are pending or not (`OS_OPT_DEL_ALWAYS`). In this case, all pending tasks are readied.

`p_err` is a pointer to a variable that is used to hold an error code:

<code>OS_ERR_NONE</code>	if the call is successful and the mutex has been deleted.
<code>OS_ERR_DEL_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if attempting to delete a mutex from an ISR.
<code>OS_ERR_OBJ_PTR_NULL</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_mutex</code> is a <code>NULL</code> pointer.
<code>OS_ERR_OBJ_TYPE</code>	if <code>OS_CFG_OBJ_TYPE_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_mutex</code> is not pointing to a mutex.
<code>OS_ERR_OPT_INVALID</code>	if the user does not specify one of the two options mentioned in the <code>opt</code> argument.

OS_ERR_TASK_WAITING

if one or more task are waiting on the mutex
and **OS_OPT_DEL_NO_PEND** is specified.

RETURNED VALUE

The number of tasks that were waiting for the mutex and 0 if an error occurred.

NOTES/WARNINGS

Use this call with care as other tasks may expect the presence of the mutex.

EXAMPLE

```
OS_MUTEX DispMutex;

void Task (void *p_arg)
{
    OS_ERR err;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        OSMutexDel(&DispMutex,
                    OS_OPT_DEL_ALWAYS,
                    &err);
        /* Check "err" */
        :
        :
    }
}
```

A-30 OSMutexPend()

```
void OSMutexPend (OS_MUTEX *p_mutex,
                  OS_TICK   timeout,
                  OS_OPT    opt,
                  CPU_TS   *p_ts,
                  OS_ERR   *p_err)
```

File	Called from	Code enabled by
os_mutex.c	Task only	OS_CFG_MUTEX_EN

`OSMutexPend()` is used when a task requires exclusive access to a resource. If a task calls `OSMutexPend()` and the mutex is available, `OSMutexPend()` gives the mutex to the caller and returns to its caller. Note that nothing is actually given to the caller except that if `p_err` is set to `OS_ERR_NONE`, the caller can assume that it owns the mutex.

However, if the mutex is already owned by another task, `OSMutexPend()` places the calling task in the wait list for the mutex. The task waits until the task that owns the mutex releases the mutex and therefore the resource, or until the specified timeout expires. If the mutex is signaled before the timeout expires, μC/OS-III resumes the highest-priority task that is waiting for the mutex.

Note that if the mutex is owned by a lower-priority task, `OSMutexPend()` raises the priority of the task that owns the mutex to the same priority as the task requesting the mutex. The priority of the owner will be returned to its original priority when the owner releases the mutex (see `OSMutexPost()`).

`OSMutexPend()` allows nesting. The same task can call `OSMutexPend()` multiple times. However, the same task must then call `OSMutexPost()` an equivalent number of times to release the mutex.

ARGUMENTS

p_mutex is a pointer to the mutex.

timeout specifies a timeout value (in clock ticks) and is used to allow the task to resume execution if the mutex is not signaled (i.e., posted to) within the specified timeout. A timeout value of 0 indicates that the task wants to wait forever for the mutex. The timeout value is not synchronized with the clock tick. The timeout count is decremented on the next clock tick, which could potentially occur immediately.

opt determines whether the user wants to block if the mutex is not available or not. This argument must be set to either:

`OS_OPT_PEND_BLOCKING`, or

`OS_OPT_PEND_NON_BLOCKING`

Note that the timeout argument should be set to 0 when specifying `OS_OPT_PEND_NON_BLOCKING` since the timeout value is irrelevant using this option.

p_ts is a pointer to a timestamp indicating when the mutex was posted, the pend was aborted, or the mutex was deleted. If passing a `NULL` pointer (i.e., `(CPU_TS *)0`), the caller will not receive the timestamp. In other words, passing a `NULL` pointer is valid and indicates that the timestamp is not required.

A timestamp is useful when it is important for a task to know when the mutex was posted, or how long it took for the task to resume after the mutex was posted. In the latter case, the user must call `OS_TS_GET()` and compute the difference between the current value of the timestamp and `*p_ts`. In other words:

```
delta = OS_TS_GET() - *p_ts;
```

`p_err` is a pointer to a variable that is used to hold an error code:

<code>OS_ERR_NONE</code>	if the call is successful and the mutex is available.
<code>OS_ERR_MUTEX_NESTING</code>	if the calling task already owns the mutex and it has not posted all nested values.
<code>OS_ERR_MUTEX_OWNER</code>	if the calling task already owns the mutex.
<code>OS_ERR_OBJ_PTR_NULL</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_mutex</code> is a <code>NULL</code> pointer.
<code>OS_ERR_OBJ_TYPE</code>	if <code>OS_CFG_OBJ_TYPE_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if the user did not pass a pointer to a mutex.
<code>OS_ERR_OPT_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if a valid option is not specified.
<code>OS_ERR_PEND_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if attempting to acquire the mutex from an ISR.
<code>OS_ERR_SCHED_LOCKED</code>	if calling this function when the scheduler is locked
<code>OS_ERR_TIMEOUT</code>	if the mutex is not available within the specified timeout.

RETURNED VALUE

None

NOTES/WARNINGS

- Mutexes must be created before they are used.
- Do not suspend the task that owns the mutex. Also, do not have the mutex owner wait on any other μC/OS-III objects (i.e., semaphore, event flag, or queue), and delay the task that owns the mutex. The code should release the resource as quickly as possible.

EXAMPLE

```
OS_MUTEX  DispMutex;

void  DispTask (void *p_arg)
{
    OS_ERR  err;
    CPU_TS  ts;

    (void)&p_arg;
    while (DEF_ON) {
        :
        OSMutexPend(&DispMutex,
                     0,
                     OS_OPT_PEND_BLOCKING,
                     &ts,
                     &err);
        /* Check "err" */
    }
}
```

A-31 OSMutexPendAbort()

```
void OSMutexPendAbort (OS_MUTEX *p_mutex,
                      OS_OPT      opt,
                      OS_ERR      *p_err)
```

File	Called from	Code enabled by
os_mutex.c	Task only	OS_CFG_MUTEX_EN and OS_CFG_MUTEX_PEND_ABORT_EN

OSMutexPendAbort() aborts and readies any tasks currently waiting on a mutex. This function should be used to fault-abort the wait on the mutex rather than to normally signal the mutex via **OSMutexPost()**.

ARGUMENTS

p_mutex is a pointer to the mutex.

opt specifies whether to abort only the highest-priority task waiting on the mutex or all tasks waiting on the mutex:

OS_OPT_PEND_ABORT_1

to abort only the highest-priority task waiting on the mutex.

OS_OPT_PEND_ABORT_ALL

to abort all tasks waiting on the mutex.

OS_OPT_POST_NO_SCHED

specifies that the scheduler should not be called even if the pend of a higher-priority task has been aborted. Scheduling will need to occur from another function.

The user would select this option if the task calling **OSMutexPendAbort()** will be doing additional pend aborts, rescheduling should not take place until all tasks are completed, and multiple pend aborts should take place simultaneously.

`p_err` is a pointer to a variable that is used to hold an error code:

<code>OS_ERR_NONE</code>	if at least one task was aborted. Check the return value for the number of tasks aborted.
<code>OS_ERR_OBJ_PTR_NULL</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_mutex</code> is a <code>NULL</code> pointer.
<code>OS_ERR_OBJ_TYPE</code>	if <code>OS_CFG_OBJ_TYPE_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if the caller does not pass a pointer to a mutex.
<code>OS_ERR_OPT_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if the caller specified an invalid option.
<code>OS_ERR_PEND_ABORT_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if attempting to call this function from an ISR
<code>OS_ERR_PEND_ABORT_NONE</code>	if no tasks were aborted.

RETURNED VALUE

`OSMutexPendAbort()` returns the number of tasks made ready-to-run by this function. Zero indicates that no tasks were pending on the mutex and therefore this function had no effect.

NOTES/WARNINGS

Mutexes must be created before they are used.

EXAMPLE

```
OS_MUTEX  DispMutex;

void  DispTask (void *p_arg)
{
    OS_ERR      err;
    OS_OBJ_QTY  qty;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        qty = OSMutexPendAbort(&DispMutex,
                               OS_OPT_PEND_ABORT_ALL,
                               &err);
        /* Check "err" */
    }
}
```

A-32 OSMutexPost()

```
void OSMutexPost (OS_MUTEX *p_mutex,
                  OS_OPT     opt,
                  OS_ERR     *p_err);
```

File	Called from	Code enabled by
os_mutex.c	Task only	OS_CFG_MUTEX_EN

A mutex is signaled (i.e., released) by calling `OSMutexPost()`. You should call this function only if you acquired the mutex by first calling `OSMutexPend()`. If the priority of the task that owns the mutex has been raised when a higher priority task attempted to acquire the mutex, at that point, the original task priority of the task is restored. If one or more tasks are waiting for the mutex, the mutex is given to the highest-priority task waiting on the mutex. The scheduler is then called to determine if the awakened task is now the highest-priority task ready-to-run, and if so, a context switch is performed to run the readied task. If no task is waiting for the mutex, the mutex value is simply set to available.

ARGUMENTS

`p_mutex` is a pointer to the mutex.

`opt` determines the type of POST performed.

<code>OS_OPT_POST_NONE</code>	No special option selected.
<code>OS_OPT_POST_NO_SCHED</code>	Do not call the scheduler after the post, therefore the caller is resumed even if the mutex was posted and tasks of higher priority are waiting for the mutex.
	Use this option if the task calling <code>OSMutexPost()</code> will be doing additional posts, if the user does not want to reschedule until all is complete, and multiple posts should take effect simultaneously.

`p_err` is a pointer to a variable that is used to hold an error code:

`OS_ERR_NONE`

if the call is successful and the mutex is available.

`OS_ERR_MUTEX_NESTING`

if the owner of the mutex has the mutex nested and it has not fully un-nested.

`OS_ERR_MUTEX_NOT_OWNER`

if the caller is not the owner of the mutex and therefore is not allowed to release it.

`OS_ERR_OBJ_PTR_NULL`

if `OS_CFG_ARG_CHK_EN` is set to 1 in `os_cfg.h`: if `p_mutex` is a NULL pointer.

`OS_ERR_OBJ_TYPE`

if `OS_CFG_OBJ_TYPE_CHK_EN` is set to 1 in `os_cfg.h`: if not passing a pointer to a mutex.

`OS_ERR_POST_ISR`

if `OS_CFG_CALLED_FROM_ISR_CHK_EN` set to 1 in `os_cfg.h`: if attempting to post the mutex from an ISR.

RETURNED VALUE

None

NOTES/WARNINGS

- Mutexes must be created before they are used.
- Do not call this function from an ISR.

EXAMPLE

```
OS_MUTEX  DispMutex;

void  TaskX (void *p_arg)
{
    OS_ERR  err;

    (void)&p_arg;
    while (DEF_ON) {
        :
        OSMutexPost(&DispMutex,
                     OS_OPT_POST_NONE,
                     &err);
        /* Check "err" */
        :
    }
}
```

A-33 OSPendMulti()

```
OS_OBJ_QTY  OSPendMulti(OS_PEND_DATA *p_pend_data_tbl,
                         OS_OBJ_QTY    tbl_size,
                         OS_TICK       timeout,
                         OS_OPT        opt,
                         OS_ERR        *p_err);
```

File	Called from	Code enabled by
os_pend_multi.c	Task only	OS_CFG_PEND_MULTI_EN && (OS_CFG_Q_EN OS_CFG_SEM_EN)

`OSPendMulti()` is used when a task expects to wait on multiple kernel objects, specifically semaphores or message queues. If more than one such object is ready when `OSPendMulti()` is called, then all available objects and messages, if any, are returned as ready to the caller. If no objects are ready, `OSPendMulti()` suspends the current task until either:

- an object becomes ready,
- a timeout occurs,
- one or more of the tasks are deleted or pend aborted or,
- one or more of the objects are deleted.

If an object becomes ready, and multiple tasks are waiting for the object, μC/OS-III resumes the highest-priority task waiting on that object.

A pended task suspended with `OSTaskSuspend()` can still receive a message from a multi-pended message queue, or obtain a signal from a multi-pended semaphore. However, the task remains suspended until it is resumed by calling `OSTaskResume()`.

ARGUMENTS

`p_pend_data_tbl` is a pointer to an `OS_PEND_DATA` table. This table will be used by the caller to understand the outcome of this call. Also, the caller *must* initialize the `.PendObjPtr` field of the `OS_PEND_DATA` field for each object that the caller wants to pend on (see example below).

tbl_size is the number of entries in the **OS_PEND_DATA** table pointed to by **p_pend_data_tbl**. This value indicates how many objects the task will be pending on.

timeout specifies the amount of time (in clock ticks) that the calling task is willing to wait for objects to be posted. A timeout value of 0 indicates that the task wants to wait forever for any of the multi-pended objects. The timeout value is not synchronized with the clock tick. The timeout count begins decrementing on the next clock tick, which could potentially occur immediately.

opt specifies options:

OS_OPT_PEND_BLOCKING if the caller desired to wait until any of the objects is posted to, a timeout, the pend is aborted or an object is deleted.

OS_OPT_PEND_NON_BLOCKING if the caller is not willing to wait if none of the objects have not already been posted.

p_err is a pointer to a variable that holds an error code:

OS_ERR_NONE if any of the multi-pended objects are ready.
OS_ERR_OBJ_TYPE if **OS_CFG_OBJ_TYPE_CHK_EN** is set to 1 in **os_cfg.h**: if any of the **.PendObjPtr** in the **p_pend_data_tbl** is a **NULL** pointer (i.e. is not a semaphore or not a message queue).

OS_ERR_OPT_INVALID if **OS_CFG_ARG_CHK_EN** is set to 1 in **os_cfg.h**: if specifying an invalid option.

OS_ERR_PEND_ABORT indicates that a multi-pended object was aborted; check the **.RdyObjPtr** of the **p_pend_data_tbl** to know which object was aborted. The first non-**NULL** **.RdyObjPtr** is the object that was aborted.

OS_ERR_PEND_DEL indicates that a multi-pended object was deleted; check the **.RdyObjPtr** of the **p_pend_data_tbl** to know which object was deleted. The first non-**NULL** **.RdyObjPtr** is the object that was deleted.

<code>OS_ERR_PEND_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if calling this function from an ISR.
<code>OS_ERR_PEND_LOCKED</code>	if calling this function when the scheduler is locked.
<code>OS_ERR_PEND_WOULD_BLOCK</code>	if the caller does not want to block and no object is ready and <code>opt</code> was <code>OS_OPT_PEND_NON_BLOCKING</code> .
<code>OS_ERR_PTR_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_pend_data_tbl</code> is a <code>NULL</code> pointer.
<code>OS_ERR_TIMEOUT</code>	if no multi-pended object is ready within the specified timeout.

RETURNED VALUE

`OSPendingMulti()` returns the number of multi-pended objects that are ready. If an object is pending aborted or deleted, the return value will be 1. You should examine the value of `*p_err` to know the exact outcome of this call. If no multi-pended object is ready within the specified timeout period, or because of any error, the `.RdyObjPtr` in the `p_pend_data_tbl` array will all be `NULL`.

When objects are posted, the `OS_PEND_DATA` fields of `p_pend_data_tbl` contains additional information about the posted objects:

- `RdyObjPtr` Contains a pointer to the object ready or posted to, or `NULL` pointer if the object was not ready or posted to.
- `RdyMsgPtr` If the object pended on was a message queue and the queue was posted to, this field contains the message.
- `RdyMsgSize` If the object pended on was a message queue and the queue was posted to, this field contains the size of the message (in number of bytes).

.RdyTS	If the object pended on was posted to, this field contains the timestamp as to when the object was posted. Note that if the object is deleted or pend-aborted, this field contains the timestamp of when this occurred.
--------	---

NOTES/WARNINGS

- Message queue or semaphore objects must be created before they are used.
- You cannot call `OSPendMulti()` from an ISR.
- The user cannot multi-pend on event flags and mutexes.

EXAMPLE

```
OS_SEM  Sem1;
OS_SEM  Sem2;
OS_Q    Q1;
OS_Q    Q2;

void Task(void *p_arg)
{
    OS_PEND_DATA  pend_data_tbl[4];
    OS_ERR        err;
    OS_OBJ_QTY   nbr_rdy;

    (void)&p_arg;
    while (DEF_ON) {
        :
        pend_data_tbl[0].PendObjPtr = (OS_PEND_OBJ *)Sem1;
        pend_data_tbl[1].PendObjPtr = (OS_PEND_OBJ *)Sem2;
        pend_data_tbl[2].PendObjPtr = (OS_PEND_OBJ *)Q1;
        pend_data_tbl[3].PendObjPtr = (OS_PEND_OBJ *)Q2;
        nbr_rdy = OSPendMulti(&pend_data_tbl[0],
                             4,
                             0,
                             OS_OPT_PEND_BLOCKING,
                             &err);
        /* Check "err" */
        :
        :
    }
}
```

A-34 OSQCreate()

```
void OSQCreate (OS_Q      *p_q,
                CPU_CHAR   *p_name,
                OS_MSG_QTY max_qty,
                OS_ERR     *p_err)
```

File	Called from	Code enabled by
os_q.c	Task or startup code	OS_CFG_Q_EN and OS_CFG_MSG_EN

`OSQCreate()` creates a message queue. A message queue allows tasks or ISRs to send pointer-sized variables (messages) to one or more tasks. The meaning of the messages sent are application specific.

ARGUMENTS

`p_q` is a pointer to the message queue control block. It is assumed that storage for the message queue will be allocated in the application. The user will need to declare a “global” variable as follows, and pass a pointer to this variable to `OSQCreate()`:

```
OS_Q MyMsgQ;
```

`p_name` is a pointer to an ASCII string used to name the message queue. The name can be displayed by debuggers or µC/Probe.

`msg_qty` indicates the maximum size of the message queue (must be non-zero). If the user intends to not limit the size of the queue, simply pass a very large number. Of course, if there are not enough `OS_MSGs` in the pool of `OS_MSGs`, the post call (i.e., `OSQPost()`) will simply fail and an error code will indicate that there are no more `OS_MSGs` to use.

`p_err` is a pointer to a variable that is used to hold an error code:

<code>OS_ERR_NONE</code>	if the call is successful and the mutex has been created.
<code>OS_ERR_CREATE_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if attempting to create the message queue from an ISR.
<code>OS_ERR_OBJ_PTR_NULL</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_q</code> is a <code>NULL</code> pointer.
<code>OS_ERR_Q_SIZE</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if the size specified is 0.
<code>OS_ERR_ILLEGAL_CREATE_RUN_TIME</code>	if <code>OS_SAFETY_CRITICAL_IEC61508</code> is defined: you called this after calling <code>OSSafetyCriticalStart()</code> and thus you are no longer allowed to create additional kernel objects.

RETURNED VALUE

None

NOTES/WARNINGS

Queues must be created before they are used.

EXAMPLE

```
OS_Q CommQ;

void main (void)
{
    OS_ERR err;

    OSInit(&err);                                /* Initialize µC/OS-III */
    :
    :
    OSQCreate(&CommQ,
              "Comm Queue",
              10,
              &err);                                /* Create COMM Q */
    /* Check "err" */
    :
    :
    OSStart();                                    /* Start Multitasking */
}
```

A-35 OSQDel()

```
OS_OBJ_QTY OSQDel (OS_Q      *p_q,
                    OS_OPT     opt,
                    OS_ERR    *p_err)
```

File	Called from	Code enabled by
os_q.c	Task only	OS_CFG_Q_EN and OS_CFG_Q_DEL_EN

OSQDel() is used to delete a message queue. This function should be used with care since multiple tasks may rely on the presence of the message queue. Generally speaking, before deleting a message queue, first delete all the tasks that can access the message queue. However, it is highly recommended that you do not delete kernel objects at run time.

ARGUMENTS

p_q is a pointer to the message queue to delete.

opt specifies whether to delete the queue only if there are no pending tasks (OS_OPT_DEL_NO_PEND), or always delete the queue regardless of whether tasks are pending or not (OS_OPT_DEL_ALWAYS). In this case, all pending task are readied.

p_err is a pointer to a variable that is used to hold an error code. The error code can be one of the following:

OS_ERR_NONE if the call is successful and the message queue has been deleted.

OS_ERR_DEL_ISR if OS_CFG_CALLED_FROM_ISR_CHK_EN set to 1 in os_cfg.h: if the user attempts to delete the message queue from an ISR.

OS_ERR_OBJ_PTR_NULL if OS_CFG_ARG_CHK_EN is set to 1 in os_cfg.h: if passing a NULL pointer for p_q.

OS_ERR_OBJ_TYPE if OS_CFG_OBJ_TYPE_CHK_EN is set to 1 in os_cfg.h: if p_q is not pointing to a queue.

OS_ERR_OPT_INVALID if not specifying one of the two options mentioned in the opt argument.

OS_ERR_TASK_WAITING

if one or more tasks are waiting for messages at the message queue and it is specified to only delete if no task is pending.

RETURNED VALUE

The number of tasks that were waiting on the message queue and **0** if an error is detected.

NOTES/WARNINGS

- Message queues must be created before they can be used.
- This function must be used with care. Tasks that would normally expect the presence of the queue *must* check the return code of **OSQPend()**.

EXAMPLE

```
OS_Q DispQ;

void Task (void *p_arg)
{
    OS_ERR err;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        OSQDel(&DispQ,
                OS_OPT_DEL_ALWAYS,
                &err);
        /* Check "err" */
        :
        :
    }
}
```

A-36 OSQFlush()

```
OS_MSG_QTY OSQFlush (OS_Q      *p_q,
                      OS_ERR   *p_err)
```

File	Called from	Code enabled by
os_q.c	Task only	OS_CFG_Q_EN and OS_CFG_Q_FLUSH_EN

OSQFlush() empties the contents of the message queue and eliminates all messages sent to the queue. This function takes the same amount of time to execute regardless of whether tasks are waiting on the queue (and thus no messages are present), or the queue contains one or more messages. **OS_MSGs** from the queue are simply returned to the free pool of **OS_MSGs**.

ARGUMENTS

p_q is a pointer to the message queue.

p_err is a pointer to a variable that will contain an error code returned by this function.

OS_ERR_NONE	if the message queue is flushed.
OS_ERR_FLUSH_ISR	if OS_CFG_CALLED_FROM_ISR_CHK_EN set to 1 in os_cfg.h : if calling this function from an ISR
OS_ERR_OBJ_PTR_NULL	if OS_CFG_ARG_CHK_EN is set to 1 in os_cfg.h : if p_q is a NULL pointer.
OS_ERR_OBJ_TYPE	if OS_CFG_OBJ_TYPE_CHK_EN is set to 1 in os_cfg.h : if you attempt to flush an object other than a message queue.

RETURNED VALUE

The number of **OS_MSG** entries freed from the message queue. Note that the **OS_MSG** entries are returned to the free pool of **OS_MSGs**.

NOTES/WARNINGS

- Queues must be created before they are used.
- Use this function with great care. When flushing a queue, you lose the references to what the queue entries are pointing to, potentially causing 'memory leaks'. The data that the user is pointing to that is referenced by the queue entries should, most likely, be de-allocated (i.e., freed).

EXAMPLE

```
OS_Q CommQ;

void Task (void *p_arg)
{
    OS_ERR err;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        entries = OSFlush(&CommQ,
                           &err);
        /* Check "err" */
        :
        :
    }
}
```

or, to flush a queue that contains entries, instead you can use `OSQPend()` and specify the `OS_OPT_PEND_NON_BLOCKING` option.

```
OS_Q CommQ;

void Task (void *p_arg)
{
    OS_ERR      err;
    CPU_TS      ts;
    OS_MSG_SIZE msg_size;

    (void)&p_arg;
    :
    do {
        OSOpen(&CommQ,
               0,
               OS_OPT_PEND_NON_BLOCKING,
               &msg_size,
               &ts,
               &err);
    } while (err != OS_ERR_PEND_WOULD_BLOCK);
    :
    :
}
```

A-37 OSQPend()

```
void *OSQPend (OS_Q          *p_q,
               OS_TICK       timeout,
               OS_OPT        opt,
               OS_MSG_SIZE   *p_msg_size,
               CPU_TS        *p_ts,
               OS_ERR        *p_err)
```

File	Called from	Code enabled by
os_q.c	Task only	OS_CFG_Q_EN and OS_CFG_MSG_EN

OSQPend() is used when a task wants to receive messages from a message queue. The messages are sent to the task via the message queue either by an ISR, or by another task using the **OSQPost()** call. The messages received are pointer-sized variables, and their use is application specific. If at least one message is already present in the message queue when **OSQPend()** is called, the message is retrieved and returned to the caller.

If no message is present in the message queue and **OS_OPT_PEND_BLOCKING** is specified for the **opt** argument, **OSQPend()** suspends the current task until either a message is received, or a user-specified timeout expires. If a message is sent to the message queue and multiple tasks are waiting for such a message, μC/OS-III resumes the highest priority task that is waiting.

A pended task suspended with **OSTaskSuspend()** can receive a message. However, the task remains suspended until it is resumed by calling **OSTaskResume()**.

If no message is present in the queue and **OS_OPT_PEND_NON_BLOCKING** is specified for the **opt** argument, **OSQPend()** returns to the caller with an appropriate error code, and returns a **NULL** pointer.

ARGUMENTS

- p_q** is a pointer to the queue from which the messages are received.
- timeout** allows the task to resume execution if a message is not received from the message queue within the specified number of clock ticks. A **timeout** value of 0 indicates that the task is willing to wait forever for a message. The timeout value is not synchronized with the clock tick. The timeout count starts decrementing on the next clock tick, which could potentially occur immediately.
- opt** determines whether or not to block if a message is not available in the queue. This argument must be set to either:
- OS_OPT_PEND_BLOCKING**, or
 - OS_OPT_PEND_NON_BLOCKING**
- Note that the **timeout** argument should be set to 0 when specifying **OS_OPT_PEND_NON_BLOCKING**, since the timeout value is irrelevant using this option.
- p_msg_size** is a pointer to a variable that will receive the size of the message (in number of bytes).
- p_ts** is a pointer to a variable that will receive the timestamp of when the message was received. Passing a **NULL** pointer is valid, and indicates that the user does not need the timestamp.
- A timestamp is useful when the user wants the task to know when the message queue was posted, or how long it took for the task to resume after the message queue was posted. In the latter case, you would call **OS_TS_GET()** and compute the difference between the current value of the timestamp and ***p_ts**. In other words:

```
delta = OS_TS_GET() - *p_ts;
```

`p_err` is a pointer to a variable used to hold an error code.

<code>OS_ERR_NONE</code>	if a message is received.
<code>OS_ERR_OBJ_PTR_NULL</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_q</code> is a <code>NULL</code> pointer.
<code>OS_ERR_OBJ_TYPE</code>	if <code>OS_CFG_OBJ_TYPE_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_q</code> is not pointing to a message queue.
<code>OS_ERR_OPT_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if you specified invalid options.
<code>OS_ERR_PEND_ABORT</code>	if the pend was aborted because another task called <code>OSQPendAbort()</code> .
<code>OS_ERR_PEND_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if the function is called from an ISR.
<code>OS_ERR_PEND_WOULD_BLOCK</code>	if this function is called with the <code>opt</code> argument set to <code>OS_OPT_PEND_NON_BLOCKING</code> , and no message is in the queue.
<code>OS_ERR_PTR_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_msg_size</code> is a <code>NULL</code> pointer.
<code>OS_ERR_SCHED_LOCKED</code>	if calling this function when the scheduler is locked.
<code>OS_ERR_TIMEOUT</code>	if a message is not received within the specified timeout.

RETURNED VALUE

The message (i.e., a pointer) or a `NULL` pointer if no messages has been received. Note that it is possible for the actual message to be a `NULL` pointer, so you should check the returned error code instead of relying on the returned value.

NOTES/WARNINGS

- Queues must be created before they are used.
- The user cannot call `OSQPend()` from an ISR.

EXAMPLE

```
OS_Q CommQ;

void CommTask (void *p_arg)
{
    OS_ERR      err;
    void       *p_msg;
    OS_MSG_SIZE msg_size;
    CPU_TS      ts;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        p_msg = OSOpen(CommQ,
                      100,
                      OS_OPT_PEND_BLOCKING,
                      &msg_size,
                      &ts,
                      &err);
        /* Check "err" */
        :
        :
    }
}
```

A-38 OSQPendAbort()

```
OS_OBJ_QTY OSQPendAbort (OS_Q      *p_q,
                         OS_OPT     opt,
                         OS_ERR    *p_err)
```

File	Called from	Code enabled by
os_q.c	Task only	OS_CFG_Q_EN and OS_CFG_Q_PEND_ABORT_EN

OSQPendAbort() aborts and readies any tasks currently waiting on a message queue. This function should be used to fault-abort the wait on the message queue, rather than to signal the message queue via **OSQPost()**.

ARGUMENTS

p_q is a pointer to the queue for which pend(s) need to be aborted.

opt determines the type of abort to be performed.

OS_OPT_PEND_ABORT_1	Aborts the pend of only the highest-priority task waiting on the message queue.
OS_OPT_PEND_ABORT_ALL	Aborts the pend of all tasks waiting on the message queue.
OS_OPT_POST_NO_SCHED	specifies that the scheduler should not be called, even if the pend of a higher-priority task has been aborted. Scheduling will need to occur from another function. You would use this option if the task calling OSQPendAbort() is doing additional pend aborts, rescheduling is not performed until completion, and multiple pend aborts are to take effect simultaneously.

`p_err` is a pointer to a variable that holds an error code:

`OS_ERR_NONE`

at least one task waiting on the message queue was readied and informed of the aborted wait. Check the return value for the number of tasks whose wait on the message queue was aborted.

`OS_ERR_PEND_ABORT_ISR`

if `OS_CFG_CALLED_FROM_ISR_CHK_EN` set to 1 in `os_cfg.h`: if called from an ISR

`OS_ERR_PEND_ABORT_NONE`

if no task was pending on the message queue
if `OS_CFG_ARG_CHK_EN` is set to 1 in `os_cfg.h`: if `p_q` is a `NULL` pointer.

`OS_ERR_OBJ_PTR_NULL`

if `OS_CFG_OBJ_TYPE_CHK_EN` is set to 1 in `os_cfg.h`: if `p_q` is not pointing to a message queue.

`OS_ERR_OBJ_TYPE`

if `OS_CFG_ARG_CHK_EN` is set to 1 in `os_cfg.h`: if an invalid option is specified.

RETURNED VALUE

`OSQPendAbort()` returns the number of tasks made ready-to-run by this function. Zero indicates that no tasks were pending on the message queue, therefore this function had no effect.

NOTES/WARNINGS

Queues must be created before they are used.

EXAMPLE

```
OS_Q CommQ;

void CommTask(void *p_arg)
{
    OS_ERR     err;
    OS_OBJ_QTY nbr_tasks;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        nbr_tasks = OSQPendAbort(&CommQ,
                                OS_OPT_PEND_ABORT_ALL,
                                &err);
        /* Check "err" */
        :
        :
    }
}
```

A-39 OSQPost()

```
void OSQPost (OS_Q      *p_q,
              void      *p_void,
              OS_MSG_SIZE msg_size,
              OS_OPT     opt,
              OS_ERR     *p_err)
```

File	Called from	Code enabled by
os_q.c	Task or ISR	OS_CFG_Q_EN

`OSQPost()` sends a message to a task through a message queue. A message is a pointer-sized variable, and its use is application specific. If the message queue is full, an error code is returned to the caller. In this case, `OSQPost()` immediately returns to its caller, and the message is not placed in the message queue.

If any task is waiting for a message to be posted to the message queue, the highest-priority task receives the message. If the task waiting for the message has a higher priority than the task sending the message, the higher-priority task resumes, and the task sending the message is suspended; that is, a context switch occurs. Message queues can be first-in first-out (`OS_OPT_POST_FIFO`), or last-in-first-out (`OS_OPT_POST_LIFO`) depending of the value specified in the `opt` argument.

If any task is waiting for a message at the message queue, `OSQPost()` allows the user to either post the message to the highest-priority task waiting at the queue (`opt` set to `OS_OPT_POST_FIFO` or `OS_OPT_POST_LIFO`), or to all tasks waiting at the message queue (`opt` is set to `OS_OPT_POST_ALL`). In either case, scheduling occurs unless `opt` is also set to `OS_OPT_POST_NO_SCHED`.

ARGUMENTS

`p_q` is a pointer to the message queue being posted to.

`p_void` is the actual message posted. `p_void` is a pointer-sized variable. Its meaning is application specific.

`msg_size` specifies the size of the message (in number of bytes).

opt	determines the type of POST performed. The last two options may be added to either <code>OS_OPT_POST_FIFO</code> or <code>OS_OPT_POST_LIFO</code> to create different combinations:
<code>OS_OPT_POST_FIFO</code>	POST message to the end of the queue (FIFO), or send message to a single waiting task.
<code>OS_OPT_POST_LIFO</code>	POST message to the front of the queue (LIFO), or send message to a single waiting task
<code>OS_OPT_POST_ALL</code>	POST message to ALL tasks that are waiting on the queue. This option can be added to either <code>OS_OPT_POST_FIFO</code> or <code>OS_OPT_POST_LIFO</code> .
<code>OS_OPT_POST_NO_SCHED</code>	This option specifies to not call the scheduler after the post and therefore the caller is resumed, even if the message was posted to a message queue with tasks having a higher priority than the caller. You would use this option if the task (or ISR) calling <code>OSQPost()</code> will do additional posts, in this case, the caller does not want to reschedule until finished, and, multiple posts are to take effect simultaneously.
p_err	is a pointer to a variable that will contain an error code returned by this function.
<code>OS_ERR_NONE</code>	if no tasks were waiting on the queue. In this case, the return value is also 0.
<code>OS_ERR_MSG_POOL_EMPTY</code>	if there are no more <code>OS_MSG</code> structures to use to store the message.
<code>OS_ERR_OBJ_PTR_NULL</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_q</code> is a <code>NULL</code> pointer.
<code>OS_ERR_OBJ_TYPE</code>	if <code>OS_CFG_OBJ_TYPE_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_q</code> is not pointing to a message queue.
<code>OS_ERR_Q_MAX</code>	if the queue is full and therefore cannot accept more messages.

RETURNED VALUE

None

NOTES/WARNINGS

- Queues must be created before they are used.
- Possible combinations of options are:

```
OS_OPT_POST_FIFO  
OS_OPT_POST_LIFO  
OS_OPT_POST_FIFO + OS_OPT_POST_ALL  
OS_OPT_POST_LIFO + OS_OPT_POST_ALL  
OS_OPT_POST_FIFO + OS_OPT_POST_NO_SCHED  
OS_OPT_POST_LIFO + OS_OPT_POST_NO_SCHED  
OS_OPT_POST_FIFO + OS_OPT_POST_ALL + OS_OPT_POST_NO_SCHED  
OS_OPT_POST_LIFO + OS_OPT_POST_ALL + OS_OPT_POST_NO_SCHED
```

- Although the example below shows calling `OSQPost()` from a task, it can also be called from an ISR.

EXAMPLE

```
OS_Q          CommQ;
CPU_INT08U   CommRxBuf[100];

void CommTaskRx (void *p_arg)
{
    OS_ERR  err;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        OSPost(&CommQ,
               &CommRxBuf[0],
               sizeof(CommRxBuf),
               OS_OPT_POST_OPT_FIFO + OS_OPT_POST_ALL + OS_OPT_POST_NO_SCHED,
               &err);
        /* Check "err" */
        :
        :
    }
}
```

A-40 OSSafetyCriticalStart()

`void OSSafetyCriticalStart (void)`

File	Called from	Code enabled by
<code>os_core.c</code>	Task only	<code>OS_SAFETY_CRITICAL_IEC61508</code>

`OSSafetyCriticalStart()` allows your code to notify µC/OS-III that you are done initializing and creating kernel objects. After calling `OSSafetyCriticalStart()`, your application code will no longer be allowed to create kernel objects. In other words, once your code has called `OSSafetyCriticalStart()`, you will not be allowed to create tasks, semaphores, mutexes, message queues, event flags and timers.

ARGUMENTS

None

RETURNED VALUE

None

NOTES/WARNINGS

None

EXAMPLE

```
void AppStartTask (void *p_arg)
{
    (void)&p_arg;
    /* Create tasks and other kernel objects */  

    OSSafetyCriticalStart();
    /* Your code is no longer allowed to create any additional kernel objects */
    while (DEF_ON) {
        :
        :
    }
}
```

A-41 OSSched()

`void OSSched (void)`

File	Called from	Code enabled by
<code>os_core.c</code>	Task only	N/A

`OSSched()` allows a task to call the scheduler. You would use this function after doing a series of “posts” where you specified `OS_OPT_POST_NO_SCHED` as a post option.

`OSSched()` can only be called by task-level code. Also, if the scheduler is locked (i.e., `OSSchedLock()` was previously called), then `OSSched()` will have no effect.

If a higher-priority task than the calling task is ready-to-run, `OSSched()` will context switch to that task.

ARGUMENTS

None

RETURNED VALUE

None

NOTES/WARNINGS

None

EXAMPLE

```
void TaskX (void *p_arg)
{
    (void)&p_arg;
    while (DEF_ON) {
        :
        OS??Post(...);           /* Posts with OS_OPT_POST_NO_SCHED option */
        /* Check "err" */
        OS??Post(...);
        /* Check "err" */
        OS??Post(...);
        /* Check "err" */
        :
        OSSched();               /* Run the scheduler */
        :
    }
}
```

A-42 OSSchedLock()

`void OSSchedLock (OS_ERR *p_err)`

File	Called from	Code enabled by
<code>os_core.c</code>	Task only	N/A

`OSSchedLock()` prevents task rescheduling until its counterpart, `OSSchedUnlock()`, is called. The task that calls `OSSchedLock()` retains control of the CPU, even though other higher-priority tasks are ready-to-run. However, interrupts are still recognized and serviced (assuming interrupts are enabled). `OSSchedLock()` and `OSSchedUnlock()` must be used in pairs.

μ C/OS-III allows `OSSchedLock()` to be nested up to 250 levels deep. Scheduling is enabled when an equal number of `OSSchedUnlock()` calls have been made.

ARGUMENTS

`p_err` is a pointer to a variable that will contain an error code returned by this function.

<code>OS_ERR_NONE</code>	the scheduler is locked.
<code>OS_ERR_LOCK_NESTING_OVF</code>	if the user called this function too many times.
<code>OS_ERR_OS_NOT_RUNNING</code>	if the function is called before calling <code>OSStart()</code> .
<code>OS_ERR_SCHED_LOCK_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if you attempted to call <code>OSSchedLock()</code> from an ISR.

RETURNED VALUE

None

NOTES/WARNINGS

After calling `OSSchedLock()`, the application must not make system calls that suspend execution of the current task; that is, the application cannot call `OSTimedly()`, `OSTimedlyHMSM()`, `OSFlagPend()`, `OSSemPend()`, `OSMutexPend()`, or `OSQPend()`. Since the scheduler is locked out, no other task is allowed to run, and the system will lock up.

EXAMPLE

```
void TaskX (void *p_arg)
{
    OS_ERR err;

    (void)&p_arg;
    while (DEF_ON) {
        :
        OSSchedLock(&err);      /* Prevent other tasks to run          */
        /* Check "err" */           :
        /* Code protected from context switch */
        OSSchedUnlock(&err);    /* Enable other tasks to run          */
        /* Check "err" */           :
    }
}
```

A-43 OSSchedRoundRobinCfg()

```
void OSSchedRoundRobinCfg (CPU_BOOLEAN en,
                           OS_TICK      dflt_time_quanta,
                           OS_ERR       *p_err)
```

File	Called from	Code enabled by
os_core.c	Task or startup code	OS_CFG_SCHED_ROUND_ROBIN_EN

OSSchedRoundRobinCfg() is used to enable or disable round-robin scheduling.

ARGUMENTS

en when set to **DEF_ENABLED** enables round-robin scheduling, and when set to **DEF_DISABLED** disables it.

dflt_time_quanta is the default time quanta given to a task. This value is used when a task is created and you specify a value of 0 for the time quanta. In other words, if the user did not specify a non-zero for the task's time quanta, this is the value that will be used. If passing 0 for this argument, μC/OS-III will assume a time quanta of 1/10 the tick rate. For example, if the tick rate is 1000 Hz and 0 is passed for **dflt_time_quanta** then, μC/OS-III will set the time quanta to 10 milliseconds.

p_err is a pointer to a variable that is used to hold an error code:

OS_ERR_NONE	if the call is successful.
--------------------	----------------------------

RETURNED VALUE

None

NOTES/WARNINGS

None

EXAMPLE

```
void main (void)
{
    OS_ERR  err;

    :
    OSInit(&err);           /* Initialize μC/OS-III          */
    :
    :
    OSSchedRoundRobinCfg(DEF_ENABLED,
                          10,
                          &err);
    /* Check "err" */
    :
    :
    OSStart(&err);           /* Start Multitasking          */
}
```

A-44 OSSchedRoundRobinYield()

```
void OSSchedRoundRobinYield (OS_ERR *p_err);
```

File	Called from	Code enabled by
os_core.c	Task only	OS_CFG_SCHED_ROUND_ROBIN_EN

OSSchedRoundRobinYield() is used to voluntarily give up a task's time slot, assuming that there are other tasks running at the same priority.

ARGUMENTS

p_err is a pointer to a variable used to hold an error code:

OS_ERR_NONE	if the call was successful.
OS_ERR_ROUND_ROBIN_1	if there is only one task at the current priority level that is ready-to-run.
OS_ERR_ROUND_ROBIN_DISABLED	if round-robin scheduling has not been enabled. See OSSchedRoundRobinCfg() to enable or disable.
OS_ERR_SCHED_LOCKED	if the scheduler is locked and µC/OS-III cannot switch tasks.
OS_ERR_YIELD_ISR	if OS_CFG_CALLED_FROM_ISR_CHK_EN set to 1 in os_cfg.h: if calling this function from an ISR.

RETURNED VALUE

None

NOTES/WARNINGS

None

EXAMPLE

```
void Task (void *p_arg)
{
    OS_ERR  err;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        OSSchedRoundRobinYield(&err); /* Give up the CPU to the next task at same priority */
        /* Check "err" */
        :
        :
    }
}
```

A-45 OSSchedUnlock()

```
void OSSchedUnlock(OS_ERR *p_err);
```

File	Called from	Code enabled by
os_core.c	Task only	N/A

OSSchedUnlock() re-enables task scheduling whenever it is paired with OSSchedLock().

ARGUMENTS

`p_err` is a pointer to a variable that will contain an error code returned by this function.

<code>OS_ERR_NONE</code>	the call is successful and the scheduler is no longer locked.
<code>OS_ERR_OS_NOT_RUNNING</code>	if calling this function before calling OSStart().
<code>OS_ERR_SCHED_LOCKED</code>	if the scheduler is still locked. This would indicate that scheduler lock has not fully unnested
<code>OS_ERR_SCHED_NOT_LOCKED</code>	if the user did not call OSSchedLock().
<code>OS_ERR_SCHED_UNLOCK_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if you attempted to unlock scheduler from an ISR.

RETURNED VALUE

None

NOTES/WARNINGS

None

EXAMPLE

```
void TaskX (void *p_arg)
{
    OS_ERR  err;

    (void)&p_arg;
    while (DEF_ON) {
        :
        OSSchedLock(&err);      /* Prevent other tasks to run          */
        /* Check "err" */
        :
        OSSchedUnlock(&err);    /* Code protected from context switch */
        /* Enable other tasks to run          */
        /* Check "err" */
        :
    }
}
```

A-46 OSSemCreate()

```
void OSSemCreate (OS_SEM      *p_sem,
                  CPU_CHAR    *p_name,
                  OS_SEM_CTR   cnt,
                  OS_ERR      *p_err)
```

File	Called from	Code enabled by
os_sem.c	Task or startup code	OS_CFG_SEM_EN

`OSSemCreate()` initializes a semaphore. Semaphores are used when a task wants exclusive access to a resource, needs to synchronize its activities with an ISR or a task, or is waiting until an event occurs. You would use a semaphore to signal the occurrence of an event to one or multiple tasks, and use mutexes to guard share resources. However, technically, semaphores allow for both.

ARGUMENTS

`p_sem` is a pointer to the semaphore control block. It is assumed that storage for the semaphore will be allocated in the application. In other words, you need to declare a “global” variable as follows, and pass a pointer to this variable to `OSSemCreate()`:

```
OS_SEM MySem;
```

`p_name` is a pointer to an ASCII string used to assign a name to the semaphore. The name can be displayed by debuggers or µC/Probe.

`cnt` specifies the initial value of the semaphore.

If the semaphore is used for resource sharing, you would set the initial value of the semaphore to the number of identical resources guarded by the semaphore. If there is only one resource, the value should be set to 1 (this is called a binary semaphore). For multiple resources, set the value to the number of resources (this is called a counting semaphore).

If using a semaphore as a signaling mechanism, you should set the initial value to 0.

`p_err` is a pointer to a variable used to hold an error code:

<code>OS_ERR_NONE</code>	if the call is successful and the semaphore has been created.
<code>OS_ERR_CREATE_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if you attempted to create a semaphore from an ISR.
<code>OS_ERR_OBJ_PTR_NULL</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_sem</code> is a <code>NULL</code> pointer.
<code>OS_ERR_OBJ_TYPE</code>	if <code>OS_CFG_OBJ_TYPE_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_sem</code> has been initialized to a different object type.
<code>OS_ERR_ILLEGAL_CREATE_RUN_TIME</code>	if <code>OS_SAFETY_CRITICAL_IEC61508</code> is defined: you called this after calling <code>OSSafetyCriticalStart()</code> and thus you are no longer allowed to create additional kernel objects.

RETURNED VALUE

None

NOTES/WARNINGS

Semaphores must be created before they are used.

EXAMPLE

```
OS_SEM  SwSem;

void main (void)
{
    OS_ERR  err;

    :
    OSInit(&err);           /* Initialize μC/OS-III          */
    :
    :
    OSSemCreate(&SwSem,        /* Create Switch Semaphore      */
                "Switch Semaphore",
                0,
                &err);
    /* Check "err" */
    :
    :
    OSStart(&err);          /* Start Multitasking          */
}

}
```

A-47 OSSemDel()

```
void OSSemDel (OS_SEM *p_sem,
               OS_OPT opt,
               OS_ERR *p_err)
```

File	Called from	Code enabled by
os_sem.c	Task only	OS_CFG_SEM_EN and OS_CFG_SEM_DEL_EN

`OSSemDel()` is used to delete a semaphore. This function should be used with care as multiple tasks may rely on the presence of the semaphore. Generally speaking, before deleting a semaphore, first delete all the tasks that access the semaphore. As a rule, it is highly recommended to not delete kernel objects at run time.

Deleting the semaphore will not de-allocate the object. In other words, storage for the variable will still remain at the same location unless the semaphore is allocated dynamically from the heap. The dynamic allocation of objects has its own set of problems. Specifically, it is not recommended for embedded systems to allocate (and de-allocate) objects from the heap given the high likelihood of fragmentation.

ARGUMENTS

`p_sem` is a pointer to the semaphore.

`opt` specifies one of two options: `OS_OPT_DEL_NO_PEND` or `OS_OPT_DEL_ALWAYS`.

`OS_OPT_DEL_NO_PEND` specifies to delete the semaphore only if no task is waiting on the semaphore. Because no task is “currently” waiting on the semaphore does not mean that a task will not attempt to wait for the semaphore later. How would such a task handle the situation waiting for a semaphore that was deleted? The application code will have to deal with this eventuality.

`OS_OPT_DEL_ALWAYS` specifies deleting the semaphore, regardless of whether tasks are waiting on the semaphore or not. If there are tasks waiting on the semaphore, these tasks will be made ready-to-run and informed (through an appropriate error code) that the reason the task is readied is that the

semaphore it was waiting on was deleted. The same reasoning applies with the other option, how will the tasks handle the fact that the semaphore they want to wait for is no longer available?

`p_err` is a pointer to a variable used to hold an error code. The error code may be one of the following:

<code>OS_ERR_NONE</code>	if the call is successful and the semaphore has been deleted.
<code>OS_ERR_DEL_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if attempting to delete the semaphore from an ISR.
<code>OS_ERR_OBJ_PTR_NULL</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_sem</code> is a NULL pointer.
<code>OS_ERR_OBJ_TYPE</code>	if <code>OS_CFG_OBJ_TYPE_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_sem</code> is not pointing to a semaphore.
<code>OS_ERR_OPT_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if one of the two options mentioned in the <code>opt</code> argument is not specified.
<code>OS_ERR_TASK_WAITING</code>	if one or more tasks are waiting on the semaphore.

RETURNED VALUE

None

NOTES/WARNINGS

Use this call with care because other tasks might expect the presence of the semaphore.

EXAMPLE

```
OS_SEM  SwSem;

void Task (void *p_arg)
{
    OS_ERR  err;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        OSSemDel(&SwSem,
                  OS_OPT_DEL_ALWAYS,
                  &err);
        /* Check "err" */
        :
        :
    }
}
```

A-48 OSSemPend()

```
OS_SEM_CTR OSSemPend (OS_SEM      *p_sem,
                      OS_TICK     timeout,
                      OS_OPT      opt,
                      CPU_TS      *p_ts,
                      OS_ERR      *p_err)
```

File	Called from	Code enabled by
os_sem.c	Task only	OS_CFG_SEM_EN

`OSSemPend()` is used when a task wants exclusive access to a resource, needs to synchronize its activities with an ISR or task, or is waiting until an event occurs.

When the semaphore is used for resource sharing, if a task calls `OSSemPend()` and the value of the semaphore is greater than 0, `OSSemPend()` decrements the semaphore and returns to its caller. However, if the value of the semaphore is 0, `OSSemPend()` places the calling task in the waiting list for the semaphore. The task waits until the owner of the semaphore (which is always a task in this case) releases the semaphore by calling `OSSemPost()`, or the specified timeout expires. If the semaphore is signaled before the timeout expires, μC/OS-III resumes the highest-priority task waiting for the semaphore.

When the semaphore is used as a signaling mechanism, the calling task waits until a task or an ISR signals the semaphore by calling `OSSemPost()`, or the specified timeout expires. If the semaphore is signaled before the timeout expires, μC/OS-III resumes the highest-priority task waiting for the semaphore.

A pended task that has been suspended with `OSTaskSuspend()` can obtain the semaphore. However, the task remains suspended until it is resumed by calling `OSTaskResume()`.

`OSSemPend()` also returns if the pend is aborted or, the semaphore is deleted.

ARGUMENTS

`p_sem` is a pointer to the semaphore.

timeout allows the task to resume execution if a semaphore is not posted within the specified number of clock ticks. A timeout value of 0 indicates that the task waits forever for the semaphore. The timeout value is not synchronized with the clock tick. The timeout count begins decrementing on the next clock tick, which could potentially occur immediately.

opt specifies whether the call is to block if the semaphore is not available, or not block.

`OS_OPT_PEND_BLOCKING` to block the caller until the semaphore is available or a timeout occurs.

`OS_OPT_PEND_NON_BLOCKING` if the semaphore is not available, `OSSemPend()` will not block but return to the caller with an appropriate error code.

p_ts is a pointer to a variable that will receive a timestamp of when the semaphore was posted, pend aborted, or deleted. Passing a `NULL` pointer is valid and indicates that a timestamp is not required.

A timestamp is useful when the task must know when the semaphore was posted or, how long it took for the task to resume after the semaphore was posted. In the latter case, call `OS_TS_GET()` and compute the difference between the current value of the timestamp and `*p_ts`. In other words:

```
delta = OS_TS_GET() - *p_ts;
```

p_err is a pointer to a variable used to hold an error code:

`OS_ERR_NONE` if the semaphore is available.

`OS_ERR_OBJ_DEL` if the semaphore was deleted.

`OS_ERR_OBJ_PTR_NULL` if `OS_CFG_ARG_CHK_EN` is set to 1 in `os_cfg.h`: if `p_sem` is a `NULL` pointer.

`OS_ERR_OBJ_TYPE` if `OS_CFG_OBJ_TYPE_CHK_EN` is set to 1 in `os_cfg.h`: if `p_sem` is not pointing to a semaphore.

OS_ERR_OPT_INVALID	if OS_CFG_ARG_CHK_EN is set to 1 in os_cfg.h: if opt is not OS_OPT_PEND_NON_BLOCKING or OS_OPT_PEND_BLOCKING.
OS_ERR_PEND_ABORT	if the pend was aborted
OS_ERR_PEND_ISR	if OS_CFG_CALLED_FROM_ISR_CHK_EN set to 1 in os_cfg.h: if this function is called from an ISR.
OS_ERR_PEND_WOULD_BLOCK	if this function is called as specified OS_OPT_PEND_NON_BLOCKING, and the semaphore was not available.
OS_ERR_SCHED_LOCKED	if calling this function when the scheduler is locked.
OS_ERR_TIMEOUT	if the semaphore is not signaled within the specified timeout.

RETURNED VALUE

The new value of the semaphore count.

NOTES/WARNINGS

Semaphores must be created before they are used.

EXAMPLE

```
OS_SEM  SwSem;

void DispTask (void *p_arg)
{
    OS_ERR    err;
    CPU_TS   ts;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        (void)OSSemPend(&SwSem,
                         0,
                         OS_OPT_PEND_BLOCKING,
                         &ts,
                         &err);
        /* Check "err" */
    }
}
```

A-49 OSSemPendAbort()

```
OS_OBJ_QTY OSSemPendAbort (OS_SEM *p_sem,
                           OS_OPT opt,
                           OS_ERR *p_err)
```

File	Called from	Code enabled by
os_sem.c	Task only	OS_CFG_SEM_EN and OS_CFG_SEM_PEND_ABORT_EN

OSSemPendAbort() aborts and readies any task currently waiting on a semaphore. This function should be used to fault-abort the wait on the semaphore, rather than to normally signal the semaphore via **OSSemPost()**.

ARGUMENTS

p_sem is a pointer to the semaphore for which pend(s) need to be aborted.

opt determines the type of abort performed.

OS_OPT_PEND_ABORT_1	Aborts the pend of only the highest-priority task waiting on the semaphore.
OS_OPT_PEND_ABORT_ALL	Aborts the pend of all the tasks waiting on the semaphore.
OS_OPT_POST_NO_SCHED	Specifies that the scheduler should not be called, even if the pend of a higher-priority task has been aborted. Scheduling will need to occur from another function. You would use this option if the task calling OSSemPendAbort() will be doing additional pend aborts, reschedule takes place when finished, and multiple pend aborts are to take effect simultaneously.

`p_err` Is a pointer to a variable that holds an error code:

`OS_ERR_NONE`

At least one task waiting on the semaphore was readied and informed of the aborted wait. Check the return value for the number of tasks whose wait on the semaphore was aborted.

`OS_ERR_OBJ_PTR_NULL`

if `OS_CFG_ARG_CHK_EN` is set to 1 in `os_cfg.h`: if `p_sem` is a `NULL` pointer.

`OS_ERR_OBJ_TYPE`

if `OS_CFG_OBJ_TYPE_CHK_EN` is set to 1 in `os_cfg.h`: if `p_sem` is not pointing to a semaphore.

`OS_ERR_OPT_INVALID`

if `OS_CFG_ARG_CHK_EN` is set to 1 in `os_cfg.h`: if an invalid option is specified.

`OS_ERR_PEND_ABORT_ISR`

if `OS_CFG_CALLED_FROM_ISR_CHK_EN` set to 1 in `os_cfg.h`: if you called this function from an ISR.

`OS_ERR_PEND_ABORT_NONE`

No task was aborted because no task was waiting.

RETURNED VALUE

`OSSemPendAbort()` returns the number of tasks made ready-to-run by this function. Zero indicates that no tasks were pending on the semaphore and therefore, the function had no effect.

NOTES/WARNINGS

Semaphores must be created before they are used.

EXAMPLE

```
OS_SEM  SwSem;

void CommTask(void *p_arg)
{
    OS_ERR      err;
    OS_OBJ_QTY  nbr_tasks;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        nbr_tasks = OSSemPendAbort(&SwSem,
                                    OS_OPT_PEND_ABORT_ALL,
                                    &err);
        /* Check "err" */
        :
        :
    }
}
```

A-50 OSSemPost()

```
OS_SEM_CTR OSSemPost (OS_SEM *p_sem,
                      OS_OPT opt,
                      OS_ERR *p_err)
```

File	Called from	Code enabled by
os_sem.c	Task or ISR	OS_CFG_SEM_EN

A semaphore is signaled by calling `OSSemPost()`. If the semaphore value is 0 or more, it is incremented, and `OSSemPost()` returns to its caller. If tasks are waiting for the semaphore to be signaled, `OSSemPost()` removes the highest-priority task pending for the semaphore from the waiting list and makes this task ready-to-run. The scheduler is then called to determine if the awakened task is now the highest-priority task that is ready-to-run.

ARGUMENTS

`p_sem` is a pointer to the semaphore.

`opt` determines the type of post performed.

`OS_OPT_POST_1` Post and ready only the highest-priority task waiting on the semaphore.

`OS_OPT_POST_ALL` Post to all tasks waiting on the semaphore. You should only use this option if the semaphore is used as a signaling mechanism and never when the semaphore is used to guard a shared resource. It does not make sense to tell all tasks that are sharing a resource that they can all access the resource.

`OS_OPT_POST_NO_SCHED` This option indicates that the caller does not want the scheduler to be called after the post. This option can be used in combination with one of the two previous options.

You should use this option if the task (or ISR) calling `OSSemPost()` will be doing additional posting and, the user does not want to

reschedule until all done, and multiple posts are to take effect simultaneously.

`p_err` is a pointer to a variable that holds an error code:

<code>OS_ERR_NONE</code>	if no tasks are waiting on the semaphore. In this case, the return value is also 0.
<code>OS_ERR_OBJ_PTR_NULL</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_sem</code> is a <code>NULL</code> pointer.
<code>OS_ERR_OBJ_TYPE</code>	if <code>OS_CFG_OBJ_TYPE_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_sem</code> is not pointing to a semaphore.
<code>OS_ERR_SEM_OVF</code>	if the post would have caused the semaphore counter to overflow.

RETURNED VALUE

The current value of the semaphore count

NOTES/WARNINGS

- Semaphores must be created before they are used.
- You can also post to a semaphore from an ISR but the semaphore must be used as a signaling mechanism and not to protect a shared resource.

EXAMPLE

```
OS_SEM  SwSem;

void TaskX (void *p_arg)
{
    OS_ERR      err;
    OS_SEM_CTR  ctr;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        ctr = OSSemPost(&SwSem,
                         OS_OPT_POST_1 + OS_OPT_POST_NO_SCHED,
                         &err);
        /* Check "err" */
        :
        :
    }
}
```

A-51 OSSemSet()

```
void OSSemSet (OS_SEM      *p_sem,
               OS_SEM_CTR   cnt,
               OS_ERR       *p_err)
```

File	Called from	Code enabled by
os_sem.c	Task only	OS_CFG_SEM_EN and OS_CFG_SEM_SET_EN

`OSSemSet()` is used to change the current value of the semaphore count. This function is normally selected when a semaphore is used as a signaling mechanism. `OSSemSet()` can then be used to reset the count to any value. If the semaphore count is already 0, the count is only changed if there are no tasks waiting on the semaphore.

ARGUMENTS

`p_sem` is a pointer to the semaphore that is used as a signaling mechanism.

`cnt` is the desired count that the semaphore should be set to.

`p_err` is a pointer to a variable used to hold an error code:

<code>OS_ERR_NONE</code>	if the count was changed or, not changed, because one or more tasks was waiting on the semaphore.
<code>OS_ERR_OBJ_PTR_NULL</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_sem</code> is a NULL pointer.
<code>OS_ERR_OBJ_TYPE</code>	if <code>OS_CFG_OBJ_TYPE_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_sem</code> is not pointing to a semaphore.
<code>OS_ERR_SET_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if this function was called from an ISR.
<code>OS_ERR_TASK_WAITING</code>	if tasks are waiting on the semaphore.

RETURNED VALUE

None

NOTES/WARNINGS

Do not use this function if the semaphore is used to protect a shared resource.

EXAMPLE

```
OS_SEM  SwSem;

void Task (void *p_arg)
{
    OS_ERR  err;

    (void)&p_arg;
    while (DEF_ON) {
        OSSemSet(&SwSem,      /* Reset the semaphore count */
                 0,
                 &err);
        /* Check "err" */
        :
        :
    }
}
```

A-52 OSStart()

`void OSStart (OS_ERR *p_err)`

File	Called from	Code enabled by
<code>os_core.c</code>	Startup code only	N/A

`OSStart()` starts multitasking under μC/OS-III. This function is typically called from startup code after calling `OSInit()` and creating at least one application task. `OSStart()` will not return to the caller. Once μC/OS-III is running, calling `OSStart()` again will have no effect.

ARGUMENTS

`p_err` is a pointer to a variable used to hold an error code:

<code>OS_ERR_FATAL_RETURN</code>	if we ever return to this function.
<code>OS_ERR_OS_RUNNING</code>	if the kernel is already running. In other words, if this function has already been called.

RETURNED VALUE

None

NOTES/WARNINGS

`OSInit()` must be called prior to calling `OSStart()`. `OSStart()` should only be called once by the application code. However, if you called `OSStart()` more than once, nothing happens on the second and subsequent calls.

EXAMPLE

```
void main (void)
{
    OS_ERR  err;

    /* User Code */

    :
    OSInit(&err);           /* Initialize µC/OS-III */
    /* Check "err" */
    :
    /* User Code */

    :
    OSStart(&err);          /* Start Multitasking */
    /* Any code here should NEVER be executed!
}
```

A-53 OSStartHighRdy()

```
void OSStartHighRdy (void)
```

File	Called from	Code enabled by
os_cpu_a.asm	OSStart()	N/A

`OSStartHighRdy()` is responsible for starting the highest-priority task that was created prior to calling `OSStart()`. `OSStartHighRdy()` is a µC/OS-III port function that is generally written in assembly language.

ARGUMENTS

None

RETURNED VALUES

None

NOTES/WARNINGS

None

EXAMPLE

The pseudocode for `OSStartHighRdy()` is shown below.

```
OSStartHighRdy:
    OSTaskSwHook();                                (1)
    SP = OSTCBHighRdyPtr->StkPtr;                  (2)
    Pop CPU registers off the task's stack;        (3)
    Return from interrupt;                         (4)
```

-
- (1) `OSStartHighRdy()` must call `OSTaskSwHook()`.

When called, `OSTCBCurPtr` and `OSTCBHighRdyPtr` both point to the `OS_TCB` of the highest-priority task created.

`OSTaskSwHook()` should check that `OSTCBCurPtr` is not equal to `OSTCBHighRdyPtr` as this is the first time `OSTaskSwHook()` is called and there is not a task being switched out.

- (2) The CPU stack pointer register is loaded with the top-of-stack (TOS) of the task being started. The TOS is found in the `.StkPtr` field of the `OS_TCB`. For convenience, the `.StkPtr` field is the very first field of the `OS_TCB` data structure. This makes it easily accessible from assembly language.
- (3) The registers are popped from the task's stack frame. Recall that the registers should have been placed on the stack frame in the same order as if they were pushed at the beginning of an interrupt service routine.
- (4) You must execute a return from interrupt. This starts the task as if it was resumed when returning from a real interrupt.

A-54 OSStatReset()

`void OSStatReset (OS_ERR *p_err)`

File	Called from	Code enabled by
<code>os_stat.c</code>	Task only	<code>OS_CFG_STAT_TASK_EN</code>

`OSStatReset()` is used to reset statistical variables maintained by μC/OS-III. Specifically, the per-task maximum interrupt disable time, maximum scheduler lock time, maximum amount of time a message takes to reach a task queue, the maximum amount of time it takes a signal to reach a task and more.

ARGUMENTS

`p_err` is a pointer to a variable used to hold an error code:

<code>OS_ERR_NONE</code>	the call was successful.
<code>OS_ERR_STAT_RESET_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if the call was attempted from an ISR.

RETURNED VALUE

None

NOTES/WARNINGS

None

EXAMPLE

```
void TaskX (void *p_arg)
{
    OS_ERR    err;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        if (statistics reset switch is pressed) {
            OSStatReset(&err);
            /* Check "err" */
        }
        :
        :
    }
}
```

A-55 OSStatTaskCPUUsageInit()

```
void OSStatTaskCPUUsageInit (OS_ERR *p_err)
```

File	Called from	Code enabled by
os_stat.c	Startup code only	OS_CFG_TASK_STAT_EN

`OSStatTaskCPUUsageInit()` determines the maximum value that a 32-bit counter can reach when no other task is executing. This function must be called when only one task is created in the application and when multitasking has started. This function must be called from the first and only task created by the application.

ARGUMENTS

`p_err` is a pointer to a variable used to hold an error code:

<code>OS_ERR_NONE</code>	Always returns this value.
--------------------------	----------------------------

RETURNED VALUE

None

NOTES/WARNINGS

None

EXAMPLE

```
void FirstAndOnlyTask (void *p_arg)
{
    OS_ERR  err;
    :
    :

#if OS_CFG_TASK_STAT_EN > 0
    OSStatTaskCPUUsageInit(&err); /* Compute CPU capacity with no task running */
#endif
    :
    OSTaskCreate(_);           /* Create the other tasks                      */
    OSTaskCreate(_);
    :
    while (DEF_ON) {
        :
        :
    }
}
```

A-56 OSStatTaskHook()

```
void OSStatTaskHook (void);
```

File	Called from	Code enabled by
os_cpu_c.c	OSStatTask()	Always enabled

`OSStatTaskHook()` is a function called by µC/OS-III's statistic task, `OSStatTask()`. `OSStatTaskHook()` is generally implemented by the port implementer for the processor used. This hook allows the port to perform additional statistics.

ARGUMENTS

None

RETURNED VALUES

None

NOTES/WARNINGS

None

EXAMPLE

The code below calls an application-specific hook that an application programmer can define. For this, the user can simply set the value of `OS_AppStatTaskHookPtr` to point to the desired hook function (see `App_OS_SetAllHooks()` in `os_app_hooks.c`).

In the example below, `OSStatTaskHook()` calls `App_OS_StatTaskHook()` if the pointer `OS_AppStatTaskHookPtr` is set to that function.

Appendix A

```
void App_OS_StatTaskHook (void)                                /* os_app_hooks.c      */
{
    /* Your code goes here! */
}

void App_OS_SetAllHooks (void)                                /* os_app_hooks.c      */
{
    CPU_SR_ALLOC();

    CPU_CRITICAL_ENTER();
    :
    OS_AppStatTaskHookPtr = App_OS_StatTaskHook;
    :
    CPU_CRITICAL_EXIT();
}

void OSStatTaskHook (void)                                     /* os_cpu_c.c          */
{
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppStatTaskHookPtr != (OS_APP_HOOK_VOID)0) { /* Call application hook */
        (*OS_AppStatTaskHookPtr)();
    }
#endif
}
```

A-57 OSTaskChangePrio()

```
void OSTaskChangePrio (OS_TCB *p_tcb,
                      OS_PRIO prio_new,
                      OS_ERR *p_err)
```

File	Called from	Code enabled by
os_task.c	Task only	OS_CFG_TASK_CHANGE_PRIO_EN

When you creating a task (see `OSTaskCreate()`), you specify the priority of the task being created. In most cases, it is not necessary to change the priority of the task at run time. However, it is sometimes useful to do so, and `OSTaskChangePrio()` allows this to take place.

If the task is ready-to-run, `OSTaskChangePrio()` simply changes the position of the task in μC/OS-III's ready list. If the task is waiting on an event, `OSTaskChangePrio()` will change the position of the task in the pend list of the corresponding object, so that the pend list remains sorted by priority.

Because μC/OS-III supports multiple tasks at the same priority, there are no restrictions on the priority that a task can have, except that task priority zero (0) is reserved by μC/OS-III, and priority `OS_PRIO_MAX-1` is used by the idle task.

Note that a task priority cannot be changed from an ISR.

ARGUMENTS

`p_tcb` is a pointer to the `OS_TCB` of the task for which the priority is being changed. If you pass a `NULL` pointer, the priority of the current task is changed.

`prio_new` is the new task's priority. This value must never be set to `OS_CFG_PRIO_MAX-1`, or higher and you must not use priority 0 since they are reserved for μC/OS-III.

`p_err` is a pointer to a variable that will receive an error code:

<code>OS_ERR_NONE</code>	if the task's priority is changed.
<code>OS_ERR_TASK_CHANGE_PRIO_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if attempting to change the task's priority from an ISR.
<code>OS_ERR_PRIO_INVALID</code>	if the priority of the task specified is invalid. By specifying a priority greater than or equal to <code>OS_PRIO_MAX-1</code> , or 0.

RETURNED VALUE

None

NOTES/WARNINGS

None

EXAMPLE

```
OS_TCB MyTaskTCB;

void TaskX (void *p_arg)
{
    OS_ERR err;

    while (DEF_ON) {
        :
        :
        OSTaskChangePrio(&MyTaskTCB,      /* Change the priority of "MyTask" to 10 */
                         10,
                         &err);
        /* Check "err" */
        :
    }
}
```

A-58 OSTaskCreate()

```
void OSTaskCreate (OS_TCB      *p_tcb,
                  CPU_CHAR     *p_name,
                  OS_TASK_PTR  p_task,
                  void         *p_arg,
                  OS_PRIO      prio,
                  CPU_STK      *p_stk_base,
                  CPU_STK_SIZE stk_limit,
                  CPU_STK_SIZE stk_size,
                  OS_MSG_QTY   q_size,
                  OS_TICK      time_quanta,
                  void         *p_ext,
                  OS_OPT       opt,
                  OS_ERR       *p_err)
```

File	Called from	Code enabled by
os_task.c	Task or startup code	N/A

Tasks must be created in order for µC/OS-III to recognize them as tasks. You create a task by calling `OSTaskCreate()` and by providing arguments specifying to µC/OS-III how the task will be managed. Tasks are always created in the ready-to-run state.

Tasks can be created either prior to the start of multitasking (i.e., before calling `osStart()`), or by a running task. A task cannot be created by an ISR. A task must either be written as an infinite loop, or delete itself once completed. If the task code returns by mistake, µC/OS-III will terminate the task by calling `OSTaskDel((OS_TCB *)0, &err)`). At Micrium, we like the “`while (DEF_ON)`” to implement infinite loops because, by convention, we use a `while` loop when we don’t know how many iterations a loop will do. This is the case of an infinite loop. We prefer to use `for` loops when we know how many iterations a loop will do.

Appendix A

Task as an infinite loop:

```
void MyTask (void *p_arg)
{
    /* Local variables */

    /* Do something with 'p_arg' */
    /* Task initialization */
    while (DEF_ON) {      /* Task body, as an infinite loop. */
        :
        :
        /* Must call one of the following services: */
        /* OSFlagPend() */
        /* OSMutexPend() */
        /* OSQPend() */
        /* OSSemPend() */
        /* OSTimeDly() */
        /* OSTimeDlyHMSM() */
        /* OSTaskQPend() */
        /* OSTaskSemPend() */
        /* OSTaskSuspend()      (Suspend self) */
        /* OSTaskDel()          (Delete  self) */
        :
        :
    }
}
```

Run to completion task:

```
void MyTask (void *p_arg)
{
    OS_ERR  err;
    /* Local variables */

    /* Do something with 'p_arg' */
    /* Task initialization */
    /* Task body (do some work) */
    OSTaskDel((OS_TCB *)0, &err);
    /* Check 'err" ... you code should never end up here! */
}
```

ARGUMENTS

p_tcb is a pointer to the task's **OS_TCB** to use. It is assumed that storage for the TCB of the task will be allocated by the user code. You can declare a "global" variable as follows, and pass a pointer to this variable to **OSTaskCreate()**:

```
OS_TCB MyTaskTCB;
```

p_name is a pointer to an ASCII string (NUL terminated) to assign a name to the task. The name can be displayed by debuggers or by **μC/Probe**.

p_task is a pointer to the task (i.e., the name of the function that defines the task).


p_arg is a pointer to an optional data area which is used to pass parameters to the task when it is created. When **μC/OS-III** runs the task for the first time, the task will think that it was invoked, and passed the argument **p_arg**. For example, you could create a generic task that handles an asynchronous serial port. **p_arg** can be used to pass task information about the serial port it will manage: the port address, baud rate, number of bits, parity, and more. **p_arg** is the argument received by the task shown below.

```
void MyTask (void *p_arg)
{
    while (DEF_ON) {
        Task code;
    }
}
```

prio is the task priority. The lower the number, the higher the priority (i.e., the importance) of the task. If **OS_CFG_ISR_POST_DEFERRED_EN** is set to 1, the user cannot use priority 0.

Task priority must also have a lower number than **OS_CFG_PRIO_MAX**. Priorities 0, 1, **OS_CFG_PRIO_MAX-2** and **OS_CFG_PRIO_MAX-1** are reserved. In other words, a task should have a priority between 2 and **OS_CFG_PRIO_MAX-3**, inclusively.

`p_stk_base` is a pointer to the task's stack base address. The task's stack is used to store local variables, function parameters, return addresses, and possibly CPU registers during an interrupt.

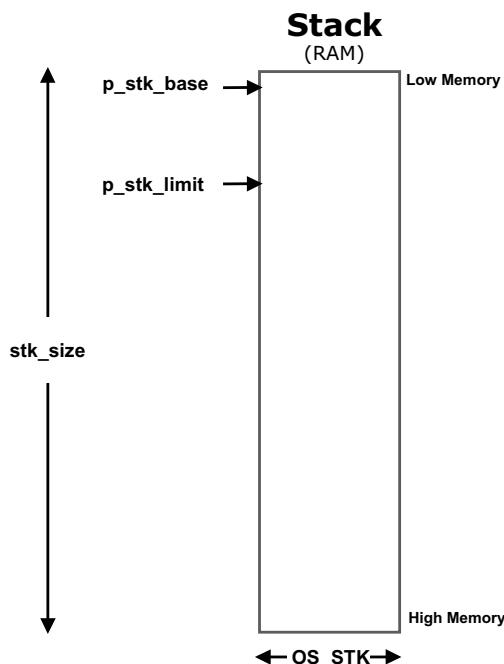

The task stack must be declared as follows:

```
CPU_STK MyTaskStk[???];
```


The user would then pass `p_stk_base` the address of the first element of this array or, `&MyTaskStk[0]`. “`???`” represents the size of the stack.

The size of this stack is determined by the task's requirements and the anticipated interrupt nesting (unless the processor has a separate stack just for interrupts). Determining the size of the stack involves knowing how many bytes are required for storage of local variables for the task itself, all nested functions, as well as requirements for interrupts (accounting for nesting).

Note that you can allocate stack space for a task from the heap but, in this case, we don't recommend to ever delete the task and free the stack space as this can cause the heap to fragment, which is not desirable in embedded systems.

`stk_limit` is used to locate, within the task's stack, a watermark limit that can be used to monitor and ensure that the stack does not overflow.

If the processor does not have hardware stack overflow detection, or this feature is not implemented in software by the port developer, this value may be used for other purposes. For example, some processors have two stacks, a hardware and a software stack. The hardware stack typically keeps track of function call nesting and the software stack is used to pass function arguments. `stk_limit` may be used to set the size of the hardware stack as shown below.

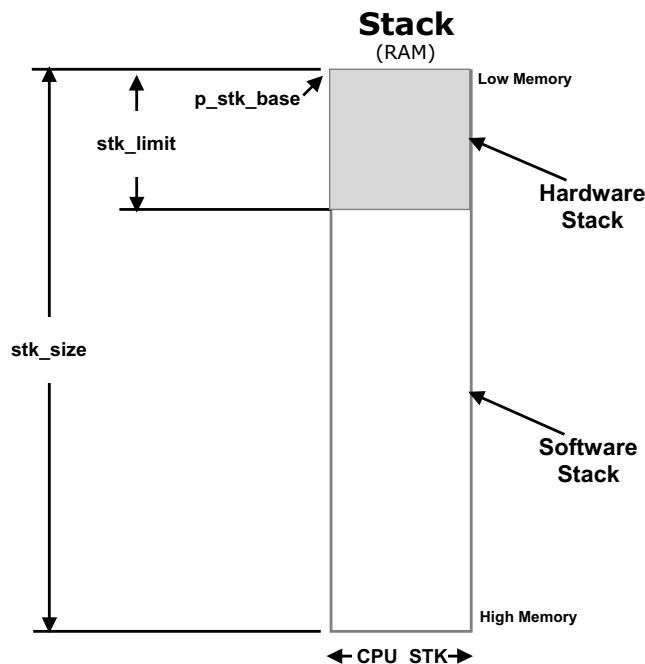

`stk_size` specifies the size of the task's stack in number of elements. If `CPU_STK` is set to `CPU_INT08U` (see `os_type.h`), `stk_size` corresponds to the number of bytes available on the stack. If `CPU_STK` is set to `CPU_INT16U`, then `stk_size` contains the number of 16-bit entries available on the stack. Finally, if `CPU_STK` is set to `CPU_INT32U`, `stk_size` contains the number of 32-bit entries available on the stack.

q_size	A μC/OS-III task contains an optional internal message queue (if <code>OS_CFG_TASK_Q_EN > 0</code>). This argument specifies the maximum number of messages that the task can receive through this message queue. The user may specify that the task is unable to receive messages by setting this argument to 0.
time_quanta	the amount of time (in clock ticks) for the time quanta when round robin is enabled. If you specify 0, then the default time quanta will be used which is the tick rate divided by 10.
p_ext	is a pointer to a user-supplied memory location (typically a data structure) used as a TCB extension. For example, the user memory can hold the contents of floating-point registers during a context switch.
opt	contains task-specific options. Each option consists of one bit. The option is selected when the bit is set. The current version of μC/OS-III supports the following options:
<code>OS_OPT_TASK_NONE</code>	specifies that there are no options.
<code>OS_OPT_TASK_STK_CHK</code>	specifies whether stack checking is allowed for the task.
<code>OS_OPT_TASK_STK_CLR</code>	specifies whether the stack needs to be cleared.
<code>OS_OPT_TASK_SAVE_FP</code>	specifies whether floating-point registers are saved. This option is only valid if the processor has floating-point hardware and the processor-specific code saves the floating-point registers.
p_err	is a pointer to a variable that will receive an error code:
<code>OS_ERR_NONE</code>	if the function is successful.
<code>OS_ERR_PRIO_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if prio is higher than the maximum value allowed (i.e., > <code>OS_PRIO_MAX-1</code>). Also, you will get this error if the user set <code>OS_CFG_ISR_POST_DEFERRED_EN</code> to 1 and tried to use priority 0.

<code>OS_ERR_STK_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if specifying a <code>NULL</code> pointer for <code>p_stk_base</code> .
<code>OS_ERR_STK_SIZE_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if specifying a stack size smaller than what is currently specified by <code>OS_CFG_STK_SIZE_MIN</code> (see the <code>os_cfg.h</code>).
<code>OS_ERR_TASK_CREATE_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if attempting to create the task from an ISR.
<code>OS_ERR_TASK_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if specifying a <code>NULL</code> pointer for <code>p_task</code>
<code>OS_ERR_TCB_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if specifying a <code>NULL</code> pointer for <code>p_tcb</code> .
<code>OS_ERR_ILLEGAL_CREATE_RUN_TIME</code>	if <code>OS_SAFETY_CRITICAL_IEC61508</code> is defined: you called this after calling <code>OSSafetyCriticalStart()</code> and thus you are no longer allowed to create additional kernel objects.

RETURNED VALUE

None

NOTES/WARNINGS

- The stack must be declared with the `CPU_STK` type.
- A task must always invoke one of the services provided by μC/OS-III to wait for time to expire, suspend the task, or wait on an object (wait on a message queue, event flag, mutex, semaphore, a signal or a message to be sent directly to the task). This allows other tasks to gain control of the CPU.
- You should not use task priorities 0, 1, `OS_CFG_PRIO_MAX-2` and `OS_CFG_PRIO_MAX-1` because they are reserved for use by μC/OS-III.

EXAMPLE

`OSTaskCreate()` can be called from `main()` (in C), or a previously created task.

```

OS_TCB  MyTaskTCB;                      /* (1) Storage for task's TCB          */
CPU_STK MyTaskStk[200];                  /*                                         */

void  MyTask (void *p_arg)                /* (3) The address of the task is its name      */
{
    while (DEF_ON) {
        /* Wait for an event */
        /* My task body       */
    }
}

void SomeCode (void)
{
    OS_ERR  err;
    :
    :
    OSTaskCreate (&MyTaskTCB,           /* (1) Address of TCB assigned to the task      */
                  "My Task",          /* (2) Name you want to give the task          */
                  MyTask,             /* (3) Address of the task itself            */
                  (void *)0,          /* (4) "p_arg" is not used                   */
                  12,                 /* (5) Priority you want to assign to the task */
                  &MyTaskStk[0],       /* (6) Base address of task's stack          */
                  10,                 /* (7) Watermark limit for stack growth     */
                  200,                /* (8) Stack size in number of CPU_STK elements */
                  5,                  /* (9) Size of task message queue          */
                  10,                 /* (10) Time quanta (in number of ticks)    */
                  (void *)0,          /* (11) Extension pointer is not used       */
                  OS_OPT_TASK_STK_CHK + OS_OPT_TASK_STK_CLR, /* (12) Options                            */
                  &err);              /* (13) Error code                         */
    /* Check "err"                                (14) */
    :
    :
}

```

- (1) In order to create a task, you need to allocate storage for a TCB and pass a pointer to this TCB to `OSTaskCreate()`.

-
- (2) You can assign an ASCII name to the task by passing a pointer to an ASCII string. The ASCII string may be allocated in code space (i.e., ROM), or data space (i.e., RAM). In either case, it is assumed that the code can access that memory. The ASCII string must be **NUL** terminated.
 - (3) You pass the address of the task to **OSTaskCreate()**. In C, the address of a function is simply the name of that function.
 - (4) To provide additional data to **MyTask()**, you can pass a pointer to such data. In this case, **MyTask()** did not need such data and therefore, a **NULL** pointer is passed.
 - (5) The user must assign a priority to the task. The priority specifies the importance of this task with respect to other tasks. A low-priority value indicates a high priority. Priority **0** is the highest priority (reserved for an internal task) and a priority up to **OS_CFG_PRIO_MAX-3** can be specified (see **os_cfg.h**). Note that **OS_CFG_PRIO_MAX-1** is also reserved for an internal task, the idle task.
 - (6) The next argument specifies the “base address” of the task’s stack. In this case, it is simply the base address of the array **MyTaskStk[]**. Note that it is possible to simply specify the name of the array. I prefer to make it clear by writing **&MyTaskStk[0]**.
 - (7) This argument sets the watermark limit for stack growth. If the processor port does not use this field then you can set this value to 0.
 - (8) μ C/OS-III also needs to know the size of the stack for the task. This allows μ C/OS-III to perform stack checking at run time. This argument represents the number of **CPU_STK** elements, not the number of bytes.
 - (9) μ C/OS-III allows tasks or ISRs to send messages directly to a task. This argument specifies how many such messages can be received by this task.
 - (10) This argument specifies how much time (in number of ticks) this task will run on the CPU before μ C/OS-III will force the CPU away from this task and run the next task at the same priority (if there are more than one task at the same priority that is ready-to-run).

- (11) µC/OS-III allows the user to “extend” the capabilities of the TCB by allowing passing a pointer to some memory location that could contain additional information about the task. For example, there may be a CPU that supports floating-point math and the user would likely need to save the floating-point registers during a context switch. This pointer could point to the storage area for these registers.
- (12) When creating a task, options must be specified. Specifically, such options as, whether the stack of the task will be cleared (i.e., filled with 0x00) when the task is created (`OS_OPT_TASK_STK_CLR`), whether µC/OS-III will be allowed to check for stack usage (`OS_OPT_TASK_STK_CHK`), whether the CPU supports floating-point math, and whether the task will make use of the floating-point registers and therefore need to save and restore them during a context switch (`OS_OPT_TASK_SAVE_FP`). The options are additive.
- (13) Most of µC/OS-III’s services return an error code indicating the outcome of the call. The error code is always returned as a pointer to a variable of type `OS_ERR`. The user must allocate storage for this variable prior to calling `OSTaskCreate()`.
- (14) It is highly recommended that the user examine the error code whenever calling a µC/OS-III function. If the call is successful, the error code will always be `OS_ERR_NONE`. If the call is not successful, the returned code will indicate the reason for the failure (see `OS_ERR_???` in `os.h`).

A-59 OSTaskCreateHook()

```
void OSTaskCreateHook (OS_TCB *p_tcb)
```

File	Called from	Code enabled by
os_cpu_c.c	OSTaskCreate() ONLY	N/A

This function is called by `OSTaskCreate()` after initializing the `OS_TCB` fields and setting up the stack frame for the task, just before adding the task to the ready list. When `OSTaskCreateHook()` is called, all of the `OS_TCB` fields are assumed to be initialized.

`OSTaskCreateHook()` is part of the CPU port code and this function *must not* be called by the application code. `OSTaskCreateHook()` is actually used by the µC/OS-III port developer.

You can use this hook to initialize and store the contents of floating-point registers, MMU registers, or anything else that can be associated with a task. Typically, you would store this additional information in memory allocated by the application.

ARGUMENTS

`p_tcb` is a pointer to the TCB of the task being created. Note that the `OS_TCB` has been validated by `OSTaskCreate()` and is guaranteed to not be a `NULL` pointer when `OSTaskCreateHook()` is called.

RETURNED VALUE

None

NOTES/WARNINGS

Do not call this function from the application.

EXAMPLE

The code below calls an application-specific hook that the application programmer can define. The user can simply set the value of `OS_AppTaskCreateHookPtr` to point to the desired hook function as shown in the example. `OSTaskCreate()` calls

Appendix A

OSTaskCreateHook() which in turns calls **App_OS_TaskCreateHook()** through **OS_AppTaskCreateHookPtr**. As can be seen, when called, the application hook is passed the address of the **OS_TCB** of the newly created task.

```
void App_OS_TaskCreateHook (OS_TCB *p_tcb)          /* os_app_hooks.c      */
{
    /* Your code goes here! */

}

void App_OS_SetAllHooks (void)                      /* os_app_hooks.c      */
{
    CPU_SR_ALLOC();

    CPU_CRITICAL_ENTER();
    :
    OS_AppTaskCreateHookPtr = App_OS_TaskCreateHook;
    :
    CPU_CRITICAL_EXIT();
}

void OSTaskCreateHook (OS_TCB *p_tcb)              /* os_cpu.c            */
{
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppTaskCreateHookPtr != (OS_APP_HOOK_TCB)0) { /* Call application hook */
        (*OS_AppTaskCreateHookPtr)(p_tcb);
    }
#endif
}
```

A-60 OSTaskDel()

```
void OSTaskDel (OS_TCB *p_tcb,
                OS_ERR *p_err)
```

File	Called from	Code enabled by
os_task.c	Task only	OS_CFG_TASK_DEL_EN

When a task is no longer needed, it can be deleted. Deleting a task does not mean that the code is removed, but that the task code is no longer managed by µC/OS-III. `OSTaskDel()` can be used when creating a task that will only run once. In this case, the task must not return but instead call `OSTaskDel(OS_TCB *)0, &err)` which specifies to µC/OS-III to delete the currently running task.

A task may also delete another task by specifying to `OSTaskDel()` the address of the `OS_TCB` of the task to delete.

Once a task is deleted, its `OS_TCB` and stack may be reused to create another task. This assumes that the task's stack requirement of the new task is satisfied by the stack size of the deleted task.

Even though µC/OS-III allows the user to delete tasks at run time, it is recommend that such actions be avoided. Why? Because a task can “own” resources that are shared with other tasks. Deleting the task that owns resource(s) without first relinquishing the resources could lead to strange behaviors and possible deadlocks.

ARGUMENTS

`p_tcb` is a pointer to the TCB of the task to delete or, you can pass a `NULL` pointer to specify that the calling task delete itself. If deleting the calling task, the scheduler will be invoked so that the next highest-priority task is executed.

`p_err` is a pointer to a variable that will receive an error code:

`OS_ERR_NONE`

'`p_err`' gets set to `OS_ERR_NONE` before `OSSched()` to allow the returned error code to be monitored (by another task) even for a task that is deleting itself. In this case, `p_err` *must*

`OS_ERR_TASK_DEL_IDLE`
`OS_ERR_TASK_DEL_ISR`
`OS_ERR_TASK_DEL_INVALID`

point to a global variable that can be accessed by that other task and, you should initialize that variable to `OS_ERR_TASK_RUNNING` prior to deleting the task.

if attempting to delete the idle task.

if `OS_CFG_CALLED_FROM_ISR_CHK_EN` set to 1 in `os_cfg.h`: if you called `OSTaskDel()` from an ISR.

if attempting to delete the ISR Handler task while `OS_CFG_ISR_POST_DEFERRED_EN` is set to 1.

RETURNED VALUE

None

NOTES/WARNINGS

- `OSTaskDel()` verifies that the user is not attempting to delete the µC/OS-III idle task and the ISR handler task.
- Be careful when deleting a task that owns resources.

EXAMPLE

```
OS_TCB  MyTaskTCB;

void TaskX (void *p_arg)
{
    OS_ERR  err;

    while (DEF_ON) {
        :
        :
        OSTaskDel(&MyTaskTCB,
                  &err);
        /* Check "err" */
        :
        :
    }
}
```

A-61 OSTaskDelHook()

```
void OSTaskDelHook (OS_TCB *p_tcb);
```

File	Called from	Code enabled by
os_cpu_c.c	OSTaskDel() only	N/A

This function is called by `OSTaskDel()` after the task is removed from the ready list or any pend list.

You can use this hook to deallocate storage assigned to the task.

`OSTaskDelHook()` is part of the CPU port code and this function *must not* be called by the application code. `OSTaskDelHook()` is actually used by the µC/OS-III port developer.

ARGUMENTS

`p_tcb` is a pointer to the TCB of the task being created. Note that the `OS_TCB` has been validated by `OSTaskDel()` and is guaranteed to not be a `NULL` pointer when `OSTaskDelHook()` is called.

RETURNED VALUE

None

NOTES/WARNINGS

Do not call this function from the application.

EXAMPLE

The code below calls an application-specific hook that the application programmer can define. The user can simply set the value of `OS_AppTaskDelHookPtr` to point to the desired hook function. `OSTaskDel()` calls `OSTaskDelHook()` which in turns calls `App_OS_TaskDelHook()` through `OS_AppTaskDelHookPtr`. As can be seen, when called, the application hook is passed the address of the `OS_TCB` of the task being deleted.

```
void App_OS_TaskDelHook (OS_TCB *p_tcb)           /* os_app_hooks.c      */
{
    /* Your code goes here! */

}

void App_OS_SetAllHooks (void)                     /* os_app_hooks.c      */
{
    CPU_SR_ALLOC();

    CPU_CRITICAL_ENTER();
    :
    OS_AppTaskDelHookPtr = App_OS_TaskDelHook;
    :
    CPU_CRITICAL_EXIT();
}

void OSTaskDelHook (OS_TCB *p_tcb)                /* os_cpu_c.c          */
{
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppTaskDelHookPtr != (OS_APP_HOOK_TCB)0) { /* Call application hook */
        (*OS_AppTaskDelHookPtr)(p_tcb);
    }
#endif
}
```

A-62 OSTaskQFlush()

```
OS_MSG_QTY OSTaskQFlush (OS_TCB *p_tcb,
                         OS_ERR *p_err)
```

File	Called from	Code enabled by
os_task.c	Task only	OS_CFG_TASK_Q_EN

`OSTaskQFlush()` empties the contents of the task message queue and eliminates all messages sent to the queue. `OS_MSGS` from the queue are simply returned to the free pool of `OS_MSGS`.

ARGUMENTS

`p_tcb` is a pointer to the TCB of the task that contains the queue to flush. Specifying a `NULL` pointer tells `OSTaskQFlush()` to flush the queue of the calling task's built-in message queue.

`p_err` is a pointer to a variable that will contain an error code returned by this function.

<code>OS_ERR_NONE</code>	if the message queue is flushed.
<code>OS_ERR_FLUSH_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if calling this function from an ISR

RETURNED VALUE

The number of `OS_MSG` entries freed from the message queue. Note that the `OS_MSG` entries are returned to the free pool of `OS_MSGS`.

NOTES/WARNINGS

- Use this function with great care. When flushing a queue, you lose the references to what the queue entries are pointing to, potentially causing 'memory leaks'. The data that the user is pointing to that is referenced by the queue entries should, most likely, be de-allocated (i.e., freed).

EXAMPLE

```
void Task (void *p_arg)
{
    OS_ERR  err;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        entries = OSTaskQFlush((OS_TCB *)0,
                               &err);
        /* Check "err" */
        :
        :
    }
}
```

or, to flush a queue that contains entries, instead you can use `OSTaskQPend()` and specify the `OS_OPT_PEND_NON_BLOCKING` option.

```
void Task (void *p_arg)
{
    OS_ERR      err;
    CPU_TS      ts;
    OS_MSG_SIZE msg_size;

    (void)&p_arg;
    :
    do {
        OSTaskQPend(0,
                    OS_OPT_PEND_NON_BLOCKING,
                    &msg_size,
                    &ts,
                    &err);
    } while (err != OS_ERR_PEND_WOULD_BLOCK);
    :
    :
}
```

A-63 OSTaskQPend()

```
void *OSTaskQPend (OS_TICK      timeout,
                   OS_OPT       opt,
                   OS_MSG_SIZE *p_msg_size,
                   CPU_TS      *p_ts,
                   OS_ERR      *p_err)
```

File	Called from	Code enabled by
os_task.c	Task only	OS_CFG_TASK_Q_EN and OS_CFG_MSG_EN

`OSTaskQPend()` allows a task to receive messages directly from an ISR or another task, without going through an intermediate message queue. In fact, each task has a built-in message queue if the configuration constant `OS_CFG_TASK_Q_EN` is set to 1. The messages received are pointer-sized variables, and their use is application specific. If at least one message is already present in the message queue when `OSTaskQPend()` is called, the message is retrieved and returned to the caller.

If no message is present in the task's message queue and `OS_OPT_PEND_BLOCKING` is specified for the `opt` argument, `OSTaskQPend()` suspends the current task (assuming the scheduler is not locked) until either a message is received, or a user-specified timeout expires. A pended task that is suspended with `OSTaskSuspend()` can receive messages. However, the task remains suspended until it is resumed by calling `OSTaskResume()`.

If no message is present in the task's message queue and `OS_OPT_PEND_NON_BLOCKING` is specified for the `opt` argument, `OSTaskQPend()` returns to the caller with an appropriate error code and returns a `NULL` pointer.

ARGUMENTS

timeout allows the task to resume execution if a message is not received from a task or an ISR within the specified number of clock ticks. A timeout value of 0 indicates that the task wants to wait forever for a message. The timeout value is not synchronized with the clock tick. The timeout count starts decrementing on the next clock tick, which could potentially occur immediately.

opt determines whether or not the user wants to block if a message is not available in the task's queue. This argument must be set to either:

`OS_OPT_PEND_BLOCKING`, or
`OS_OPT_PEND_NON_BLOCKING`

Note that the timeout argument should be set to 0 when `OS_OPT_PEND_NON_BLOCKING` is specified, since the timeout value is irrelevant using this option.

p_msg_size is a pointer to a variable that will receive the size of the message.

p_ts is a pointer to a timestamp indicating when the task's queue was posted, or the pend aborted. Passing a `NULL` pointer is valid and indicates that the timestamp is not necessary.

A timestamp is useful when the task must know when the task message queue was posted, or how long it took for the task to resume after the task message queue was posted. In the latter case, call `OS_TS_GET()` and compute the difference between the current value of the timestamp and `*p_ts`. In other words:

```
delta = OS_TS_GET() - *p_ts;
```

p_err is a pointer to a variable used to hold an error code.

<code>OS_ERR_NONE</code>	if a message is received.
<code>OS_ERR_OPT_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if you specified an invalid option.
<code>OS_ERR_PEND_ABORT</code>	if the pend was aborted because another task called <code>OSTaskQPendAbort()</code> .
<code>OS_ERR_PEND_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if calling this function from an ISR.
<code>OS_ERR_PEND_WOULD_BLOCK</code>	if calling this function with the opt argument set to <code>OS_OPT_PEND_NON_BLOCKING</code> and no message is in the task's message queue.

<code>OS_ERR_PTR_INVALID</code>	if OS_CFG_ARG_CHK_EN set to 1 in <code>os_cfg.h</code> : if <code>p_msg_size</code> is a <code>NULL</code> pointer.
<code>OS_ERR_SCHED_LOCKED</code>	if calling this function when the scheduler is locked and the user wanted to block.
<code>OS_ERR_TIMEOUT</code>	if a message is not received within the specified timeout.

RETURNED VALUE

The message if no error or a `NULL` pointer upon error. You should examine the error code since it is possible to send `NULL` pointer messages. In other words, a `NULL` pointer does not mean an error occurred. `*p_err` must be examined to determine the reason for the error.

NOTES/WARNINGS

Do not call `OSTaskQPend()` from an ISR.

EXAMPLE

```
void CommTask (void *p_arg)
{
    OS_ERR      err;
    void       *p_msg;
    OS_MSG_SIZE msg_size;
    CPU_TS     ts;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        p_msg = OSTaskQPend(100,
                            OS_OPT_PEND_BLOCKING,
                            &msg_size,
                            &ts,
                            &err);
        /* Check "err" */
        :
        :
    }
}
```

A-64 OSTaskQPendAbort()

```
CPU_BOOLEAN OSTaskQPendAbort (OS_TCB *p_tcb,
                           OS_OPT opt,
                           OS_ERR *p_err)
```

File	Called from	Code enabled by
os_q.c	Task only	OS_CFG_TASK_Q_EN and OS_CFG_TASK_Q_PEND_ABORT_EN

`OSTaskQPendAbort()` aborts and readies a task currently waiting on its built-in message queue. This function should be used to fault-abort the wait on the task's message queue, rather than to normally signal the message queue via `OSTaskQPost()`.

ARGUMENTS

p_tcb is a pointer to the task for which the pend needs to be aborted. Note that it doesn't make sense to pass a `NULL` pointer or the address of the calling task's TCB since, by definition, the calling task cannot be pending.

opt provides options for this function.

<code>OS_OPT_POST_NONE</code>	No option specified.
<code>OS_OPT_POST_NO_SCHED</code>	specifies that the scheduler should not be called even if the pend of a higher priority task has been aborted. Scheduling will need to occur from another function.
	Use this option if the task calling <code>OSTaskQPendAbort()</code> will do additional pend aborts, rescheduling will take place when completed, and multiple pend aborts should take effect simultaneously.

p_err is a pointer to a variable that holds an error code:

<code>OS_ERR_NONE</code>	the task was readied by another task and it was informed of the aborted wait.
--------------------------	---

`OS_ERR_PEND_ABORT_ISR`
`OS_ERR_PEND_ABORT_NONE`
`OS_ERR_PEND_ABORT_SELF`

if `OS_CFG_CALLED_FROM_ISR_CHK_EN` set to 1 in `os_cfg.h`: if called from an ISR
 if the task was not pending on the task's message queue.
 if `OS_CFG_ARG_CHK_EN` is set to 1 in `os_cfg.h`: if `p_tcb` is a `NULL` pointer. The user is attempting to pend abort the calling task which makes no sense as the caller, by definition, is not pending.

RETURNED VALUE

`OSTaskQPendAbort()` returns `DEF_TRUE` if the task was made ready-to-run by this function. `DEF_FALSE` indicates that the task was not pending, or an error occurred.

NOTES/WARNINGS

None

EXAMPLE

```
OS_TCB CommRxTaskTCB;

void CommTask (void *p_arg)
{
    OS_ERR      err;
    CPU_BOOLEAN aborted;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        aborted = OSTaskQPendAbort(&CommRxTaskTCB,
                                    OS_OPT_POST_NONE,
                                    &err);
        /* Check "err" */
        :
        :
    }
}
```

A-65 OSTaskQPost()

```
void OSTaskQPost (OS_TCB      *p_tcb,
                  void       *p_void,
                  OS_MSG_SIZE msg_size,
                  OS_OPT     opt,
                  OS_ERR     *p_err)
```

File	Called from	Code enabled by
os_q.c	Task or ISR	OS_CFG_TASK_Q_EN and OS_CFG_MSG_EN

`OSTaskQPost()` sends a message to a task through its local message queue. A message is a pointer-sized variable, and its use is application specific. If the task's message queue is full, an error code is returned to the caller. In this case, `OSTaskQPost()` immediately returns to its caller, and the message is not placed in the message queue.

If the task receiving the message is waiting for a message to arrive, it will be made ready-to-run. If the receiving task has a higher priority than the task sending the message, the higher-priority task resumes, and the task sending the message is suspended; that is, a context switch occurs. A message can be posted as first-in first-out (FIFO), or last-in-first-out (LIFO), depending on the value specified in the `opt` argument. In either case, scheduling occurs unless `opt` is set to `OS_OPT_POST_NO_SCHED`.

ARGUMENTS

`p_tcb` is a pointer to the TCB of the task. Note that it is possible to post a message to the calling task (i.e., self) by specifying a `NULL` pointer, or the address of its TCB.

`p_void` is the actual message sent to the task. `p_void` is a pointer-sized variable and its meaning is application specific.

`msg_size` specifies the size of the message posted (in number of bytes).

opt determines the type of POST performed. Of course, it does not make sense to post LIFO and FIFO simultaneously, so these options are exclusive:

`OS_OPT_POST_FIFO`

POST message to task and place at the end of the queue if the task is not waiting for messages.

`OS_OPT_POST_LIFO`

POST message to task and place at the front of the queue if the task is not waiting for messages.

`OS_OPT_POST_NO_SCHED`

This option prevents calling the scheduler after the post and therefore the caller is resumed.

You should use this option if the task (or ISR) calling `OSTaskQPost()` will be doing additional posts, the user does not want to reschedule until all done, and multiple posts are to take effect simultaneously.

p_err is a pointer to a variable that will contain an error code returned by this function.

`OS_ERR_NONE`

if the call was successful and the message was posted to the task's message queue.

`OS_ERR_MSG_POOL_EMPTY`

if running out of `OS_MSG` to hold the message being posted.

`OS_ERR_Q_MAX`

if the task's message queue is full and cannot accept more messages.

RETURNED VALUE

None

NOTES/WARNINGS

None

EXAMPLE

```
OS_TCB      CommRxTaskTCB;
CPU_INT08U  CommRxBuf[100];

void CommTaskRx (void *p_arg)
{
    OS_ERR  err;

    (void)&p_arg;
    while (DEF_ON) {
        :
        OSTaskQPost(&CommRxTaskTCB,
                     (void *)&CommRxBuf[0],
                     sizeof(CommRxBuf),
                     OS_OPT_POST_FIFO,
                     &err);
        /* Check "err" */
        :
    }
}
```


A-66 OSTaskRegGet()

```
OS_REG OSTaskRegGet (OS_TCB      *p_tcb,
                     OS_REG_ID   id,
                     OS_ERR      *p_err)
```

File	Called from	Code enabled by
os_task.c	Task only	OS_CFG_TASK_REG_TBL_SIZE > 0

μ C/OS-III allows the user to store task-specific values in task registers. Task registers are different than CPU registers and are used to save such information as “errno,” which are common in software components. Task registers can also store task-related data to be associated with the task at run time such as I/O register settings, configuration values, etc. A task may have as many as OS_CFG_TASK_REG_TBL_SIZE registers, and all registers have a data type of OS_REG. However, OS_REG can be declared at compile time (see os_type.h) to be nearly anything (8-, 16-, 32-, 64-bit signed or unsigned integer, or floating-point).

As shown below, a task register is changed by calling OSTaskRegSet() and read by calling OSTaskRegGet(). The desired task register is specified as an argument to these functions and can take a value between 0 and OS_CFG_TASK_REG_TBL_SIZE-1.

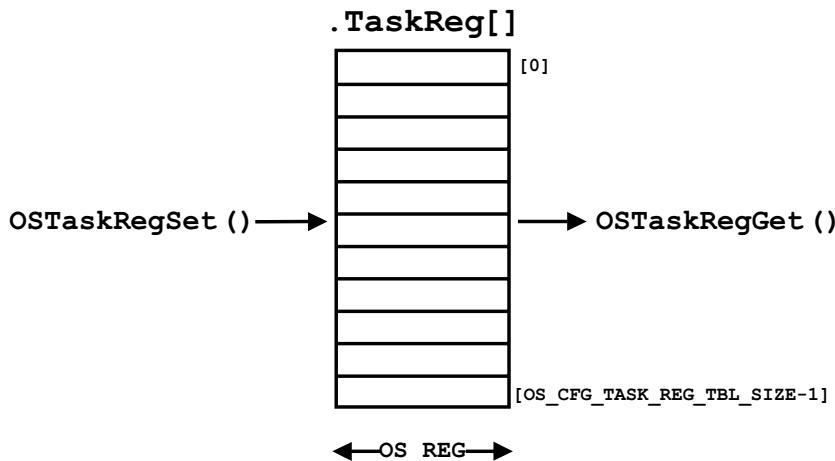

ARGUMENTS

<code>p_tcb</code>	is a pointer to the TCB of the task the user is receiving a task-register value from. A <code>NULL</code> pointer indicates that the user wants the value of a task register of the calling task.
<code>id</code>	is the identifier of the task register and valid values are from 0 to <code>OS_CFG_TASK_REG_TBL_SIZE-1</code> .
<code>p_err</code>	is a pointer to a variable that will contain an error code returned by this function.
<code>OS_ERR_NONE</code>	if the call was successful and the function returned the value of the desired task register.
<code>OS_ERR_REG_ID_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if a valid task register identifier is not specified.

RETURNED VALUE

The current value of the task register.

NOTES/WARNINGS

None

EXAMPLE

```
OS_TCB  MyTaskTCB;

void TaskX (void *p_arg)
{
    OS_ERR  err;
    OS_REG  reg;

    while (DEF_ON) {
        :
        reg = OSTaskRegGet(&MyTaskTCB,
                           5,
                           &err);
        /* Check "err" */
        :
    }
}
```


A-67 OSTaskRegSet()

```
void OSTaskRegSet (OS_TCB      *p_tcb,
                   OS_REG_ID   id,
                   OS_REG      value,
                   OS_ERR      *p_err)
```

File	Called from	Code enabled by
os_task.c	Task only	OS_CFG_TASK_REG_TBL_SIZE > 0

μ C/OS-III allows the user to store task-specific values in task registers. Task registers are different than CPU registers and are used to save such information as “errno,” which are common in software components. Task registers can also store task-related data to be associated with the task at run time such as I/O register settings, configuration values, etc. A task may have as many as `OS_CFG_TASK_REG_TBL_SIZE` registers, and all registers have a data type of `OS_REG`. However, `OS_REG` can be declared at compile time to be nearly anything (8-, 16-, 32-, 64-bit signed or unsigned integer, or floating-point).

As shown below, a task register is changed by calling `OSTaskRegSet()`, and read by calling `OSTaskRegGet()`. The desired task register is specified as an argument to these functions and can take a value between 0 and `OS_CFG_TASK_REG_TBL_SIZE-1`.

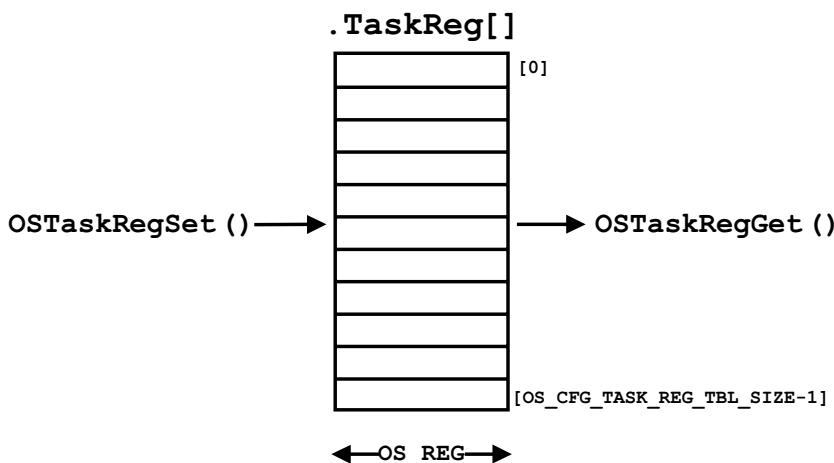

ARGUMENTS

<code>p_tcb</code>	is a pointer to the TCB of the task you are setting. A <code>NULL</code> pointer indicates that the user wants to set the value of a task register of the calling task.
<code>id</code>	is the identifier of the task register and valid values are from 0 to <code>OS_CFG_TASK_REG_TBL_SIZE-1</code> .
<code>value</code>	is the new value of the task register specified by <code>id</code> .
<code>p_err</code>	is a pointer to a variable that will contain an error code returned by this function.
<code>OS_ERR_NONE</code>	if the call was successful, and the function set the value of the desired task register.
<code>OS_ERR_REG_ID_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if a valid task register identifier is not specified.

RETURNED VALUE

None

NOTES/WARNINGS

None

EXAMPLE

```
OS_TCB  MyTaskTCB;

void TaskX (void *p_arg)
{
    OS_ERR  err;

    while (DEF_ON) {
        :
        reg = OSTaskRegSet(&MyTaskTCB,
                           5,
                           23,
                           &err);
        /* Check "err" */
        :
    }
}
```

A-68 OSTaskReturnHook()

```
void OSTaskReturnHook (void);
```

File	Called from	Code enabled by
os_cpu_c.c	OS_TaskReturn() ONLY	N/A

This function is called by `OS_TaskReturn()`. `OS_TaskReturn()` is called if the user accidentally returns from the task code. In other words, the task should either be implemented as an infinite loop and never return, or the task must call `OSTaskDel((OS_TCB *)0, &err)` to delete itself to prevent it from exiting.

`OSTaskReturnHook()` is part of the CPU port code and this function *must not* be called by the application code. `OSTaskReturnHook()` is actually used by the µC/OS-III port developer.

Note that after calling `OSTaskReturnHook()`, `OS_TaskReturn()` will actually delete the task by calling:

```
OSTaskDel((OS_TCB *)0,
          &err)
```

ARGUMENTS

`p_tcb` is a pointer to the TCB of the task that is not behaving as expected. Note that the `OS_TCB` is validated by `OS_TaskReturn()`, and is guaranteed to not be a NULL pointer when `OSTaskReturnHook()` is called.

RETURNED VALUE

None

NOTES/WARNINGS

Do not call this function from the application.

EXAMPLE

The code below calls an application-specific hook that the application programmer can define. For this, the user can simply set the value of `OS_AppTaskReturnHookPtr` to point to the desired hook function as shown in the example. If a task returns and forgets to call `OSTaskDel((OS_TCB *)0, &err)` then µC/OS-III will call `OSTaskReturnHook()` which in turns calls `App_OS_TaskReturnHook()` through `OS_AppTaskReturnHookPtr`. When called, the application hook is passed the address of the `OS_TCB` of the task returning.

```

void App_OS_TaskReturnHook (OS_TCB *p_tcb)                                /* os_app_hooks.c */
{
    /* Your code goes here! */
}

void App_OS_SetAllHooks (void)                                              /* os_app_hooks.c */
{
    CPU_SR_ALLOC();

    CPU_CRITICAL_ENTER();
    :
    OS_AppTaskReturnHookPtr = App_OS_TaskReturnHook;
    :
    CPU_CRITICAL_EXIT();
}

void OSTaskReturnHook (OS_TCB *p_tcb)                                         /* os_cpu.c */
{
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppTaskReturnHookPtr != (OS_APP_HOOK_TCB)0) { /* Call application hook */
        (*OS_AppTaskReturnHookPtr)(p_tcb);
    }
#endif
}

```

A-69 OSTaskResume()

```
void OSTaskResume (OS_TCB *p_tcb,
                  OS_ERR *p_err)
```

File	Called from	Code enabled by
os_task.c	Task only	OS_CFG_TASK_SUSPEND_EN

`OSTaskResume()` resumes a task suspended through the `OSTaskSuspend()` function. In fact, `OSTaskResume()` is the only function that can unsuspend a suspended task. Obviously, the suspended task can only be resumed by another task. If the suspended task is also waiting on another kernel object such as an event flag, semaphore, mutex, message queue etc., the suspension will simply be lifted (i.e., removed), but the task will continue waiting for the object.

The user can “nest” suspension of a task by calling `OSTaskSuspend()` and therefore must call `OSTaskResume()` an equivalent number of times to resume such a task. In other words, if suspending a task five times, it is necessary to unsuspend the same task five times to remove the suspension of the task.

ARGUMENTS

`p_tcb` is a pointer to the TCB of the task that is resuming. A `NULL` pointer is not a valid value as one cannot resume the calling task because, by definition, the calling task is running and is not suspended.

`p_err` is a pointer to a variable that will contain an error code returned by this function.

<code>OS_ERR_NONE</code>	if the call was successful and the desired task is resumed.
--------------------------	---

<code>OS_ERR_TASK_RESUME_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if calling this function from an ISR.
-------------------------------------	---

OS_ERR_TASK_RESUME_SELF

if `OS_CFG_ARG_CHK_EN` is set to 1 in `os_cfg.h`: if passing a `NULL` pointer for `p_tcb` or, a pointer to the current TCB. It is not possible to resume the calling task since, if suspended, it cannot be executing.

OS_ERR_TASK_NOT_SUSPENDED

if the task attempting to be resumed is not suspended.

RETURNED VALUE

None

NOTES/WARNINGS

None

EXAMPLE

```
OS_TCB    TaskY;

void TaskX (void *p_arg)
{
    OS_ERR err;

    while (DEF_ON) {
        :
        :
        OSTaskResume(&TaskY,
                     &err);           /* Resume suspended task */
        /* Check "err" */
        :
        :
    }
}
```

A-70 OSTaskSemPend()

```
OS_SEM_CTR OSTaskSemPend (OS_TICK    timeout,
                           OS_OPT      opt,
                           CPU_TS     *p_ts,
                           OS_ERR     *p_err)
```

File	Called from	Code enabled by
os_task.c	Task only	Always enabled

`OSTaskSemPend()` allows a task to wait for a signal to be sent by another task or ISR without going through an intermediate object such as a semaphore. If the task was previously signaled when `OSTaskSemPend()` is called then, the caller resumes.

If no signal was received by the task and `OS_OPT_PEND_BLOCKING` is specified for the `opt` argument, `OSTaskSemPend()` suspends the current task until either a signal is received, or a user-specified timeout expires. A pended task suspended with `OSTaskSuspend()` can receive signals. However, the task remains suspended until it is resumed by calling `OSTaskResume()`.

If no signals were sent to the task and `OS_OPT_PEND_NON_BLOCKING` was specified for the `opt` argument, `OSTaskSemPend()` returns to the caller with an appropriate error code and returns a signal count of 0.

ARGUMENTS

`timeout` allows the task to resume execution if a signal is not received from a task or an ISR within the specified number of clock ticks. A timeout value of 0 indicates that the task wants to wait forever for a signal. The timeout value is not synchronized with the clock tick. The timeout count starts decrementing on the next clock tick, which could potentially occur immediately.

`opt` determines whether the user wants to block or not, if a signal was not sent to the task. Set this argument to either:

`OS_OPT_PEND_BLOCKING`, or
`OS_OPT_PEND_NON_BLOCKING`

Note that the `timeout` argument should be set to 0 when specifying `OS_OPT_PEND_NON_BLOCKING`, since the timeout value is irrelevant using this option.

`p_ts` is a pointer to a timestamp indicating when the task's semaphore was posted, or the pend was aborted. Passing a `NULL` pointer is valid and indicates that the timestamp is not necessary.

A timestamp is useful when the task is to know when the semaphore was posted, or how long it took for the task to resume after the semaphore was posted. In the latter case, call `OS_TS_GET()` and compute the difference between the current value of the timestamp and `*p_ts`. In other words:

```
delta = OS_TS_GET() - *p_ts;
```

`p_err` is a pointer to a variable used to hold an error code.

<code>OS_ERR_NONE</code>	if a signal is received.
<code>OS_ERR_PEND_ABORT</code>	if the pend was aborted because another task called <code>OSTaskSemPendAbort()</code> .
<code>OS_ERR_PEND_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if calling this function from an ISR.
<code>OS_ERR_PEND_WOULD_BLOCK</code>	if calling this function with the <code>opt</code> argument set to <code>OS_OPT_PEND_NON_BLOCKING</code> , and no signal was received.
<code>OS_ERR_SCHED_LOCKED</code>	if calling this function when the scheduler is locked and the user wanted the task to block.
<code>OS_ERR_TIMEOUT</code>	if a signal is not received within the specified timeout.

RETURNED VALUE

The current value of the signal counter after it has been decremented. In other words, the number of signals still remaining in the signal counter.

NOTES/WARNINGS

Do not call `OSTaskSemPend()` from an ISR.

EXAMPLE

```
void CommTask(void *p_arg)
{
    OS_ERR      err;
    OS_SEM_CTR  ctr;
    CPU_TS      ts;

    (void)&p_arg;
    while (DEF_ON) {
        :
        ctr = OSTaskSemPend(100,
                            OS_OPT_PEND_BLOCKING,
                            &ts,
                            &err);
        /* Check "err" */
        :
    }
}
```

A-71 OSTaskSemPendAbort()

```
CPU_BOOLEAN OSTaskSemPendAbort (OS_TCB *p_tcb,
                                OS_OPT opt,
                                OS_ERR *p_err)
```

File	Called from	Code enabled by
os_task.c	Task only	OS_CFG_TASK_SEM_PEND_ABORT_EN

`OSTaskSemPendAbort()` aborts and readies a task currently waiting on its built-in semaphore. This function should be used to fault-abort the wait on the task's semaphore, rather than to normally signal the task via `OSTaskSemPost()`.

ARGUMENTS

`p_tcb` is a pointer to the task for which the pend must be aborted. Note that it does not make sense to pass a `NULL` pointer or the address of the calling task's TCB since, by definition, the calling task cannot be pending.

`opt` provides options for this function.

<code>OS_OPT_POST_NONE</code>	no option specified, call the scheduler by default.
-------------------------------	---

<code>OS_OPT_POST_NO_SCHED</code>	specifies that the scheduler should not be called even if the pend of a higher-priority task has been aborted. Scheduling will need to occur from another function.
-----------------------------------	---

<code>OS_OPT_POST_NO_SCHED</code>	Use this option if the task calling <code>OSTaskSemPendAbort()</code> will be doing additional pend aborts, rescheduling will not take place until finished, and multiple pend aborts are to take effect simultaneously.
-----------------------------------	--

<code>p_err</code>	is a pointer to a variable that holds an error code:
--------------------	--

<code>OS_ERR_NONE</code>	the pend was aborted for the specified task.
<code>OS_ERR_PEND_ABORT_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if called from an ISR
<code>OS_ERR_PEND_ABORT_NONE</code>	if the task was not waiting for a signal.

`OS_ERR_PEND_ABORT_SELF`

if `p_tcb` is a `NULL` pointer or the TCB of the calling task is specified. The user is attempting to pend abort the calling task, which makes no sense since, by definition, the calling task is not pending.

RETURNED VALUE

`OSTaskSemPendAbort()` returns `DEF_TRUE` if the task was made ready-to-run by this function. `DEF_FALSE` indicates that the task was not pending, or an error occurred.

NOTES/WARNINGS

None

EXAMPLE

```
OS_TCB CommRxTaskTCB;

void CommTask (void *p_arg)
{
    OS_ERR      err;
    CPU_BOOLEAN aborted;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        aborted = OSTaskSemPendAbort(&CommRxTaskTCB,
                                      OS_OPT_POST_NONE,
                                      &err);
        /* Check "err" */
        :
        :
    }
}
```

A-72 OSTaskSemPost()

```
OS_SEM_CTR OSTaskSemPost (OS_TCB      *p_tcb,
                           OS_OPT       opt,
                           OS_ERR      *p_err)
```

File	Called from	Code enabled by
os_task.c	Task or ISR	Always enabled

`OSTaskSemPost()` sends a signal to a task through its local semaphore.

If the task receiving the signal is actually waiting for a signal to be received, it will be made ready-to-run and, if the receiving task has a higher priority than the task sending the signal, the higher-priority task resumes, and the task sending the signal is suspended; that is, a context switch occurs. Note that scheduling only occurs if `opt` is set to `OS_OPT_POST_NONE`, because the `OS_OPT_POST_NO_SCHED` option does not cause the scheduler to be called.

ARGUMENTS

`p_tcb` is a pointer to the TCB of the task being signaled. A `NULL` pointer indicates that the user is sending a signal to itself.

`opt` provides options to the call.

<code>OS_OPT_POST_NONE</code>	No option, by default the scheduler will be called.
-------------------------------	---

<code>OS_OPT_POST_NO_SCHED</code>	Do not call the scheduler after the post, therefore the caller is resumed.
-----------------------------------	--

	You would use this option if the task (or ISR) calling <code>OSTaskSemPost()</code> will be doing additional posts, reschedule waits until all is done, and multiple posts are to take effect simultaneously.
--	---

`p_err` is a pointer to a variable that will contain an error code returned by this function.

`OS_ERR_NONE` if the call was successful and the signal was sent.

`OS_ERR_SEM_OVF` the post would have caused the semaphore counter to overflow.

RETURNED VALUE

The current value of the task's signal counter, or 0 if called from an ISR and `OS_CFG_ISR_POST_DEFERRED_EN` is set to 1.

NOTES/WARNINGS

None

EXAMPLE

```
OS_TCB          CommRxTaskTCB;

void CommTaskRx (void *p_arg)
{
    OS_ERR      err;
    OS_SEM_CTR  ctr;

    (void)&p_arg;
    while (DEF_ON) {
        :
        ctr = OSTaskSemPost(&CommRxTaskTCB,
                            OS_OPT_POST_NONE,
                            &err);
        /* Check "err" */
        :
    }
}
```

A-73 OSTaskSemSet()

```
OS_SEM_CTR OSTaskSemSet (OS_TCB      *p_tcb,
                         OS_SEM_CTR  cnt;
                         OS_ERR      *p_err)
```

File	Called from	Code enabled by
os_task.c	Task or ISR	Always Enabled

`OSTaskSemSet()` allows the user to set the value of the task's signal counter. You would set the signal counter of the calling task by passing a `NULL` pointer for `p_tcb`.

ARGUMENTS

`p_tcb` is a pointer to the task's `OS_TCB` to clear the signal counter. A `NULL` pointer indicates that the user wants to clear the caller's signal counter.

`cnt` the desired value for the task semaphore counter.

`p_err` is a pointer to a variable that will contain an error code returned by this function.

`OS_ERR_NONE` if the call was successful and the signal counter was cleared.

`OS_ERR_SET_ISR` if `OS_CFG_CALLED_FROM_ISR_CHK_EN` set to 1 in `os_cfg.h`: if calling this function from an ISR

RETURNED VALUE

The value of the signal counter prior to setting it.

NOTES/WARNINGS

None

EXAMPLE

```
OS_TCB    TaskY;

void TaskX (void *p_arg)
{
    OS_ERR err;

    while (DEF_ON) {
        :
        :
        OSTaskSemSet(&TaskY,
                     0,
                     &err);
        /* Check "err" */
        :
        :
    }
}
```

A-74 OSStatTaskHook()

```
void OSStatTaskHook (void);
```

File	Called from	Code enabled by
os_cpu_c.c	OS_StatTask() ONLY	OS_CFG_TASK_STAT_EN

This function is called by `OS_StatTask()`.

`OSStatTaskHook()` is part of the CPU port code and *must not* be called by the application code. `OSStatTaskHook()` is actually used by the µC/OS-III port developer.

ARGUMENTS

None

RETURNED VALUE

None

NOTES/WARNINGS

Do not call this function from the application.

EXAMPLE

The code below calls an application-specific hook that the application programmer can define. The user can simply set the value of `OS_AppStatTaskHookPtr` to point to the desired hook function as shown in the example. The statistic task calls `OSStatTaskHook()` which in turns calls `App_OS_StatTaskHook()` through `OS_AppStatTaskHookPtr`.

Appendix A

```
void App_OS_StatTaskHook (void)                                /* os_app_hooks.c */
{
    /* Your code goes here! */
}

void App_OS_SetAllHooks (void)                                /* os_app_hooks.c */
{
    CPU_SR_ALLOC();

    CPU_CRITICAL_ENTER();
    :
    OS_AppStatTaskHookPtr = App_OS_StatTaskHook;
    :
    CPU_CRITICAL_EXIT();
}

void OSStatTaskHook (void)                                     /* os_cpu_c.c */
{
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppStatTaskHookPtr != (OS_APP_HOOK_VOID)0) { /* Call application hook */
        (*OS_AppStatTaskHookPtr)();
    }
#endif
}
```

A-75 OSTaskStkChk()

```
void OSTaskStkChk (OS_TCB      *p_tcb,
                    CPU_STK_SIZE *p_free,
                    CPU_STK_SIZE *p_used,
                    OS_ERR       *p_err)
```

File	Called from	Code enabled by
os_task.c	Task only	OS_CFG_TASK_STAT_CHK_EN

`OSTaskStkChk()` determines a task's stack statistics. Specifically, it computes the amount of free stack space, as well as the amount of stack space used by the specified task. This function requires that the task be created with the `OS_TASK_OPT_STK_CHK` and `OS_TASK_OPT_STK_CLR` options.

Stack sizing is accomplished by walking from the bottom of the stack and counting the number of 0 entries on the stack until a non-zero value is found.

It is possible to not set the `OS_TASK_OPT_STK_CLR` when creating the task if the startup code clears all RAM, and tasks are not deleted (this reduces the execution time of `OSTaskCreate()`).

`μC/OS-III`'s statistic task calls `OSTaskStkChk()` for each task created and stores the results in each task's `OS_TCB` so your application doesn't need to call this function if the statistic task is enabled.

ARGUMENTS

`p_tcb` is a pointer to the TCB of the task where the stack is being checked. A `NULL` pointer indicates that the user is checking the calling task's stack.

`p_free` is a pointer to a variable of type `CPU_STK_SIZE` and will contain the number of free `CPU_STK` elements on the stack of the task being inquired about.

`p_used` is a pointer to a variable of type `CPU_STK_SIZE` and will contain the number of used `CPU_STK` elements on the stack of the task being inquired about.

`p_err` is a pointer to a variable that will contain an error code returned by this function.

<code>OS_ERR_NONE</code>	if the call was successful.
<code>OS_ERR_PTR_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if either <code>p_free</code> or <code>p_used</code> are <code>NULL</code> pointers.
<code>OS_ERR_TASK_NOT_EXIST</code>	if the stack pointer of the task is a <code>NULL</code> pointer.
<code>OS_ERR_TASK_OPT</code>	if <code>OS_OPT_TASK_STK_CHK</code> is not specified when creating the task being checked.
<code>OS_ERR_TASK_STK_CHK_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if calling this function from an ISR.

RETURNED VALUE

None

NOTES/WARNINGS

- Execution time of this task depends on the size of the task's stack.
- The application can determine the total task stack space (in number of `CPU_STK` elements) by adding the value of `*p_free` and `*p_used`. This number should add up to the task's stack size which is stored in the `.StkSize` field of the `OS_TCB` of the task.
- The `#define CPU_CFG_STK_GROWTH` must be declared (typically from `os_cpu.h`). When this `#define` is set to `CPU_STK_GROWTH_LO_TO_HI`, the stack grows from low memory to high memory. When this `#define` is set to `CPU_STK_GROWTH_HI_TO_LO`, the stack grows from high memory to low memory.

EXAMPLE

```
OS_TCB  MyTaskTCB;

void Task (void *p_arg)
{
    OS_ERR          err;
    CPU_STK_SIZE   n_free;
    CPU_STK_SIZE   n_used;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        OSTaskStkChk(&MyTaskTCB,
                      &n_free,
                      &n_used,
                      &err);
        /* Check "err" */
        :
        :
    }
}
```

A-76 OSTaskStkInit()

```
void OSTaskStkInit (OS_TASK_PTR      p_task,
                    void            *p_arg,
                    CPU_STK        *p_stk_base,
                    CPU_STK        *p_stk_limit,
                    CPU_STK_SIZE   stk_size,
                    OS_OPT         opt);
```

File	Called from	Code enabled by
os_cpu_c.c	OSTaskCreate() ONLY	N/A

This function is called by `OSTaskCreate()` to setup the stack frame of the task being created. Typically, the stack frame will look as if an interrupt just occurred, and all CPU registers were pushed onto the task's stack. The stacking order of CPU registers is very CPU specific.

`OSTaskStkInit()` is part of the CPU port code and this function *must not* be called by the application code. `OSTaskStkInit()` is actually defined by the µC/OS-III port developer.

ARGUMENTS

`p_task` is the address of the task being created (see `MyTask()` below). Tasks must be declared as follows:

```
void  MyTask (void  *p_arg)
{
    /* Do something with "p_arg" (optional) */
    while (DEF_ON) {
        /* Wait for an event to occur */
        /* Do some work                 */
    }
}
```

Or,

```
void MyTask (void *p_arg)
{
    OS_ERR err;

    /* Do something with "p_arg" (optional) */
    /* Do some work */
    OSTaskDel((OS_TCB *)0,
              &err);
}
```

p_arg is the argument that the task will receive when the task first starts (see code above).

p_stk_base is the base address of the task's stack. This is typically the lowest address of the area of storage reserved for the task stack. In other words, if declaring the task's stack as follows:

```
CPU_STK MyTaskStk[100];
```

`OSTaskCreate()` would pass `&OSMyTaskStk[0]` to **p_stk_base**.

p_stk_limit is the address of the task's stack limit watermark. This pointer is computed by `OSTaskCreate()` prior to calling `OSTaskStkInit()`.

stk_size is the size of the task's stack in number of `CPU_STK` elements. In the example above, the stack size is 100.

opt is the options passed to `OSTaskCreate()` for the task being created.

RETURNED VALUE

The new top of stack after the task's stack is initialized. `OSTaskStkInit()` will place values on the task's stack and will return the new pointer for the stack pointer for the task. The value returned is very processor specific. For some processors, the returned value will point to the last value placed on the stack while, with other processors, the returned value will point at the next free stack entry.

NOTES/WARNINGS

Do not call this function from the application.

EXAMPLE

The pseudo code below shows the typical steps performed by this function. Consult an existing µC/OS-III port for examples. Here it is assumed that the stack grows from high memory to low memory.

```
CPU_STK *OSTaskStkInit (OS_TASK_PTR p_task,
                        void        *p_arg,
                        CPU_STK    *p_stk_base,
                        CPU_STK    *p_stk_limit,
                        CPU_STK_SIZE stk_size,
                        OS_OPT      opt)
{
    CPU_STK *p_stk;

    p_stk    = &p_stk_base[stk_size - lu];                      (1)
    *p_stk-- = Initialize the stack as if an interrupt just occurred; (2)
    return (p_stk);                                         (3)
}
```

- (1) `p_stk` is set to the top-of-stack. It is assumed that the stack grows from high memory locations to lower ones. If the stack of the CPU grew from low memory locations to higher ones, the user would simply set `p_stk` to point at the base. However, this also means that it would be necessary to initialize the stack frame in the opposite direction.

-
- (2) The CPU registers are stored onto the stack using the same stacking order as used when an interrupt service routine (ISR) saves the registers at the beginning of the ISR. The value of the register contents on the stack is typically not important. However, there are some values that are critical. Specifically, you need to place the address of the task in the proper location on the stack frame and it may be important to load the value of the CPU register and possibly pass the value of `p_arg` in one of the CPU registers. Finally, if the task is to return by mistake, it is a good idea to place the address of `OS_TaskReturn()` in the proper location on the stack frame. This ensures that a faulty returning task is intercepted by μC/OS-III.
 - (3) Finally, your code will need to return the value of the stack pointer at the new top-of-stack frame. Some processors point to the last stored location, while others point to the next empty location. You should consult the processor documentation so that the return value points at the proper location.

Below is an example showing which arguments `OSTaskCreate()` passes to `OSTaskStkInit()`.

Appendix A

```
CPU_STK  MyTaskStk[100];
OS_TCB   MyTaskTCB;

void  MyTask (void *p_arg)
{
    /* Do something with "parg" (optional) */
}

void  main (void)
{
    OS_ERR  err;
    :
    :
    OSInit(&err);
    /* Check "err" */
    :
    OSTaskCreate ((OS_TCB      *) &MyTaskTCB,
                  (CPU_CHAR     *) "My Task",
                  (OS_TASK_PTR  ) MyTask,           /* "p_task"      of OSTaskStkInit() */
                  (void         *) 0,              /* "p_arg"       of OSTaskStkInit() */
                  (OS_PRIO      ) prio,
                  (CPU_STK      *) &MyTaskStk[0],  /* "p_stk_base"  of OSTaskStkInit() */
                  (CPU_STK_SIZE  ) 10,             /* "p_stk_limit" of OSTaskStkInit() */
                  (CPU_STK_SIZE  ) 100,            /* "stk_size"    of OSTaskStkInit() */
                  (OS_MSG_QTY   ) 0,
                  (OS_TICK      ) 0,
                  (void         *) 0,
                  (OS_OPT       ) (OS_OPT_TASK_STK_CLR + OS_OPT_TASK_STK_CHK), /* "opt" */
                  (OS_ERR       *) &err);
    /* Check "err" */
    :
    :
    OSStart(&err);
    /* Check "err" */
}
```

A-77 OSTaskSuspend()

```
void OSTaskSuspend (OS_TCB *p_tcb,
                    OS_ERR *p_err)
```

File	Called from	Code enabled by
os_task.c	Task only	OS_CFG_TASK_SUSPEND_EN

`OSTaskSuspend()` suspends (or blocks) execution of a task unconditionally. The calling task may be suspended by specifying a `NULL` pointer for `p_tcb`, or simply by passing the address of its `OS_TCB`. In this case, another task needs to resume the suspended task. If the current task is suspended, rescheduling occurs, and μC/OS-III runs the next highest priority task ready-to-run. The only way to resume a suspended task is to call `OSTaskResume()`.

Task suspension is additive, which means that if the task being suspended is delayed until N ticks expire, the task is resumed only when both the time expires and the suspension is removed. Also, if the suspended task is waiting for a semaphore and the semaphore is signaled, the task is removed from the semaphore wait list (if it is the highest-priority task waiting for the semaphore), but execution is not resumed until the suspension is removed.

The user can “nest” suspension of a task by calling `OSTaskSuspend()` and therefore it is important to call `OSTaskResume()` an equivalent number of times to resume the task. If suspending a task five times, it is necessary to unsuspend the same task five times to remove the suspension of the task.

ARGUMENTS

`p_tcb` is a pointer to the TCB of the task the user is suspending. A `NULL` pointer indicates suspension of the calling task.

`p_err` is a pointer to a variable that will contain an error code returned by this function.

<code>OS_ERR_NONE</code>	if the call was successful and the desired task was suspended.
--------------------------	--

<code>OS_ERR_TASK_SUSPEND_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if the function is called from an ISR.
--------------------------------------	--

OS_ERR_TASK_SUSPEND_IDLE if attempting to suspend the idle task. This is not allowed since the idle task must always exist.

OS_ERR_TASK_SUSPEND_INT_HANDLER if attempting to suspend the ISR handler task. This is not allowed since the ISR handler task is a µC/OS-III internal task.

RETURNED VALUE

None

NOTES/WARNINGS

- `OSTaskSuspend()` and `OSTaskResume()` must be used in pairs.
- A suspended task can only be resumed by `OSTaskResume()`.

EXAMPLE

```
void TaskX (void *p_arg)
{
    OS_ERR  err;

    (void)&p_arg;
    while (DEF_ON) {
        :
        :
        OSTaskSuspend((OS_TCB *)0,
                      &err);           /* Suspend current task */
        /* Check "err" */
        :
    }
}
```

A-78 OSTaskSwHook()

```
void OSTaskSwHook (void)
```

File	Called from	Code enabled by
os_cpu_c.c	OSCtxSw() or OSIntCtxSw()	N/A

`OSTaskSwHook()` is always called by either `OSCtxSw()` or `OSIntCtxSw()` (see `os_cpu_a.asm`), just after saving the CPU registers onto the task being switched out. This hook function allows the port developer to perform additional operations (if needed) when μC/OS-III performs a context switch.

Before calling `OSTaskSwHook()`, `OSTCBCurPtr` points at the `OS_TCB` of the task being switched out, and `OSTCBHighRdyPtr` points at the `OS_TCB` of the new task being switched in.

The code shown in the example below should be included in all implementations of `OSTaskSwHook()`, and is used for performance measurements. This code is written in C for portability.

ARGUMENTS

None

RETURNED VALUES

None

NOTES/WARNINGS

None

EXAMPLE

The code below calls an application specific hook that the application programmer can define. The user can simply set the value of `OS_AppTaskSwHookPtr` to point to the desired hook function. When μC/OS-III performs a context switch, it calls `OSTaskSwHook()` which in turn calls `App_OS_TaskSwHook()` through `OS_AppTaskSwHookPtr`.

Appendix A

```
void App_OS_TaskSwHook (void)                                /* os_app_hooks.c      */
{
    /* Your code goes here! */
}

void App_OS_SetAllHooks (void)                                /* os_app_hooks.c      */
{
    CPU_SR_ALLOC();

    CPU_CRITICAL_ENTER();
    :
    OS_AppTaskSwHookPtr = App_OS_TaskSwHook;
    :
    CPU_CRITICAL_EXIT();
}
```

```

void OSTaskSwHook (void)                                /* os_cpu.c.c */
{
#if OS_CFG_TASK_PROFILE_EN > 0u
    CPU_TS      ts;
#endif
#ifdef CPU_CFG_TIME_MEAS_INT_DIS_EN
    CPU_TS      int_dis_time;
#endif

#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppTaskSwHookPtr != (OS_APP_HOOK_VOID)0) {
        (*OS_AppTaskSwHookPtr)();
    }
#endif
#if OS_CFG_TASK_PROFILE_EN > 0u
    ts = OS_TS_GET();
    if (OSTCBCurPtr != OSTCBHighRdyPtr) {
        OSTCBCurPtr->CyclesDelta = ts - OSTCBCurPtr->CyclesStart;
        OSTCBCurPtr->CyclesTotal += OSTCBCurPtr->CyclesDelta;
    }
    OSTCBHighRdyPtr->CyclesStart = ts;
#endif
#ifdef CPU_CFG_INT_DIS_MEAS_EN
    int_dis_time = CPU_IntDisMeasMaxCurReset();
    if (int_dis_time > OSTCBCurPtr->IntDisTimeMax) {
        OSTCBCurPtr->IntDisTimeMax = int_dis_time;
    }
#endif
#if OS_CFG_SCHED_LOCK_TIME_MEAS_EN > 0u
    if (OSTCBCurPtr->SchedLockTimeMax < OSSchedLockTimeMaxCur) {
        OSTCBCurPtr->SchedLockTimeMax = OSSchedLockTimeMaxCur;
    }
    OSSchedLockTimeMaxCur      = (CPU_TS)0;
#endif
}

```

A-79 OSTaskTimeQuantaSet()

```
void OSTaskTimeQuantaSet (OS_TCB *p_tcb,
                         OS_TICK time_quanta,
                         OS_ERR *p_err)
```

File	Called from	Code enabled by
os_task.c	Task only	OS_CFG_SCHED_ROUND_ROBIN_EN

`OSTaskTimeQuantaSet()` is used to change the amount of time a task is given when time slicing multiple tasks running at the same priority.

ARGUMENTS

`p_tcb` is a pointer to the TCB of the task for which the time quanta is being set. A `NULL` pointer indicates that the user is changing the time quanta for the calling task.

`time_quanta` specifies the amount of time (in ticks) that the task will run when μC/OS-III is time slicing between tasks at the same priority. Specifying 0 indicates that the default time as specified will be used when calling the function `OSSchedRoundRobinCfg()`, or `OS_CFG_TICK_RATE_HZ / 10` if you never called `OSSchedRoundRobinCfg()`.

You should not specify a “large” value for this argument as this means that the task will execute for that amount of time when multiple tasks are ready-to-run at the same priority. The concept of time slicing is to allow other equal-priority tasks a chance to run. Typical time quanta periods should be approximately 10 mS. A too small value results in more overhead because of the additional context switches.

p_err is a pointer to a variable that will contain an error code returned by this function.

<code>OS_ERR_NONE</code>	if the call was successful and the time quanta for the task was changed.
<code>OS_ERR_SET_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if calling this function from an ISR.

RETURNED VALUE

None

NOTES/WARNINGS

Do not specify a large value for `time_quanta`.

EXAMPLE

```
void TaskX (void *p_arg)
{
    OS_ERR  err;

    while (DEF_ON) {
        :
        :
        OSTaskTimeQuantaSet((OS_TCB *)0,
                            OS_CFG_TICK_RATE_HZ / 4;
                            &err);
        /* Check "err" */
        :
    }
}
```

A-80 OSTickISR()

```
void OSTickISR (void)
```

File	Called from	Code enabled by
os_cpu_a.asm	Tick interrupt	N/A

`OSTickISR()` is invoked by the tick interrupt, and the function is generally written in assembly language. However, this depends on how interrupts are handled by the processor. (see Chapter 9, “Interrupt Management” on page 175).

ARGUMENTS

None

RETURNED VALUES

None

NOTES/WARNINGS

None

EXAMPLE

The code below indicates how to write `OSTickISR()` if all interrupts vector to a common location, and the interrupt handler simply calls `OSTickISR()`. As indicated, this code can be written completely in C and can be placed either in `os_cpu_c.c` of the µC/OS-III port, or in the board support package (`bsp.c`) and be reused by applications using the same BSP.

```
void OSTickISR (void)
{
    Clear the tick interrupt;
    OSTimeTick();
}
```

The pseudo code below shows how to write **OSTickISR()** if each interrupt directly vectors to its own interrupt handler. The code, in this case, would be written in assembly language and placed either in **os_cpu_a.asm** of the µC/OS-III port, or in the board support package (**bsp.c**).

```
void OSTickISR (void)
{
    Save all the CPU registers onto the current task's stack;
    if (OSIntNestingCtr == 0) {
        OSTCBCurPtr->StkPtr = SP;
    }
    OSIntNestingCtr++;
    Clear the tick interrupt;
    OSTimeTick();
    OSIntExit();
    Restore the CPU registers from the stack;
    Return from interrupt;
}
```

A-81 OSTimeDly()

```
void OSTimeDly (OS_TICK dly,
                OS_OPT opt,
                OS_ERR *p_err)
```

File	Called from	Code enabled by
os_time.c	Task only	N/A

`OSTimeDly()` allows a task to delay itself for an integral number of clock ticks. The delay can either be relative (delay from current time), periodic (delay occurs at fixed intervals) or absolute (delay until we reach some time).

In relative mode, rescheduling always occurs when the number of clock ticks is greater than zero. A delay of 0 means that the task is not delayed, and `OSTimeDly()` returns immediately to the caller.

In periodic mode, you must specify a non-zero period otherwise the function returns immediately with an appropriate error code. The period is specified in “ticks”.

In absolute mode, rescheduling always occurs since all delay values are valid.

The actual delay time depends on the tick rate (see `OS_CFG_TICK_RATE_HZ` if `os_cfg_app.h`).

ARGUMENTS

`dly` is the desired delay expressed in number of clock ticks. Depending on the value of the `opt` field, delays can be relative or absolute.

A relative delay means that the delay is started from the “`current_time + dly`”.

A periodic delay means the period (in number of ticks). µC/OS-III saves the current time + `dly` in `.TclkCtrPrev` so the next time `OSTimeDly()` is called, we use `.TickDlyPrev + dly`.

An absolute delay means that the task will wake up when `OSTickCtr` reaches the value specified by `dly`.

opt is used to indicate whether the delay is absolute or relative:

<code>OS_OPT_TIME_DLY</code>	Specifies a relative delay.
<code>OS_OPT_TIME_PERIODIC</code>	Specifies periodic mode.
<code>OS_OPT_TIME_MATCH</code>	Specifies that the task will wake up when <code>OSTickCtr</code> reaches the value specified by <code>dly</code>

p_err is a pointer to a variable that will contain an error code returned by this function.

<code>OS_ERR_NONE</code>	if the call was successful, and the task has returned from the desired delay.
<code>OS_ERR_OPT_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if a valid option is not specified.
<code>OS_ERR_TIME_DLY_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if calling this function from an ISR.
<code>OS_ERR_TIME_ZERO_DLY</code>	if specifying a delay of 0 when the option was set to <code>OS_OPT_TIME_DLY</code> . Note that a value of 0 is valid when setting the option to <code>OS_OPT_TIME_MATCH</code> .

RETURNED VALUE

None

NOTES/WARNINGS

None

EXAMPLE

```
void TaskX (void *p_arg)
{
    OS_ERR  err;

    while (DEF_ON) {
        :
        :
        OSTimeDly(10,
                  OS_OPT_TIME_PERIODIC,
                  &err);
        /* Check "err" */
        :
        :
    }
}
```

A-82 OSTimeDlyHMSM()

```
void OSTimeDlyHMSM (CPU_INT16U hours,
                     CPU_INT16U minutes,
                     CPU_INT16U seconds,
                     CPU_INT32U milli,
                     OS_OPT      opt,
                     OS_ERR      *p_err)
```

File	Called from	Code enabled by
os_time.c	Task only	OS_CFG_TIME_DLY_HMSM_EN

`OSTimeDlyHMSM()` allows a task to delay itself for a user-specified period that is specified in hours, minutes, seconds, and milliseconds. This format is more convenient and natural than simply specifying ticks as in `OSTimeDly()`. Rescheduling always occurs when at least one of the parameters is non-zero. The delay is relative from the time this function is called.

`μC/OS-III` allows the user to specify nearly any value when indicating that this function is not to be strict about the values being passed (`opt == OS_OPT_TIME_HMSM_NON_STRICT`). This is a useful feature, for example, to delay a task for thousands of milliseconds.

ARGUMENTS

hours is the number of hours the task is delayed. Depending on the `opt` value, the valid range is 0..99 (`OS_OPT_TIME_HMSM_STRICT`), or 0..999 (`OS_OPT_TIME_HMSM_NON_STRICT`).

Please note that it *not* recommended to delay a task for many hours because feedback from the task will not be available for such a long period of time.

minutes is the number of minutes the task is delayed. The valid range of values is 0 to 59 (`OS_OPT_TIME_HMSM_STRICT`), or 0..9,999 (`OS_OPT_TIME_HMSM_NON_STRICT`).

Please note that it *not* recommended to delay a task for tens to hundreds of minutes because feedback from the task will not be available for such a long period of time.

seconds is the number of seconds the task is delayed. The valid range of values is 0 to 59 (`OS_OPT_TIME_HMSM_STRICT`), or 0..65,535 (`OS_OPT_TIME_HMSM_NON_STRICT`).

milli is the number of milliseconds the task is delayed. The valid range of values is 0 to 999 (`OS_OPT_TIME_HMSM_STRICT`), or 0..4,294,967,295 (`OS_OPT_TIME_HMSM_NON_STRICT`). Note that the resolution of this argument is in multiples of the tick rate. For instance, if the tick rate is set to 100Hz, a delay of 4 ms results in no delay because the delay is rounded to the nearest tick. Thus, a delay of 15 ms actually results in a delay of 20 ms.

opt is the desired mode and can be either:

`OS_OPT_TIME_HMSM_STRICT` (see above)
`OS_OPT_TIME_HMSM_NON_STRICT` (see above)

p_err is a pointer to a variable that contains an error code returned by this function.

<code>OS_ERR_NONE</code>	if the call was successful and the task has returned from the desired delay.
<code>OS_ERR_TIME_DLY_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if calling this function from an ISR.
<code>OS_ERR_TIME_INVALID_HOURS</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if not specifying a valid value for hours.
<code>OS_ERR_TIME_INVALID_MINUTES</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if not specifying a valid value for minutes.
<code>OS_ERR_TIME_INVALID_SECONDS</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if not specifying a valid value for seconds.
<code>OS_ERR_TIME_INVALID_MILLISECONDS</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if not specifying a valid value for milliseconds.
<code>OS_ERR_TIME_ZERO_DLY</code>	if specifying a delay of 0 because all the time arguments are 0.

RETURNED VALUE

None

NOTES/WARNINGS

- Note that `OSTimeDlyHMSM(0,0,0,0,OS_OPT_TIME_HMSM_???,&err)` (i.e., hours, minutes, seconds, milliseconds are 0) results in no delay, and the function returns to the caller.
- The total delay (in ticks) must not exceed the maximum acceptable value that an `OS_TICK` variable can hold. Typically `OS_TICK` is a 32-bit value.

EXAMPLE

```
void TaskX (void *p_arg)
{
    OS_ERR  err;

    while (DEF_ON) {
        :
        :
        OSTimeDlyHMSM(0,
                      0,
                      1,
                      0,
                      OS_OPT_TIME_HMSM_STRICT,
                      &err);           /* Delay task for 1 second */
        /* Check "err" */
        :
        :
    }
}
```

A-83 OSTimeDlyResume()

```
void OSTimeDlyResume (OS_TCB *p_tcb,
                      OS_ERR *p_err)
```

File	Called from	Code enabled by
os_time.c	Task only	OS_CFG_TIME_DLY_RESUME_EN

`OSTimeDlyResume()` resumes a task that has been delayed through a call to either `OSTimeDly()`, or `OSTimeDlyHMSM()`.

ARGUMENTS

`p_tcb` is a pointer to the TCB of the task that is resuming. A `NULL` pointer is not valid since it would indicate that the user is attempting to resume the current task and that is not possible as the caller cannot possibly be delayed.

`p_err` is a pointer to a variable that contains an error code returned by this function.

<code>OS_ERR_NONE</code>	if the call was successful and the task was resumed.
<code>OS_ERR_STATE_INVALID</code>	if the task is in an invalid state.
<code>OS_ERR_TIME_DLY_RESUME_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if calling this function from an ISR.
<code>OS_ERR_TIME_NOT_DLY</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if the task was not delayed or, you passed a <code>NULL</code> pointer for the TCB.
<code>OS_ERR_TASK_SUSPENDED</code>	if the task to resume is suspended and will remain suspended.

RETURNED VALUE

None

NOTES/WARNINGS

Do not call this function to resume a task that is waiting for an event with timeout.

EXAMPLE

```
OS_TCB AnotherTaskTCB;

void TaskX (void *p_arg)
{
    OS_ERR err;

    while (DEF_ON) {
        :
        OSTimeDlyResume(&AnotherTaskTCB,
                         &err);
        /* Check "err" */
        :
    }
}
```

A-84 OSTimeGet()

`OS_TICK OSTimeGet (OS_ERR *p_err)`

File	Called from	Code enabled by
<code>os_time.c</code>	Task or ISR	N/A

`OSTimeGet()` obtains the current value of the system clock. Specifically, it returns a snapshot of the variable `OSTickCtr`. The system clock is a counter of type `OS_TICK` that counts the number of clock ticks since power was applied, or since `OSTickCtr` was last set by `OSTimeSet()`.

ARGUMENTS

`p_err` is a pointer to a variable that contains an error code returned by this function.

`OS_ERR_NONE` if the call was successful.

RETURNED VALUE

The current value of `OSTickCtr` (in number of ticks).

NOTES/WARNINGS

None

EXAMPLE

```
void TaskX (void *p_arg)
{
    OS_TICK  clk;
    OS_ERR   err;

    while (DEF_ON) {
        :
        :
        clk = OSTimeGet(&err); /* Get current value of system clock */
        /* Check "err" */
        :
        :
    }
}
```

A-85 OSTimeSet()

```
void OSTimeSet (OS_TICK ticks,
                OS_ERR *p_err)
```

File	Called from	Code enabled by
os_time.c	Task or ISR	N/A

`OSTimeSet()` sets the system clock. The system clock (`OSTickCtr`) is a counter, which has a data type of `OS_TICK`, and it counts the number of clock ticks since power was applied, or since the system clock was last set.

ARGUMENTS

`ticks` is the desired value for the system clock, in ticks.

`p_err` is a pointer to a variable that will contain an error code returned by this function.

`OS_ERR_NONE` if the call was successful.

RETURNED VALUE

None

NOTES/WARNINGS

You should be careful when using this function because other tasks may depend on the current value of the tick counter (`OSTickCtr`). Specifically, a task may delay itself (see `OSTimeDly()`) and specify to wake up when `OSTickCtr` reaches a specific value.

EXAMPLE

```
void TaskX (void *p_arg)
{
    OS_ERR  err;

    while (DEF_ON) {
        :
        :
        OSTimeSet(0,
                  &err);      /* Reset the system clock */
        /* Check "err" */
        :
        :
    }
}
```

A-86 OSTimeTick()

void OSTimeTick (void)

File	Called from	Code enabled by
os_time.c	ISR only	N/A

OSTimeTick() “announces” that a tick has just occurred, and that time delays and timeouts need to be updated. This function must be called from the tick ISR.

ARGUMENTS

None

RETURNED VALUE

None

NOTES/WARNINGS

None

EXAMPLE

```
void MyTickISR (void)
{
    /* Clear interrupt source */
    OSTimeTick();
    :
    :
}
```

A-87 OSTimeTickHook()

```
void OSTimeTickHook (void);
```

File	Called from	Code enabled by
os_cpu_c.c	OSTimeTick() ONLY	N/A

This function is called by `OSTimeTick()`, which is assumed to be called from an ISR. `OSTimeTickHook()` is called at the very beginning of `OSTimeTick()` to give priority to user or port-specific code when the tick interrupt occurs.

If the `#define OS_CFG_APP_HOOKS_EN` is set to 1 in `os_cfg.h`, `OSTimeTickHook()` will call `App_OS_TimeTickHook()`.

`OSTimeTickHook()` is part of the CPU port code and the function *must not* be called by the application code. `OSTimeTickHook()` is actually used by the µC/OS-III port developer.

ARGUMENTS

None

RETURNED VALUE

None

NOTES/WARNINGS

Do not call this function from the application.

EXAMPLE

The code below calls an application-specific hook that the application programmer can define. The user can simply set the value of `OS_AppTimeTickHookPtr` to point to the desired hook function. `OSTimeTickHook()` is called by `OSTimeTick()` which in turn calls `App_OS_TimeTickHook()` through the pointer `OS_AppTimeTickHookPtr`.

Appendix A

```
void App_OS_TimeTickHook (void)                                /* os_app_hooks.c      */
{
    /* Your code goes here! */
}

void App_OS_SetAllHooks (void)                                /* os_app_hooks.c      */
{
    CPU_SR_ALLOC();

    CPU_CRITICAL_ENTER();
    :
    OS_AppTimeTickHookPtr = App_OS_TimeTickHook;
    :
    CPU_CRITICAL_EXIT();
}

void OSTimeTickHook (void)                                     /* os_cpu_c.c          */
{
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppTimeTickHookPtr != (OS_APP_HOOK_VOID)0) { /* Call application hook */
        (*OS_AppTimeTickHookPtr)();
    }
#endif
}
```


A-88 OSTmrCreate()

```
void OSTmrCreate (OS_TMR          *p_tmrv,
                  CPU_CHAR        *p_namev,
                  OS_TICK         dly,
                  OS_TICK         period,
                  OS_OPT          opt,
                  OS_TMR_CALLBACK_PTR p_callback,
                  void           *p_callback_arg,
                  OS_ERR          *p_err)
```


File	Called from	Code enabled by
os_tmrv.c	Task only	OS_CFG_TMR_EN

OSTmrCreate() allows the user to create a software timer. The timer can be configured to run continuously (opt set to OS_TMR_OPT_PERIODIC), or only once (opt set to OS_TMR_OPT_ONE_SHOT). When the timer counts down to 0 (from the value specified in period), an optional “callback” function can be executed. The callback can be used to signal a task that the timer expired, or perform any other function. However, it is recommended to keep the callback function as short as possible.


The timer is created in the “stop” mode and therefore the user *must* call OSTmrStart() to actually start the timer. If configuring the timer for ONE-SHOT mode, and the timer expires, you need to call OSTmrStart() to retrigger the timer, call OSTmrDel() to delete the timer if it is not necessary to retrigger it, or not use the timer anymore. Note: you can use the callback function to delete the timer if using the ONE-SHOT mode.

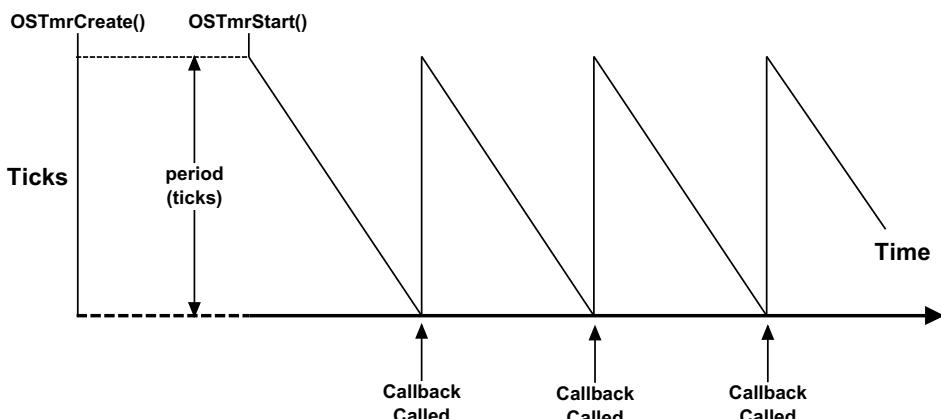

PERIODIC MODE (see “opt”) – $dly > 0$, $period > 0$

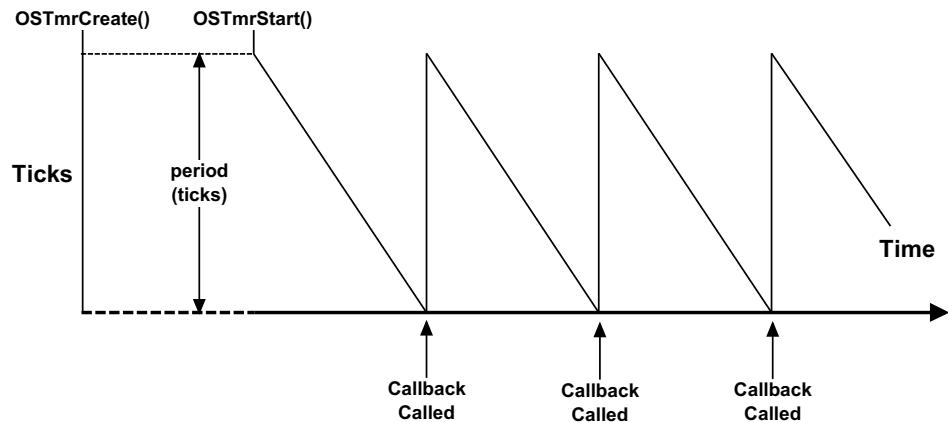

PERIODIC MODE (see “opt”) – “ $dly == 0$, $period > 0$

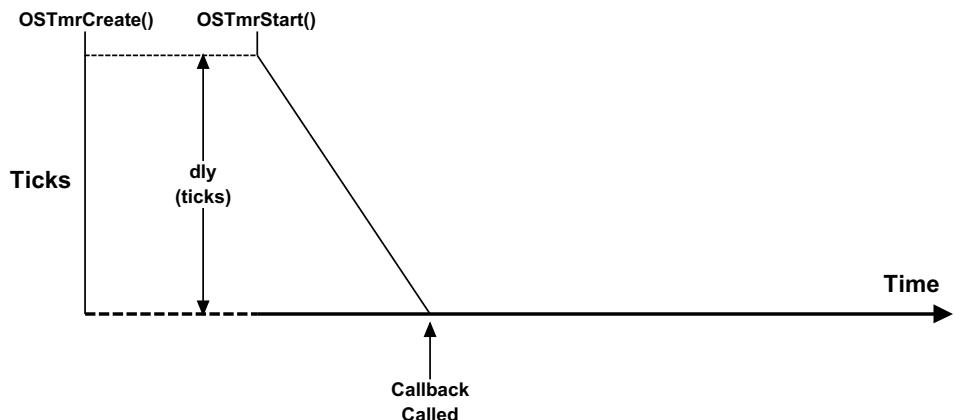

ONE-SHOT MODE (see “opt”) – $dly > 0$, $period == 0$

ARGUMENTS

p_tmrv is a pointer to the timer-control block of the desired timer. It is assumed that storage for the timer will be allocated in the application. In other words, you should declare a “global” variable as follows, and pass a pointer to this variable to **OSTmrCreate()**:

```
OS_TMR MyTmr;
```

p_name is a pointer to an ASCII string (**NUL** terminated) used to assign a name to the timer. The name can be displayed by debuggers or µC/Probe.

dly specifies the initial delay (specified in timer tick units) used by the timer (see drawing above). If the timer is configured for ONE-SHOT mode, this is the timeout used. If the timer is configured for PERIODIC mode, this is the timeout to wait before the timer enters periodic mode. The units of this time depends on how often the user will call **OSTmrSignal()** (see **ostimeTick()**). If **OSTmrSignal()** is called every 1/10 of a second (i.e., **OS_CFG_TMR_TASK_RATE_HZ** set to 10), **dly** specifies the number of 1/10 of a second before the delay expires.

period specifies the period repeated by the timer if configured for PERIODIC mode. You would set the “**period**” to 0 when using ONE-SHOT mode. The units of time depend on how often **OSTmrSignal()** is called. If **OSTmrSignal()** is called every 1/10 of a second (i.e., **OS_CFG_TMR_TASK_RATE_HZ** set to 10), the period specifies the number of 1/10 of a second before the timer repeats.

opt is used to specify whether the timer is to be ONE-SHOT or PERIODIC:

```
OS_OPT_TMR_ONE_SHOT specifies ONE-SHOT mode
OS_OPT_TMR_PERIODIC specifies PERIODIC mode
```

p_callback is a pointer to a function that will execute when the timer expires (ONE-SHOT mode), or every time the period expires (PERIODIC mode). A **NULL** pointer indicates that no action is to be performed upon timer expiration. The callback function must be declared as follows:

```
void MyCallback (OS_TMR *p_tmrv, void *p_arg);
```

When called, the callback will be passed the pointer to the timer as well as an argument (`p_callback_arg`), which can be used to indicate to the callback what to do. Note that the user is allowed to call all of the timer related functions (i.e., `OSTmrCreate()`, `OSTmrDel()`, `OSTmrStateGet()`, `OSTmrRemainGet()`, `OSTmrStart()`, and `OSTmrStop()`) from the callback function.

Do not make blocking calls within callback functions.

`p_callback_arg` is an argument passed to the callback function when the timer expires (ONE-SHOT mode), or every time the period expires (PERIODIC mode). The pointer is declared as a “`void *`” so it can point to any data.

`p_err` is a pointer to a variable that contains an error code returned by this function.

<code>OS_ERR_NONE</code>	if the call was successful.
<code>OS_ERR_OBJ_PTR_NULL</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_tmr</code> is a <code>NULL</code> pointer
<code>OS_ERR_TMR_INVALID_DLY</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if specifying an invalid delay in ONE-SHOT mode. In other words, it is not allowed to delay for 0 in ONE-SHOT mode.
<code>OS_ERR_TMR_INVALID_PERIOD</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if specifying an invalid period in PERIODIC mode. It is not allowed to have a 0 period in PERIODIC.
<code>OS_ERR_OPT_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if not specifying a valid options.
<code>OS_ERR_TMR_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if calling this function from an ISR.
<code>OS_ERR_ILLEGAL_CREATE_RUN_TIME</code>	if <code>OS_SAFETY_CRITICAL_IEC61508</code> is defined: you called this after calling <code>OSSafetyCriticalStart()</code> and thus you are no longer allowed to create additional kernel objects.

RETURNED VALUES

None.

NOTES/WARNINGS

- *Do not* call this function from an ISR.
- The timer is *not* started when it is created. To start the timer, simply call `OSTmrStart()`.
- *Do not* make blocking calls within callback functions.
- Keep callback functions as short as possible.

EXAMPLE

```
OS_TMR CloseDoorTmr;

void Task (void *p_arg)
{
    OS_ERR   err;

    (void)&p_arg;
    while (DEF_ON) {
        OSTmrCreate(&CloseDoorTmr,          /* p_tmr          */
                    "Door close"        /* p_name         */
                    10,                 /* dly            */
                    100,                /* period          */
                    OS_OPT_TMR_PERIODIC,/* opt             */
                    DoorCloseFnct,      /* p_callback      */
                    0,                  /* p_callback_arg */
                    &err);              /* p_err           */
        /* Check "err" */
    }
}

void DoorCloseFnct (OS_TMR  *p_tmr,
                    void     *p_arg)
{
    /* Close the door! */
}
```

A-89 OSTmrDel()

```
CPU_BOOLEAN OSTmrDel(OS_TMR    *p_tmrv,
                      OS_ERR     *p_err)
```

File	Called from	Code enabled by
os_tmrv.c	Task only	OS_CFG_TMR_EN and OS_CFG_TMR_DEL_EN

`OSTmrDel()` allows the user to delete a timer. If a timer was running it will be stopped and then deleted. If the timer has already timed out and is therefore stopped, it will simply be deleted.

It is up to the user to delete unused timers. If deleting a timer, you must not reference it again.

ARGUMENTS

`p_tmrv` is a pointer to the timer to be deleted.

`p_err` a pointer to an error code and can be any of the following:

<code>OS_ERR_NONE</code>	if the timer was deleted.
<code>OS_ERR_OBJ_TYPE</code>	if <code>OS_CFG_OBJ_TYPE_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if the user did not pass a pointer to a timer.
<code>OS_ERR_TMR_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_tmrv</code> is a NULL pointer.
<code>OS_ERR_TMR_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : This function is called from an ISR, which is <i>not</i> allowed.
<code>OS_ERR_TMR_INACTIVE</code>	<code>p_tmrv</code> is pointing to an inactive timer. In other words, this error appears when pointing to a timer that has been deleted.
<code>OS_ERR_TMR_INVALID_STATE</code>	the timer is in an invalid state.

RETURNED VALUES

`DEF_TRUE` if the timer was deleted, `DEF_FALSE` if not.

NOTES/WARNINGS

- *Do not* call this function from an ISR.
- When deleting a timer, *do not* reference it again unless you re-create the timer by calling `OSTmrCreate()`.

EXAMPLE

```
OS_TMR CloseDoorTmr;

void Task (void *p_arg)
{
    OS_ERR      err;
    CPU_BOOLEAN deleted;

    (void)&p_arg;
    while (DEF_ON) {
        deleted = OSTmrDel(&CloseDoorTmr,
                           &err);
        /* Check "err" */
    }
}
```

A-90 OSTmrRemainGet()

```
OS_TICK OSTmrRemainGet(OS_TMR *p_tmr,
                        OS_ERR *p_err);
```

File	Called from	Code enabled by
os_tmr.c	Task only	OS_CFG_TMR_EN

`OSTmrRemainGet()` allows the user to obtain the time remaining (before timeout) of the specified timer. The value returned depends on the rate (in Hz) at which the timer task is signaled (see `OS_CFG_TMR_TASK_RATE_HZ`). If `OS_CFG_TMR_TASK_RATE_HZ` is set to 10, the value returned is the number of 1/10 of a second before the timer times out. If the timer has timed out, the value returned is 0.

ARGUMENTS

`p_tmr` is a pointer to the timer the user is inquiring about.

`p_err` is a pointer to an error code and can be any of the following:

<code>OS_ERR_NONE</code>	if the function returned the time remaining for the timer.
<code>OS_ERR_OBJ_TYPE</code>	if <code>OS_CFG_OBJ_TYPE_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : ' <code>p_tmr</code> ' is not pointing to a timer.
<code>OS_ERR_TMR_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_tmr</code> is a <code>NULL</code> pointer.
<code>OS_ERR_TMR_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : This function is called from an ISR, which is <i>not</i> allowed.
<code>OS_ERR_TMR_INACTIVE</code>	<code>p_tmr</code> is pointing to an inactive timer. In other words, this error will appear when pointing to a timer that has been deleted.
<code>OS_ERR_TMR_INVALID_STATE</code>	the timer is in an invalid state.

RETURNED VALUES

The time remaining for the timer. The value returned depends on the rate (in Hz) at which the timer task is signaled (see `OS_CFG_TMR_TASK_RATE_HZ`). If `OS_CFG_TMR_TASK_RATE_HZ` is set to 10 the value returned is the number of 1/10 of a second before the timer times out. If specifying an invalid timer, the returned value will be 0. If the timer expired, the returned value will be 0.

NOTES/WARNINGS

- *Do not* call this function from an ISR.

EXAMPLE

```
OS_TICK    TimeRemainToCloseDoor;
OS_TMR     CloseDoorTmr;

void Task (void *p_arg)
{
    OS_ERR     err;

    (void)&p_arg;
    while (DEF_ON) {
        TimeRemainToCloseDoor = OSTmrRemainGet(&CloseDoorTmr,
                                                &err);
        /* Check "err" */
    }
}
```

A-91 OSTmrStart()

```
CPU_BOOLEAN OSTmrStart (OS_TMR    *p_tmrv,
                        OS_ERR     *p_err);
```

File	Called from	Code enabled by
os_tmrv.c	Task only	OS_CFG_TMR_EN

OSTmrStart() allows the user to start (or restart) the countdown process of a timer. The timer *must* have previously been created.

ARGUMENTS

p_tmrv is a pointer to the timer to start (or restart).

p_err a pointer to an error code and can be any of the following:

OS_ERR_NONE	if the timer was started.
OS_ERR_OBJ_TYPE	if OS_CFG_OBJ_TYPE_CHK_EN is set to 1 in os_cfg.h: ‘p_tmrv’ is not pointing to a timer.
OS_ERR_TMR_INVALID	if OS_CFG_ARG_CHK_EN is set to 1 in os_cfg.h: if p_tmrv is a NULL pointer.
OS_ERR_TMR_INACTIVE	p_tmrv is pointing to an inactive timer. In other words, this error occurs if pointing to a timer that has been deleted or was not created.
OS_ERR_TMR_INVALID_STATE	the timer is in an invalid state.
OS_ERR_TMR_ISR	if OS_CFG_CALLED_FROM_ISR_CHK_EN set to 1 in os_cfg.h: This function was called from an ISR, which is <i>not</i> allowed.

RETURNED VALUES

DEF_TRUE if the timer was started

DEF_FALSE if an error occurred.

NOTES/WARNINGS

- *Do not* call this function from an ISR.
- The timer *must* have previously been created.

EXAMPLE

```
OS_TMR      CloseDoorTmr;

void Task (void *p_arg)
{
    OS_ERR      err;
    CPU_BOOLEAN status;

    (void)&p_arg;
    while (DEF_ON) {
        status = OSTmrStart(&CloseDoorTmr,
                            &err);
        /* Check "err" */
    }
}
```

A-92 OSTmrStateGet()

```
OS_STATE OSTmrStateGet(OS_TMR *p_tmr,
                      OS_ERR *p_err);
```

File	Called from	Code enabled by
os_tmr.c	Task only	OS_CFG_TMR_EN

OSTmrStateGet() allows the user to obtain the current state of a timer. A timer can be in one of four states:

OS_TMR_STATE_UNUSED	the timer has not been created
OS_TMR_STATE_STOPPED	the timer is created but has not yet started, or has been stopped.
OS_TMR_STATE_COMPLETED	the timer is in <i>one-shot</i> mode, and has completed its delay.
OS_TMR_STATE_RUNNING	the timer is currently running

ARGUMENTS

p_tmr is a pointer to the timer that the user is inquiring about.

p_err a pointer to an error code and can be any of the following:

OS_ERR_NONE	if the function returned the state of the timer.
OS_ERR_OBJ_TYPE	if OS_CFG_OBJ_TYPE_CHK_EN is set to 1 in os_cfg.h: p_tmr is not pointing to a timer.
OS_ERR_TMR_INVALID	if OS_CFG_ARG_CHK_EN is set to 1 in os_cfg.h: if p_tmr is a NULL pointer.
OS_ERR_TMR_INVALID_STATE	the timer is in an invalid state.
OS_ERR_TMR_ISR	if OS_CFG_CALLED_FROM_ISR_CHK_EN set to 1 in os_cfg.h: This function was called from an ISR, which is <i>not</i> allowed.

RETURNED VALUES

The state of the timer (see description).

NOTES/WARNINGS

- *Do not* call this function from an ISR.

EXAMPLE

```
OS_STATE  CloseDoorTmrState;
OS_TMR     CloseDoorTmr;

void Task (void *p_arg)
{
    OS_ERR  err;

    (void)&p_arg;
    while (DEF_ON) {
        CloseDoorTmrState = OSTmrStateGet(&CloseDoorTmr,
                                           &err);
        /* Check "err" */
    }
}
```

A-93 OSTmrStop()

```
CPU_BOOLEAN OSTmrStop (OS_TMR    *p_tmr,
                      OS_OPT     opt,
                      void      *p_callback_arg,
                      OS_ERR    *p_err)
```

File	Called from	Code enabled by
os_tmr.c	Task only	OS_CFG_TMR_EN

`OSTmrStop()` allows the user to stop a timer. The user may execute the callback function of the timer when it is stopped, and pass this callback function a different argument than was specified when the timer was started. This allows the callback function to know that the timer was stopped since the callback argument can be set to indicate this (this is application specific). If the timer is already stopped, the callback function is not called.

ARGUMENTS

`p_tmr` is a pointer to the timer control block of the desired timer.

`opt` is used to specify options:

<code>OS_OPT_TMR_NONE</code>	No option
<code>OS_OPT_TMR_CALLBACK</code>	Run the callback function with the argument specified when the timer was created.
<code>OS_OPT_TMR_CALLBACK_ARG</code>	Run the callback function, but use the argument passed in <code>OSTmrStop()</code> instead of the one specified when the task was created.

`p_callback_arg` is a new argument to pass the callback functions (see options above).

`p_err` is a pointer to a variable that contains an error code returned by this function.

<code>OS_ERR_NONE</code>	if the call was successful.
<code>OS_ERR_OBJ_TYPE</code>	if <code>OS_CFG_OBJ_TYPE_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if <code>p_tmr</code> is not pointing to a timer object.

<code>OS_ERR_TMR_INACTIVE</code>	the timer cannot be stopped since it is inactive.
<code>OS_ERR_TMR_INVALID</code>	if <code>OS_CFG_ARG_CHK_EN</code> is set to 1 in <code>os_cfg.h</code> : if you passed a <code>NULL</code> pointer for the <code>p_tmr</code> argument.
<code>OS_ERR_TMR_INVALID_OPT</code>	if the user did not specify a valid option.
<code>OS_ERR_TMR_INVALID_STATE</code>	the timer is in an invalid state.
<code>OS_ERR_TMR_ISR</code>	if <code>OS_CFG_CALLED_FROM_ISR_CHK_EN</code> set to 1 in <code>os_cfg.h</code> : if calling this function from an ISR.
<code>OS_ERR_TMR_NO_CALLBACK</code>	if the timer lacks a callback function. This should have been specified when the timer was created.
<code>OS_ERR_TMR_STOPPED</code>	if the timer is currently stopped.

RETURNED VALUES

`DEF_TRUE` if the timer was stopped (even if it was already stopped).

`DEF_FALSE` if an error occurred.

NOTES/WARNINGS

- *Do not* call this function from an ISR.
- The callback function is *not* called if the timer is already stopped.

EXAMPLE

```
OS_TMR CloseDoorTmr;

void Task (void *p_arg)
{
    OS_ERR     err;

    (void)&p_arg;
    while (DEF_ON) {
        OSTmrStop(&CloseDoorTmr,
                  OS_TMR_OPT_CALLBACK,
                  (void *)0,
                  &err);
        /* Check "err" */
    }
}
```

A-94 OSVersion()

CPU_INT16U OSVersion (OS_ERR *p_err);

File	Called from	Code enabled by
os_core.c	Task or ISR	N/A

OSVersion() obtains the current version of µC/OS-III.

ARGUMENTS

p_err is a pointer to a variable that contains an error code returned by this function. Currently, **OSVersion()** always return:

OS_ERR_NONE

RETURNED VALUE

The version is returned as **x.yy.zz** multiplied by 10,000. For example, V3.00.00 is returned as 30000.

NOTES/WARNINGS

None

EXAMPLE

```
void TaskX (void *p_arg)
{
    CPU_INT16U  os_version;
    OS_ERR      err;

    while (DEF_ON) {
        :
        :
        os_version = OSVersion(&err); /* Obtain μC/OS-III's version */
        /* Check "err" */
        :
        :
    }
}
```

Appendix

B

μ C/OS-III Configuration Manual

Three (3) files are used to configure μ C/OS-III as highlighted in Figure B-1: `os_cfg.h`, `os_cfg_app.h` and `os_type.h`.

Table B-1 shows where these files are typically located on your computer.

File	Directory
<code>os_cfg.h</code>	<code>\Micrium\Software\uCOS-III\Cfg\Template</code>
<code>os_cfg_app.h</code>	<code>\Micrium\Software\uCOS-III\Cfg\Template</code>
<code>os_type.h</code>	<code>\Micrium\Software\uCOS-III\Source</code>

Table B-1 Configuration files and directories

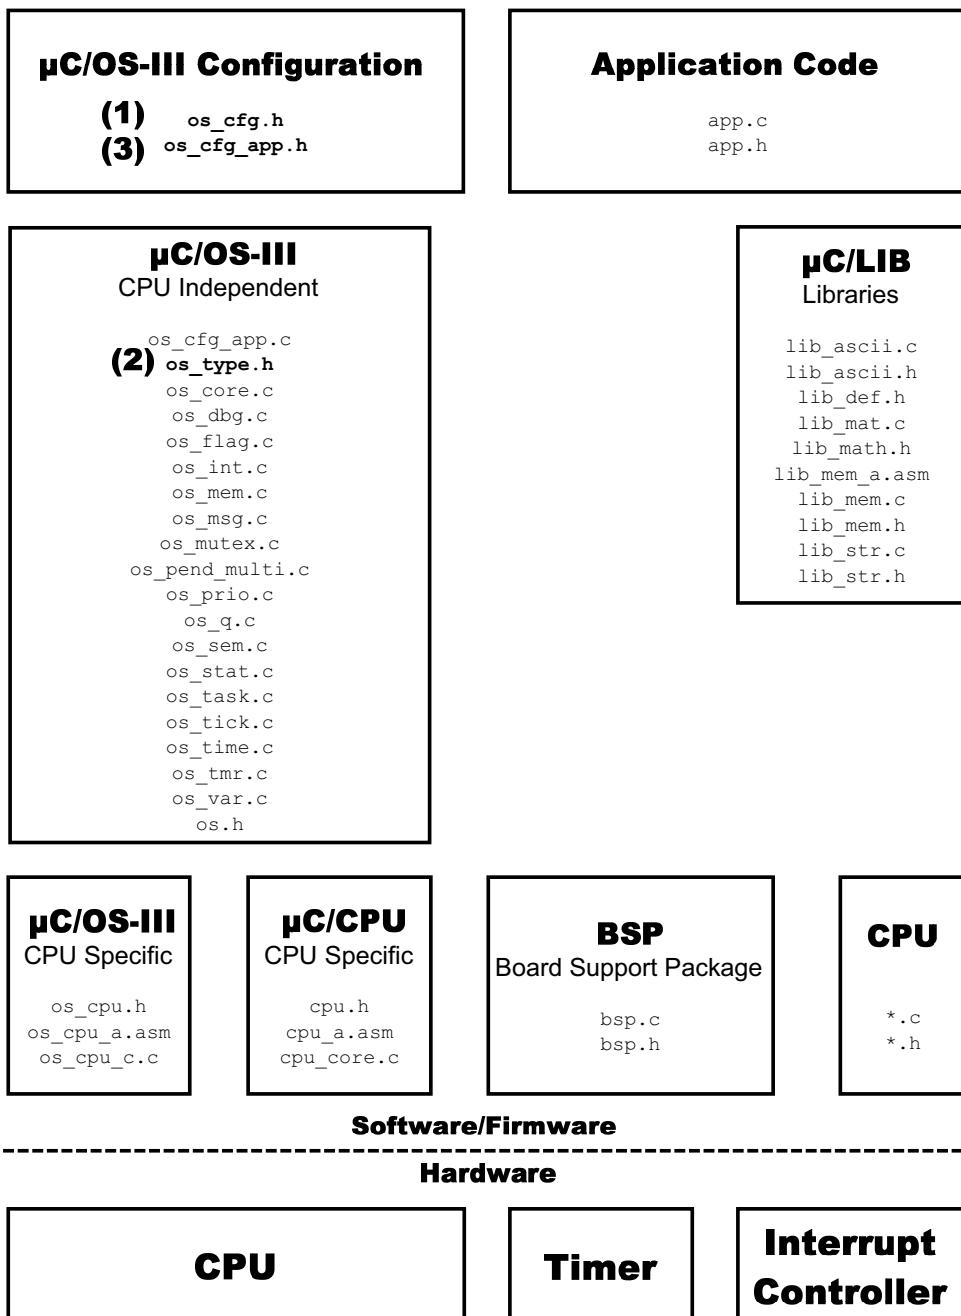


Figure B-1 μC/OS-III File Structure

FB-1(1) **μC/OS-III Features (`os_cfg.h`):**

`os_cfg.h` is used to determine which features are needed from μC/OS-III for an application (i.e., product). Specifically, this file allows a user to determine whether to include semaphores, mutexes, event flags, run-time argument checking, etc.

FB-1(2) **μC/OS-III Data Types (`os_type.h`):**

`os_type.h` establishes μC/OS-III-specific data types used when building an application. It specifies the size of variables used to represent task priorities, the size of a semaphore count, and more. This file contains recommended data types for μC/OS-III, however these can be altered to make better use of the CPU's natural word size. For example, on some 32-bit CPUs, it is better to declare boolean variables as 32-bit values for performance considerations, even though an 8-bit quantity is more space efficient (assuming performance is more important than footprint).

The port developer typically makes those decisions, since altering the contents of the file requires a deep understanding of the CPU and, most important, how data sizes affect μC/OS-III.

FB-1(3) **μC/OS-III Stacks, Pools and other data sizes (`os_cfg_app.h`):**

μC/OS-III can be configured at the application level through `#define` constants in `os_cfg_app.h`. The `#defines` allows a user to specify stack sizes for all μC/OS-III internal tasks: the idle task, statistic task, tick task, timer task, and the ISR handler task. `os_cfg_app.h` also allows users to specify task priorities (except for the idle task since it is always the lowest priority), the tick rate, tick wheel size, the timer wheel size, and more.

The contents of the three configuration files will be described in the following sections.

B-1 µC/OS-III FEATURES (OS_CFG.H)

Compile-time configuration allows users to determine which features to enable and those features that are not needed. With compile-time configuration, the code and data sizes of µC/OS-III (i.e., its footprint) can be reduced by enabling only the desired functionality.

Compile-time configuration is accomplished by setting a number of **#define** constants in a file called **os_cfg.h** that the application is expected to provide. You simply copy **os_cfg.h** into the application directory and change the copied file to satisfy the application's requirements. This way, **os_cfg.h** is not recreated from scratch.

The compile-time configuration **#defines** are listed below in alphabetic order and are not necessarily found in this order in **os_cfg.h**.

OS_CFG_APP_HOOKS_EN

When set to 1, this **#define** specifies that application-defined hooks can be called from µC/OS-III's hooks. This allows the application code to extend the functionality of µC/OS-III. Specifically:

The µC/OS-III hook ...	Calls the Application-define hook through...
<code>OSIdleTaskHook()</code>	<code>OS_AppIdleTaskHookPtr</code>
<code>OSInitHook()</code>	<code>None</code>
<code>OSStatTaskHook()</code>	<code>OS_AppStatTaskHookPtr</code>
<code>OSTaskCreateHook()</code>	<code>OS_AppTaskCreateHookPtr</code>
<code>OSTaskDelHook()</code>	<code>OS_AppTaskDelHookPtr</code>
<code>OSTaskReturnHook()</code>	<code>OS_AppTaskReturnHookPtr</code>
<code>OSTaskSwHook()</code>	<code>OS_AppTaskSwHookPtr</code>
<code>OSTimeTickHook()</code>	<code>OS_AppTimeTickHookPtr</code>

Application hook functions could be declared as shown in the code below.

```
void App_OS_TaskCreateHook (OS_TCB *p_tcb)
{
    /* Your code here */
}

void App_OS_TaskDelHook (OS_TCB *p_tcb)
{
    /* Your code here */
}

void App_OS_TaskReturnHook (OS_TCB *p_tcb)
{
    /* Your code here */
}

void App_OS_IdleTaskHook (void)
{
    /* Your code here */
}

void App_OS_StatTaskHook (void)
{
    /* Your code here */
}

void App_OS_TaskSwHook (void)
{
    /* Your code here */
}

void App_OS_TimeTickHook (void)
{
    /* Your code here */
}
```

It's also up to a user to set the value of the pointers so that they point to the appropriate functions as shown below. The pointers do not have to be set in `main()` but, you can set them after calling `OSInit()`.

Appendix B

```

void main (void)
{
    OS_ERR err;

    OSInit(&err);
    :
    :
    OS_AppTaskCreateHookPtr = (OS_APP_HOOK_TCB )App_OS_TaskCreateHook;
    OS_AppTaskDelHookPtr   = (OS_APP_HOOK_TCB )App_OS_TaskDelHook;
    OS_AppTaskReturnHookPtr = (OS_APP_HOOK_TCB )App_OS_TaskReturnHook;
    OS_AppIdleTaskHookPtr  = (OS_APP_HOOK_VOID)App_OS_IdleTaskHook;
    OS_AppStatTaskHookPtr  = (OS_APP_HOOK_VOID)App_OS_StatTaskHook;
    OS_AppTaskSwHookPtr    = (OS_APP_HOOK_VOID)App_OS_TaskSwHook;
    OS_AppTimeTickHookPtr  = (OS_APP_HOOK_VOID)App_OS_TimeTickHook;
    :
    :
    OSStart(&err);
}

```

Note that not every hook function need to be defined, only the ones the user wants to place in the application code.

Also, if you don't intend to extend µC/OS-III's hook through these application hooks, you can set **OS_CFG_APP_HOOKS_EN** to 0 to save RAM (i.e., the pointers).

OS_CFG_ARG_CHK_EN

OS_CFG_ARG_CHK_EN determines whether the user wants most of µC/OS-III functions to perform argument checking. When set to 1, µC/OS-III ensures that pointers passed to functions are non-NULL, that arguments passed are within allowable range, that options are valid, and more. When set to 0, **OS_CFG_ARG_CHK_EN** those arguments are not checked and the amount of code space and processing time required by µC/OS-III is reduced. You would set **OS_CFG_ARG_CHK_EN** to 0 if you are certain that the arguments are correct.

µC/OS-III performs argument checking in over 40 functions. Therefore, you can save a few hundred bytes of code space by disabling this check. However, you should always enable argument checking until you are certain the code can be trusted.

OS_CFG_CALLED_FROM_ISR_CHK_EN

OS_CFG_CALLED_FROM_ISR_CHK_EN determines whether most of µC/OS-III functions are to confirm that the function is not called from an ISR. In other words, most of the functions from µC/OS-III should be called by task-level code except “post” type functions (which can

also be called from ISRs). By setting this `#define` to 1 μC/OS-III is told to make sure that functions that are only supposed to be called by tasks are not called by ISRs. It's highly recommended to set this `#define` to 1 until you are absolutely certain that the code is behaving correctly and that task-level functions are always called from tasks. You can set this `#define` to 0 to save code space and, of course, processing time.

μC/OS-III performs this check in approximately 50 functions. Therefore, you can save a few hundred bytes of code space by disabling this check.

`OS_CFG_DBG_EN`

When set to 1, this `#define` adds ROM constants located in `os_dbg.c` to help support kernel aware debuggers. Specifically, a number of named ROM variables can be queried by a debugger to find out about compiled-in options. For example, a debugger can find out the size of an `OS_TCB`, μC/OS-III's version number, the size of an event flag group (`OS_FLAG_GRP`), and much more.

`OS_CFG_FLAG_EN`

`OS_CFG_FLAG_EN` enables (when set to 1) or disables (when set to 0) code generation of event flag services and data structures. This reduces the amount of code and data space needed when an application does not require event flags. When `OS_CFG_FLAG_EN` is set to 0, it is not necessary to enable or disable any of the other `OS_CFG_FLAG_xxx` `#define` constants in this section.

`OS_CFG_FLAG_DEL_EN`

`OS_CFG_FLAG_DEL_EN` enables (when set to 1) or disables (when set to 0) code generation of the function `OSFlagDel()`.

`OS_CFG_FLAG_MODE_CLR_EN`

`OS_CFG_FLAG_MODE_CLR_EN` enables (when set to 1) or disables (when set to 0) code generation used to wait for event flags to be 0 instead of 1. Generally, you would wait for event flags to be set. However, the user may also want to wait for event flags to be clear and in this case, enable this option.

`OS_CFG_FLAG_PEND_ABORT_EN`

`OS_CFG_FLAG_PEND_ABORT_EN` enables (when set to 1) or disables (when set to 0) code generation of the function `OSFlagPendAbort()`.

OS_CFG_ISR_POST_DEFERRED_EN

When set to 1, OS_CFG_ISR_POST_DEFERRED_EN reduces interrupt latency since interrupts are not disabled during most critical sections of code within μC/OS-III. Instead, the scheduler is locked during the processing of these critical sections. The advantage of setting OS_CFG_ISR_POST_DEFERRED_EN to 1 is that interrupt latency is lower, however, ISR to task response is slightly higher. It is recommended to set OS_CFG_ISR_POST_DEFERRED_EN to 1 when enabling the following services, since setting this `#define` to 0 would potentially make interrupt latency unacceptably high:

μC/OS-III Services	Enabled by ...
Event Flags	OS_CFG_FLAG_EN
Multiple Pend	OS_CFG_PEND_MULTI_EN
OS???Post() with broadcast	
OS???Del() with OS_OPT_DEL_ALWAYS	
OS???PendAbort()	

The compromise to make is:

`OS_CFG_ISR_POST_DEFERRED_EN set to 1`

Short interrupt latency, longer ISR-to-task response.

`OS_CFG_ISR_POST_DEFERRED_EN set to 0`

Long interrupt latency (see table above), shorter ISR-to-task response.

OS_CFG_MEM_EN

OS_CFG_MEM_EN enables (when set to 1) or disables (when set to 0) code generation of the μC/OS-III partition memory manager and its associated data structures. This feature allows users to reduce the amount of code and data space needed when an application does not require the use of memory partitions.

OS_CFG_MUTEX_EN

`OS_CFG_MUTEX_EN` enables (when set to 1) or disables (when set to 0) the code generation of all mutual exclusion semaphore services and data structures. This feature allows users to reduce the amount of code and data space needed when an application does not require the use of mutexes. When `OS_CFG_MUTEX_EN` is set to 0, there is no need to enable or disable any of the other `OS_CFG_MUTEX_XXX #define` constants in this section.

OS_CFG_MUTEX_DEL_EN

`OS_CFG_MUTEX_DEL_EN` enables (when set to 1) or disables (when set to 0) code generation of the function `OSMutexDel()`.

OS_CFG_MUTEX_PEND_ABORT_EN

`OS_CFG_MUTEX_PEND_ABORT_EN` enables (when set to 1) or disables (when set to 0) code generation of the function `OSMutexPendAbort()`.

OS_CFG_OBJ_TYPE_CHK_EN

`OS_CFG_OBJ_TYPE_CHK_EN` determines whether most of μC/OS-III functions should check to see if the function is manipulating the proper object. In other words, if attempting to post to a semaphore, is the user in fact passing a semaphore object or another object by mistake? It is recommended to set this `#define` to 1 until absolutely certain that the code is behaving correctly and the user code is always pointing to the proper objects. You would set this `#define` to 0 to save code space as well as data space. μC/OS-III object type checking is done nearly 30 times, and it is possible to save a few hundred bytes of code space and processing time by disabling this check.

OS_CFG_PEND_MULTI_EN

This constant determines whether the code to support pending on multiple events (i.e., semaphores or message queues) will be enabled (1) or not (0).

OS_CFG_PRIO_MAX

`OS_CFG_PRIO_MAX` specifies the maximum number of priorities available in the application. Specifying `OS_CFG_PRIO_MAX` to just the number of priorities the user intends to use, reduces the amount of RAM needed by μC/OS-III.

In μC/OS-III, task priorities can range from 0 (highest priority) to a maximum of 255 (lowest possible priority) when the data type `OS_PRIO` is defined as a `CPU_INT08U`. However, in

μ C/OS-III, there is no practical limit to the number of available priorities. Specifically, if defining `OS_PRIO` as a `CPU_INT16U`, there can be up to 65536 priority levels. It is recommended to leave `OS_PRIO` defined as a `CPU_INT08U` and use only 256 different priority levels (i.e., 0..255), which is generally sufficient for every application. You should always set the value of `OS_CFG_PRIO_MAX` to even multiples of 8 (8, 16, 32, 64, 128, 256, etc.). The higher the number of different priorities, the more RAM μ C/OS-III will consume.

An application cannot create tasks with a priority number higher than or equal to `OS_CFG_PRIO_MAX`. In fact, μ C/OS-III reserves priority `OS_CFG_PRIO_MAX-2` and `OS_CFG_PRIO_MAX-1` for itself; `OS_CFG_PRIO_MAX-1` is reserved for the idle task `OS_IdleTask()`. Additionally, do not use priority 0 for an application since it is reserved by μ C/OS-III's ISR handler task. The priorities of the application tasks can therefore take a value between 2 and `OS_CFG_PRIO_MAX-3` (inclusive).

To summarize, there are two priority levels to avoid in an application:

Priority	Reserved by μ C/OS-III for ...
0	The ISR Handler Task (<code>os_Int0Task()</code>)
1	Reserved
<code>OS_CFG_PRIO_MAX-2</code>	Reserved
<code>OS_CFG_PRIO_MAX-1</code>	The idle task (<code>os_IdleTask()</code>)

`OS_CFG_Q_EN`

`OS_CFG_Q_EN` enables (when set to 1) or disables (when set to 0) code generation of message queue services and data structures. This reduces the amount of code space needed when an application does not require the use of message queues. When `OS_CFG_Q_EN` is set to 0, you do not need to enable or disable any of the other `OS_CFG_Q_XXX #define` constants in this section.

`OS_CFG_Q_DEL_EN`

`OS_CFG_Q_DEL_EN` enables (when set to 1) or disables (when set to 0) code generation of the function `OSQDel()`.

OS_CFG_Q_FLUSH_EN

`OS_CFG_Q_FLUSH_EN` enables (when set to 1) or disables (when set to 0) code generation of the function `OSQFlush()`.

OS_CFG_Q_PEND_ABORT_EN

`OS_CFG_Q_PEND_ABORT_EN` enables (when set to 1) or disables (when set to 0) code generation of the function `OSQPendAbort()`.

OS_CFG_SCHED_LOCK_TIME_MEAS_EN

This constant enables (when set to 1) or disables (when set to 0) code generation to measure the amount of time the scheduler is locked. This is useful when determining task latency.

OS_CFG_SCHED_ROUND_ROBIN_EN

This constant enables (when set to 1) or disables (when set to 0) code generation for the round-robin feature of μC/OS-III.

OS_CFG_SEM_EN

`OS_CFG_SEM_EN` enables (when set to 1) or disables (when set to 0) code generation of the semaphore manager and associated data structures. This reduces the amount of code and data space needed when an application does not require the use of semaphores. When `OS_CFG_SEM_EN` is set to 0, it is not necessary to enable or disable any of the other `OS_CFG_SEM_XXX #define` constants in this section.

OS_CFG_SEM_DEL_EN

`OS_CFG_SEM_DEL_EN` enables (when set to 1) or disables (when set to 0) code generation of the function `OSSemDel()`.

OS_CFG_SEM_PEND_ABORT_EN

`OS_CFG_SEM_PEND_ABORT_EN` enables (when set to 1) or disables (when set to 0) code generation of the function `OSSemPendAbort()`.

OS_CFG_SEM_SET_EN

`OS_CFG_SEM_SET_EN` enables (when set to 1) or disables (when set to 0) code generation of the function `OSSemSet()`.

OS_CFG_STAT_TASK_EN

OS_CFG_STAT_TASK_EN specifies whether or not to enable µC/OS-III's statistic task, as well as its initialization function. When set to 1, the statistic task **OS_StatTask()** and statistic task initialization function are enabled. **OS_StatTask()** computes the CPU usage of an application, stack usage of each task, the CPU usage of each task at run time and more.

When enabled, **OS_StatTask()** executes at a rate of **OS_CFG_STAT_TASK_RATE_HZ** (see **os_cfg_app.h**), and computes the value of **OSStatTaskCPUUsage**, which is a variable that contains the percentage of CPU used by the application. **OS_StatTask()** calls **OSStatTaskHook()** every time it executes so that the user can add their own statistics as needed. See **os_stat.c** for details on the statistic task. The priority of **OS_StatTask()** is configurable by the application code (see **os_cfg_app.h**).

OS_StatTask() also computes stack usage of each task created when the **#define OS_CFG_STAT_TASK_STK_CHK_EN** is set to 1. In this case, **OS_StatTask()** calls **OSTaskStkChk()** for each task and the result is placed in the task's TCB. The **.StkFree** and **.StkUsed** field of the task's TCB represents the amount of free space (in bytes) and amount of used space, respectively.

When **OS_CFG_STAT_TASK_EN** is set to 0, all variables used by the statistic task are not declared (see **os.h**). This, of course, reduces the amount of RAM needed by µC/OS-III when not enabling the statistic task. When setting **OS_CFG_STAT_TASK_EN** to 1, statistics will be determined at a rate of **OS_CFG_STAT_TASK_RATE_HZ** (see **os_cfg_app.h**).

OS_CFG_STAT_TASK_STK_CHK_EN

This constant allows the statistic task to call **OSTaskStkChk()** for each task created. For this to happen, **OS_CFG_STAT_TASK_EN** needs to be set to 1 (i.e., the statistic task needs to be enabled). However, you can call **OSStatStkChk()** from one of the tasks to obtain this information about the task(s).

OS_CFG_STK_SIZE_MIN

This **#define** specifies the minimum stack size (in **CPU_STK** elements) for each task. This is used by µC/OS-III to verify that sufficient stack space is provided for when each task is created. Suppose the full context of a processor consists of 16 registers of 32 bits. Also, suppose **CPU_STK** is declared as being of type **CPU_INT32U**, at a bare minimum, set **OS_CFG_STK_SIZE_MIN** to 16. However, it would be quite unwise to not accommodate for

storage of local variables, function call returns, and possibly nested ISRs. Refer to the “port” of the processor used to see how to set this minimum. Again, this is a safeguard to make sure task stacks have sufficient stack space.

OS_CFG_TASK_CHANGE_PRIO_EN

`OS_CFG_TASK_CHANGE_PRIO_EN` enables (when set to 1) or disables (when set to 0) code generation of the function `OSTaskChangePrio()`.

OS_CFG_TASK_DEL_EN

`OS_CFG_TASK_DEL_EN` enables (when set to 1) or disables (when set to 0) code generation of the function `OSTaskDel()`.

OS_CFG_TASK_Q_EN

`OS_CFG_TASK_Q_EN` enables (when set to 1) or disables (when set to 0) code generation of the `OSTaskQXXX()` functions used to send and receive messages directly to/from tasks and ISRs. Sending messages directly to a task is more efficient than sending messages using a message queue because there is no pend list associated with messages sent to a task.

OS_CFG_TASK_Q_PEND_ABORT_EN

`OS_CFG_TASK_Q_PEND_ABORT_EN` enables (when set to 1) or disables (when set to 0) code generation of code for the function `OSTaskQOpenAbort()`.

OS_CFG_TASK_PROFILE_EN

This constant allows variables to be allocated in each task’s `OS_TCB` to hold performance data about each task. If `OS_CFG_TASK_PROFILE_EN` is set to 1, each task will have a variable to keep track of the number of times a task is switched to, the task execution time, the percent CPU usage of the task relative to the other tasks and more. The information made available with this feature is highly useful when debugging, but requires extra RAM.

OS_CFG_TASK_REG_TBL_SIZE

This constant allows each task to have task context variables. Use task variables to store such elements as “`errno`”, task identifiers and other task-specific values. The number of variables that a task contains is set by this constant. Each variable is identified by a unique identifier from 0 to `OS_CFG_TASK_REG_TBL_SIZE-1`. Also, each variable is declared as having an `OS_REG` data type (see `os_type.h`). If `OS_REG` is a `CPU_INT08U`, all variables in this table are of this type.

OS_CFG_TASK_SEM_PEND_ABORT_EN

OS_CFG_TASK_SEM_PEND_ABORT_EN enables (when set to 1) or disables (when set to 0) code generation of code for the function `OSTaskSemPendAbort()`.

OS_CFG_TASK_SUSPEND_EN

OS_CFG_TASK_SUSPEND_EN enables (when set to 1) or disables (when set to 0) code generation of the functions `OSTaskSuspend()` and `OSTaskResume()`, which allows the application to explicitly suspend and resume tasks, respectively. Suspending and resuming a task is useful when debugging, especially if calling these functions via a terminal interface at run time.

OS_CFG_TIME_DLY_HMSM_EN

OS_CFG_TIME_DLY_HMSM_EN enables (when set to 1) or disables (when set to 0) the code generation of the function `OSTimeDlyHMSM()`, which is used to delay a task for a specified number of hours, minutes, seconds, and milliseconds.

OS_CFG_TIME_DLY_RESUME_EN

OS_CFG_TIME_DLY_RESUME_EN enables (when set to 1) or disables (when set to 0) the code generation of the function `OSTimeDlyResume()`.

OS_CFG_TMR_EN

Enables (when set to 1) or disables (when set to 0) the code generation of timer management services.

OS_CFG_TMR_DEL_EN

OS_CFG_TMR_DEL_EN enables (when set to 1) or disables (when set to 0) the code generation of the function `OSTmrDel()`.

B-2 DATA TYPES (OS_TYPE.H)

`os_type.h` contains the data types used by μC/OS-III, which should only be altered by the implementer of the μC/OS-III port. You can alter the contents of `os_type.h`. However, it is important to understand how each of the data types that are being changed will affect the operation of μC/OS-III-based applications.

The reason to change `os_type.h` is that processors may work better with specific word sizes. For example, a 16-bit processor will likely be more efficient at manipulating 16-bit values and a 32-bit processor more comfortable with 32-bit values, even at the cost of extra RAM. In other words, the user may need to choose between processor performance and RAM footprint.

If changing “any” of the data types, you should copy `os_type.h` in the project directory and change that file (not the original `os_type.h` that comes with the μC/OS-III release).

Recommended data type sizes are specified in comments in `os_type.h`.

B-3 μC/OS-III STACKS, POOLS AND OTHER (OS_CFG_APP.H)

μC/OS-III allows the user to configure the sizes of the idle task stack, statistic task stack, message pool, tick wheel, timer wheel, debug tables, and more. This is done through `os_cfg_app.h`.

`OS_CFG_TASK_STK_LIMIT_PCT_EMPTY`

This `#define` sets the position (as a percentage to empty) of the stack limit for the idle, statistic, tick, interrupt queue handler, and timer tasks stacks. In other words, the amount of space to leave before the stack is empty. For example if the stack contains 1000 `CPU_STK` entries and the user declares `OS_CFG_TASK_STK_LIMIT_PCT_EMPTY` to 10, the stack limit will be set when the stack reaches 90% full, or 10% empty.

If the stack of the processor grows from high memory to low memory, the limit would be set towards the “base address” of the stack, i.e., closer to element 0 of the stack.

If the processor used does not offer automatic stack limit checking, you should set this `#define` to 0.

OS_CFG_IDLE_TASK_STK_SIZE

This `#define` sets the size of the idle task's stack (in `CPU_STK` elements) as follows:

```
CPU_STK OSCfg_IdleTaskStk[OS_CFG_IDLE_TASK_STK_SIZE];
```

Note that the stack size needs to be at least greater than `OS_CFG_STK_SIZE_MIN`.

OS_CFG_INT_Q_SIZE

If `OS_CFG_ISR_POST_DEFERRED_EN` is set to 1 (see `os_cfg.h`), this `#define` specifies the number of entries that can be placed in the interrupt queue. The size of this queue depends on how many interrupts could occur in the time it takes to process interrupts by the ISR Handler Task. The size also depends on whether or not to allow interrupt nesting. A good start point is approximately 10 entries.

OS_CFG_INT_Q_TASK_STK_SIZE

If `OS_CFG_ISR_POST_DEFERRED_EN` is set to 1 (see `os_cfg.h`) then this `#define` sets the size of the ISR handler task's stack (in `CPU_STK` elements) as follows:

```
CPU_STK OSCfg_IntQTaskStk[OS_CFG_INT_Q_TASK_STK_SIZE];
```

Note that the stack size needs to be at least greater than `OS_CFG_STK_SIZE_MIN`.

OS_CFG_ISR_STK_SIZE

This specifies the size of μC/OS-III's interrupt stack (in `CPU_STK` elements). Note that the stack size needs to accommodate for worst case interrupt nesting, assuming the processor supports interrupt nesting. The ISR handler task stack is declared in `os_cfg_app.c` as follows:

```
CPU_STK OSCfg_ISRStk[OS_CFG_ISR_STK_SIZE];
```

OS_CFG_MSG_POOL_SIZE

This entry specifies the number of `OS_MSGS` available in the pool of `OS_MSGS`. The size is specified in number of `OS_MSG` elements. The message pool is declared in `os_cfg_app.c` as follows:

```
OS_MSG OSCfg_MsgPool[OS_CFG_MSG_POOL_SIZE];
```

OS_CFG_STAT_TASK_PRIO

This **#define** allows a user to specify the priority assigned to the μC/OS-III statistic task. It is recommended to make this task a very low priority and possibly even one priority level just above the idle task, or, OS_CFG_PRIO_MAX-2.

OS_CFG_STAT_TASK_RATE_HZ

This **#define** defines the execution rate (in Hz) of the statistic task. It is recommended to make this rate an even multiple of the tick rate (see OS_CFG_TICK_RATE_HZ).

OS_CFG_STAT_TASK_STK_SIZE

This **#define** sets the size of the statistic task's stack (in CPU_STK elements) as follows:

```
CPU_STK OSCfg_StatTaskStk[OS_CFG_STAT_TASK_STK_SIZE];
```

Note that the stack size needs to be at least greater than OS_CFG_STK_SIZE_MIN.

OS_CFG_TICK_RATE_HZ

This **#define** specifies the rate in Hertz of μC/OS-III's tick interrupt. The tick rate should be set between 10 and 1000 Hz. The higher the rate, the more overhead it will impose on the processor. The desired rate depends on the granularity required for time delays and timeouts.

OS_CFG_TICK_TASK_PRIO

This **#define** specifies the priority to assign to the μC/OS-III tick task. It is recommended to make this task a fairly high priority, but it does not need to be the highest. The priority assigned to this task must be greater than 0 and less than OS_CFG_PRIO_MAX-1.

OS_CFG_TICK_TASK_STK_SIZE

This entry specifies the size of μC/OS-III's tick task stack (in CPU_STK elements). Note that the stack size must be at least greater than OS_CFG_STK_SIZE_MIN. The tick task stack is declared in os_cfg_app.c as follows:

```
CPU_STK OSCfg_TickTaskStk[OS_CFG_TICK_TASK_STK_SIZE];
```

OS_CFG_TICK_WHEEL_SIZE

This `#define` determines the number of entries in the `OSTickWheel[]` table. This “wheel” reduces the number of tasks to be updated by the tick task. The size of the wheel should be a fraction of the number of tasks expected in the application.

This value should be a number between 4 and 1024. Task management overhead is somewhat determined by the size of the wheel. A large number of entries might reduce the overhead for tick management but would require more RAM. Each entry requires a pointer and a counter of the number of entries in each “spoke” of the wheel. This counter is typically a 16-bit value. It is recommended that `OS_CFG_TICK_WHEEL_SIZE` not be a multiple of the tick rate. If the application has many tasks, a large wheel size is recommended. As a starting value, you should use a prime number (3, 5, 7, 11, 13, 17, 19, 23, etc.).

OS_CFG_TMR_TASK_PRIO

This `#define` allows a user to specify the priority to assign to the µC/OS-III timer task. It is recommended to make this task a medium-to-low priority, depending on how fast the timer task will execute (see `OS_CFG_TMR_TASK_RATE_HZ`), how many timers running in the application, and the size of the timer wheel, etc. The priority assigned to this task must be greater than 0 and less than `OS_CFG_PRIO_MAX-1`.

You should start with these simple rules:

- The faster the timer rate, the higher the priority to assign to this task.
- The higher the timer wheel size, the higher the priority to assign this task.
- The higher the number of timers in the system, the lower the priority.

In other words:

High Timer Rate	Higher Priority
-----------------	-----------------

High Timer Wheel Size	Higher Priority
-----------------------	-----------------

High Number of Timers	Lower Priority
-----------------------	----------------

OS_CFG_TMR_TASK_RATE_HZ

This **#define** specifies the rate in Hertz of μC/OS-III's timer task. The timer task rate should typically be set to 10 Hz. However, timers can run at a faster rate at the price of higher processor overhead. Note that **OS_CFG_TMR_TASK_RATE_HZ** MUST be an integer multiple of **OS_CFG_TICK_TASK_RATE_HZ**. In other words, if setting **OS_CFG_TICK_TASK_RATE_HZ** to 1000, do not set **OS_CFG_TMR_TASK_RATE_HZ** to 11 since 90.91 ticks would be required for every timer update, and 90.91 is not an integer multiple. Use approximately 10 Hz in this example.

OS_CFG_TMR_TASK_STK_SIZE

This **#define** sets the size of the timer task's stack (in **CPU_STK** elements) as follows:

```
CPU_STK OSCfg_TmrTaskStk[OS_CFG_TMR_TASK_STK_SIZE];
```

Note that the stack size needs to be at least greater than **OS_CFG_STK_SIZE_MIN**.

OS_CFG_TMR_WHEEL_SIZE

Timers are updated using a rotating wheel mechanism. This “wheel” reduces the number of timers to be updated by the timer manager task. The size of the wheel should be a fraction of the number of timers in the application.

This value should be a number between 4 and 1024. Timer management overhead is somewhat determined by the size of the wheel. A large number of entries might reduce the overhead for timer management but would require more RAM. Each entry requires a pointer and a counter of the number of entries in each “spoke” of the wheel. This counter is typically a 16-bit value. It is recommended that this value *not* be a multiple of the tick rate. If an application has many timers a large wheel size is recommended. As a starting value, you should use a prime number (3, 5, 7, 11, 13, 17, 19, 23, etc.).

Appendix B

Appendix

C

Migrating from µC/OS-II to µC/OS-III

µC/OS-III is a completely new real-time kernel with roots in µC/OS-II. Portions of the µC/OS-II Application Programming Interface (API) function names are the same, but the arguments passed to the functions have, in some places, drastically changed.

Appendix C explains several differences between the two real-time kernels. However, access to µC/OS-II and µC/OS-III source files best highlights the differences.

Table C-1 is a feature-comparison chart for µC/OS-II and µC/OS-III.

Feature	µC/OS-II	µC/OS-III
Year of introduction	1998	2009
Book	Yes	Yes
Source code available	Yes	Yes
Preemptive Multitasking	Yes	Yes
Maximum number of tasks	255	Unlimited
Number of tasks at each priority level	1	Unlimited
Round Robin Scheduling	No	Yes
Semaphores	Yes	Yes
Mutual Exclusion Semaphores	Yes	Yes (nestable)
Event Flags	Yes	Yes
Message Mailboxes	Yes	No (not needed)
Message Queues	Yes	Yes
Fixed Sized Memory Management	Yes	Yes
Signal a task without requiring a semaphore	No	Yes
Send messages to a task without requiring a message queue	No	Yes
Software Timers	Yes	Yes
Task suspend/resume	Yes	Yes (nestable)
Deadlock prevention	Yes	Yes
Scalable	Yes	Yes
Code Footprint	6K to 26K	6K to 24K
Data Footprint	1K+	1K+
ROMable	Yes	Yes
Run-time configurable	No	Yes
Catch a task that returns	No	Yes
Compile-time configurable	Yes	Yes

Feature	µC/OS-II	µC/OS-III
ASCII names for each kernel object	Yes	Yes
Option to post without scheduling	No	Yes
Pend on multiple objects	Yes	Yes
Task registers	Yes	Yes
Built-in performance measurements	Limited	Extensive
User definable hook functions	Yes	Yes
Time stamps on posts	No	Yes
Built-in Kernel Awareness support	Yes	Yes
Optimizable Scheduler in assembly language	No	Yes
Tick handling at task level	No	Yes
Number of services	~90	~70
MISRA-C:1998	Yes	N/A
MISRA-C:2004	No	Yes
DO178B Level A and EUROCAE ED-12B	Yes	In progress
Medical FDA pre-market notification (510(k)) and pre-market approval (PMA)	Yes	In progress
SIL3/SIL4 IEC for transportation and nuclear systems	Yes	In progress
IEC-61508	Yes	In progress

Table C-1 µC/OS-II and µC/OS-III features comparison chart

C-1 DIFFERENCES IN SOURCE FILE NAMES AND CONTENTS

Table C-2 shows the source files used in both kernels. Note that a few of the files have the same or similar name.

μC/OS-II	μC/OS-III	Note
	os_app_hooks.c	(1)
	os_cfg_app.c	(2)
	os_cfg_app.h	(3)
os_cfg_r.h	os_cfg.h	(4)
os_core.c	os_core.c	
os_cpu.h	os_cpu.h	(5)
os_cpu_a.asm	os_cpu_a.asm	(5)
os_cpu_c.c	os_cpu_c.c	(5)
os_dbg_r.c	os_dbg.c	(6)
os_flag.c	os_flag.c	
	os_int.c	(7)
	os_pend_multi.c	(8)
	os_prio.c	(9)
os_mbox.c		(10)
os_mem.c	os_mem.c	
	os_msg.c	(11)
os_mutex.c	os_mutex.c	
os_q.c	os_q.c	
os_sem.c	os_sem.c	
	os_stat.c	(12)
os_task.c	os_task.c	
os_time.c	os_time.c	
os_tmr.c	os_tmr.c	
	os_var.c	(13)
	os_type.h	(14)
ucos_ii.h	os.h	(15)

Table C-2 μC/OS-II and μC/OS-III files

- TC-2(1) µC/OS-II does not have this file, which is now provided for convenience so you can add application hooks. You should copy this file to the application directory and edit the contents of the file to satisfy your application requirements.
- TC-2(2) `os_cfg_app.c` did not exist in µC/OS-II. This file needs to be added to a project build for µC/OS-III.
- TC-2(3) In µC/OS-II, all configuration constants were placed in `os_cfg.h`. In µC/OS-III, some of the configuration constants are placed in this file, while others are in `os_cfg_app.h`. `os_cfg_app.h` contains application-specific configurations such as the size of the idle task stack, tick rate, and others.
- TC-2(4) In µC/OS-III, `os_cfg.h` is reserved for configuring certain features of the kernel. For example, are any of the semaphore services required, and will the application have fixed-sized memory partition management?
- TC-2(5) These are the port files and a few variables and functions will need to be changed when using a µC/OS-II port as a starting point for the µC/OS-III port.

µC/OS-II variable changes from to these in µC/OS-III
<code>OSIntNesting</code>	<code>OSIntNestingCtr</code>
<code>OSTCBCur</code>	<code>OSTCBCurPtr</code>
<code>OSTCBHighRdy</code>	<code>OSTCBHighRdyPtr</code>
µC/OS-II function changes from to these in µC/OS-III
<code>OSInitHookBegin()</code>	<code>OSInitHook()</code>
<code>OSInitHookEnd()</code>	N/A
<code>OSTaskStatHook()</code>	<code>OSStatTaskHook()</code>
<code>OSTaskIdleHook()</code>	<code>OSIdleTaskHook()</code>
<code>OSTCBInitHook()</code>	N/A
<code>OSTaskStkInit()</code>	<code>OSTaskStkInit()</code>

The name of `OSTaskStkInit()` is the same but it is listed here since the code for it needs to be changed slightly as several arguments passed to this function are different. Specifically, instead of passing the top-of-stack as in µC/OS-II, `OSTaskStkInit()` is passed the base address and the size of the task stack.

Appendix C

- TC-2(6) In μC/OS-III, `os_dbg.c` should always be part of the build. In μC/OS-II, the equivalent file (`os_dbg_r.c`) was optional.
- TC-2(7) `os_int.c` contains the code for the Interrupt Queue handler, which is a new feature in μC/OS-III, allowing post calls from ISRs to be deferred to a task-level handler. This is done to reduce interrupt latency (see Chapter 9, “Interrupt Management” on page 175).
- TC-2(8) Both kernels allow tasks to pend on multiple kernel objects. In μC/OS-II, this code is found in `os_core.c`, while in μC/OS-III, the code is placed in a separate file, `os_pend_multi.c`.
- TC-2(9) The code to determine the highest priority ready-to-run task is isolated in μC/OS-III and placed in `os_prio.c`. This allows the port developer to replace this file by an assembly language equivalent file, especially if the CPU used supports certain bit manipulation instructions and a count leading zeros (CLZ) instruction.
- TC-2(10) μC/OS-II provides message mailbox services. A message mailbox is identical to a message queue of size one. μC/OS-III does not have these services since they can be easily emulated by message queues.
- TC-2(11) Management of messages for message queues is encapsulated in `os_msg.c` in μC/OS-III.
- TC-2(12) The statistics task and its support functions have been extracted out of `os_core.c` and placed in `os_stat.c` for μC/OS-III.
- TC-2(13) All the μC/OS-III variables are instantiated in a file called `os_var.c`.
- TC-2(14) In μC/OS-III, the size of most data types is better adapted to the CPU architecture used. In μC/OS-II, the size of a number of these data types was assumed.
- TC-2(15) In μC/OS-II, the main header file is called `ucos_ii.h`. In μC/OS-III, it is renamed to `os.h`.

C-2 CONVENTION CHANGES

There are a number of convention changes from µC/OS-II to µC/OS-III. The most notable is the use of CPU-specific data types. Table C-3 shows the differences between the data types used in both kernels

µC/OS-II (os_cpu.h)	µC/CPU (cpu.h)	Note
BOOLEAN	CPU_BOOLEAN	
INT8S	CPU_INT08S	
INT8U	CPU_INT08U	
INT16S	CPU_INT16S	
INT16U	CPU_INT16U	
INT32S	CPU_INT32S	
INT32U	CPU_INT32U	
OS_STK	CPU_STK	(1)
OS_CPU_SR	CPU_SR	(2)
µC/OS-II (os_cfg.h)	µC/CPU (cpu.h)	
OS_STK_GROWTH	CPU_CFG_STK_GROWTH	(3)

Table C-3 µC/OS-II vs. µC/OS-III basic data types

- TC-3(1) A task stack in µC/OS-II is declared as an `OS_STK`, which is now replaced by a CPU specific data type `CPU_STK`. These two data types are equivalent, except that defining the width of the CPU stack in µC/CPU makes more sense.
- TC-3(2) It also makes sense to declare the CPU's status register in µC/CPU.
- TC-3(3) Stack growth (high-to-low or low-to-high memory) is declared in µC/CPU since stack growth is a CPU feature and not an OS one.

Appendix C

Another convention change is the use of the acronym “CFG” which stands for configuration. Now, all `#define` configuration constants and variables have the “CFG” or “Cfg” acronym in them as shown in Table C-4. Table C-4 shows the configuration constants that have been moved from `os_cfg.h` to `os_cfg_app.h`. This is done because μC/OS-III is configurable at the application level instead of just at compile time as with μC/OS-II.

μC/OS-II (<code>os_cfg.h</code>)	μC/OS-III (<code>os_cfg_app.h</code>)	Note
	OS_CFG_MSG_POOL_SIZE	
	OS_CFG_ISR_STK_SIZE	
	OS_CFG_TASK_STK_LIMIT_PCT_EMPTY	
OS_TASK_IDLE_STK_SIZE	OS_CFG_IDLE_TASK_STK_SIZE	
	OS_CFG_INT_Q_SIZE	
	OS_CFG_INT_Q_TASK_STK_SIZE	
	OS_CFG_STAT_TASK_PRIO	
	OS_CFG_STAT_TASK_RATE_HZ	
OS_TASK_STAT_STK_SIZE	OS_CFG_STAT_TASK_STK_SIZE	
OS_TICKS_PER_SEC	OS_CFG_TICK_RATE_HZ	(1)
	OS_CFG_TICK_TASK_PRIO	
	OS_CFG_TICK_TASK_STK_SIZE	
	OS_CFG_TICK_WHEEL_SIZE	
	OS_CFG_TMR_TASK_PRIO	
OS_TMR_CFG_TICKS_PER_SEC	OS_CFG_TMR_TASK_RATE_HZ	
OS_TASK_TMR_STK_SIZE	OS_CFG_TMR_TASK_STK_SIZE	
OS_TMR_CFG_WHEEL_SIZE	OS_CFG_TMR_WHEEL_SIZE	

Table C-4 μC/OS-III uses “CFG” in configuration

TC-4(1) The very useful `OS_TICKS_PER_SEC` in μC/OS-II was renamed to `OS_CFG_TICK_RATE_HZ` in μC/OS-III. The “HZ” indicates that this `#define` represents Hertz (i.e., ticks per second).

Table C-5 shows additional configuration constants added to `os_cfg.h`, while several μC/OS-II constants were either removed or renamed.

μC/OS-II (os_cfg.h)	μC/OS-III (os_cfg.h)	Note
OS_APP_HOOKS_EN	OS_CFG_APP_HOOKS_EN	
OS_ARG_CHK_EN	OS_CFG_ARG_CHK_EN	
	OS_CFG_CALLED_FROM_ISR_CHK_EN	
OS_DEBUG_EN	OS_CFG_DBG_EN	(1)
OS_EVENT_MULTI_EN	OS_CFG_PEND_MULTI_EN	
OS_EVENT_NAME_EN		(2)
	OS_CFG_ISR_POST_DEFERRED_EN	
OS_MAX_EVENTS		(3)
OS_MAX_FLAGS		(3)
OS_MAX_MEM_PART		(3)
OS_MAX_OS		(3)
OS_MAX_TASKS		(3)
	OS_CFG_OBJ_TYPE_CHK_EN	
OS_LOWEST_PRIO	OS_CFG_PRIO_MAX	
	OS_CFG_SCHED_LOCK_TIME_MEAS_EN	
	OS_CFG_SCHED_ROUND_ROBIN_EN	
	OS_CFG_STK_SIZE_MIN	
OS_FLAG_EN	OS_CFG_FLAG_EN	
OS_FLAG_ACCEPT_EN		(6)
OS_FLAG_DEL_EN	OS_CFG_FLAG_DEL_EN	
OS_FLAG_WAIT_CLR_EN	OS_CFG_FLAG_MODE_CLR_EN	
OS_FLAG_NAME_EN		(2)
OS_FLAG_NBITS		(4)
OS_FLAG_QUERY_EN		(5)
	OS_CFG_PEND_ABORT_EN	
OS_MBOX_EN		
OS_MBOX_ACCEPT_EN		(6)

Appendix C

μC/OS-II (os_cfg.h)	μC/OS-III (os_cfg.h)	Note
OS_MBOX_DEL_EN		
OS_MBOX_PEND_ABORT_EN		
OS_MBOX_POST_EN		
OS_MBOX_POST_OPT_EN		
OS_MBOX_QUERY_EN		(5)
OS_MEM_EN	OS_CFG_MEM_EN	
OS_MEM_NAME_EN		(2)
OS_MEM_QUERY_EN		(5)
OS_MUTEX_EN	OS_CFG_MUTEX_EN	
OS_MUTEX_ACCEPT_EN		(6)
OS_MUTEX_DEL_EN	OS_CFG_MUTEX_DEL_EN	
	OS_CFG_MUTEX_PEND_ABORT_EN	
OS_MUTEX_QUERY_EN		(5)
OS_Q_EN	OS_CFG_Q_EN	
OS_Q_ACCEPT_EN		(6)
OS_Q_DEL_EN	OS_CFG_Q_DEL_EN	
OS_Q_FLUSH_EN	OS_CFG_Q_FLUSH_EN	
	OS_CFG_Q_PEND_ABORT_EN	
OS_Q_POST_EN		(7)
OS_Q_POST_FRONT_EN		(7)
OS_Q_POST_OPT_EN		(7)
OS_Q_QUERY_EN		(5)
OS_SCHED_LOCK_EN		
OS_SEM_EN	OS_CFG_SEM_EN	
OS_SEM_ACCEPT_EN		(6)
OS_SEM_DEL_EN	OS_CFG_SEM_DEL_EN	
OS_SEM_PEND_ABORT_EN	OS_CFG_SEM_PEND_ABORT_EN	

µC/OS-II (os_cfg.h)	µC/OS-III (os_cfg.h)	Note
OS_SEM_QUERY_EN		(5)
OS_SEM_SET_EN	OS_CFG_SEM_SET_EN	
OS_TASK_STAT_EN	OS_CFG_STAT_TASK_EN	
OS_TASK_STK_CHK_EN	OS_CFG_STAT_TASK_STK_CHK_EN	
OS_TASK_CHANGE_PRIO_EN	OS_CFG_TASK_CHANGE_PRIO_EN	
OS_TASK_CREATE_EN		
OS_TASK_CREATE_EXT_EN		
OS_TASK_DEL_EN	OS_CFG_TASK_DEL_EN	
OS_TASK_NAME_EN		(2)
	OS_CFG_TASK_Q_EN	
	OS_CFG_TASK_Q_PEND_ABORT_EN	
OS_TASK_QUERY_EN		(5)
OS_TASK_PROFILE_EN	OS_CFG_TASK_PROFILE_EN	
	OS_CFG_TASK_REG_TBL_SIZE	
	OS_CFG_TASK_SEM_PEND_ABORT_EN	
OS_TASK_SUSPEND_EN	OS_CFG_TASK_SUSPEND_EN	
OS_TASK_SW_HOOK_EN		
OS_TICK_STEP_EN		(8)
OS_TIME_DLY_HMSM_EN	OS_CFG_TIME_DLY_HMSM_EN	
OS_TIME_DLY_RESUME_EN	OS_CFG_TIME_DLY_RESUME_EN	
OS_TIME_GET_SET_EN		
OS_TIME_TICK_HOOK_EN		
OS_TMR_EN	OS_CFG_TMR_EN	
OS_TMR_CFG_NAME_EN		(2)
OS_TMR_DEL_EN	OS_CFG_TMR_DEL_EN	

Table C-5 µC/OS-III uses “CFG” in configuration

Appendix C

- TC-5(1) **DEBUG** is replaced with **DBG**.
- TC-5(2) In μC/OS-II, all kernel objects can be assigned ASCII names after creation. In μC/OS-III, ASCII names are assigned when the object is created.
- TC-5(3) In μC/OS-II, it is necessary to declare the maximum number of kernel objects (number of tasks, number of event flag groups, message queues, etc.) at compile time. In μC/OS-III, all kernel objects are allocated at run time so it is no longer necessary to specify the maximum number of these objects. This feature saves valuable RAM as it is no longer necessary to over allocate objects.
- TC-5(4) In μC/OS-II, event-flag width must be declared at compile time through **OS_FLAG_NBITS**. In μC/OS-III, this is accomplished by defining the width (i.e., number of bits) in **os_type.h** through the data type **OS_FLAG**. The default is typically 32 bits.
- TC-5(5) μC/OS-III does not provide query services to the application.
- TC-5(6) μC/OS-III does not directly provide “**accept**” function calls as with μC/OS-II. Instead, **OS???Pend()** functions provide an option that emulates the “**accept**” functionality by specifying **OS_OPT_PEND_NON_BLOCKING**.
- TC-5(7) In μC/OS-II, there are a number of “**post**” functions. The features offered are now combined in the **OS???Post()** functions in μC/OS-III.
- TC-5(8) The μC/OS-View feature **OS_TICK_STEP_EN** is not present in μC/OS-III since μC/OS-View is an obsolete product and in fact, was replaced by μC/Probe.

C-3 VARIABLE NAME CHANGES

Some of the variable names in μC/OS-II are changed for μC/OS-III to be more consistent with coding conventions. Significant variables are shown in Table C-6.

μC/OS-II (ucos_ii.h)	μC/OS-III (os.h)	Note
OSCtxSwCtr	OSTaskCtxSwCtr	
OSCPUUsage	OSStatTaskCPUUsage	(1)
OSIdleCtr	OSIdleTaskCtr	
OSIdleCtrMax	OSIdleTaskCtrMax	
OSIntNesting	OSIntNestingCtr	(2)
OSPrioCur	OSPrioCur	
OSPrioHighRdy	OSPrioHighRdy	
OSRunning	OSRunning	
OSSchedNesting	OSSchedLockNestingCtr	(3)
	OSSchedLockTimeMax	
OSTaskCtr	OSTaskQty	
OSTCBCur	OSTCBCurPtr	(4)
OSTCBHighRdy	OSTCBHighRdyPtr	(4)
OSTime	OSTickCtr	(5)
OSTmrTime	OSTmrTickCtr	

Table C-6 Changes in variable naming

- TC-6(1) In μC/OS-II, **OSCPUUsage** contains the total CPU utilization in percentage format. If the CPU is busy 12% of the time, **OSCPUUsage** has the value 12. In μC/OS-III, the same information is provided in **OSStatTaskCPUUsage**. However, as of μC/OS-III V3.03.00, the resolution of **OSStatTaskCPUUsage** is 1/100th of a percent or, 0.00% (value is 0) to 100.00% (value is 10,000).
- TC-6(2) In μC/OS-II, **OSIntNesting** keeps track of the number of interrupts nesting. μC/OS-III uses **OSIntNestingCtr**. The “Ctr” has been added to indicate that this variable is a counter.

-
- TC-6(3) `OSSchedNesting` represents the number of times `OSSchedLock()` is called. µC/OS-III renames this variable to `OSSchedLockNestingCtr` to better represent the variable's meaning.
- TC-6(4) In µC/OS-II, `OSTCBCur` and `OSTCBHighRdy` are pointers to the `OS_TCB` of the current task, and to the `OS_TCB` of the highest-priority task that is ready-to-run. In µC/OS-III, these are renamed by adding the “`Ptr`” to indicate that they are pointers.
- TC-6(5) The internal counter of the number of ticks since power up, or the last time the variable was changed through `OSTimeSet()`, has been renamed to better reflect its function.

C-4 API CHANGES

The most significant change from µC/OS-II to µC/OS-III occurs in the API. In order to port a µC/OS-II-based application to µC/OS-III, it is necessary to change the way services are invoked.

Table C-7 shows changes in the way critical sections in µC/OS-III are handled. Specifically, µC/OS-II defines macros to disable interrupts, and they are moved to µC/CPU with µC/OS-III since they are CPU specific functions.

µC/OS-II (<code>os_cpu.h</code>)	µC/CPU (<code>cpu.h</code>)	Note
<code>OS_ENTER_CRITICAL()</code>	<code>CPU_CRITICAL_ENTER()</code>	
<code>OS_EXIT_CRITICAL()</code>	<code>CPU_CRITICAL_EXIT()</code>	

Table C-7 **Changes in macro naming**

One of the biggest changes in the µC/OS-III API is its consistency. In fact, based on the function performed, it is possible to guess which arguments are needed, and in what order. For example, “`*p_err`” is a pointer to an errorReturned variable. When present, “`*p_err`” is always the last argument of a function. In µC/OS-II, errorReturned values are at times returned as a “`*perr`,” and at other times as the return value of the function. This inconsistency has been removed in µC/OS-III.

C-4-1 EVENT FLAGS

Table C-8 shows the API for event-flag management.

µC/OS-II (os_flag.c)	µC/OS-III (os_flag.c)	Note
<pre>OS_FLAGS OSFlagAccept(OS_FLAG_GRP *pgrp, OS_FLAGS flags, INT8U wait_type, INT8U *perr);</pre>		(1)
<pre>OS_FLAG_GRP * OSFlagCreate(OS_FLAGS flags, INT8U *perr);</pre>	<pre>void OSFlagCreate(OS_FLAG_GRP *p_grp, CPU_CHAR *p_name, OS_FLAGS flags, OS_ERR *p_err);</pre>	(2)
<pre>OS_FLAG_GRP * OSFlagDel(OS_FLAG_GRP *pgrp, INT8U opt, INT8U *perr);</pre>	<pre>OS_OBJ_QTY OSFlagDel(OS_FLAG_GRP *p_grp, OS_OPT opt, OS_ERR *p_err);</pre>	
<pre>INT8U OSFlagNameGet(OS_FLAG_GRP *pgrp, INT8U **pname, INT8U *perr);</pre>		
<pre>void OSFlagNameSet(OS_FLAG_GRP *pgrp, INT8U *pname, INT8U *perr);</pre>		(3)
<pre>OS_FLAGS OSFlagPend(OS_FLAG_GRP *pgrp, OS_FLAGS flags, INT8U wait_type, INT32U timeout, INT8U *perr);</pre>	<pre>OS_FLAGS OSFlagPend(OS_FLAG_GRP *p_grp, OS_FLAGS flags, OS_TICK timeout, OS_OPT opt, OS_TS *p_ts, OS_ERR *p_err);</pre>	

Appendix C

μC/OS-II (os_flag.c)	μC/OS-III (os_flag.c)	Note
<pre>OS_FLAGS OSFlagPendGetFlagsRdy(void);</pre>	<pre>OS_FLAGS OSFlagPendGetFlagsRdy(OS_ERR *p_err);</pre>	
<pre>OS_FLAGS OSFlagPost(OS_FLAG_GRP *pgrp, OS_FLAGS flags, INT8U opt, INT8U *perr);</pre>	<pre>OS_FLAGS OSFlagPost(OS_FLAG_GRP *p_grp, OS_FLAGS flags, OS_OPT opt, OS_ERR *p_err);</pre>	
<pre>OS_FLAGS OSFlagQuery(OS_FLAG_GRP *pgrp, INT8U *perr);</pre>		(4)

Table C-8 Event Flags API

- TC-8(1) In μC/OS-III, there is no “accept” API. This feature is actually built-in the `OSFlagPend()` by specifying the `OS_OPT_PEND_NON_BLOCKING` option.
- TC-8(2) In μC/OS-II, `OSFlagCreate()` returns the address of an `OS_FLAG_GRP`, which is used as the “handle” to the event-flag group. In μC/OS-III, the application must allocate storage for an `OS_FLAG_GRP`, which serves the same purpose as the `OS_EVENT`. The benefit in μC/OS-III is that it is not necessary to predetermine the number of event flags at compile time.
- TC-8(3) In μC/OS-II, the user may assign a name to an event-flag group after the group is created. This functionality is built-into `OSFlagCreate()` for μC/OS-III.
- TC-8(4) μC/OS-III does not provide query services, as they were rarely used in μC/OS-II.

C-4-2 MESSAGE MAILBOXES

Table C-9 shows the API for message mailbox management. Note that µC/OS-III does not directly provide services for managing message mailboxes. Given that a message mailbox is a message queue of size one, µC/OS-III can easily emulate message mailboxes.

µC/OS-II (<code>os_mbox.c</code>)	µC/OS-III (<code>os_q.c</code>)	Note
<code>void *</code> <code>OSMboxAccept(</code> <code>OS_EVENT *pevent);</code>		(1)
<code>OS_EVENT *</code> <code>OSMboxCreate(</code> <code>void *pmsg);</code>	<code>void</code> <code>OSQCreate(</code> <code>OS_Q *p_q,</code> <code>CPU_CHAR *p_name,</code> <code>OS_MSG_QTY max_qty,</code> <code>OS_ERR *p_err);</code>	(2)
<code>void *</code> <code>OSMboxDel(</code> <code>OS_EVENT *pevent,</code> <code>INT8U opt,</code> <code>INT8U *perr);</code>	<code>OS_OBJ_QTY,</code> <code>OSQDel(</code> <code>OS_Q *p_q,</code> <code>OS_OPT opt,</code> <code>OS_ERR *p_err);</code>	
<code>void *</code> <code>OSMboxPend(</code> <code>OS_EVENT *pevent,</code> <code>INT32U timeout,</code> <code>INT8U *perr);</code>	<code>void *</code> <code>OSQPend(</code> <code>OS_Q *p_q,</code> <code>OS_TICK timeout,</code> <code>OS_OPT opt,</code> <code>OS_MSG_SIZE *p_msg_size,</code> <code>CPU_TS *p_ts,</code> <code>OS_ERR *p_err);</code>	(3)
<code>INT8U</code> <code>OSMboxPendAbort(</code> <code>OS_EVENT *pevent,</code> <code>INT8U opt,</code> <code>INT8U *perr);</code>	<code>OS_OBJ_QTY</code> <code>OSQPendAbort(</code> <code>OS_Q *p_q,</code> <code>OS_OPT opt</code> <code>OS_ERR *p_err);</code>	

Appendix C

μC/OS-II (os_mbox.c)	μC/OS-III (os_q.c)	Note
<pre>INT8U OSMboxPost(OS_EVENT *pevent, void *pmsg);</pre>	<pre>void OSQPost(OS_Q *p_q, Void *p_void, OS_MSG_SIZE msg_size, OS_OPT opt, OS_ERR *p_err);</pre>	(4)
<pre>INT8U OSMboxPostOpt(OS_EVENT *pevent, void *pmsg, INT8U opt);</pre>		(4)
<pre>INT8U OSMboxQuery(OS_EVENT *pevent, OS_MBOX_DATA *p_mbox_data);</pre>		(5)

Table C-9 **Message Mailbox API**

- TC-9(1) In μC/OS-III, there is no “accept” API since this feature is built into the `OSQPend()` by specifying the `OS_OPT_PEND_NON_BLOCKING` option.
- TC-9(2) In μC/OS-II, `OSMboxCreate()` returns the address of an `OS_EVENT`, which is used as the “handle” to the message mailbox. In μC/OS-III, the application must allocate storage for an `OS_Q`, which serves the same purpose as the `OS_EVENT`. The benefit in μC/OS-III is that it is not necessary to predetermine the number of message queues at compile time. Also, to create the equivalent of a message mailbox, you would specify 1 for the `max_qty` argument.
- TC-9(3) μC/OS-III returns additional information about the message received. Specifically, the sender specifies the size of the message as a snapshot of the current timestamp is taken and stored as part of the message. The receiver of the message therefore knows when the message was sent.
- TC-9(4) In μC/OS-III, `OSQPost()` offers a number of options that replaces the two post functions provided in μC/OS-II.
- TC-9(5) μC/OS-III does not provide query services, as they were rarely used in μC/OS-II.

C-4-3 MEMORY MANAGEMENT

Table C-10 shows the difference in API for memory management.

μC/OS-II (os_mem.c)	μC/OS-III (os_mem.c)	Note
<pre>OS_MEM * OSMemCreate(void *addr, INT32U nblks, INT32U blksize, INT8U *perr);</pre>	<pre>void OSMemCreate(OS_MEM *p_mem, CPU_CHAR *p_name, void *p_addr, OS_MEM_QTY n_blks, OS_MEM_SIZE blk_size, OS_ERR *p_err);</pre>	(1)
<pre>void * OSMemGet(OS_MEM *pmem, INT8U *perr);</pre>	<pre>void * OSMemGet(OS_MEM *p_mem, OS_ERR *p_err);</pre>	
<pre>INT8U OSMemNameGet(OS_MEM *pmem, INT8U **pname, INT8U *perr);</pre>		
<pre>void OSMemNameSet(OS_MEM *pmem, INT8U *pname, INT8U *perr);</pre>	<pre>void OSMemPut(OS_MEM *p_mem, void *p_blk, OS_ERR *p_err);</pre>	(2)
<pre>INT8U OSMemPut(OS_MEM *pmem, void *pblk);</pre>		
<pre>INT8U OSMemQuery(OS_MEM *pmem, OS_MEM_DATA *p_mem_data);</pre>		(3)

Table C-10 Memory Management API

- TC-10(1) In μC/OS-II, `OSMemCreate()` returns the address of an `OS_MEM` object, which is used as the “handle” to the newly created memory partition. In μC/OS-III, the application must allocate storage for an `OS_MEM`, which serves the same purpose. The benefit in μC/OS-III is that it is not necessary to predetermine the number of memory partitions at compile time.

Appendix C

- TC-10(2) μC/OS-III does not need an `OSMemNameSet()` since the name of the memory partition is passed as an argument to `OSMemCreate()`.
- TC-10(3) μC/OS-III does not support query calls.

C-4-4 MUTUAL EXCLUSION SEMAPHORES

Table C-11 shows the difference in API for mutual exclusion semaphore management.

μC/OS-II (os_mutex.c)	μC/OS-III (os_mutex.c)	Note
<code>BOOLEAN OSMutexAccept(OS_EVENT *pevent, INT8U *perr);</code>		(1)
<code>OS_EVENT * OSMutexCreate(INT8U prio, INT8U *perr);</code>	<code>void OSMutexCreate(OS_MUTEX *p_mutex, CPU_CHAR *p_name, OS_ERR *p_err);</code>	(2)
<code>OS_EVENT * OSMutexDel(OS_EVENT *pevent, INT8U opt, INT8U *perr);</code>	<code>void OSMutexDel(OS_MUTEX *p_mutex, OS_OPT opt, OS_ERR *p_err);</code>	
<code>void OSMutexPend(OS_EVENT *pevent, INT32U timeout, INT8U *perr);</code>	<code>void OSMutexPend(OS_MUTEX *p_mutex, OS_TICK timeout, OS_OPT opt, CPU_TS *p_ts, OS_ERR *p_err);</code>	(3)
	<code>OS_OBJ_QTY OSMutexPendAbort(OS_MUTEX *p_mutex, OS_OPT opt, OS_ERR *p_err);</code>	

μC/OS-II (os_mutex.c)	μC/OS-III (os_mutex.c)	Note
INT8U OSMutexPost(OS_EVENT *pevent);	void OSMutexPost(OS_MUTEX *p_mutex, OS_OPT opt, OS_ERR *p_err);	
INT8U OSMutexQuery(OS_EVENT *pevent, OS_MUTEX_DATA *p_mutex_data);		(4)

Table C-11 Mutual Exclusion Semaphore Management API

- TC-11(1) In μC/OS-III, there is no “accept” API, since this feature is built into the `OSMutexPend()` by specifying the `OS_OPT_PEND_NON_BLOCKING` option.
- TC-11(2) In μC/OS-II, `OSMutexCreate()` returns the address of an `OS_EVENT`, which is used as the “handle” to the message mailbox. In μC/OS-III, the application must allocate storage for an `OS_MUTEX`, which serves the same purpose as the `OS_EVENT`. The benefit in μC/OS-III is that it is not necessary to predetermine the number of mutual-exclusion semaphores at compile time.
- TC-11(3) μC/OS-III returns additional information when a mutex is released. The releaser takes a snapshot of the current time stamp and stores it in the `OS_MUTEX`. The new owner of the mutex therefore knows when the mutex was released.
- TC-11(4) μC/OS-III does not provide query services as they were rarely used.

C-4-5 MESSAGE QUEUES

Table C-12 shows the difference in API for message-queue management.

μC/OS-II (os_q.c)	μC/OS-III (os_q.c)	Note
<pre>void * OSQAccept(OS_EVENT *pevent, INT8U *perr);</pre>		(1)
<pre>OS_EVENT * OSQCreate(void **start, INT16U size);</pre>	<pre>void OSQCreate(OS_Q *p_q, CPU_CHAR *p_name, OS_MSG_QTY max_qty, OS_ERR *p_err);</pre>	(2)
<pre>OS_EVENT * OSQDel(OS_EVENT *pevent, INT8U opt, INT8U *perr);</pre>	<pre>OS_OBJ_QTY, OSQDel(OS_Q *p_q, OS_OPT opt, OS_ERR *p_err);</pre>	
<pre>INT8U OSQFlush(OS_EVENT *pevent);</pre>	<pre>OS_MSG_QTY OSQFlush(OS_Q *p_q, OS_ERR *p_err);</pre>	
<pre>void * OSQPend(OS_EVENT *pevent, INT32U timeout, INT8U *perr);</pre>	<pre>void * OSQPend(OS_Q *p_q, OS_MSG_SIZE *p_msg_size, OS_TICK timeout, OS_OPT opt, CPU_TS *p_ts, OS_ERR *p_err);</pre>	(3)
<pre>INT8U OSQPendAbort(OS_EVENT *pevent, INT8U opt, INT8U *perr);</pre>	<pre>OS_OBJ_QTY OSQPendAbort(OS_Q *p_q, OS_OPT opt, OS_ERR *p_err);</pre>	
<pre>INT8U OSQPost(OS_EVENT *pevent, void *pmsg);</pre>	<pre>void OSQPost(OS_Q *p_q, void *p_void, OS_MSG_SIZE msg_size, OS_OPT opt, OS_ERR *p_err);</pre>	(4)

μC/OS-II (os_q.c)	μC/OS-III (os_q.c)	Note
<pre>INT8U OSQPostFront(OS_EVENT *pevent, void *pmsg);</pre>		
<pre>INT8U OSQPostOpt(OS_EVENT *pevent, void *pmsg, INT8U opt);</pre>		(4)
<pre>INT8U OSQuery(OS_EVENT *pevent, OS_Q_DATA *p_q_data);</pre>		(5)

Table C-12 Message Queue Management API

- TC-12(1) In μC/OS-III, there is no “accept” API as this feature is built into the **OSQPend()** by specifying the **OS_OPT_PEND_NON_BLOCKING** option.
- TC-12(2) In μC/OS-II, **OSQCreate()** returns the address of an **OS_EVENT**, which is used as the “handle” to the message queue. In μC/OS-III, the application must allocate storage for an **OS_Q** object, which serves the same purpose as the **OS_EVENT**. The benefit in μC/OS-III is that it is not necessary to predetermine at compile time, the number of message queues.
- TC-12(3) μC/OS-III returns additional information when a message queue is posted. Specifically, the sender includes the size of the message and takes a snapshot of the current timestamp and stores it in the message. The receiver of the message therefore knows when the message was posted.
- TC-12(4) In μC/OS-III, **OSQPost()** offers a number of options that replaces the three post functions provided in μC/OS-II.
- TC-12(5) μC/OS-III does not provide query services as they were rarely used.

C-4-6 SEMAPHORES

Table C-13 shows the difference in API for semaphore management.

μC/OS-II (os_sem.c)	μC/OS-III (os_sem.c)	Note
INT16U OSSemAccept(OS_EVENT *pevent);		(1)
OS_EVENT * OSSemCreate(INT16U cnt);	void OSSemCreate(OS_SEM *p_sem, CPU_CHAR *p_name, OS_SEM_CTR cnt, OS_ERR *p_err);	(2)
OS_EVENT * OSSemDel(OS_EVENT *pevent, INT8U opt, INT8U *perr);	OS_OBJ_QTY, OSSemDel(OS_SEM *p_sem, OS_OPT opt, OS_ERR *p_err);	
void OSSemPend(OS_EVENT *pevent, INT32U timeout, INT8U *perr);	OS_SEM_CTR OSSemPend(OS_SEM *p_sem, OS_TICK timeout, OS_OPT opt, CPU_TS *p_ts, OS_ERR *p_err);	(3)
INT8U OSSemPendAbort(OS_EVENT *pevent, INT8U opt, INT8U *perr);	OS_OBJ_QTY OSSemPendAbort(OS_SEM *p_sem, OS_OPT opt, OS_ERR *p_err);	
void OSSemPost(OS_EVENT *pevent);	void OSSemPost(OS_SEM *p_sem, OS_OPT opt, OS_ERR *p_err);	
INT8U OSSemQuery(OS_EVENT *pevent, OS_SEM_DATA *p_sem_data);		(4)

μC/OS-II (os_sem.c)	μC/OS-III (os_sem.c)	Note
<pre>void OSSemSet(OS_EVENT *pevent, INT16U cnt, INT8U *perr);</pre>	<pre>void OSSemSet(OS_SEM *p_sem, OS_SEM_CTR cnt, OS_ERR *p_err);</pre>	

Table C-13 **Semaphore Management API**

- TC-13(1) In μC/OS-III, there is no “accept” API since this feature is built into the `OSSemPend()` by specifying the `OS_OPT_PEND_NON_BLOCKING` option.
- TC-13(2) In μC/OS-II, `OSSemCreate()` returns the address of an `OS_EVENT`, which is used as the “handle” to the semaphore. In μC/OS-III, the application must allocate storage for an `OS_SEM` object, which serves the same purpose as the `OS_EVENT`. The benefit in μC/OS-III is that it is not necessary to predetermine the number of semaphores at compile time.
- TC-13(3) μC/OS-III returns additional information when a semaphore is signaled. The ISR or task that signals the semaphore takes a snapshot of the current timestamp and stores this in the `OS_SEM` object signaled. The receiver of the signal therefore knows when the signal was sent.
- TC-13(4) μC/OS-III does not provide query services, as they were rarely used.

C-4-7 TASK MANAGEMENT

Table C-14 shows the difference in API for task-management services.

μC/OS-II (os_task.c)	μC/OS-III (os_task.c)	Note
<pre>INT8U OSTaskChangePrio(INT8U oldprio, INT8U newprio);</pre>	<pre>void OSTaskChangePrio(OS_TCB *p_tcb, OS_PRIO prio, OS_ERR *p_err);</pre>	(1)
<pre>INT8U OSTaskCreate(void (*task)(void *p_arg), void *p_arg, OS_STK *ptos, INT8U prio);</pre>	<pre>void OSTaskCreate(OS_TCB *p_tcb, CPU_CHAR *p_name, OS_TASK_PTR *p_task, void *p_arg, OS_PRIO prio, CPU_STK *p_stk_base, CPU_STK_SIZE stk_limit, CPU_STK_SIZE stk_size, OS_MSG_QTY q_size, OS_TICK time_quanta, void *p_ext, OS_OPT opt, OS_ERR *p_err);</pre>	(2)
<pre>INT8U OSTaskCreateExt(void (*task)(void *p_arg), void *p_arg, OS_STK *ptos, INT8U prio, INT16U id, OS_STK *pbos, INT32U stk_size, void *pext, INT16U opt);</pre>	<pre>void OSTaskCreate(OS_TCB *p_tcb, CPU_CHAR *p_name, OS_TASK_PTR *p_task, void *p_arg, OS_PRIO prio, CPU_STK *p_stk_base, CPU_STK_SIZE stk_limit, CPU_STK_SIZE stk_size, OS_MSG_QTY q_size, OS_TICK time_quanta, void *p_ext, OS_OPT opt, OS_ERR *p_err);</pre>	(2)
<pre>INT8U OSTaskDel(INT8U prio);</pre>	<pre>void OSTaskDel(OS_TCB *p_tcb, OS_ERR *p_err);</pre>	

μC/OS-II (os_task.c)	μC/OS-III (os_task.c)	Note
INT8U OSTaskDelReq(INT8U prio);		
INT8U OSTaskNameGet(INT8U prio, INT8U **pname, INT8U *perr);		
void OSTaskNameSet(INT8U prio, INT8U *pname, INT8U *perr);		(3)
	OS_MSG_QTY OSTaskQFlush(OS_TCB *p_tcb, OS_ERR *p_err);	(4)
	void * OSTaskQPend(OS_TICK timeout, OS_OPT opt, OS_MSG_SIZE *p_msg_size, CPU_TS *p_ts, OS_ERR *p_err);	(4)
	CPU_BOOLEAN OSTaskQPendAbort(OS_TCB *p_tcb, OS_OPT opt, OS_ERR *p_err);	(4)
	void OSTaskQPost(OS_TCB *p_tcb, void *p_void, OS_MSG_SIZE msg_size, OS_OPT opt, OS_ERR *p_err);	(4)
INT32U OSTaskRegGet(INT8U prio, INT8U id, INT8U *perr);	OS_REG OSTaskRegGet(OS_TCB *p_tcb, OS_REG_ID id, OS_ERR *p_err);	

Appendix C

μC/OS-II (os_task.c)	μC/OS-III (os_task.c)	Note
<pre>void OSTaskRegSet(INT8U prio, INT8U id, INT32U value, INT8U *perr);</pre>	<pre>void OSTaskRegGet(OS_TCB *p_tcb, OS_REG_ID id, OS_REG value, OS_ERR *p_err);</pre>	
<pre>INT8U OSTaskResume(INT8U prio);</pre>	<pre>void OSTaskResume(OS_TCB *p_tcb, OS_ERR *p_err);</pre>	
	<pre>OS_SEM_CTR OSTaskSemPend(OS_TICK timeout, OS_OPT opt, CPU_TS *p_ts, OS_ERR *p_err);</pre>	(5)
	<pre>CPU_BOOLEAN OSTaskSemPendAbort(OS_TCB *p_tcb, OS_OPT opt, OS_ERR *p_err);</pre>	(5)
	<pre>CPU_BOOLEAN OSTaskSemPendAbort(OS_TCB *p_tcb, OS_OPT opt, OS_ERR *p_err);</pre>	(5)
	<pre>OS_SEM_CTR OSTaskSemPost(OS_TCB *p_tcb, OS_OPT opt, OS_ERR *p_err);</pre>	(5)
	<pre>OS_SEM_CTR OSTaskSemSet(OS_TCB *p_tcb, OS_SEM_CTR cnt, OS_ERR *p_err);</pre>	(5)
<pre>INT8U OSTaskSuspend(INT8U prio);</pre>	<pre>void OSTaskSuspend(OS_TCB *p_tcb, OS_ERR *p_err);</pre>	

μC/OS-II (<code>os_task.c</code>)	μC/OS-III (<code>os_task.c</code>)	Note
<pre>INT8U OSTaskStkChk(INT8U prio, OS_STK_DATA *p_stk_data);</pre>	<pre>void OSTaskStkChk(OS_TCB *p_tcb, CPU_STK_SIZE *p_free, CPU_STK_SIZE *p_used, OS_ERR *p_err);</pre>	(6)
	<pre>void OSTaskTimeQuantaSet(OS_TCB *p_tcb, OS_TICK time_quanta, OS_ERR *p_err);</pre>	(7)
<pre>INT8U OSTaskQuery(INT8U prio, OS_TCB *p_task_data);</pre>		(8)

Table C-14 Task Management API

- TC-14(1) In μC/OS-II, each task must have a unique priority. The priority of a task can be changed at run-time, however it can only be changed to an unused priority. This is generally not a problem since μC/OS-II supports up to 255 different priority levels and is rare for an application to require all levels. Since μC/OS-III supports an unlimited number of tasks at each priority, the user can change the priority of a task to any available level.
- TC-14(2) μC/OS-II provides two functions to create a task: `OSTaskCreate()` and `OSTaskCreateExt()`. `OSTaskCreateExt()` is recommended since it offers more flexibility. In μC/OS-III, only one API is used to create a task, `OSTaskCreate()`, which offers similar features to `OSTaskCreateExt()` and provides additional ones.
- TC-14(3) μC/OS-III does not need an `OSTaskNameSet()` since an ASCII name for the task is passed as an argument to `OSTaskCreate()`.
- TC-14(4) μC/OS-III allows tasks or ISRs to send messages directly to a task instead of having to pass through a mailbox or a message queue as does μC/OS-II.
- TC-14(5) μC/OS-III allows tasks or ISRs to directly signal a task instead of having to pass through a semaphore as does μC/OS-II.

Appendix C

- TC-14(6) In μC/OS-II, the user must allocate storage for a special data structure called `OS_STK_DATA`, which is used to place the result of a stack check of a task. This data structure contains only two fields: `.OSFree` and `.OSUsed`. In μC/OS-III, it is required that the caller pass pointers to destination variables where those values will be placed.
- TC-14(7) μC/OS-III allows users to specify the time quanta of each task on a per-task basis. This is available since μC/OS-III supports multiple tasks at the same priority, and allows for round robin scheduling. The time quanta for a task is specified when the task is created, but it can be changed by the API at run time.
- TC-14(8) μC/OS-III does not provide query services as they were rarely used.

C-4-8 TIME MANAGEMENT

Table C-15 shows the difference in API for time-management services.

μC/OS-II (<code>os_time.c</code>)	μC/OS-III (<code>os_time.c</code>)	Note
<code>void OSTimeDly(INT32U ticks);</code>	<code>void OSTimeDly(OS_TICK dly, OS_OPT opt, OS_ERR *p_err);</code>	(1)
<code>INT8U OSTimeDlyHMSM(INT8U hours, INT8U minutes, INT8U seconds, INT16U ms);</code>	<code>void OSTimeDlyHMSM(CPU_INT16U hours, CPU_INT16U minutes, CPU_INT16U seconds CPU_INT32U milli, OS_OPT opt, OS_ERR *p_err);</code>	(2)
<code>INT8U OSTimeDlyResume(INT8U prio);</code>	<code>void OSTimeDlyResume(OS_TCB *p_tcb, OS_ERR *p_err);</code>	
<code>INT32U OSTimeGet(void);</code>	<code>OS_TICK OSTimeGet(OS_ERR *p_err);</code>	

μC/OS-II (os_time.c)	μC/OS-III (os_time.c)	Note
void OSTimeSet(INT32U ticks);	void OSTimeSet(OS_TICK ticks, OS_ERR *p_err);	
void OSTimeTick(void)	void OSTimeTick(void)	

Table C-15 Time Management API

- TC-15(1) μC/OS-III includes an option argument, which allows the user to delay a task for a certain number of ticks, periodic mode or wait until the tick counter reaches a certain value. In μC/OS-II, only the former is available.
- TC-15(2) `OSTimeDlyHMSM()` in μC/OS-III is more flexible as it allows a user to specify whether to be “strict” about the ranges of hours (0 to 999), minutes (0 to 59), seconds (0 to 59), and milliseconds (0 to 999), or whether to allow any values such as 200 minutes, 75 seconds, or 20,000 milliseconds (non-strict).

C-4-9 TIMER MANAGEMENT

Table C-16 shows the difference in API for timer-management services. The timer management in μC/OS-III is similar to that of μC/OS-II except for minor changes in arguments in `OSTmrCreate()`.

μC/OS-II (os_tmr.c)	μC/OS-III (os_tmr.c)	Note
OS_TMR * OSTmrCreate(INT32U dly, INT32U period, INT8U opt, OS_TMR_CALLBACK callback, void *callback_arg, INT8U *pname, INT8U *perr);	void OSTmrCreate(OS_TMR *p_tmr, CPU_CHAR *p_name, OS_TICK dly, OS_TICK period, OS_OPT opt, OS_TMR_CALLBACK_PTR *p_callback, void *p_callback_arg, OS_ERR *p_err);	

Appendix C

μC/OS-II (os_tmr.c)	μC/OS-III (os_tmr.c)	Note
<pre>BOOLEAN OSTmrDel(OS_TMR *ptmr, INT8U *perr);</pre>	<pre>CPU_BOOLEAN OSTmrDel(OS_TMR *p_tmr, OS_ERR *p_err);</pre>	
<pre>INT8U OSTmrNameGet(OS_TMR *ptmr, INT8U **pdest, INT8U *perr);</pre>		
<pre>INT32U OSTmrRemainGet(OS_TMR *ptmr, INT8U *perr);</pre>	<pre>OS_TICK OSTmrRemainGet(OS_TMR *p_tmr, OS_ERR *p_err);</pre>	
<pre>INT8U OSTmrStateGet(OS_TMR *ptmr, INT8U *perr);</pre>	<pre>OS_STATE OSTmrStateGet(OS_TMR *p_tmr, OS_ERR *p_err);</pre>	
<pre>BOOLEAN OSTmrStart(OS_TMR *ptmr, INT8U *perr);</pre>	<pre>CPU_BOOLEAN OSTmrStart(OS_TMR *p_tmr, OS_ERR *p_err);</pre>	
<pre>BOOLEAN OSTmrStop(OS_TMR *ptmr, INT8U opt, void *callback_arg, INT8U *perr);</pre>	<pre>CPU_BOOLEAN OSTmrStop(OS_TMR *p_tmr, OS_OPT opt, void *p_callback_arg, OS_ERR *p_err);</pre>	
<pre>INT8U OSTmrSignal(void);</pre>		

Table C-16 Timer Management API

C-4-10 MISCELLANEOUS

Table C-17 shows the difference in API for miscellaneous services.

μC/OS-II (os_core.c)	μC/OS-III (os_core.c)	Note
INT8U OSEventNameGet(OS_EVENT *pevent, INT8U **pname, INT8U *perr);		(1)
void OSEventNameSet(OS_EVENT *pevent, INT8U *pname, INT8U *perr);		(1)
INT16U OSEventPendMulti(OS_EVENT **pevent_pend, OS_EVENT **pevent_rdy, void **pmsgs_rdy, INT32U timeout, INT8U *perr);	OS_OBJ_QTY OSPendMulti(OS_PEND_DATA *p_pend_data_tbl, OS_OBJ_QTY tbl_size, OS_TICK timeout, OS_OPT opt, OS_ERR *p_err);	(2)
void OSInit(void)	void OSInit(OS_ERR *p_err);	(3)
void OSIntEnter(void)	void OSIntEnter(void);	
void OSIntExit(void)	void OSIntExit(void)	
	void OSSched(void);	
void OSSchedLock(void)	void OSSchedLock(OS_ERR *p_err);	(4)
	void OSSchedRoundRobinCfg(CPU_BOOLEAN en, OS_TICK dflt_time_quanta, OS_ERR *p_err);	(5)
	void OSSchedRoundRobinYield(OS_ERR *p_err);	(6)
void OSSchedUnlock(void)	void OSSchedUnlock(OS_ERR *p_err);	(7)

μC/OS-II (os_core.c)	μC/OS-III (os_core.c)	Note
void OSStart(void)	void OSStart(void);	
void OSStatInit(void)	void OSStatTaskCPUUsageInit(OS_ERR *p_err);	(8)
INT16U OSVersion(void)	CPU_INT16U OSVersion(OS_ERR *p_err);	(9)

Table C-17 **Miscellaneous API**

- TC-17(1) Objects in μC/OS-III are named when they are created and these functions are not required in μC/OS-II.
- TC-17(2) The implementation of the multi-pend functionality is changed from μC/OS-II. However, the purpose of multi-pend is the same, to allow a task to pend (or wait) on multiple objects. In μC/OS-III, however, it is possible to only multi-pend on semaphores and message queues and not event flags and mutexes.
- TC-17(3) μC/OS-III returns an error code for this function. Initialization is successful if `OS_ERR_NONE` is received from `OSInit()`. In μC/OS-II, there is no way of detecting an error in the configuration that caused `OSInit()` to fail.
- TC-17(4) An error code is returned in μC/OS-III for this function.
- TC-17(5) Enable or disable μC/OS-III's round-robin scheduling at run time, as well as change the default time quanta.
- TC-17(6) A task that completes its work before its time quanta expires may yield the CPU to another task at the same priority.
- TC-17(7) An error code is returned in μC/OS-III for this function.
- TC-17(8) Note the change in name for the function that computes the “capacity” of the CPU for the purpose of computing CPU usage at run-time.
- TC-17(9) An error code is returned in μC/OS-III for this function.

C-4-11 HOOKS AND PORT

Table C-18 shows the difference in APIs used to port μC/OS-II to μC/OS-III.

μC/OS-II (<code>os_cpu*.c/h</code>)	μC/OS-III (<code>os_cpu*.c/h</code>)	Note
	<code>OS_GET_TS();</code>	(1)
<code>void OSInitHookBegin(void);</code>	<code>void OSInitHook(void);</code>	
<code>void OSInitHookEnd(void);</code>		
<code>void OSTaskCreateHook(OS_TCB *p tcb);</code>	<code>void OSTaskCreateHook(OS_TCB *p tcb);</code>	
<code>void OSTaskDelHook(OS_TCB *p tcb);</code>	<code>void OSTaskDelHook(OS_TCB *p tcb);</code>	
<code>void OSTaskIdleHook(void);</code>	<code>void OSIdleTaskHook(void);</code>	
	<code>void OSTaskReturnHook(OS_TCB *p tcb);</code>	(2)
<code>void OSTaskStatHook(void)</code>	<code>void OSStatTaskHook(void);</code>	
<code>void OSTaskStkInit(void (*task)(void *p_arg), void *p_arg, OS_STK *ptos, INT16U opt);</code>	<code>CPU_STK * OSTaskStkInit(OS_TASK_PTR p_task, void *p_arg, CPU_STK *p_stk_base, CPU_STK *p_stk_limit, CPU_STK_SIZE size, OS_OPT opt);</code>	(3)
<code>void OSTaskSwHook(void)</code>	<code>void OSTaskSwHook(void);</code>	
<code>void OSTCBInitHook(OS_TCB *p tcb);</code>		(4)
<code>void OSTimeTickHook(void);</code>	<code>void OSTimeTickHook(void);</code>	
<code>void OSStartHighRdy(void);</code>	<code>void OSStartHighRdy(void);</code>	(5)
<code>void OSIntCtxSw(void);</code>	<code>void OSIntCtxSw(void);</code>	(5)

Appendix C

μC/OS-II (os_cpu*.c/h)	μC/OS-III (os_cpu*.c/h)	Note
void OSCtxSw(void);	void OSCtxSw(void);	(5)

Table C-18 Hooks and Port API

- TC-18(1) μC/OS-III requires that the Board Support Package (BSP) provide a 32-bit free-running counter (from `0x00000000` to `0xFFFFFFFF` and rolls back to `0x00000000`) for the purpose of performing time measurements. When a signal is sent, or a message is posted, this counter is read and sent to the recipient. This allows the recipient to know when the message was sent. If a 32-bit free-running counter is not available, you can simulate one using a 16-bit counter but, this requires more code to keep track of overflows.
- TC-18(2) μC/OS-III is able to terminate a task that returns. Recall that tasks should not return since they should be either implemented as an infinite loop, or deleted if implemented as run once.
- TC-18(3) The code for `OSTaskStkInit()` must be changed slightly in μC/OS-III since several arguments passed to this function are different than in μC/OS-II. Instead of passing the top-of-stack as in μC/OS-II, `OSTaskStkInit()` is passed the base address of the task stack, as well as the size of the stack.
- TC-18(4) This function is not needed in μC/OS-III.
- TC-18(5) These functions are a part of `os_cpu_a.asm`, and should only require name changes for the following variables:

μC/OS-II variable changes from to this in μC/OS-III
<code>OSIntNesting</code>	<code>OSIntNestingCtr</code>
<code>OSTCBCur</code>	<code>OSTCBCurPtr</code>
<code>OSTCBHighRdy</code>	<code>OSTCBHighRdyPtr</code>

Appendix

D

MISRA-C:2004 and μC/OS-III

MISRA C is a software development standard for the C programming language developed by the Motor Industry Software Reliability Association (MISRA). Its aims are to facilitate code safety, portability, and reliability in the context of embedded systems, specifically those systems programmed in ANSI C. There is also a set of guidelines for MISRA C++.

There are now more MISRA users outside of the automotive industry than within it. MISRA has evolved into a widely accepted model of best practices by leading developers in such sectors as aerospace, telecom, medical devices, defense, railway, and others.

The first edition of the MISRA C standard, "Guidelines for the use of the C language in vehicle based software," was produced in 1998 and is officially known as MISRA-C:1998. MISRA-C:1998 had 127 rules, of which 93 were required and 34 advisory. The rules were numbered in sequence from 1 to 127.

In 2004, a second edition "Guidelines for the use of the C language in critical systems," or MISRA-C:2004 was produced with many substantial changes, including a complete renumbering of the rules.

The MISRA-C:2004 document contains 141 rules, of which 121 are "required" and 20 are "advisory," divided into 21 topical categories, from "Environment" to "Run-time failures."

μC/OS-III follows most of the MISRA-C:2004 except a few of the required rules were suppressed. The reasoning behind this is discussed within this appendix.

IAR Embedded Workbench for ARM (EWARM) V6.2x was used to verify MISRA-C:2004 compliance, which required suppressing the rules to achieve a clean build.

D-1 MISRA-C:2004, RULE 8.5 (REQUIRED)

Rule Description

There shall be no definitions of objects or functions in a header file.

Offending code appears as

```
OS_EXT OS_IDLE_CTR OSIdleTaskCtr;
```

OS_EXT allows us to declare “extern” and storage using a single declaration in **os.h** but allocation of storage actually occurs in **os_var.c**.

Rule suppressed

The method used in µC/OS-III is an improved scheme as it avoids declaring variables in multiple files.

Occurs in

os.h

D-2 MISRA-C:2004, RULE 8.12 (REQUIRED)

Rule Description:

When an array is declared with external linkage, its size shall be stated explicitly or defined implicitly by initialization.

Offending code appears as

```
extern CPU_STK      oscfg_IdleTaskStk[];
```

μC/OS-III can be provided in object form (linkable object), but requires that the value and size of known variables and arrays be declared in application code. It is not possible to know the size of the arrays.

Rule suppressed

There is no choice other than to suppress or add a fictitious size, which would not be proper. For example, we could specify a size of 1 and the MISRA-C:2004 would pass but, we chose not to.

Occurs in:

os.h

D-3 MISRA-C:2004, RULE 14.7 (REQUIRED)

Rule Description

A function shall have a single point of exit at the end of the function.

Offending code appears as

```
if (argument is invalid) {  
    Set error code;  
    return;  
}
```

Rule suppressed

We prefer to exit immediately upon finding an invalid argument rather than create nested “if” statements.

Occurs in

os_core.c
os_flag.c
os_int.c
os_mem.c
os_msg.c
os_mutex.c
os_pend_multi.c
os_prio.c
os_q.c
os_sem.c
os_stat.c
os_task.c
os_tick.c
os_time.c
os_tmr.c

D-4 MISRA-C:2004, RULE 15.2 (REQUIRED)

Rule Description

An unconditional break statement shall terminate every non-empty `switch` clause.

Offending code appears as

```
switch (value) {  
    case constant_value:  
        /* Code */  
        return;  
}
```

Rule suppressed

The problem involves using a `return` statement to exit the function instead of using a `break`. When adding a “`break`” statement after the `return`, the compiler complains about the unreachable code of the “`break`” statement.

Occurs in

`os_flag.c`
`os_mutex.c`
`os_q.c`
`os_tmr.c`

D-5 MISRA-C:2004, RULE 17.4 (REQUIRED)

Rule Description

Array indexing shall be the only allowed form of pointer arithmetic.

Offending code appears as

```
:  
p_tcb++;  
:
```

Rule suppressed

It is common practice in C to increment a pointer instead of using array indexing to accomplish the same thing. This common practice is not in agreement with this rule.

Occurs in

`os_core.c`
`os_cpu_c.c`
`os_int.c`
`os_msg.c`
`os_pend_multi.c`

Appendix



Bibliography

- Bal Sathe, Dhananjay. 1988. *Fast Algorithm Determines Priority*. EDN (India), September, p. 237.
- Comer, Douglas. 1984. *Operating System Design, The XINU Approach*. Englewood Cliffs, New Jersey: Prentice-Hall. ISBN 0-13-637539-1.
- Kernighan, Brian W. and Dennis M. Ritchie. 1988. *The C Programming Language, 2nd edition*. Englewood Cliffs, New Jersey: Prentice Hall. ISBN 0-13-110362-8.
- Klein, Mark H., Thomas Ralya, Bill Pollak, Ray Harbour Obenza, and Michael Gonzlez. 1993. *A Practitioner's Handbook for Real-Time Analysis: Guide to Rate Monotonic Analysis for Real-Time Systems*. Norwell, Massachusetts: Kluwer Academic Publishers Group. ISBN 0-7923-9361-9.
- Labrosse, Jean J. 2002, *MicroC/OS-II, The Real-Time Kernel*, CMP Books, 2002, ISBN 1-57820-103-9.
- Li, Qing. *Real-Time Concepts for Embedded Systems*, CMP Books, July 2003, ISBN 1-57820-124-1.
- The Motor Industry Software Reliability Association, *MISRA-C:2004*, Guidelines for the Use of the C Language in Critical Systems, October 2004. www.misra-c.com.

Appendix

F

Licensing Policy

uC/OS-III is provided in source form for FREE short-term evaluation, for educational use or for peaceful research. If you plan or intend to use uC/OS-III in a commercial application/product then, you need to contact Micrium to properly license uC/OS-III for its use in your application/product. We provide ALL the source code for your convenience and to help you experience uC/OS-III. The fact that the source is provided does NOT mean that you can use it commercially without paying a licensing fee.

It is necessary to purchase this license when the decision to use µC/OS-III in a design is made, not when the design is ready to go to production.

If you are unsure about whether you need to obtain a license for your application, please contact Micrium and discuss the intended use with a sales representative.

CONTACT MICRIUM

1290 Weston Road, Suite 306
Weston, FL 33326
USA

Phone: +1 954 217 2036
Fax: +1 954 217 2037

E-mail: Licensing@Micrium.com
Web: www.Micrium.com



μC/OS-III™

The Real-Time Kernel

and the
STMicroelectronics

STM32F107

Jean J. Labrosse

Micriµm
Press
Weston, FL 33326

Micrium Press
1290 Weston Road, Suite 306
Weston, FL 33326
USA
www.micrium.com

Designations used by companies to distinguish their products are often claimed as trademarks. In all instances where Micrium Press is aware of a trademark claim, the product name appears in initial capital letters, in all capital letters, or in accordance with the vendor's capitalization preference. Readers should contact the appropriate companies for more complete information on trademarks and trademark registrations. All trademarks and registered trademarks in this book are the property of their respective holders.

Copyright © 2011 by Micrium Press except where noted otherwise. Published by Micrium Press. All rights reserved. Printed in the United States of America. No part of this publication may be reproduced or distributed in any form or by any means, or stored in a database or retrieval system, without the prior written permission of the publisher; with the exception that the program listings may be entered, stored, and executed in a computer system, but they may not be reproduced for publication.

The programs and code examples in this book are presented for instructional value. The programs and examples have been carefully tested, but are not guaranteed to any particular purpose. The publisher does not offer any warranties and does not guarantee the accuracy, adequacy, or completeness of any information herein and is not responsible for any errors or omissions. The publisher assumes no liability for damages resulting from the use of the information in this book or for any infringement of the intellectual property rights of third parties that would result from the use of this information.

Library of Congress Control Number: 2009934275

Library of Congress subject headings:

1. Embedded computer systems
2. Real-time data processing
3. Computer software - Development

For bulk orders, please contact Micrium Press at: +1 954 217 2036

ISBN: 978-0-9823375-3-0
100-uCOS-III-ST-STM32-003

Micrium
 **Press**

Chapter 1

Introduction

Part II of this book delivers to the reader the experience of µC/OS-III through the use of world-class tools and step-by-step instruction.

Here, you will find examples for the Micrium µC/Eval-STM32F107 evaluation board, which contains an STMicroelectronics STM32F107 connectivity microcontroller.

To build the example code provided in Part II of this book, you need to download the IAR Systems Embedded Workbench for ARM Kickstart version, which enables you to build applications up to 32 Kbytes in code size (See Chapter 3, “Setup” on page 755). Also, you can also download the award-winning µC/Probe from the Micrium website to monitor and change application variables at run time (See Chapter 3, “Setup” on page 755).

The heart of the STM32F107 is the ARM Cortex-M3 CPU, one of the most popular CPU cores on the market today. The Cortex-M3 runs the very efficient ARMv7 instruction set.

The STM32F107 runs at clock frequencies up to 72 MHz and contains such high-performance peripherals as a 10/100 Ethernet MAC, full-speed USB OTG (On-The-Go) controller, CAN controller, timers, UARTs, and more. The STM32F107 also features built-in Flash memory of 256 Kbytes, and 64 Kbytes of high-speed static RAM.

1-1 THE MICRIUM µC/EVAL-STM32F107

Figure 1-1 shows a picture of the Micrium µC/Eval-STM32F107. Board features include:

- Low cost
- STM32F107-based microcontroller
- Ethernet connector
- On-board J-Tag debugger
- SD card socket
- USB-OTG connector
- RS-232C female connector
- Temperature sensor
- LEDs
- Expansion connector
- Prototyping area

The STM32F107 is capable of running a TCP/IP stack such as Micrium's high-quality µC/TCP-IP. This allows application to network with other devices, as well as access the Internet. µC/TCP-IP was tested on the µC/Eval-STM32F107, achieving data TCP throughputs of 25 Mbps (receiving) and over 30 Mbps (sending), and UDP throughputs of 50 Mbps (receiving) and 50 Mbps (sending). Other application protocols allow applications to run a DHCP client (to obtain an IP address), FTP client/server, HTTP server (*i.e.* a web server), SMTP client (to send e-mails), POP3 client (to receive e-mails), and more.

The STM32F107 is also capable of running a USB On-The-Go stack such as Micrium's µC/USB-Device, µC/USB-Host, and µC/USB-OTG. The USB controller is a full-speed device, and can transfer data up to 12 Mbps. The µC/Eval-STM32F107 can thus act as a USB device or a USB host. As a device, the evaluation board can act as a Human Interface Device (HID) or a Mass Storage Device (MSD), especially with the on-board SD card. In other words, the µC/Eval-STM32F107 appears as a disk drive to a PC. As a USB host, the µC/Eval-STM32F107 interfaces to USB memory sticks, allowing for the storage and retrieval of data.

The included SD connector allows applications to run a file system such as Micrium's µC/FS to save and retrieve contents onto a Secure Digital (SD) card. The SD card can be used to log data to a file, which can be read from a PC (assumes USB Device, MSD, or an FTP client or server).

The RS-232C connector allows an application to output information to a terminal (or a terminal emulator). The RS-232C interface can also interface to µC/Probe to obtain faster data throughput than the on-board J-Link. However, unlike the J-Link interface, it is assumed that the target code (provided by Micrium) is running.

Appendix E contains the complete schematics for the µC/Eval-STM32F107.

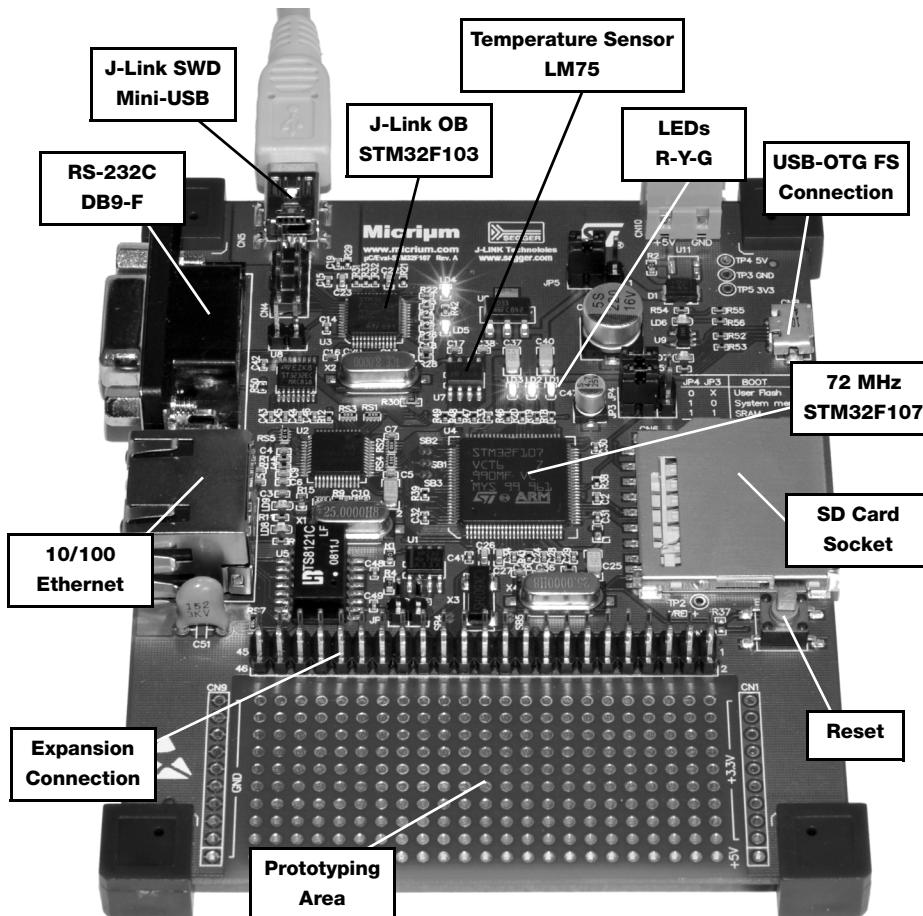


Figure 1-1 Micrium's µC/Eval-STM32F107

1-2 PART II CHAPTER CONTENTS

Figure 1-2 shows the layout and flow of Part II of the book. This diagram should be useful in understanding the relationship between chapters and appendices.

The first column on the left indicates chapters that should be read in order to understand µC/OS-III's structure as well as examples. The second column shows porting information for the ARM Cortex-M3 CPU. The third column consists of miscellaneous appendices.

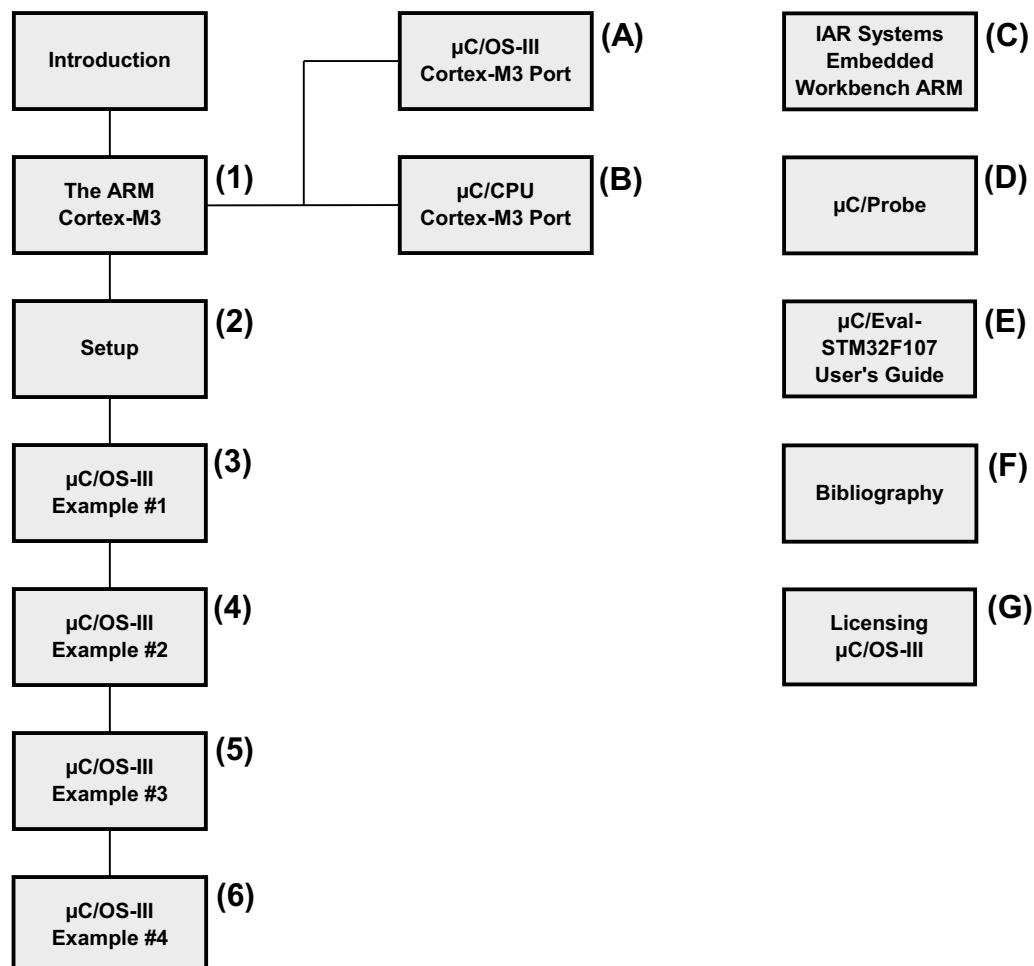


Figure 1-2 Part II Chapter Layout

Chapter 1, Introduction. This chapter.

Chapter 2, The ARM Cortex-M3. This chapter provides a brief introduction to the ARM Cortex-M3 CPU.

Chapter 3, Setup. The chapter explains how to set up the test environment to run µC/OS-III examples. The chapter describes how to download the 32K Kickstart version of the IAR Systems Embedded Workbench for ARM tool chain, how to obtain example code that accompanies the book, and how to connect the µC/Eval-STM32F107 evaluation board to a PC.

Chapter 4, Example #1. This chapter explains how to get µC/OS-III up and running. The project simply blinks the LEDs on the µC/Eval-STM32F107 evaluation board. You will also see how easy it is to use µC/Probe to display run-time data in a target.

Chapter 5, Example #2. The chapter shows how to read an on-board LM75 temperature sensor and display the current temperature using µC/Probe.

Chapter 6, Example #3. The chapter shows how to monitor select µC/OS-III performance measurement values. Again, µC/Probe is used to show run-time information.

Chapter 7, Example #4. This chapter shows how to use µC/OS-III to simulate measuring the RPM of a rotating wheel.

Appendix A, µC/OS-III Port for the Cortex-M3. This appendix explains how µC/OS-III was adapted to the Cortex-M3 CPU. The Cortex-M3 contains interesting features specifically designed for real-time kernels, and µC/OS-III makes good use of these.

Appendix B, µC/CPU Port to the Cortex-M3. This appendix describes how µC/CPU was adapted to the Cortex-M3.

Appendix C, IAR Systems Embedded Workbench ARM. This appendix provides a brief description of IAR Systems Embedded Workbench for the ARM architecture (EWARM).

Appendix D, µC/Probe. This appendix provides a brief description of Micrium's award-winning µC/Probe, which easily allows users to display and change target variables at run time.

Appendix E, µC/Eval-STM32F107 User's Guide. This appendix provides a description of the µC/Eval-STM32F107 evaluation board, as well as complete electrical schematics.

Appendix F, Bibliography.

Appendix G, Licensing µC/OS-III.

1-3 ACKNOWLEDGEMENTS

I would like to thank Mr. Dominique Jugnon and Mr. Olivier Brun and the fine team at ST for designing the µC/Eval-STM32F107 evaluation board and providing its User's Guide.

I would also like to thank IAR for their support and for providing access to the 32K Kickstart version of the IAR Embedded Workbench for ARM (EWARM). EWARM is an awesome tool and I'm sure readers of this book will appreciate the ability to try out µC/OS-III on the µC/Eval-STM32F107 board.

A special thanks to Mr. Rolf Segger for providing the on-board J-Link, which makes debugging and accessing variables with µC/Probe a breeze.

Thank you also to Hitex for providing the majority of the text of Chapter 2, "The ARM Cortex-M3 and the STM32" on page 743.

Finally, thank you to my great team at Micrium for the help and support they provided for this project.

Chapter 2

The ARM Cortex-M3 and the STM32

The ARM Cortex family is a new generation of processor that provides a standard architecture for a wide range of technological demands. Unlike other ARM CPUs, the Cortex family is a complete processor core that provides a standard CPU and system architecture. The Cortex-M3 family is designed for cost-sensitive and microcontroller applications.

This chapter provides a brief summary of the Cortex-M3 architecture. Additional reference material is provided in the section “Bibliography” on page 905.

While ARM7 and ARM9 CPUs are successfully integrated into standard microcontrollers, they do show their SoC heritage. Each specific manufacturer has designed an interrupt handling solution. However, the Cortex-M3 provides a standardized microcontroller core, which goes beyond the CPU to provide the complete heart of a microcontroller (including the interrupt system, SysTick timer, debug system and memory map). The 4 Gbyte address space of Cortex-M3 is split into well-defined regions for code, SRAM, peripherals, and system peripherals. Unlike the ARM7, the Cortex-M3 is a Harvard architecture with multiple busses that allow it to perform operations in parallel, boosting overall performance. Unlike earlier ARM architectures, the Cortex family allows unaligned data access. This ensures the most efficient use of the internal SRAM. The Cortex family also supports setting and clearing of bits within two 1Mbyte regions of memory by a method called bit banding. This allows efficient access to peripheral registers and flags located in SRAM memory, without the need for a full Boolean processor.

One of the key components of the Cortex-M3 core is the Nested Vector Interrupt Controller (NVIC). The NVIC provides a standard interrupt structure for all Cortex-based microcontrollers and exceptional interrupt handling. The NVIC provides dedicated interrupt vectors for up to 240 peripheral sources so that each interrupt source can be individually prioritized. In the case of back-to-back interrupts, the NVIC uses a “tail chaining” method that allows successive interrupts to be serviced with minimal overhead. During the interrupt-stacking phase, a high-priority interrupt can preempt a low-priority interrupt without incurring additional CPU cycles. The interrupt structure is also tightly coupled to the low-power modes within the Cortex-M3 core.

Although the Cortex-M3 is designed as a low cost core, it is still a 32-bit CPU with support for two operating modes: Thread mode and Handler mode, which can be configured with their own stacks. This allows more sophisticated software design and support for such real-time kernels as µC/OS-II and µC/OS-III.

The Cortex core also includes a 24-bit auto reload timer that is intended to provide a periodic interrupt for the kernel. While the ARM7 and ARM9 CPUs have two instruction sets (the ARM 32-bit and Thumb 16-bit), the Cortex family is designed to support the ARM Thumb-2 instruction set. This blends both 16-bit and 32-bit instructions to deliver the performance of the ARM 32-bit instruction set with the code density of the Thumb 16-bit instruction set. The Thumb-2 is a rich instruction set designed as a target for C/C++ compilers. This means that a Cortex application can be entirely coded in C.

2-1 THE CORTEX CPU

The Cortex CPU is a 32-bit RISC CPU. This CPU has a simplified version of the ARM7/9 programmer's model, but a richer instruction set with good integer math support, better bit manipulation, and 'harder' real-time performance.

The Cortex CPU executes most instructions in a single cycle, which is achieved with a three-stage pipeline.

The Cortex CPU is a RISC processor featuring a load and store architecture. In order to perform data processing instructions, the operands must be loaded into CPU registers, the data operation must be performed on these registers, and the results saved back to memory. Consequently, all program activity focuses on the CPU registers.

As shown in Figure 2-1, the CPU registers consists of sixteen 32-bit wide registers. Registers R0-R12 can be used to hold variables or addresses. Registers R13-R15 have special functions within the Cortex CPU. Register R13 is used as a stack pointer. This register is banked, which allows the Cortex CPU to have two operating modes, each with their own separate stack space. In the Cortex CPU the two stacks are called the main stack (ISR stack) and the process stack (Task stack). The next register R14 is called the link register, and it is used to store the return address when a call is made to a function. This allows the Cortex CPU to make a fast entry and exit to a function. If the code calls several levels of subroutines, the compiler automatically stores R14 onto the stack. The final register R15 is the program counter. Since R15 is part of the CPU registers it can be read and manipulated like any other register.

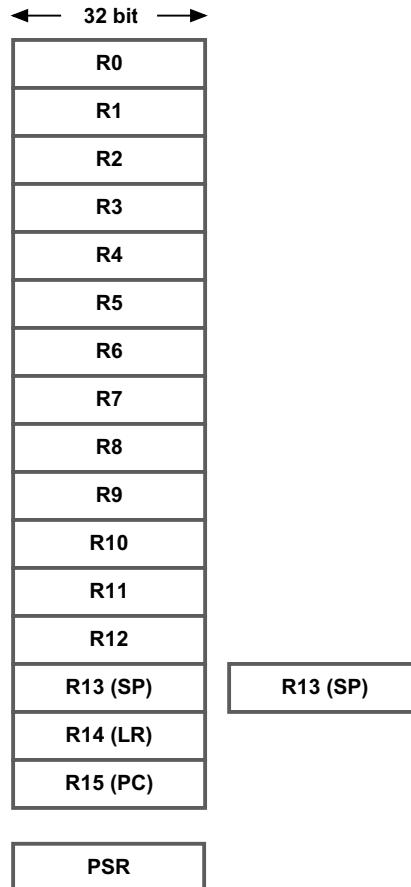


Figure 2-1 The Cortex-M3 CPU Registers

2-1-1 THE PROGRAM STATUS REGISTER

In addition to the CPU registers there is a separate register called the Program Status Register (PSR). The PSR is not part of the main CPU registers and is only accessible through two dedicated instructions. The PSR contains a number of fields that influence the execution of the Cortex CPU. Refer to the Cortex-M3 Technical Reference Manual for details.

31		26	25	24	23		16	15		10	9	8	7		6
N	Z	C	V	Q	ICI/IT	T			ICI/IT			ISR Number			

Figure 2-2 The Cortex-M3 PSR Register

While most Thumb-2 instructions execute in a single cycle, some (such as load and store instructions) take multiple cycles. To enable the Cortex CPU to have a deterministic interrupt response time, these instructions are interruptible.

2-1-2 STACKING AND INTERRUPTS

Tasks execute in Thread mode using the process stack; interrupts execute in Handler mode using the main stack. The task context is automatically saved on the process stack when an exception occurs, whereupon the processor moves to Handler mode, making the main stack active. On return from the exception, the task context is restored and Thread mode reinstated.

Figure 2-3 shows the stacking order of the CPU registers during an exception or interrupt. The software only needs to save/restore registers R4-R11 (if required by the Interrupt Service Routine); the other registers are saved automatically by hardware upon accepting the interrupt.

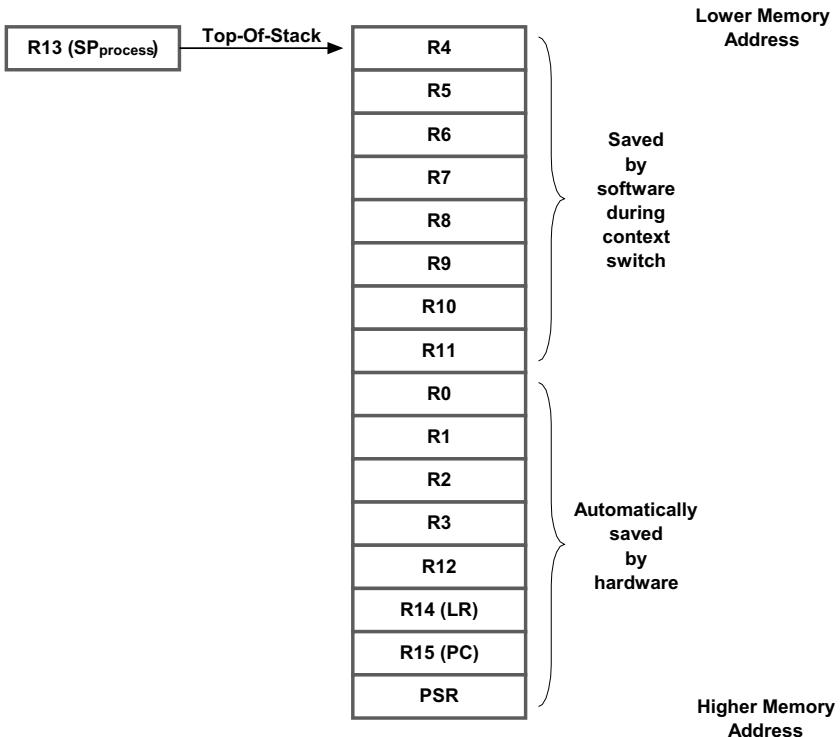


Figure 2-3 Cortex-M3 Register Stacking Order

2-2 NESTED VECTOR INTERRUPT CONTROLLER (NVIC)

The Cortex-M3 includes not only the core CPU (ALU, control logic, data interface, instruction decoding, etc.), but also several integrated peripherals. Most important is the Nested Vectored Interrupt Controller (NVIC), designed for low latency, efficiency and configurability.

The NVIC saves half of the processor registers automatically upon interrupt, restoring them upon exit, which allows for efficient interrupt handling. Moreover, back-to-back interrupts are handled without saving/restoring registers (since that is unnecessary). This is called Tail Chaining.

The NVIC offers 8 to 256 priority levels, with dynamic priority assignment. The NVIC also is capable of handling between 1 and 240 external interrupt sources.

The NVIC is a standard unit within the Cortex core. This means that all Cortex-based microcontrollers have the same interrupt structure, regardless of the manufacturer. Therefore, application code and operating systems can be easily ported from one microcontroller to another, and the programmer does not need to learn a new set of registers. The NVIC is also designed to have very low interrupt latency. This is both a feature of the NVIC itself and of the Thumb-2 instruction set, which allows such multi-cycle instructions as load and store multiple to be interruptible.

The NVIC peripheral eases the migration between Cortex-M3 processors. This is particularly true for μC/OS-III.

2-3 EXCEPTION VECTOR TABLE

The Cortex vector table starts at the bottom of the address range. However, rather than start at zero, the vector table starts at address 0x00000004 and the first four bytes are used to store the starting address of the stack pointer. The vector table is shown in Table 2-1.

Each of the interrupt vector entries is four bytes wide and holds the start address of each service routine associated with the interrupt. The first 15 entries are for exceptions that occur within the Cortex core. These include the reset vector, non-maskable interrupt, fault and error management, debug exceptions, and the SysTick timer interrupt. The Thumb-2 instruction set also includes system service call instructions which, when executed, generate an exception. The user peripheral interrupts start from entry 16, and will be linked to peripherals as defined by the manufacturer. In software, the vector table is usually maintained in the startup by locating the service routine addresses at the base of memory.

No.	Type	Priority	Type of Priority	Description
1	Reset	-3	Fixed	Reset
2	NMI	-2	Fixed	Non-Maskable Interrupts
3	Hard Fault	-1	Fixed	Default fault if other handler not implemented
4	MemManageFault	0	Settable	MPU violation
5	Bus Fault	1	Settable	Fault if AHB error
6	Usage Fault	2	Settable	Program error exception

No.	Type	Priority	Type of Priority	Description
7-10	Reserved		N/A	
11	SV Call	3	Settable	System Call Service
12	Debug Monitor	4	Settable	Breakpoints, watchpoints, external debug
13	Reserved	N/A	N/A	
14	PendSV	5	Settable	Pendable request
15	SysTick	6	Settable	System tick timer
16	Interrupt #0	7	Settable	External interrupt #0
:	:	:	Settable	:
:	:	:	Settable	:
256	Interrupt #240	247	Settable	External interrupt #240

Table 2-1 The Cortex-M3 Exception Table

The PendSV vector is used by μC/OS-III to perform a context switch, while the SysTick vector is used by μC/OS-III for the clock tick interrupt.

2-4 SYSTICK (SYSTEM TICK)

The Cortex core includes a 24-bit down counter with auto reload and end of count interrupt, called the SysTick. The SysTick was designed to be used as an RTOS clock tick interrupt, and it is present in all Cortex implementations.

The SysTick timer has three registers. The current value and reload value should be initialized with the count period. The control and status register contains an ENABLE bit to start the timer running, and a TICKINT bit to enable its interrupt line.

The SysTick peripheral eases the migration between Cortex-M3 processors, which is particularly true for μC/OS-III.

2-5 MEMORY MAP

Unlike most previous ARM processors, the Cortex-M3 has a fixed-memory map as shown in Figure 2-4.

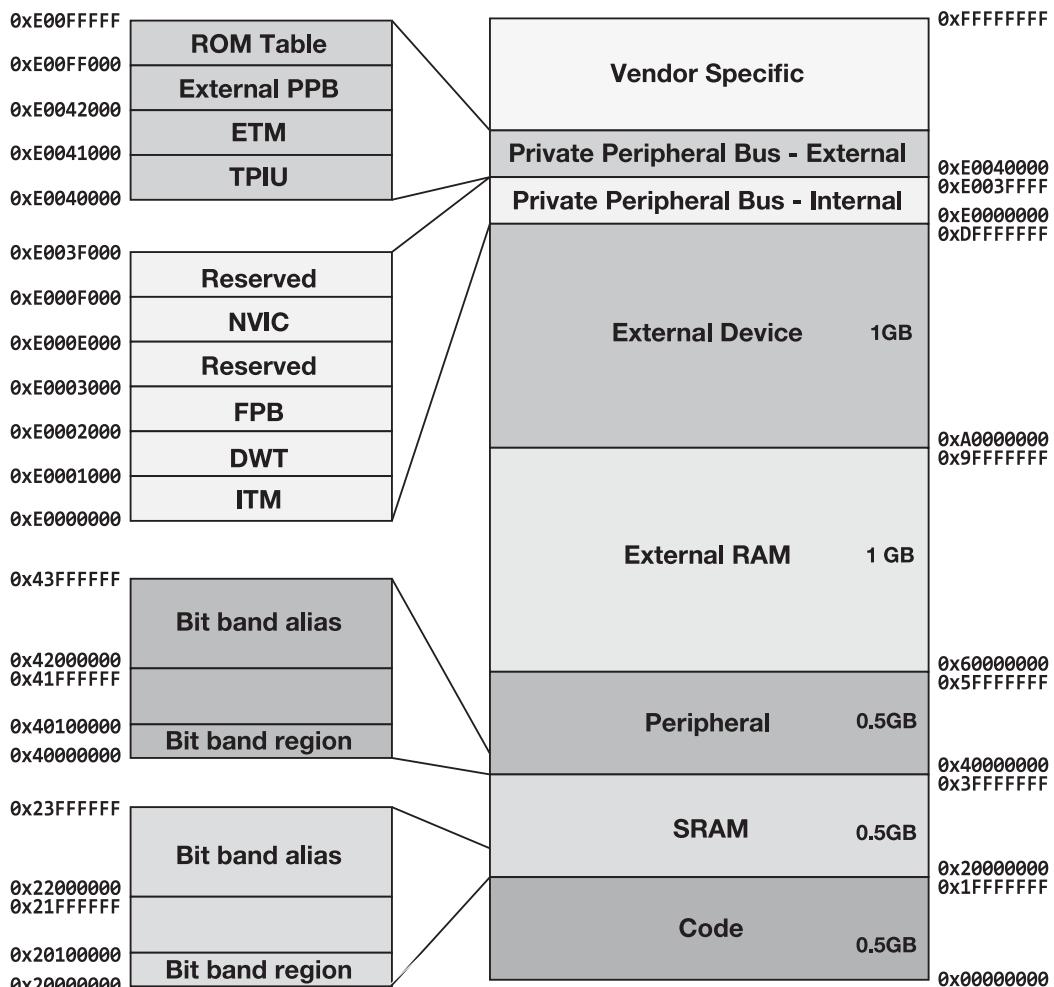


Figure 2-4 Cortex-M3 Memory Map

The first 1.0 Gbyte of memory is split evenly between a code region and a SRAM region. Although code can be loaded and executed from the SRAM, instructions would be fetched using the system bus, which incurs an extra wait state. It is likely that code would run slower from SRAM than from on-chip FLASH memory located in the code region.

The next 0.5 Gbyte of memory is the on-chip peripheral region. All user peripherals provided by the microcontroller vendor will be located in this region.

The first Mbyte of both the SRAM and Peripheral regions is bit-addressable using a technique called bit banding. Since all SRAM and user peripherals on the processor are located in these regions, every memory location of the processor can be manipulated in a word-wide or bitwise fashion.

The next 2.0 Gbytes of address space is allocated to external memory-mapped SRAM and peripherals.

The final 0.5 Gbyte is allocated to the internal Cortex processor peripherals and a region for future vendor-specific enhancements to the Cortex processor. All Cortex processor registers are at fixed locations for all Cortex-based microcontrollers.

2-6 INSTRUCTION SET

The ARM7 and ARM9 CPUs execute two instruction sets: the ARM 32-bit instruction set and the Thumb 16-bit instruction set. This allows developers to optimize a program by selecting the instruction set used for different procedures: for example, 32-bit instructions for speed, and 16-bit instructions for code compression.

The Cortex CPU is designed to execute the Thumb-2 instruction set, which is a blend of 16-bit and 32-bit instructions. The Thumb-2 instruction set yields a 26% code density improvement over the ARM 32-bit instruction set, and a 25% improvement in performance over the Thumb 16-bit instruction set.

The Thumb-2 instruction set has improved multiply instructions, which can execute in a single cycle, and a hardware divide that takes between 2 – 7 cycles.

Of special interest to µC/OS-III is the Count Leading Zeros (CLZ) instruction, which greatly improves the scheduling algorithm, See Chapter 6, “The Ready List” on page 141 in Part I of this book.

2-7 DEBUGGING FEATURES

The Cortex core has a debug system called CoreSight as shown in Figure 2-5. The full core sight debug system has a Debug Access Port (DAP), which allows connection to the microcontroller by a JTAG tool. The debug tool can connect using the standard 5-pin JTAG interface or a serial 2-wire interface.

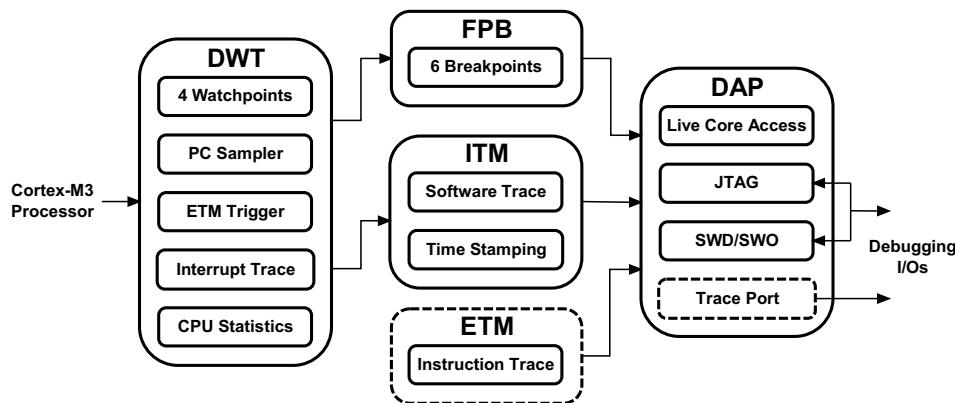


Figure 2-5 Cortex-M3 CoreSight Debug System

In addition to the JTAG debug features, the full CoreSight debug system contains a Data Watch Trace (DWT) and an Embedded Trace Macrocell (ETM). For software testing there is Instrumentation Trace Macrocell (ITM) and Flash Patch Block (FPB). The STM32 implements the CoreSight debug system, but does not include the Embedded Trace Macrocell.

The CoreSight debug system provides eight hardware breakpoints which can be non-intrusively set and cleared while the Cortex CPU is running. In addition, the Data Watch Trace allows you to view the contents of memory locations non-intrusively while the Cortex CPU runs. The CoreSight debug system can stay active when the Cortex core enters a low power or sleep mode. This makes a world of difference when debugging a low-power application. Additionally the STM32 timers can be halted when the CPU is halted by the CoreSight system. This allows you to single-step the code and keep the timers in synchronization with the instructions executing on the Cortex CPU.

The Data Watch Trace module also contains a 32-bit CPU cycle counter, which can be used to make time measurements. This is particularly interesting for µC/CPU, which can use this cycle counter for time stamping.

2-8 THE STMicroelectronics STM32

STmicroelectronics (ST) already has existing ARM7 and ARM9-based microcontroller families, however the STM32 is a significant step up along the price/performance curve. With volume pricing at just over one US dollar, the STM32 is a serious challenger to existing 16-bit microcontrollers.

At the time of this writing the STM32 has over 75 different variants, with more announced. These are split into four groups:

- 1 The performance line, which operates up to CPU clock speeds of 72MHz
- 2 The access line, which runs up to 36MHz
- 3 The USB access line, which adds a USB device peripheral and runs at CPU clock speeds of 48MHz.
- 4 The connectivity line. The STM32F107 is the first device available from this line. The evaluation board (the μ C/Eval-STM32F107) that accompanies this book is designed around this chip. The connectivity line adds advanced communication peripherals, including an Ethernet MAC and a USB Host/OTG controller. All sets of variants are pin and software compatible and offer FLASH ROM sizes up to 512K and 64K SRAM. Since the initial release, the STM32 road map has been extended to include devices with larger RAM and FLASH memories and more complex peripherals.

An STM32 resembles a typical small microcontroller, featuring peripherals such as Dual ADC, general-purpose timers, I2C, SPI, CAN, USB, and a real-time clock. However, each of these peripherals is very feature-rich. For example the 12-bit ADC has an integral temperature sensor and multiple conversion modes. Devices with dual ADC can slave both ADCs together in nine more conversion modes. Similarly, each of the four timers has four capture compare units, and each timer block may be combined with the others to build sophisticated timer arrays. An advanced timer has additional support for motor control, with six complimentary PWM outputs with programmable dead time, and a break-input line that will force the PWM signal to a pre programmed safe state. The SPI peripheral has a hardware CRC generator for 8 and 16 words to support interfacing to SD and MMC cards.

Surprisingly for such a small microcontroller, the STM32 also includes a DMA unit with up to 12 channels. Each channel can be used to transfer data to and from any peripheral register or memory location as 8/16 or 32-bit words. Each of the peripherals can be a DMA flow controller sending or demanding data as required. An internal bus arbiter and bus matrix minimizes the arbitration between the CPU data accesses and the DMA channels. This means that the DMA unit is flexible, easy to use, and automates data flow within the microcontroller.

The STM32 is a low power and high performance microcontroller. It operates from a 2V supply and, at 72 MHz and with everything turned on, it consumes only 36mA. In combination with the Cortex low-power modes the STM32 has a standby power consumption of just 2 μ A. An internal 8 MHz Resistor/Capacitor (RC) oscillator allows the chip to quickly come out of low power mode,s while the external oscillator is starting up. This fast entry and exit from low-power modes further reduces overall power consumption.

As well as demanding more processing power and more sophisticated peripherals, many modern applications must operate in safety-critical environments. With this in mind, the STM32 has a number of hardware features that help support high-integrity applications. These include a low power voltage detector, a clock security system, and two separate watchdogs. The first is a windowed watchdog that must be refreshed in a defined time frame. If hit it too soon, or too late, the watchdog will trigger. The second is an independent watchdog, which has its own external oscillator separate from the main system clock. A clock security system can detect failure of the main external oscillator, and fail safely back onto an internal 8 MHz RC oscillator.

Chapter 3 Setup


In this chapter you will learn how to setup an environment to run µC/OS-III-based projects.

It is assumed that the following elements are available:

- 1 A Windows™-based PC running Windows-XP or Windows 7
- 2 The µC/Eval-STM32F107 that accompanied this book
- 3 The USB cable that accompanied the µC/Eval-STM32F107 board

Figure 3-1 shows a simple block diagram of how to connect the µC/Eval-STM32F107 to a PC. Notice that there is no need for an external power supply since the µC/Eval-STM32F107 is powered by the PC's USB port. In fact, the same USB port is used to download code to the µC/Eval-STM32F107 during debugging.

Do not connect the µC/Eval-STM32F107 board to your computer until you have installed the software (described in the next sections).

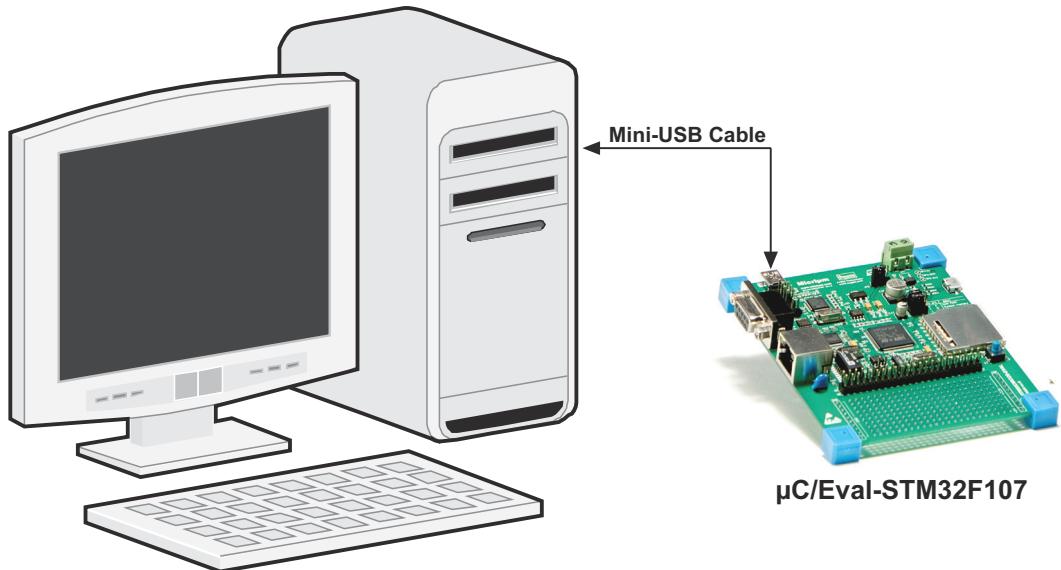

Windows-based PC
(Windows XP, Windows Vista, or Windows 7)

Figure 3-1 Connecting a PC to the **uC/Eval-STM32F107**

To run the examples provided with this book, it will be necessary to download a number of files from the Internet:

- 1 The **uC/OS-III** library and samples projects for the **uC/Eval-STM32F107**
- 2 **uC/Probe** from the Micrium website
- 3 The IAR Embedded Workbench for ARM, Kickstart version

Each of these downloads will be described in detail throughout this chapter.

3-1 DOWNLOADING µC/OS-III PROJECTS FOR THIS BOOK

The µC/OS-III book and µC/Eval-STM32F107 evaluation board do not include CDs. Instead, project files are actually downloadable from the Micrium website. This allows samples to be kept up to date.

To obtain the µC/OS-III software and example for the projects provided in this book, simply point your favorite browser to:

www.Micrium.com/Books/Micrium-uCOS-III

You will be required to register. This means that you'll have to provide information about yourself. This information will be used for market research purposes and will allow us to contact you should new updates of µC/OS-III for this book become available. Your information will be held in strict confidence.

Download and execute the following file:

Micrium-Book-uCOS-III-STM32F107.exe

Figure 3-2 shows the directory structure created by this executable.

Chapter 3

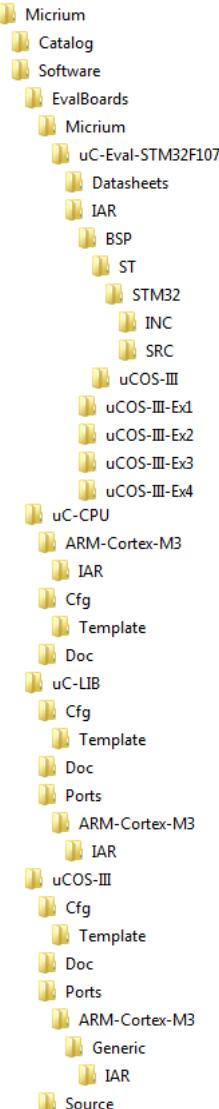


Figure 3-2 **uC/OS-III Project Directories**

All files are placed under the `\Micrium\Software` directory. There are four main sub-directories: `\EvalBoards`, `\uC-CPU`, `\uC-LIB` and `\uCOS-III` and they are described below.

3-1-1 \EvalBoards

This is the standard Micrium sub-directory where all evaluation board examples are placed. The sub-directory contains additional sub-directories organizing evaluation boards by manufacturers. In this case, \Micrium is the manufacturer of the uC/Eval-STM32F107 board, and projects for this board are placed under: \uC-Eval-STM32F107.

The \EvalBoards\Micrium\uC-Eval-STM32F107 sub-directory contains further directories.

\Datasheets contains a series of datasheets and reference manuals:

ARM-ARMv7-ReferenceManual.pdf
ARM-CortexM3-TechnicalReferenceManual.pdf
Micrium-uC-Eval-STM32F107-Schematics.pdf
STLM75.pdf
STM32F105xx-STM32F107xx-Datasheet.pdf
STM32F105xx-STM32F107xx-ReferenceManual.pdf

\EvalBoards\IAR contains the main IAR IDE workspace, which includes the three projects provided with this book. Specifically, the file **uC-Eval-STM32F107.eww** is the workspace to open with the IAR Embedded Workbench for ARM.

Projects will be described in the next four chapters. This sub-directory contains five additional sub-directories:

\bsp.c
\uCOS-III-Ex1
\uCOS-III-Ex2
\uCOS-III-Ex3
\uCOS-III-Ex4

Chapter 3

\EvalBoards\IAR\bsp.c contains Board Support Package (bsp.c) files used to support the peripherals found on the µC/Eval-STM32F107 evaluation board. The contents of these files will be described as needed within the sample projects. This sub-directory contains the following files:

```
bsp.c  
bsp.h  
bsp_i2c.c  
bsp_i2c.h  
bsp_int.c  
bsp_periph.c  
bsp_ser.c  
bsp_ser.h  
bsp_stlm75.c  
bsp_stlm75.h  
STM32_FLASH.icf  
STM32_Flash.xcl  
STM32_RAM.xcl  
\ST\STM32\inc\cortexm3_macro.h  
\ST\STM32\inc\stm32f10x_*.h  
\ST\STM32\src\stm32f10x_*.c  
\uCOS-III\bsp_os.c  
\uCOS-III\bsp_os.h
```

\EvalBoards\IAR\uCOS-III-Ex1 presents a simple project that demonstrates how to properly initialize and start a µC/OS-III-based application. This project is described in Chapter 3.

\EvalBoards\IAR\uCOS-III-Ex2 presents a project that reads the on-board temperature sensor and displays the temperature using µC/Probe. This project will be described in Chapter 4.

\EvalBoards\IAR\uCOS-III-Ex3 presents a project that measures some performance metric on µC/OS-III. This project will be described in Chapter 5.

\EvalBoards\IAR\uCOS-III-Ex4 presents a project that simulates the measurement of a rotating device. This project will be described in Chapter 6.

3-1-2 \uC-CPU

This sub-directory contains the generic and Cortex-M3-specific files for the µC/CPU module. These are described in Appendix B, “µC/CPU port for the Cortex-M3” on page 847. This sub-directory contains the following files:

```
cpu_core.c
cpu_core.h
cpu_def.h
\ARM-Cortex-M3\IAR\cpu.h
\ARM-Cortex-M3\IAR\cpu_a.asm
\ARM-Cortex-M3\IAR\cpu_c.c
\Cfg\Template\cpu_cfg.h
\Doc\uC-CPU-Manual.pdf
\Doc\uC-CPU-ReleaseNotes.pdf
```

*.h

These are the header files that need to be added to the project when using the module along with µC/OS-III.

3-1-3 \uC-LIB

This sub-directory contains compiler-independent library functions to manipulate ASCII strings, perform memory copies, and more. We refer to these files as being part of the µC/LIB module. `lib_def.h` contains a number of useful `#defines`, such as `DEF_FALSE`, `DEF_TRUE`, `DEF_ON`, `DEF_OFF`, `DEF_ENABLED`, `DEF_DISABLED`, and dozens more. µC/LIB also declares such macros as `DEF_MIN()`, `DEF_MAX()`, `DEF_ABS()`, and more.

This sub-directory contains the following files:

```
lib_ascii.c
lib_ascii.h
lib_def.h
lib_math.c
lib_math.h
lib_mem.c
lib_mem.h
lib_str.c
```

```
lib_str.h  
\Doc\uC-Lib-Manual.pdf  
\Doc\uC-Lib-ReleaseNotes.pdf  
\Ports\ARM-Cortex-M3\IAR\lib_mem_a.asm  
\Doc\uC-Lib_Manual.pdf  
\Doc\uC-Lib-ReleaseNotes.pdf  
*.h
```

These are header files that need to be added in a project when using this module with µC/OS-III.

3-1-4 \uCOS-III

This sub-directory contains the following files:

```
\Cfg\Template\os_app_hooks.c  
\Cfg\Template\os_app_hooks.h  
\Cfg\Template\os_cfg.h  
\Cfg\Template\os_cfg_app.h  
\Lib\IAR\uCOS_III_CM3_IAR.a  
\Ports\ARM-Cortex-M3\Generic\IAR\os_cpu_a.asm  
\Ports\ARM-Cortex-M3\Generic\IAR\os_cpu_c.c  
\Ports\ARM-Cortex-M3\Generic\IAR\os_cpu.h  
\Source\os_cfg_app.c  
\Source\os_core.c  
\Source\os_dbg.c  
\Source\os_flag.c  
\Source\os_int.c  
\Source\os_mem.c  
\Source\os_msg.c  
\Source\os_mutex.c  
\Source\os_pend_multi.c  
\Source\os_prio.c  
\Source\os_q.c  
\Source\os_sem.c  
\Source\os_stat.c  
\Source\os_task.c  
\Source\os_tick.c  
\Source\os_time.c
```

```
\Source\os_tmr.c  
\Source\os.h  
\Source\os_type.h  
\Source\os_var.c
```

*** .h**

These are the header files that need to be added to a project.

3-2 DOWNLOADING µC/PROBE

µC/Probe is an award-winning Microsoft Windows-based application that allows users to display or change the value (at run time) of virtually any variable or memory location on a connected embedded target. See Appendix D, “Micrium’s µC/Probe” on page 867 for a brief introduction.

µC/Probe is used in all of the examples described in Chapter 3 to gain run-time visibility. There are two versions of µC/Probe:

The *Full Version* of µC/Probe is included with all µC/OS-III licenses. The Full Version supports J-Link, RS-232C, TCP/IP, USB, and other interfaces.

The *Full Version* allows users to display or change an unlimited number of variables.

The Trial Version is not time limited, but only allows users to display or change up to five application variables. However, the trial version allows users to monitor any µC/OS-III variables because µC/Probe is µC/OS-III aware.

Both versions are available from Micrium's website. Simply point your favorite browser to:

www.Micrium.com/Books/Micrium-uCOS-III

Follow the links to download the desired version (or both). If not already registered on the Micrium website, you will be asked to do so. Once downloaded, simply execute the appropriate µC/Probe setup file:

Micrium-uC-Probe-Setup-Full.exe
Micrium-uC-Probe-Setup-Trial.exe

3-3 DOWNLOADING THE IAR EMBEDDED WORKBENCH FOR ARM

Examples provided with this book were tested using the IAR Embedded Workbench for ARM V6.21. You can download the 32K Kickstart version from the IAR website. This version allows users to create applications up to 32 Kbytes in size (excluding µC/OS-III). The file from IAR is about 400 MBytes. If you have a slow Internet connection or are planning to install a new version of Windows, you might want to consider archiving this file on a CD or even a USB drive.

You can download IAR tools from (case sensitive):

www.iar.com/MicriumuCOSIII

- Click on the '*Download IAR Embedded Workbench >>*' link in the middle of the page. This will bring you to the '*Download Evaluation Software*' page on the IAR website.
- Locate the 'ARM' processor row and to the 'Kickstart edition' column on that same row and click on the link for '*v6.21 (32K)*' link (or newer version if that's available). A page titled '*KickStart edition of IAR Embedded Workbench*' will be displayed.
- After reading this page, simply click on '*Continue...*'.
- You will again be required to register. Unfortunately, the information you provided to register with Micrium is not transferred to IAR and vice-versa. Fill out the form and click on '*Submit*'.
- Save the file to a convenient location.
- You should receive a '*License number and Key for EWARM-KS32*' from IAR.
- Double click on the IAR executable file (**EWARM-KS-CD-6213.exe**) (or a similar file if newer) and install the files on the disk drive of your choice, at the root.

You can use the full version of the IAR Embedded Workbench if you are already a licensee.

3-4 DOWNLOADING THE STM32F107 DOCUMENTATION

You can download the latest STM32F107 datasheets and programming manuals from:

<http://www.st.com/internet/mcu/class/1734.jsp>

Specifically, Table 3-1 shows recommended documents to download from the ST website.

Document	Link
STM32F10xxx Reference Manual	www.st.com/internet/com/TECHNICAL_RESOURCES/TECHNICAL_LITERATURE/ERRATA_SHEET/CD00190234.pdf
STM32F10xxx Cortex-M3 Programming Manual	http://www.st.com/internet/com/TECHNICAL_RESOURCES/TECHNICAL_LITERATURE/PROGRAMMING_MANUAL/CD00228163.pdf
STM32F10xxx Flash Programming	http://www.st.com/internet/com/TECHNICAL_RESOURCES/TECHNICAL_LITERATURE/PROGRAMMING_MANUAL/CD00283419.pdf

Table 3-1 Recommended STM32F107 documents

Chapter 4

μ C/OS-III Example #1

In this chapter see how easy it is to put together a µC/OS-III-based application. The µC/Eval-STM32F107 evaluation board, as shown in Figure 4-1, is the basis of the example.

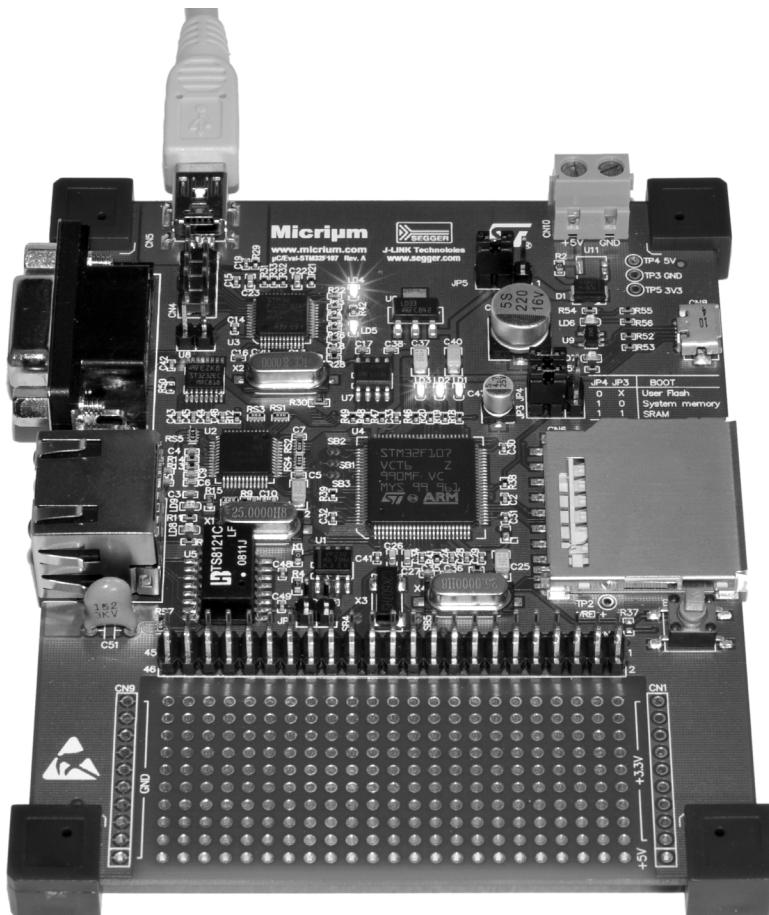


Figure 4-1 μC/Eval-STM32F107 Evaluation Board

This first project will perform the classical ‘blink a light’ test. This is not exactly exciting, but it allows us to begin to put all the pieces together.

Start the IAR Embedded Workbench for ARM and open the following workspace:

\Micrium\Software\EvalBoards\Micrium\uC-Eval-STM32F107\IAR\uC-Eval-STM32F107.eww

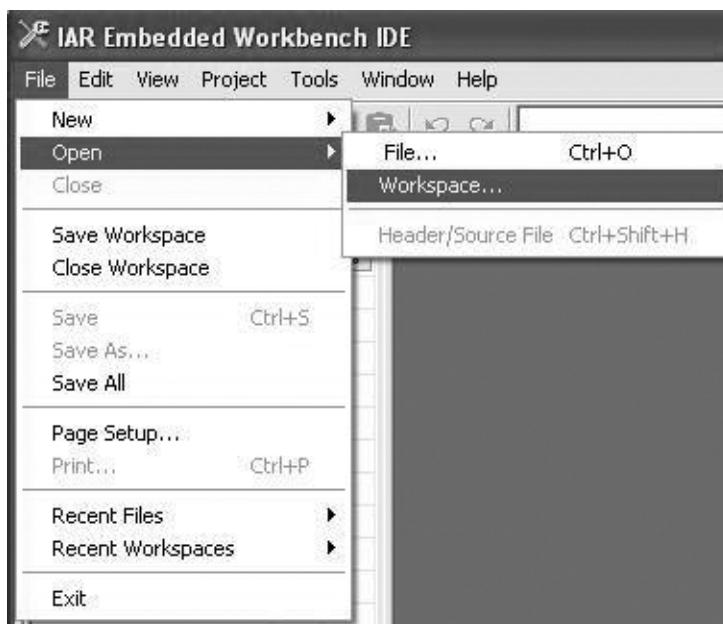


Figure 4-2 Open Workspace uC-Eval-STM32F107.eww

Click on the **uCOS-III-Ex1** tab at the bottom of the workspace explorer to select the first project. Figure 4-3 shows the workspace explorer with the groups expanded. I like to use groups as it neatly organizes projects.

The **APP** group is where the actual code for the example is placed. Under **APP** you will find the **CFG** (*i.e.* Configuration) subgroup. The files in this subgroup are used to configure the application. I’ll discuss some of the project configurations shortly.

The **bsp.c** group contains the ‘Board Support Package’ code to use some of the Input/Output (I/O) devices on the μC/Eval-STM32F107 board. Under the **bsp.c** group, you will find the STM32 Library subgroup. Here you will find code provided by ST to interface to all the peripheral devices on the STM32F107 chip.

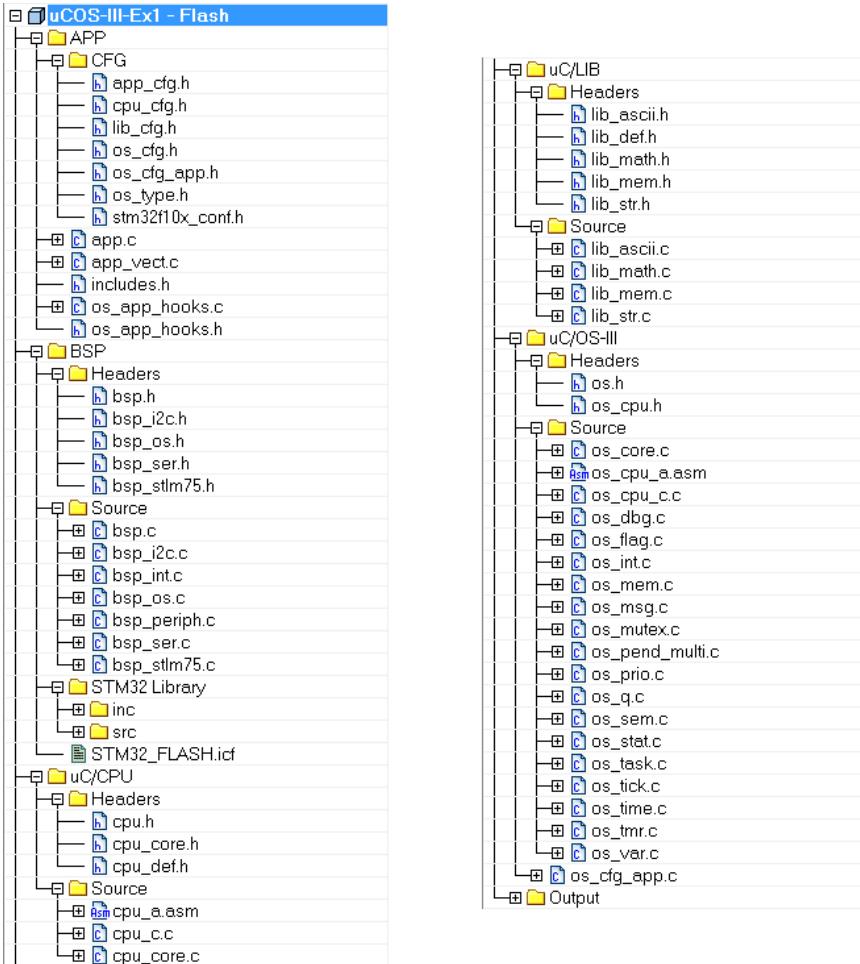


Figure 4-3 Expanded Workspace for uCOS-III-Ex1

The **uC-CPU** group contains source files for the μC/CPU module used in all of the examples in this book. The header files are needed since some of the application code requires definitions and declarations found in these files.

The **uC-LIB** group contains the source files for the μC/LIB module used in all the examples in this book. Again, the header files are needed as some of the application code needs definitions and declarations found in these files.

The **uCOS-III** group contains the source files for μC/OS-III. **os_cfg_app.c** needs to be compiled along with your application based on the contents of **os_cfg_app.h**.

4-1 RUNNING THE PROJECT

Everything should be in place to run the example project. Connect the USB cable that accompanies the µC/Eval-STM32F107 evaluation board to CN5 on the board, and the other end to a free USB port on a PC.

Click on the ‘Download and Debug’ button on the far right in the IAR Embedded Workbench as shown in Figure 4-4.



Figure 4-4 Starting the debugger

Embedded Workbench will compile and link the example code and program the object file onto the Flash of the STM32F107 using the J-Link debugger, which is built onto the µC/Eval-STM32F107 board. The code will start executing and stop at `main()` in `app.c` as shown in Figure 4-5.

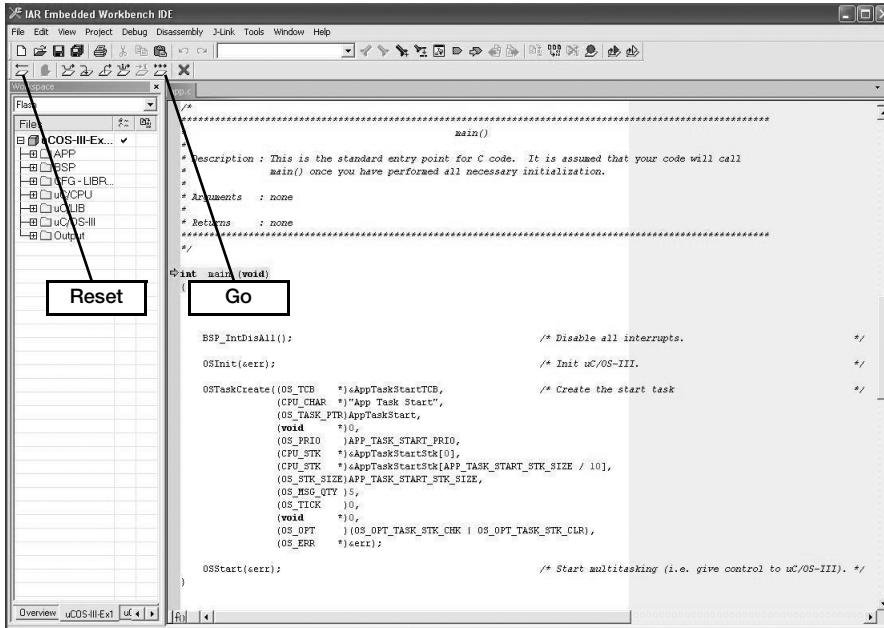


Figure 4-5 Stops at main() after code is downloaded

Click on the debugger's 'Go' button to continue execution and verify that the three LEDs (Red, Yellow and Green) are blinking.

As shown in Figure 4-6, stop execution by clicking on the 'Break' button and then click on the 'Reset' button (see Figure 4-5) to restart the application.

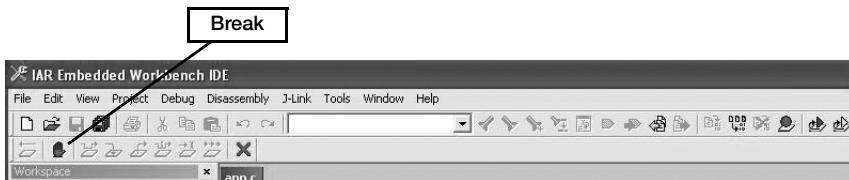


Figure 4-6 Stop execution

4-2 HOW THE EXAMPLE PROJECT WORKS

The code for `main()` is duplicated and shown in Listing 4-1 so that it is more readable.

```

int main (void)
{
    OS_ERR err;

    BSP_IntDisAll();                                (1)
    OSInit(&err);                                  (2)
    OSTaskCreate((OS_TCB     *)&AppTaskStartTCB,
                 (CPU_CHAR   *)"App Task Start",      (3)
                 (OS_TASK_PTR)AppTaskStart,
                 (void        *)0,
                 (OS_PRIO     )APP_TASK_START_PRIO,
                 (CPU_STK     *)&AppTaskStartStk[0],
                 (CPU_STK_SIZE)APP_TASK_START_STK_SIZE / 10,
                 (CPU_STK_SIZE)APP_TASK_START_STK_SIZE,
                 (OS_MSG_QTY  )5,
                 (OS_TICK     )0,
                 (void        *)0,
                 (OS_OPT      )(OS_OPT_TASK_STK_CHK | OS_OPT_TASK_STK_CLR),
                 (OS_ERR     *)&err);
    OSStart(&err);                                (4)
}

```

Listing 4-1 `main()` in `app.c`

- L4-1(1) `main()` starts by calling `BSP_IntDisAll()`. The code for this function is found in `bsp_int.c`. `BSP_IntDisAll()` simply calls `CPU_IntDis()` to disable all interrupts. The reason a `bsp.c` function is used instead of simply calling `CPU_IntDis()` is that on some processors, it is necessary to disable interrupts from the interrupt controller, which would then be appropriately handled by a `bsp.c` function. This way, the application code can easily be ported to another processor.
- L4-1(2) `OSInit()` is called to initialize µC/OS-III. Normally, you will want to verify that `OSInit()` returns without error by verifying that `err` contains `OS_ERR_NONE` (*i.e.* the value 0). You can do this with the debugger by single stepping through the code (step over) and stop after `OSInit()` returns. Simply ‘hover’ the mouse over `err` and the current value of `err` will be displayed.

`OSInit()` creates four internal tasks: the idle task, the tick task, the timer task, and the statistic task. The interrupt handler queue task is not created because in `os_cfg.h`, `OS_CFG_ISR_POST_DEFERRED_EN` set to 0.

- L4-1(3) `OSTaskCreate()` is called to create an application task called `AppTaskStart()`. `OSTaskCreate()` contains 13 arguments described in Appendix A, *μ C/OS-III API Reference Manual* in Part I of this book.

`AppTaskStartTCB` is the `OS_TCB` used by the task. This variable is declared in the 'Local Variables' section in `app.c`, just a few lines above `main()`.

`AppTaskStartStk[]` is an array of `CPU_STKs` used to declare the stack for the task. In μ C/OS-III, each task requires its own stack space. The size of the stack greatly depends on the application. In this example, the stack size is declared through `APP_TASK_START_STK_SIZE`, which is defined in `app_cfg.h`. 128 `CPU_STK` elements are allocated, which, on the Cortex-M3, corresponds to 512 bytes (each `CPU_STK` entry is 4 bytes, see `cpu.h`) and this should be sufficient stack space for the simple code of `AppTaskStart()`.

`APP_TASK_START_PRIO` determines the priority of the start task and is defined in `app_cfg.h`.

- L4-1(4) `OSStart()` is called to start the multitasking process. With the application task, μ C/OS-III will be managing five tasks. However, `OSStart()` will start the highest priority of the tasks created. In our example, the highest priority task is the `AppTaskStart()` task. `OSStart()` is not supposed to return. However, it would be wise to still add code to check the returned value.

The code for `AppTaskStart()` is shown in Listing 4-2.

```

static void AppTaskStart (void *p_arg)
{
    CPU_INT32U cpu_clk_freq;
    CPU_INT32U cnts;
    OS_ERR     err;

    (void)&p_arg;
    BSP_Init();                                (1)
    CPU_Init();                                (2)
    cpu_clk_freq = BSP_CPU_ClkFreq();           (3)
    cnts      = cpu_clk_freq / (CPU_INT32U)OSCfg_TickRate_Hz;
    OS_CPU_SysTickInit(cnts);
#if OS_CFG_STAT_TASK_EN > 0u
    OSStatTaskCPUUsageInit(&err);              (4)
#endif
    CPU_IntDisMeasMaxCurReset();
    BSP_LED_Off(0);
    while (DEF_TRUE) {
        BSP_LED_Toggle(0);
        OSTimedDlyHMSM(0, 0, 0, 100,
                        OS_OPT_TIME_HMSM_STRICT,
                        &err);
    }
}

```

Listing 4-2 **AppTaskStart()** in **app.c**

- L4-2(1) **AppTaskStart()** starts by calling **BSP_Init()** (See **bsp.c**) to initialize peripherals used on the μC/Eval-STM32F107. **BSP_Init()** initializes different clock sources on the STM32F107. The crystal that feeds the μC/Eval-STM32F107 runs at 25 MHz and the STM32F107's PLLs (Phase Locked Loops) and dividers are configured such that the CPU operates at 72 MHz.
- L4-2(2) **CPU_Init()** is called to initialize the μC/CPU services. **CPU_Init()** initializes internal variables used to measure interrupt disable time, the time stamping mechanism, and a few other services.
- L4-2(3) The Cortex-M3's system tick timer is initialized. **BSP_CPU_ClkFreq()** returns the frequency (in Hz) of the CPU, which is 72 MHz for the μC/Eval-STM32F107. This value is used to compute the reload value for the Cortex-M3's system tick timer. The computed value is passed to **OS_CPU_SysTickInit()**, which is part of the μC/OS-III port (**os_cpu_c.c**). However, this file is not provided in

source form with the book. Once the system tick is initialized, the STM32F107 will receive interrupts at the rate specified by `OS_CFG_TICK_RATE_HZ` (See `os_cfg_app.c`), which in turn is assigned to `OSCfg_TickRate_Hz` in `os_cfg_app.c`. The first interrupt will occur in 1/`OS_CFG_TICK_RATE_HZ` second, since the interrupt will occur only when the system tick timer reaches zero after being initialized with the computed value, `cnts`.

- L4-2(4) `OSStatTaskCPUUsageInit()` is called to determine the ‘capacity’ of the CPU. μ C/OS-III will run ‘only’ its internal tasks for 1/10 of a second and determine the maximum number of time the idle task loops. The number of loops is counted and placed in the variable `OSStatTaskCtr`. This value is saved in `OSStatTaskCtrMax` just before `OSStatTaskCPUUsageInit()` returns. `OSStatTaskCtrMax` is used to determine the CPU usage when other tasks are added. Specifically, as you add tasks to the application `OSStatTaskCtr` (which is reset every 1/10 of a second) is incremented less by the idle task because other tasks consume CPU cycles. CPU usage is determined by the following equation:

$$\text{OSStatTaskCPU Usage}_{(\%)} = (100 - \frac{100 \times \text{OSStatTaskCtr}}{\text{OSStatTaskCtrMax}})$$

The value of `OSStatTaskCPUUsage` can be displayed at run-time by μ C/Probe. However, this simple example barely uses any CPU time and most likely CPU usage will be near 0.

Note that as of V3.03.00, `OSStatTaskCPUUsage` has a range of 0 to 10,000 to represent 0.00 to 100.00%. In other words, `OSStatTaskCPUUsage` now has a resolution of 0.01% instead of 1%.

- L4-2(5) The μ C/CPU module is configured (See `cpu_cfg.h`) to measure the amount of time interrupts are disabled. In fact, there are two measurements, total interrupt disable time assuming all tasks, and per-task interrupt disable time. Each task’s `OS_TCB` stores the maximum interrupt disable time when the task runs. These values can be monitored by μ C/Probe at run time. `CPU_IntDisMeasMaxCurReset()` initializes this measurement mechanism.

- L4-2(6) `BSP_LED_Off()` is called to turn off (by passing 0) all user-accessible LEDs (red, yellow and green next to the STM32F107) on the μ C/Eval-STM32F107.

- L4-2(7) A typical µC/OS-III task is written as an infinite loop.
- L4-2(8) `BSP_LED_Toggle()` is called to toggle all three LEDs (by passing 0) at once. You can change the code and specify 1, 2 or 3 to toggle only the green, yellow and red LED, respectively.
- L4-2(9) Finally, a µC/OS-III task needs to call a µC/OS-III function that will cause the task to wait for an event to occur. In this case, the event to occur is the passage of time. `OSTimeDlyHMSM()` specifies that the calling task does not need to do anything else until 100 milliseconds expire. Since the LEDs are toggled, they will blink at a rate of 5 Hz (100 milliseconds on, 100 milliseconds off).

4-3 MONITORING VARIABLES USING µC/PROBE

Click the ‘Go’ button in the IAR C-Spy debugger in order to resume execution of the code.

Now start µC/Probe by locating the µC/Probe icon on your PC as shown in Figure 4-7. The icon, by the way, represents a ‘box’ and the ‘eye’ sees inside the box (which corresponds to your embedded system). In fact, at Micrium, we like to say, “Think outside the box, but see inside with µC/Probe!”




Figure 4-7 µC/Probe icon

Figure 4-8 shows the initial screen when µC/Probe is first started.

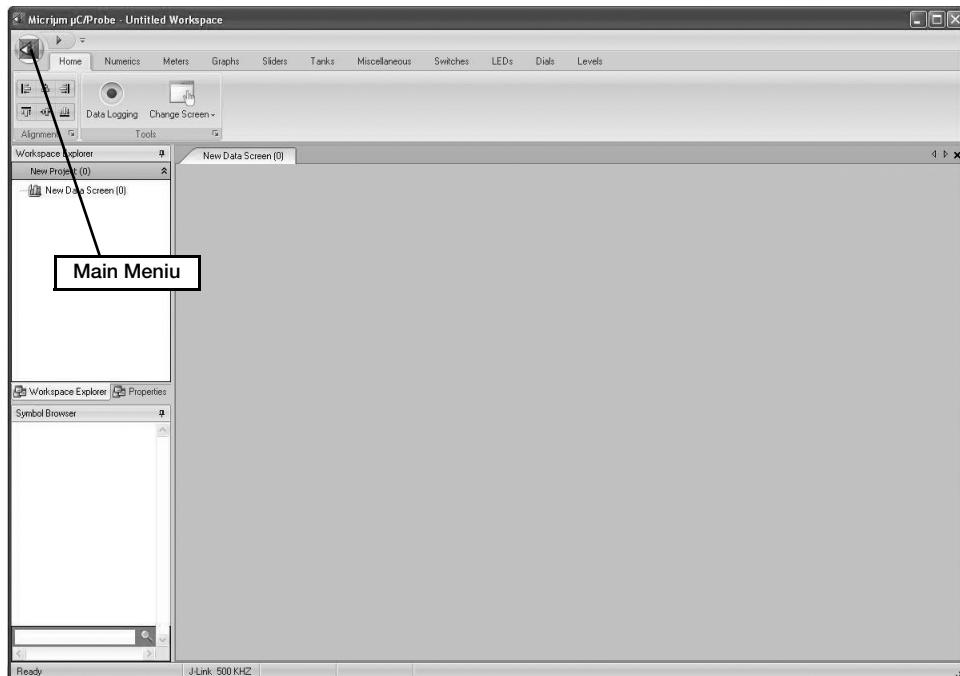


Figure 4-8 µC/Probe startup screen

Click on the ‘Main Menu’ button to open up the main menu as shown in Figure 4-9.

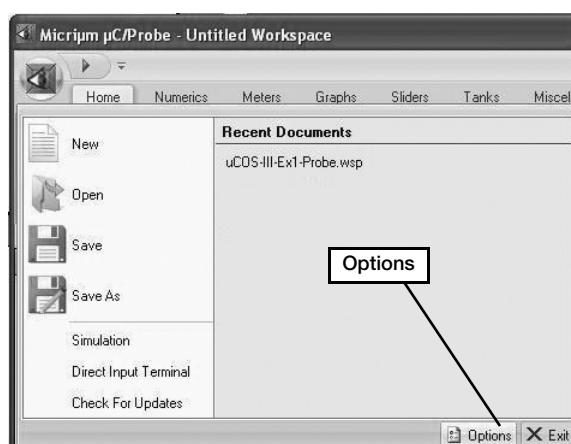


Figure 4-9 µC/Probe's main menu

Click on the ‘Options’ button to setup options as shown in Figure 4-10.

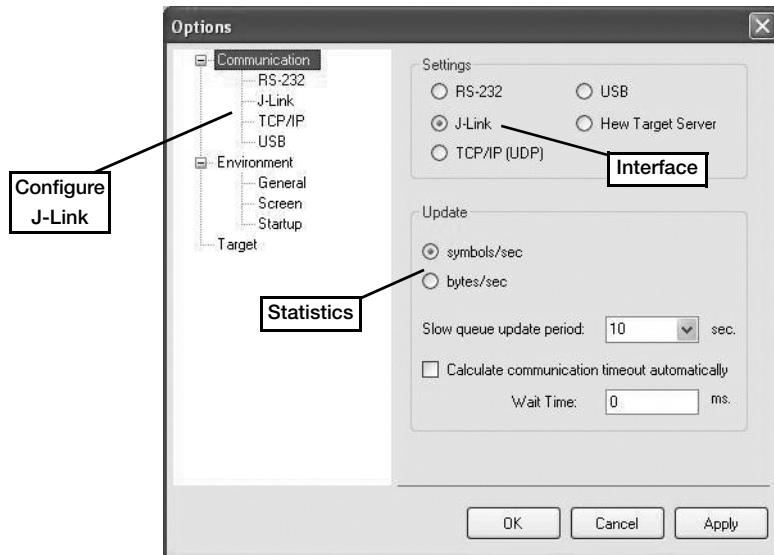


Figure 4-10 μC/Probe's options

Select ‘J-Link’ and whether μC/Probe is to display the number of symbols/second collected by μC/Probe or the number of bytes/second for run-time statistics in μC/Probe. It generally makes more sense to view the number of symbols/second.

Click on the ‘Configure J-Link’ on the upper-left corner in the options tree. You will see the dialog box shown in Figure 4-11.

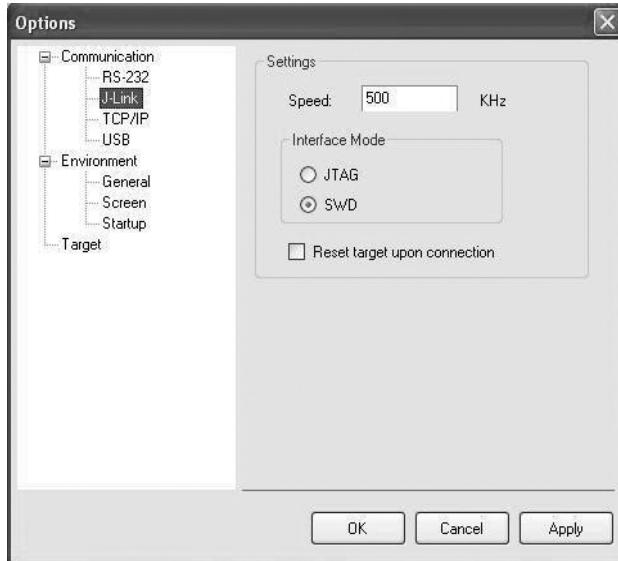


Figure 4-11 **μC/Probe's J-Link options**

Make sure you select the 'SWD' interface mode and click on the 'OK' button at the bottom.

Now go back to the 'Main Menu' and open the `uCOS-III-Ex1-Probe.wsp` workspace found in the following directory:

`\Micrium\Software\EvalBoards\Micrium\uC-Eval-STM32F107\IAR\uCOS-III-Ex1`

The μC/Probe screen should appear as the one shown in Figure 4-12.

Chapter 4

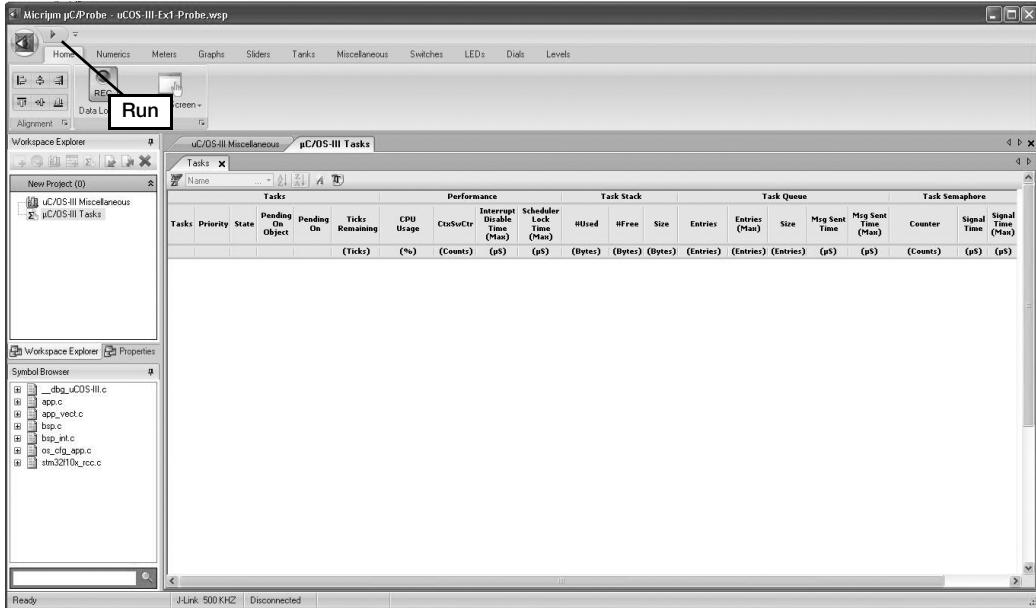


Figure 4-12 μC/Probe Example #1 Edit Mode Screen

Click on the ‘Run’ button and see μC/Probe collect run-time data from the μC/Eval-STM32F107 evaluation board as shown in Figure 4-13. The ‘μC/OS-III Tasks’ tab shows run-time information about the five μC/OS-III tasks. You should note that as of V2.4 of μC/Probe, task awareness is built-in for μC/OS-III.

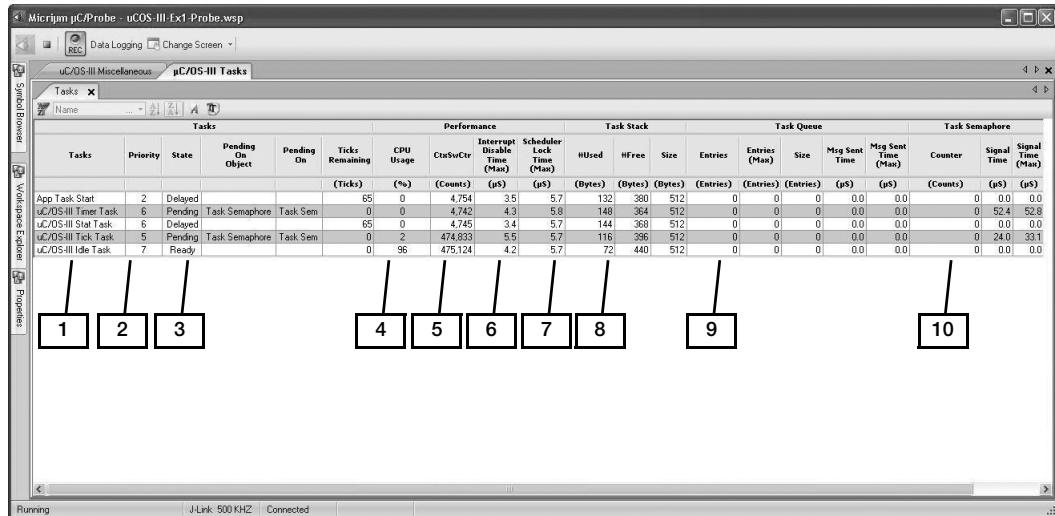


Figure 4-13 µC/Probe Example #1 Run Mode Screen

- L4-2(10) The first column displays the name of the task.
- L4-2(11) The priority of each task is displayed in the second column. µC/OS-III was configured to have up to 8 priority levels (0 to 7). The idle task is always assigned the lowest priority (*i.e.* 7). The statistic and timer tasks are executing at the same priority.
- L4-2(12) The next column indicates the state of each task. A task can be in one of eight states as described in Chapter 4, *Task Management* in Part I of this book.
- The idle task will always show that the task is ready. The tick and timer tasks will either be ready or pending because both tasks wait (*i.e.* pend) on their internal task semaphore. The statistics task will show delayed because it calls `OSTimeDly()` every 1/10th of a second.
- L4-2(13) The CPU Usage column indicates the CPU usage of each task relative to other tasks. The example consumes about 1% of the CPU. The idle task consumes 95% of that 1% or, 0.94% of the CPU. The tick task 0.05% and the other tasks nearly nothing.

-
- L4-2(14) The ‘**CtxSwCtr**’ column indicates the number of times the task executed.
 - L4-2(15) This column indicates the maximum amount of time interrupts were disabled when running the corresponding task.
 - L4-2(16) This column indicates the maximum amount of time the scheduler was locked when running the corresponding task.
 - L4-2(17) The next three columns indicate the stack usage of each task. This information is collected by the statistics task 10 times per second.
 - L4-2(18) The next five columns provide statistics about each task’s internal message queue. Because none of the internal µC/OS-III tasks make use of the internal message queue, the corresponding values are not displayed. In fact, they would all be 0 anyway.
 - L4-2(19) The last three columns provide run-time statistics regarding each task’s internal semaphore.

4-4 SUMMARY

There are several interesting things to notice.

- 1 With the on-board J-Link and the Cortex-M3 SWD interface, you can run Embedded Workbench concurrently with µC/Probe, even if you are stepping through the code. In other words, you can stop the debugger at a breakpoint and µC/Probe will continue reading values from the target. This allows you to see changes in variables as they are updated when stepping through code.
- 2 The display screens in µC/Probe only show µC/OS-III variables. However, µC/Probe allows you to ‘see’ any variable in the target as long as the variable is declared global or static. In fact, it is fairly easy to add the application task to the task list. This will be shown in the example in Chapter 4.
- 3 Variables are updated on the µC/Probe data screen as quickly as the interface permits it. The J-Link interface should update variables at about 300 or so symbols per second. If µC/Probe uses the serial port (RS-232C) instead, updates should be approximately twice as fast. With TCP/IP, we’ve seen updates easily exceeding 1,000 symbols/second. With RS-232C and TCP/IP, however, you will need to add target resident code (provided by Micrium) and µC/Probe would only be able to update the display when the target is running.

The on-board J-Link and the IAR C-Spy debugger makes it easy to download the application to the target and Flash the STM32F107.

Chapter 5

μ C/OS-III Example #2

The example described in this chapter will read the current temperature from the STLM75 temperature sensor built into the μ C/Eval-STM32F107 board shown in Figure 5-1.

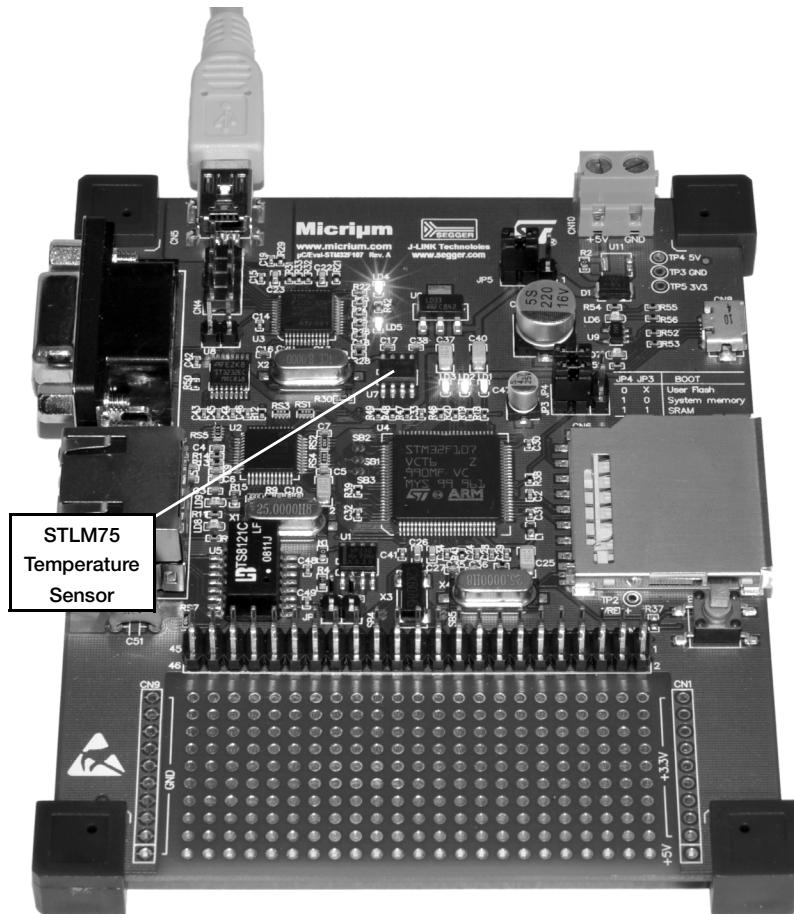


Figure 5-1 μ C/Eval-STM32F107 Evaluation Board

It is assumed that you have read the previous chapter, and are comfortable with the tools (Embedded Workbench and µC/Probe). It is also assumed that you have the µC/Eval-STM32F107 connected to a PC.

Start the IAR Embedded Workbench for ARM and open the following workspace:

`\Micrium\Software\EvalBoards\Micrium\µC-Eval-STM32F107\IAR\µC-Eval-STM32F107.eww`

Click on the uCOS-III-Ex2 tab at the bottom of the workspace explorer to select the second project. Notice that the workspace looks identical to the workspace of Example #1. The only file that changed is app.c.

5-1 RUNNING THE PROJECT

Click on the ‘Download and Debug’ button on the far right in the IAR Embedded Workbench as shown in Figure 5-2.



Figure 5-2 Starting the debugger

Embedded Workbench will compile and link the example code and program the object file onto the Flash of the STM32F107 using the J-Link debugger, which is built into the µC/Eval-STM32F107 board. The code will start executing and stop at `main()` in app.c as shown in Figure 5-3.

Notice how the code is almost exactly the same as the one presented in the previous chapter except that we turn on round-robin scheduling (by calling `OSSchedRoundRobinCfg()`) immediately after calling `OSInit()`. You might wonder then how is it possible for the previous example to run multiple tasks at the same priority when round-robin scheduling was turned off? The answer is simple, round robin occurs only when a task requires more processing than its time quanta. If a task takes less processing and calls a blocking function, the task behaves as any other task.

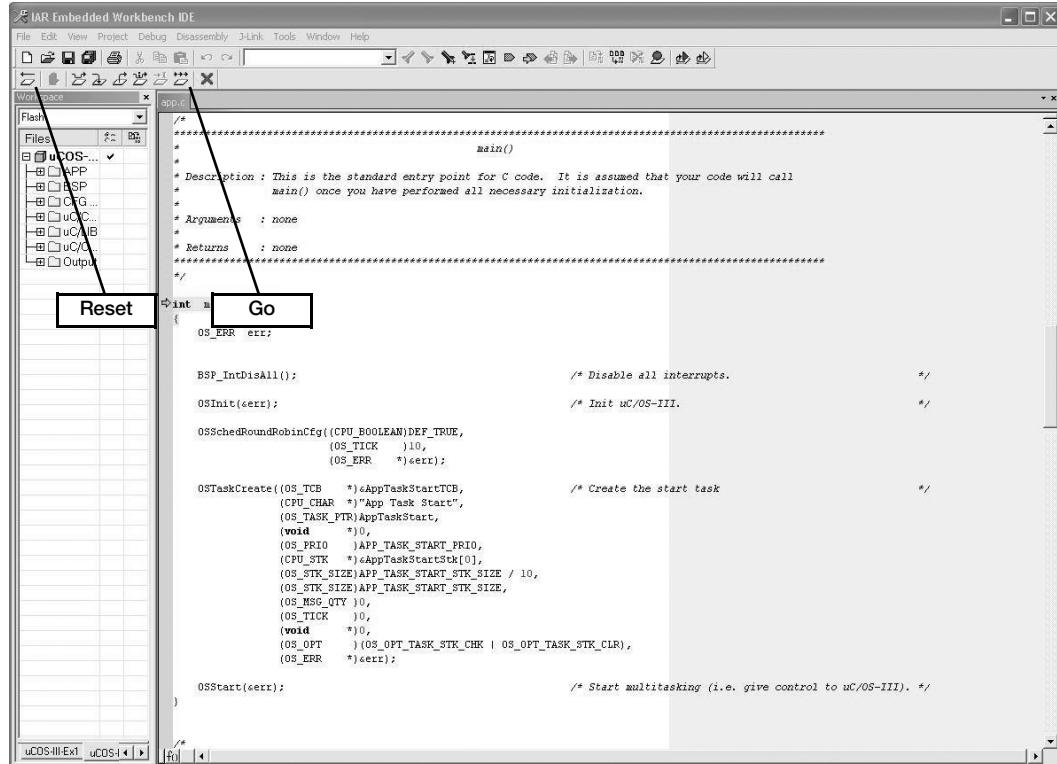


Figure 5-3 Stops at main() after code is downloaded

Click on the debugger's 'Go' button to continue execution and verify that the green LED is blinking faster than the red LED (the yellow LED will be off).

As shown in Figure 5-4, stop execution by clicking on the 'Stop' button and then click on the 'Reset' button (see Figure 5-3) to restart the application.

Chapter 5

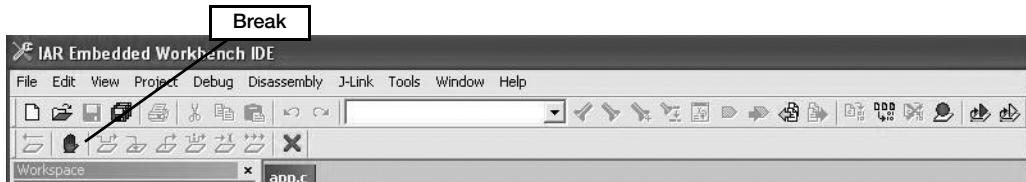


Figure 5-4 Stop execution

In the debugger, scroll down slightly to expose the code for `AppTaskStart()` as shown in Listing 5-1. Two things are different in `AppTaskStart()` from the example in the previous chapter.

```

static void AppTaskStart (void *p_arg)
{
    CPU_INT32U cpu_clk_freq;
    CPU_INT32U cnts;
    OS_ERR     err;

    (void)p_arg;
    BSP_Init();
    CPU_Init();
    cpu_clk_freq = BSP_CPU_ClkFreq();
    cnts         = cpu_clk_freq / (CPU_INT32U)OSCfg_TickRate_Hz;
    OS_CPU_SysTickInit(cnts);
#if OS_CFG_STAT_TASK_EN > 0u
    OSStatTaskCPUUsageInit(&err);
#endif
    CPU_IntDisMeasMaxCurReset();

    AppTaskCreate();                                         (1)
    BSP_LED_Off(0);
    while (DEF_TRUE) {
        BSP_LED_Toggle(1);                                 (2)
        OSTimeDlyHMSM(0, 0, 0, 250,
                      OS_OPT_TIME_HMSM_STRICT,
                      &err);
    }
}

```

Listing 5-1 `AppTaskStart()` in `app.c`

- L5-1(1) **AppTaskCreate()** is called to create other application tasks. **AppTaskCreate()** is declared after the code for **AppTaskStart()**. **AppTaskCreate()** creates a single task, **AppTaskTempSensor()**. Notice that **AppTaskTempSensor()** could have been created directly in **AppTaskStart()** but it is wise to have a separate function to create other tasks. This makes the code in **AppTaskStart()** neater.

The creation of **AppTaskTempSensor()** looks quite similar to the creation of **AppTaskStart()**. Obviously, different arguments are used to create this task. The priority of the task is defined in **app_cfg.h** and in this example, it is set to the same priority as **AppTaskStart()**.

- L5-1(2) Instead of toggling all the LEDs, only one of them is toggled, (the green LED) in this task. The LED will blink at a rate of 2 Hz.

The code for **AppTaskTempSensor()** is shown in Listing 5-2.

```
static void AppTaskTempSensor (void *p_arg)
{
    OS_ERR     err;

    BSP_STLM75_Init();                                     (1)

    AppLM75_Cfg.FaultLevel   = (CPU_INT08U )BSP_STLM75_FAULT_LEVEL_1;      (2)
    AppLM75_Cfg.HystTemp    = (CPU_INT16S )25;
    AppLM75_Cfg.IntPol      = (CPU_BOOLEAN)BSP_STLM75_INT_POL_HIGH;
    AppLM75_Cfg.Mode        = (CPU_BOOLEAN)BSP_STLM75_MODE_INTERRUPT;
    AppLM75_Cfg.OverLimitTemp = (CPU_INT16S )125;
    BSP_STLM75_CfgSet(&AppLM75_Cfg);
    while (DEF_TRUE) {
        BSP_LED_Toggle(3);
        BSP_STLM75_TempGet(BSP_STLM75_TEMP_UNIT_FAHRENHEIT,
                           &AppTempSensor);                                (3)
        OSTimeDlyHMSM(0, 0, 0, 500,
                      OS_OPT_TIME_HMSM_STRICT,
                      &err);
    }
}
```

Listing 5-2 **AppTaskTempSensor()** in **app.c**

- L5-2(1) The LM75 is initialized.
- L5-2(2) The LM75 is quite a flexible device, as it is able to generate an interrupt if the temperature exceeds a certain threshold. For this to happen, PB5 would have to be configured to trigger an interrupt when the `-OS/INT` line on the LM75 is asserted (See section E-16 “Schematics” on page 892, page 7 of the schematics). Also refer to the LM75 and STM32F107 datasheets provided by ST.

As a first step, simply poll the `-OS/INT` line to determine if the temperature exceeded the configured ‘`.OverTempLimit`’ value. For this, setup the PB5 line as a GPIO input and add code in `AppTaskTempSensor()` to read the status of PB5. This is left as an exercise. You might also want to display the status of this input using an LED in μ C/Probe. Note that you cannot isolate a specific bit of a port so, simply ‘map’ the value in PB5 to a global variable (μ C/Probe cannot monitor local variables).

- L5-2(3) The LM75 is read every 0.5 second (the surrounding temperature should not change very quickly) and the value, in degrees Fahrenheit is placed in `AppTempSensor`. You can examine this value by setting a breakpoint using C-Spy or, better yet, monitor the temperature live using μ C/Probe.

5-2 MONITORING THE TEMPERATURE SENSOR USING μ C/PROBE

Click on the ‘Run’ button in Embedded Workbench in order to resume execution of the code.

Start μ C/Probe and open the uCOS-III-Ex2-Probe workspace found in the following directory:

`\Micrium\Software\EvalBoards\Micrium\uC-Eval-STM32F107\IAR\uCOS-III-Ex2`

The μ C/Probe screen should appear as shown in Figure 5-5 once you click on the ‘Go’ button.

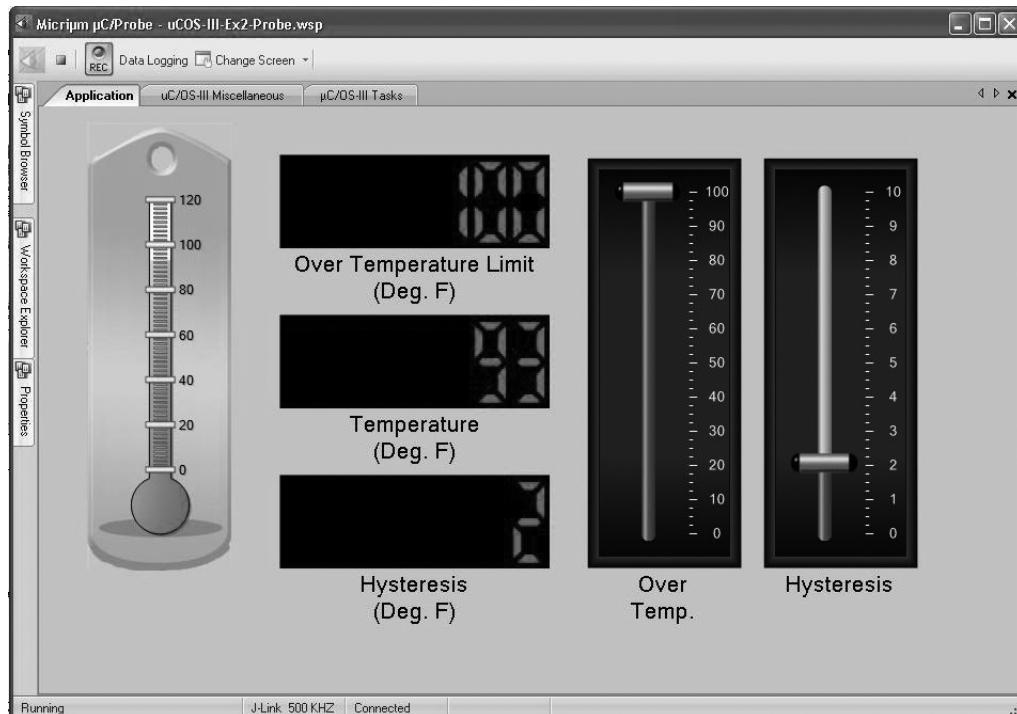


Figure 5-5 **μ C/Probe Temperature Sensor Screen**

Move the μ C/Eval-STM32F107 evaluation board closer to a heat source and see the numerical value in the middle show the temperature read by the sensor. Also, the 'ball thermometer' on the left shows the same value, but does it graphically.

You should note that the temperature should typically show around 95 degrees Farenheit, even though your room temperature might be much colder. The reason is because the LM75 is actually located in close proximity to the voltage regulator (U6) on the board and thus, the LM75 is reading the temperature generated by that heat source.

Chapter 6

μ C/OS-III Example #3

The example described in this chapter will display μ C/OS-III performance measurements. Specifically, we'll look at the built-in time measurement features of μ C/OS-III, as well as compute post-to-pend times for various kernel objects.

We will once again use the μ C/Eval-STM32F107 evaluation board.

It is assumed that you read the previous two chapters and are comfortable with the tools (Embedded Workbench and μ C/Probe). It is also assumed that you have the μ C/Eval-STM32F107 connected to your PC.

Start the IAR Embedded Workbench for ARM and open the following workspace:

`\Micrium\Software\EvalBoards\Micrium\uC-Eval-STM32F107\IAR\uC-Eval-STM32F107.eww`

Click on the uCOS-III-Ex3 tab at the bottom of the workspace explorer to select the third project. Notice that the workspace looks identical to the workspace of Examples #1 and #2. The only file that changed was `app.c`.

6-1 RUNNING THE PROJECT

Click on the ‘Download and Debug’ button on the far right in the IAR Embedded Workbench, as shown in Figure 6-1.



Figure 6-1 Starting the debugger

Embedded Workbench will compile and link the example code and program the object file onto the Flash of the STM32F107 using the J-Link debugger, which is built onto the µC/Eval-STM32F107 board. The code will start executing and stop at `main()` in `app.c`.

Click on the debugger’s ‘Go’ button to continue execution and verify that all three LEDs are blinking quickly.

6-2 EXAMINING PERFORMANCE TEST RESULTS WITH μ C/PROBE

Start μ C/Probe and open the `uCOS-III-Ex3-Probe.wsp` workspace found in the following directory:

`\Micrium\Software\EvalBoards\Micrium\uC-Eval-STM32F107\IAR\uCOS-III-Ex3`

Select the ‘Application’ tab and click on the μ C/Probe ‘Run’ button. The screen should appear as shown in Figure 6-2 (I rotated the knob to position 8).

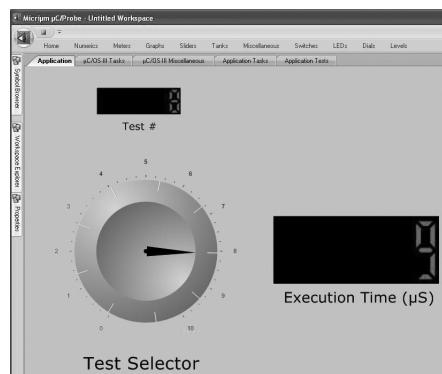


Figure 6-2 μ C/OS-III Performance Tests

With your mouse, ‘grab’ the knob pointer and rotate it. You should see the number on the ‘Test #’ indicator reflect the position on the knob. As you rotate the knob, the ‘Execution Time (μ S)’ indicator will display the execution time for the test being performed.

Example #3 creates two additional tasks used to perform a series of 11 performance measurements. One of the tasks signals or sends messages to the other task, which waits for these signals or messages. The receiving task has a higher priority than the sender.

Table 6-1 summarizes the results.

Test #	Description	Description (Non-optimized) (1)	Execution Time (μS) (Optimized) (2)
0	<p>Semaphore</p> Rx task waits on a semaphore Context Switch to Tx task Start time measurement Tx task signals the semaphore Context Switch to Rx task Rx task returns from wait Stop time measurement	25.5	11.0
1	<p>Semaphore</p> Start time measurement Rx task signals a semaphore Rx task waits for the semaphore Rx task returns from wait Stop time measurement No context switch	9.7	3.4
2	<p>Task Semaphore</p> Rx task waits on its internal task semaphore Context Switch to Tx task Start time measurement Tx task signals the task semaphore of the Rx task Context Switch to Rx task Rx task returns from wait Stop time measurement	24.4	9.9
3	<p>Task Semaphore</p> Start time measurement Rx task signals its own task semaphore Rx task waits for its task semaphore Rx task returns from wait Stop time measurement No context switch	10.1	3.9
4	<p>Message Queue</p> Rx task waits on a message queue Context Switch to Tx task Start time measurement Tx task sends a message to the message queue Context Switch to Rx task Rx task returns from wait Stop time measurement	25.9	11.3

Test #	Description	Description (Non-optimized) (1)	Execution Time (μ S) (Optimized) (2)
5	<p>Message Queue</p> <p>Start time measurement</p> Rx task sends a message to the message queue Rx task waits on the message queue Rx task returns from wait <p>Stop time measurement</p> No context switch	13.2	6.0
6	<p>Task Message Queue</p> Rx task waits on its internal task message queue Context Switch to Tx task <p>Start time measurement</p> Tx task sends a message to the Rx task's internal message queue Context Switch to Rx task Rx task returns from wait <p>Stop time measurement</p>	24.7	10.1
7	<p>Task Message Queue</p> <p>Start time measurement</p> Rx task sends a message to its own task message queue Rx task waits on its task message queue Rx task returns from wait <p>Stop time measurement</p> No context switch	13.6	6.2
8	<p>Mutual Exclusion Semaphore</p> <p>Start time measurement</p> Rx task waits on a mutex (mutex is available) Rx task releases the mutex <p>Stop time measurement</p> No context switch	9.8	3.6
9	<p>Event Flags</p> Rx task waits on an event flag group Context Switch to Tx task <p>Start time measurement</p> Tx task sets event flag group bits Context Switch to Rx task Rx task returns from wait <p>Stop time measurement</p>	26.6	11.4

Test #	Description	Description (Non-optimized) (1)	Execution Time (μS) (Optimized) (2)
10	Event Flags Start time measurement Rx task sets event flag group bits Rx task waits on the event flag group Rx task returns from wait Stop time measurement No context switch	11.0	4.6

Table 6-1 μC/OS-III Performance Test Results

T6-1(1) In these tests, the compiler was set to ‘no-optimization’ for best debug capabilities. Also, μC/OS-III was configured to check all arguments, whether some of the functions were called from ISRs, or whether API calls are passed the proper object types, etc. This is the configuration of the pre-compiled linkable library provided with this book and consists of the following settings (See Appendix B, *μC/OS-III Configuration Manual* in Part I of this book):

Compiler Optimization	None
CPU_CFG_INT_DIS_MEAS_EN	Defined
CPU_CFG_TS_EN	DEF_ENABLED
OS_CFG_APP_HOOKS_EN	1u
OS_CFG_ARG_CHK_EN	1u
OS_CFG_CALLED_FROM_ISR_CHK_EN	1u
OS_CFG_DBG_EN	1u
OS_CFG_OBJ_TYPE_CHK_EN	1u
OS_CFG_SCHED_LOCK_TIME_MEAS_EN	1u
OS_CFG_STAT_TASK_EN	1u
OS_CFG_STAT_TASK_STK_CHK_EN	1u
OS_CFG_TASK_PROFILE_EN	1u

T6-1(2) For comparison, I ran separate tests using the following configuration settings:

Compiler Optimization	Medium
CPU_CFG_INT_DIS_MEAS_EN	Not Defined
CPU_CFG_TS_EN	DEF_ENABLED
OS_CFG_APP_HOOKS_EN	1u

OS_CFG_ARG_CHK_EN	0u
OS_CFG_CALLED_FROM_ISR_CHK_EN	0u
OS_CFG_DBG_EN	0u
OS_CFG_OBJ_TYPE_CHK_EN	0u
OS_CFG_SCHED_LOCK_TIME_MEAS_EN	0u
OS_CFG_STAT_TASK_EN	0u
OS_CFG_STAT_TASK_STK_CHK_EN	0u
OS_CFG_TASK_PROFILE_EN	0u

As you can see, performance is more than doubled with the second configuration. The biggest gain in performance resulted from the disable interrupt disable and scheduler lock time measurement. While developing an application it is useful to keep μ C/OS-III's performance measurements enabled. However, when deploying a product, some of the above features could be disabled. I would use the following configuration:

Compiler Optimization	Medium
CPU_CFG_INT_DIS_MEAS_EN	Not Defined
CPU_CFG_TS_EN	DEF_ENABLED
OS_CFG_APP_HOOKS_EN	1u
OS_CFG_ARG_CHK_EN	0u
OS_CFG_CALLED_FROM_ISR_CHK_EN	0u
OS_CFG_DBG_EN	1u
OS_CFG_OBJ_TYPE_CHK_EN	0u
OS_CFG_SCHED_LOCK_TIME_MEAS_EN	0u
OS_CFG_STAT_TASK_EN	1u
OS_CFG_STAT_TASK_STK_CHK_EN	1u
OS_CFG_TASK_PROFILE_EN	1u

When μ C/OS-III is used in safety-critical applications, the following configuration should be considered:

Compiler Optimization	Medium
CPU_CFG_INT_DIS_MEAS_EN	Not Defined
CPU_CFG_TS_EN	DEF_ENABLED
OS_CFG_APP_HOOKS_EN	1u
OS_CFG_ARG_CHK_EN	1u
OS_CFG_CALLED_FROM_ISR_CHK_EN	1u
OS_CFG_DBG_EN	1u

OS_CFG_OBJ_TYPE_CHK_EN	1u
OS_CFG_SCHED_LOCK_TIME_MEAS_EN	0u
OS_CFG_STAT_TASK_EN	1u
OS_CFG_STAT_TASK_STK_CHK_EN	1u
OS_CFG_TASK_PROFILE_EN	1u

Being able to adjust the configuration assumes access to the µC/OS-III source code, which is available to licensees.

Remember that a kernel uses typically 2 to 4% of the CPU time so the fact that the code executes twice as fast with optimization has very little impact on the overall performance of a system. I generally like to leave performance measurement into the code because it gives better visibility into an application and how it's behaving. I also like to keep argument checking as it protects the code in case features are added later. Unless every ounce of performance is required in an application, I would recommend taking the safer approach.

6-3 HOW THE TEST CODE WORKS

`main()` is identical to `main()` shown in the previous examples.

`AppTaskStart()` is also nearly identical to the previous examples except that a call was added to a function called `AppObjCreate()`, which is used to initialize kernel objects that are used in this example. `AppObjCreate()` is shown in Listing 6-1.

```
static void AppObjCreate (void)
{
    OS_ERR err;
    OSSemCreate ((OS_SEM      *) &AppSem,
                 (CPU_CHAR   *) "App Sem",
                 (OS_SEM_CTR  ) 0,
                 (OS_ERR     *) &err);
    OSFlagCreate ((OS_FLAG_GRP *) &AppFlagGrp,
                  (CPU_CHAR   *) "App Flag Group",
                  (OS_FLAGS   ) 0,
                  (OS_ERR     *) &err);
    OSQCreate   ((OS_Q       *) &AppQ,
                  (CPU_CHAR   *) "App Queue",
                  (OS_MSG_QTY ) 20,
                  (OS_ERR     *) &err);
    OSMutexCreate((OS_MUTEX   *) &AppMutex,
                  (CPU_CHAR   *) "App Mutex",
                  (OS_ERR     *) &err);
}
```

Listing 6-1 **AppObjCreate()** in **app.c**

`AppTaskCreate()` creates two tasks called: `AppTaskRx()` and `AppTaskTx()`. These tasks are used in the post-to-pend performance measurements. `AppTaskRx()` has a higher priority than `AppTaskTx`. `AppTaskRx()` will be receiving signals or messages from `AppTaskTx()`.

Figure 6-3 shows how the two tasks interact to perform the tests.

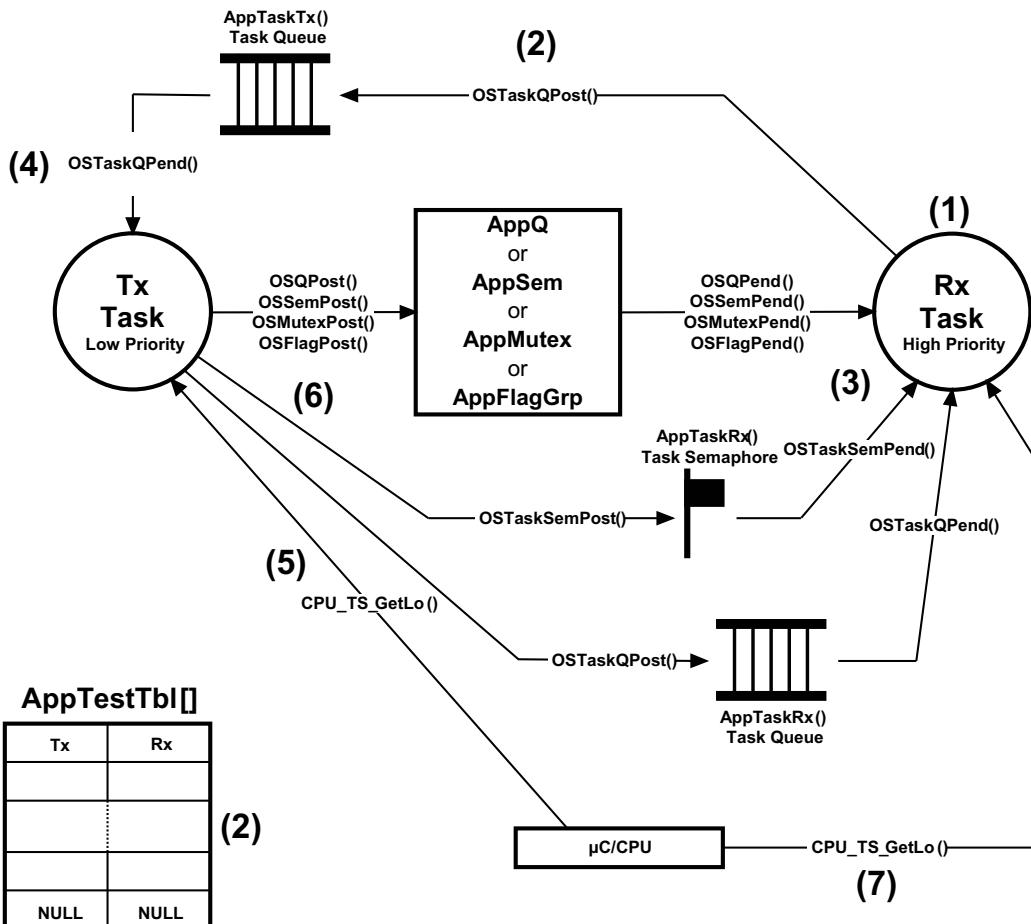


Figure 6-3 Block Diagram

F6-3(1) `AppTaskRx()` executes first since it has a higher priority than `AppTaskTx()`.

F6-3(2) `AppTaskRx()` reads the table `AppTestTbl[]`, which contains pointers to functions that need to be executed by both `AppTaskTx()` and `AppTaskRx()`. Each entry contains one test to perform. `AppTaskRx()` posts the address of the current entry of `AppTestTbl[]` to `AppTaskTx()` so that it can perform its test function.

- F6-3(3) `AppTaskRx()` then executes its ‘Rx’ test as directed by the current table entry. In most cases, this corresponds to pending on one of the 4 kernel objects created or, `AppTaskRx()`’s internal task semaphore or message queue. Since no posts have been performed yet, `AppTaskRx()` blocks waiting for `AppTaskTx()` to send it a signal or a message.
- F6-3(4) `AppTaskTx()` executes and immediately waits on its internal message queue.
- F6-3(5) `AppTaskTx()` reads the current timestamp by invoking the `OS_TS_GET()` macro. The value returned is stored in a RAM array called `AppTS_Start[]` using the index of `AppTestTbl[]` as the index to `AppTS_Start[]`.
- F6-3(6) Since `AppTaskRx()` sent the address of the current `AppTestTbl[]` entry to `AppTaskTx()`, `AppTaskTx()` executes its ‘Tx’ function from the table. This will most likely correspond to either sending a signal or a message to `AppTaskRx()` based on the test function being executed.
- F6-3(7) Since `AppTaskRx()` has a higher priority, a context switch will occur and `AppTaskRx()` will resume execution. `AppTaskRx()` will then read the current timestamp from the μ C/CPU module and store the value in another array, `AppTS_End[]`. `AppTaskRx()` will then compute the difference between the start and end time and save the difference in `AppTS_Delta[]`. Note that all values in the RAM arrays are in `CPU_TS` units.

For the Cortex-M3, a timestamp is obtained by reading the CYCCNT register of the DWT counts as fast as the CPU clock or 72 MHz in the case of the μ C/Eval-STM32F107 evaluation board. Execution time in microseconds simply requires a division by 72 of the `AppTS_Delta[]` entry.

The code for `AppTaskRx()` is shown in Listing 6-2.

Chapter 6

```

static void AppTaskRx (void *p_arg)
{
    OS_ERR      err;
    CPU_INT08U i;
    APP_TEST   *p_test;
    CPU_INT32U clk_freq_mhz;

    (void)p_arg;
    i          = 0;
    p_test     = &AppTestTbl[0];
    AppTestSel = 0;
    clk_freq_mhz = BSP_CPU_ClkFreq() / (CPU_INT32U)1000000;           (1)
    if (clk_freq_mhz == 0) {
        clk_freq_mhz = 1;
    }

    while (DEF_TRUE) {
        BSP_LED_Toggle(1);
        OSTimeDlyHMSM(0, 0, 0, 50,                                     (2)
                      OS_OPT_TIME_HMSM_STRICT,
                      &err);
        if ((void *)p_test->Tx != (void *)0) {                           (3)
            OSTaskQPost((OS_TCB *)AppTaskTxTCB,                         (4)
                          (void *)p_test,
                          (OS_MSG_SIZE)i,
                          (OS_OPT)OS_OPT_POST_FIFO,
                          (OS_ERR *)&err);
            (*(p_test->Rx))(i);                                         (5)
            i++;
            p_test++;
        } else {
            i      = 0;
            p_test = &AppTestTbl[0];
        }
        AppTestTime_uS = AppTS_Delta[AppTestSel] / clk_freq_mhz;         (6)
    }
}

```

Listing 6-2 **AppTaskRx()** in **app.c**

- L6-2(1) The CPU clock frequency in MHz is computed by obtaining the CPU frequency in Hz from the bsp.c function **BSP_CPU_ClkFreq()**.
- L6-2(2) **AppTaskRx()** executes a test every 50 milliseconds, or 20 tests per second.
- L6-2(3) **AppTaskRx()** goes through **AppTestTbl[]** until all tests have been performed and continuously restarts the tests from the beginning.

- L6-2(4) `AppTaskRx()` sends the address of the current `AppTestTbl[]` entry to `AppTaskTx()`. Notice that the index into `AppTestTbl[]` is sent as the message size.
- L6-2(5) `AppTaskRx()` then executes the ‘Rx’ function provided in `AppTestTbl[]` at the current entry.
- L6-2(6) The execution time of the test is computed (in microseconds) so that it can be displayed by μ C/Probe. Note that `AppTestSel` corresponds to the value of the ‘knob’ on the μ C/Probe ‘Application’ data screen.

The code for `AppTaskTx()` is shown in Listing 6-3.

```
static void AppTaskTx (void *p_arg)
{
    OS_ERR      err;
    OS_MSG_SIZE msg_size;
    CPU_TS      ts;
    APP_TEST    *p_test;

    (void)p_arg;
    while (DEF_TRUE) {
        BSP_LED_Toggle(3);
        p_test = (APP_TEST *)OSTaskQPend((OS_TICK      )0,          (1)
                                         (OS_OPT      )OS_OPT_PEND_BLOCKING,
                                         (OS_MSG_SIZE *)&msg_size,
                                         (CPU_TS     *)&ts,
                                         (OS_ERR     *)&err);
        (*p_test->Tx)((CPU_INT08U)msg_size);                      (2)
    }
}
```

Listing 6-3 `AppTaskTx()` in `app.c`

- L6-3(1) `AppTaskTx()` waits for a message to be sent by `AppTaskRx()`.
- L6-3(2) Once the message is received, `AppTaskTx()` executes the function at the current entry in `AppTestTbl[]`. Note that the ‘Tx’ function expects the index into `AppTS_Start[]`, `AppTS_End[]`, and `AppTS_Delta[]`, where the measurement results will be saved.

6-4 OTHER PERFORMANCE MEASUREMENTS

Run the example code and select the ‘μC/OS-III Tasks’ screen in μC/Probe. Figure 6-4 shows this screen after running the example code for more than three hours.

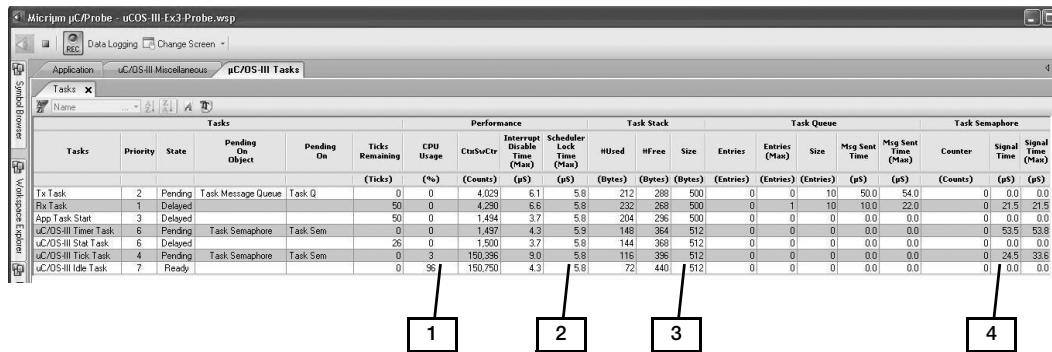


Figure 6-4 μC/OS-III Task Screen

- F6-4(1) μC/OS-III’s idle task consumes over 90% of the CPU.
- F6-4(2) Worst case interrupt disable time for μC/OS-III’s internal task is less than 6 µs, and the scheduler is locked for a maximum of 17 µs.
- F6-4(3) Based on the stack usage, it would be possible to reduce the RAM requirements of most tasks since none of the tasks never exceed 35% and, in fact, the idle task only uses 5% of its stack space.
- F6-4(4) The tick task and timer tasks are signaled by the tick ISR. The tick task runs within 39 µs from the time it is signaled, whereas the timer task runs within 111 µs of being signaled. The timer task executes after the tick task because its priority is lower.

Select the ‘μC/OS-III Miscellaneous’ screen in μC/Probe. Figure 6-5 shows this screen.

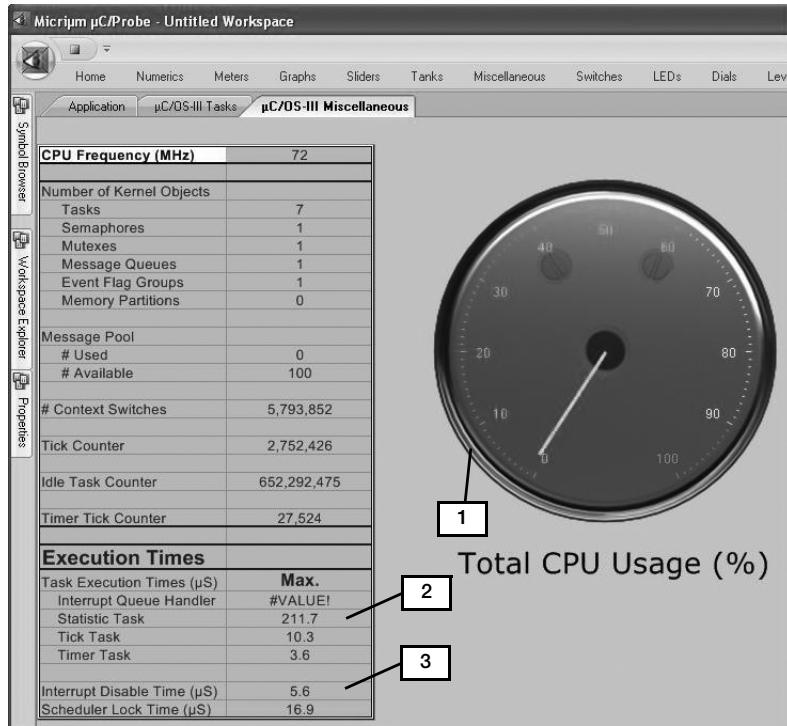


Figure 6-5 μ C/OS-III Miscellaneous Screen

- F6-5(1) The large meter indicates the total CPU usage for the code running this application. As you can see, this represents only 1%.
- F6-5(2) μ C/OS-III computes the maximum execution time of the statistic, tick, and timer tasks. These values are shown in microseconds.
- F6-5(3) Finally, μ C/OS-III measures the maximum amount of time interrupts are disabled, as well as the maximum amount of time the scheduler is locked.

6-5 SUMMARY

This example showed only a fraction of the performance measurements performed by µC/OS-III.

In most applications, you should leave performance measurement in the code because it gives better visibility into the application and how it is behaving. Argument checking protects the code in case features are later added. I recommend taking the safer approach unless every ounce of performance is needed in an application. Because µC/OS-III should only use between 2 to 4% of the CPU time, having the best performance out of µC/OS-III should have very little impact on the overall performance of a system.

With µC/Probe, it is possible to show the performance data of the application tasks. However, the Trial Version of µC/Probe limits you to display only 8 of your variables (you can display all of µC/OS-III's variables because µC/Probe is µC/OS-III aware). µC/OS-III licensees will receive one free license of the full version of µC/Probe.

Chapter 7

μ C/OS-III Example #4

This chapter involves a more complex example using a timer to simulate the rotational speed of a wheel (Revolutions Per Minute (RPM)). This is similar to the example provided in Section 14-7 in Part I of this book. Figure 7-1 shows a block diagram of the system.

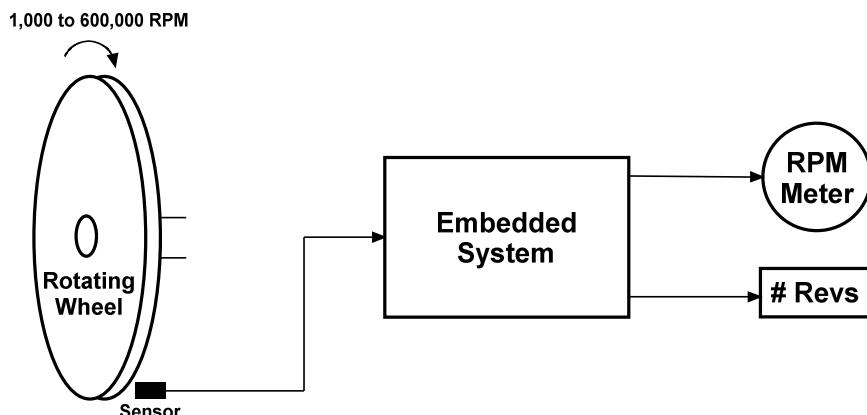


Figure 7-1 **RPM Measurement**

As you can see, the embedded system will measure and display the RPM of the wheel, as well as indicate the number of revolutions.

The rotating wheel will be simulated using a timer generating a frequency from 17 Hz to 10,000 Hz, which represents 1,000 to 600,000 RPM, respectively. Although it is doubtful that a wheel is able to spin at 600,000 RPM (Turbine engines rotate at about 20,000 RPM), the example causes a lot of interrupts that demonstrates certain aspects of μ C/OS-III.

Using μ C/Probe, we'll be able to change the frequency of the timer using a 'slider' (*i.e.* virtual potentiometer). μ C/Probe will also display the RPM and the number of revolutions along with other interesting values.

As before, the µC/Eval-STM32F107 evaluation board is used.

It is assumed that you have read the previous three chapters, and are comfortable with the tools (Embedded Workbench and µC/Probe). It is also assumed that you have the µC/Eval-STM32F107 connected to a PC.

Start the IAR Embedded Workbench for ARM and open the following workspace:

\Micrium\Software\EvalBoards\Micrium\µC-Eval-STM32F107\IAR\µC-Eval-STM32F107.eww

Click on the uCOS-III-Ex4 tab at the bottom of the workspace explorer to select the fourth project. Notice that the workspace looks identical to the workspace of the previous examples. The only file that changed is app.c.

7-1 RUNNING THE PROJECT

Click on the ‘Download and Debug’ button on the far right in the IAR Embedded Workbench as shown in Figure 7-2.



Figure 7-2 Starting the debugger

Embedded Workbench will compile and link the example code and program the object file onto the Flash of the STM32F107 using the J-Link debugger, which is built onto the µC/Eval-STM32F107 board. The code will start executing and stop at `main()` in `app.c`.

Click on the debugger’s ‘Go’ button to continue execution and verify that all three LEDs are blinking.

7-2 DISPLAYING ROTATING WHEEL DATA

Start μ C/Probe and open the `uCOS-III-Ex4-Probe.wsp` workspace found in the following directory:

`\Micrium\Software\EvalBoards\Micrium\uC-Eval-STM32F107\IAR\uCOS-III-Ex4`

Select the ‘Application’ tab and click on the μ C/Probe ‘Run’ button. The screen should appear as the one shown in Figure 7-3.

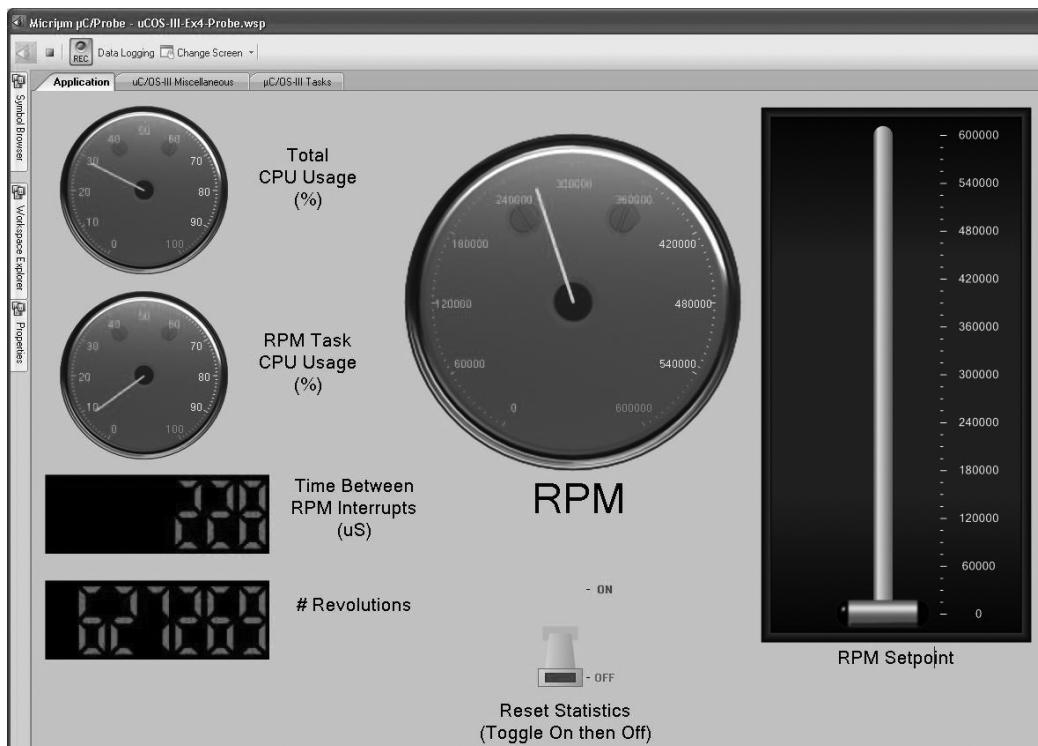


Figure 7-3 RPM Example User Interface using μ C/Probe

The big meter in the center represents the RPM of the wheel (0 to 600,000).

The numeric display on the bottom left represents the number of revolutions that the wheel performed so far.

Chapter 7


The ‘RPM Setpoint’ slider is used to adjust the RPM of the simulated wheel. This slider changes the frequency of the timer used to simulate the rotation of the wheel. The number on the slider should correspond to the number on the RPM meter.

Two additional meters are shown. The top left meter indicates the total CPU usage of the application code. The meter below it indicates the percentage of CPU time used by the RPM measurement task (described later) as a percentage of the total CPU time used. As shown on Figure 7-3, the RPM task consumes 17% of the total CPU usage, which is 28%. In other words, the RPM task consumes 4.76% of the total CPU time (17% of 28%).

The numeric indicator above the ‘# Revolutions’ represents the time it takes for the wheel to complete one revolution (in microseconds). When the slider is all the way down, this indicator will display 60,000 (60 milliseconds) and when all the way up, 100 microseconds.

The toggle switch on the right is used to reset the µC/OS-III statistics by calling `OSStatReset()` whenever the switch is toggled up and then down.

Figure 7-4 shows the statistics on the µC/OS-III tasks.

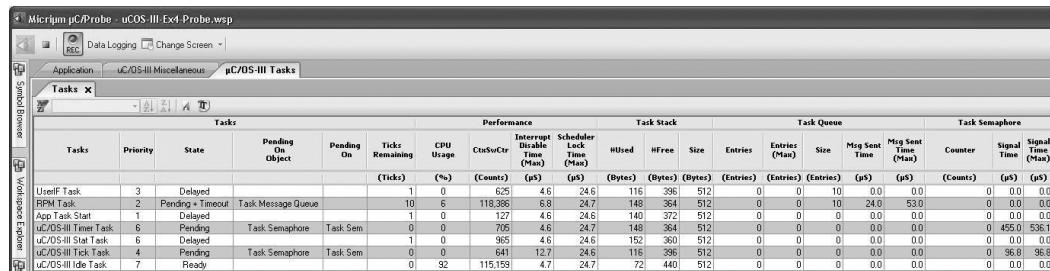

Tasks	Priority	State	Pending On Object	Pending On	Ticks Remaining	CPU Usage	CtuSvCtr	Interrupt Disable Time (μs)	Scheduler Lock Max Time (μs)	Task Stack		Task Queue		Task Semaphore			
										(Ticks)	(%)	(Counts)	(μs)	(Bytes)	(Bytes)	(Bytes)	(Entries)
UseIIF Task	3	Delayed			1	0	625	4.6	24.6	116	396	512	0	0	10	0.00	0.00
RPM Task	2	Pending + Timeout	Task Message Queue		10	6	118,386	5.8	24.7	148	364	512	0	0	10	24.0	53.0
App1 Task Stat	1	Delayed			1	0	127	4.6	24.6	140	372	512	0	0	0	0.00	0.00
uC/OS-III Timer Task	6	Pending	Task Semaphore	Task Sem	0	0	705	4.6	24.7	148	364	512	0	0	0	0.00	0.00
uC/OS-III Stat Task	6	Delayed			1	0	965	4.6	24.6	152	360	512	0	0	0	0.00	0.00
uC/OS-III Tick Task	4	Pending	Task Semaphore	Task Sem	0	0	641	12.7	24.6	116	396	512	0	0	0	0.00	0.00
uC/OS-III Idle Task	7	Ready			0	92	115,159	4.7	24.7	72	440	512	0	0	0	0.00	0.00

Figure 7-4 µC/OS-III Tasks

The idle task indicates 63% since the RPM is cranked all the way up to 600,000 on the slider.

The Tick, Statistics and Timer tasks barely consume any CPU time since they are very low overhead tasks.

7-3 RPM MEASUREMENT SIMULATION IMPLEMENTATION

Figure 7-5 shows a block diagram of the ISRs and tasks involved. The example consists of two tasks and an ISR. One task is used to monitor changes of a virtual potentiometer and switch, both provided by μ C/Probe.

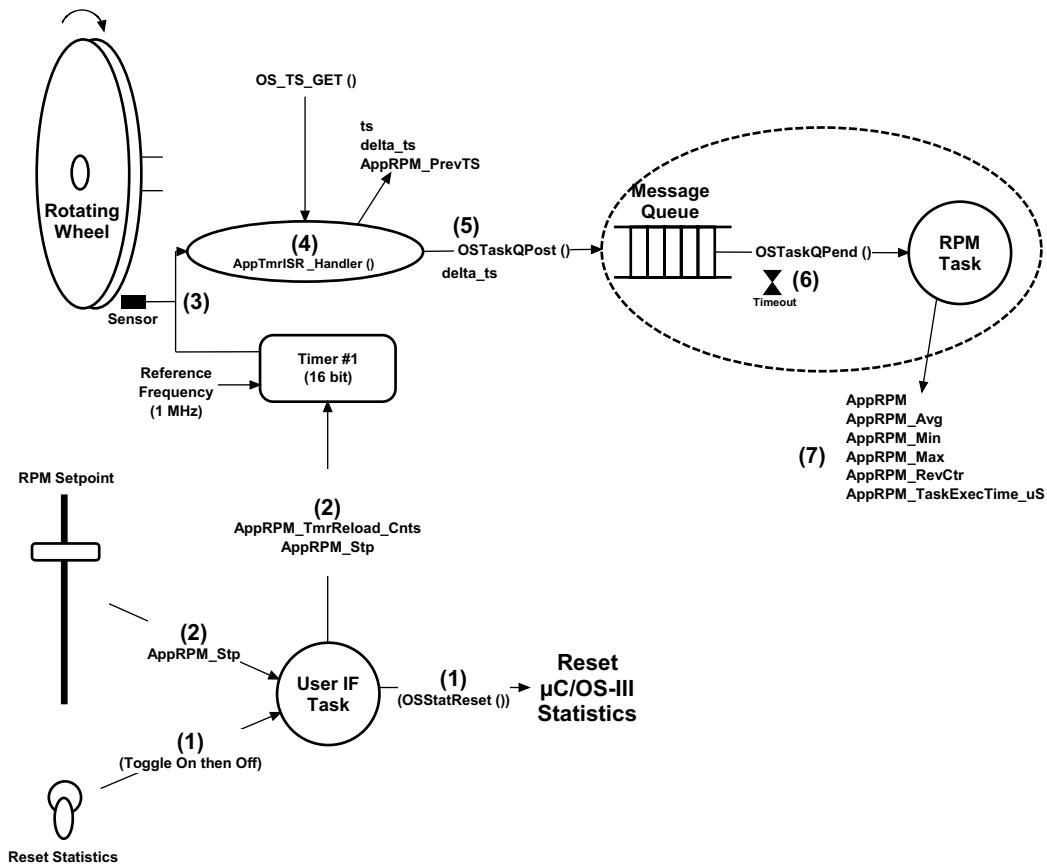


Figure 7-5 Measuring and computing RPM

- F7-5(1) The statistics reset switch is read by the User Interface task every 100 milliseconds. When toggled from off to on, `OSStatReset()` is called. To reset the statistics, return the toggle switch back to the off position and repeat the process.
- F7-5(2) The User Interface task also monitors the value of the slider (`AppRPM_Stp`) and converts this value to the reload counts (`AppRPM_TmrReload_Cnts`) used by the timer to simulate the rotation of the wheel (*i.e.* Timer #1 of the STM32F107).
- F7-5(3) Timer #1 is a 16-bit down counter that automatically reloads itself when the count reaches zero. As shown, the reference frequency for the timer is set to 1 MHz and thus, the timer can generate frequencies from 15.25 Hz (65535 counts) to 1 MHz (1 count). Upon timing out, the timer will generate an interrupt.
- F7-5(4) The interrupt service routine simulates the reading of an Input Capture (described later) by reading the current timestamp. Recall that on the Cortex-M3, the timestamp comes from the `DWT_CYCCNT` register, which is a 32-bit counter that counts CPU clock cycles. On the µC/Eval-STM32F107, the counter increments at 72 MHz, providing plenty of resolution. The timestamp is subtracted from the previous timestamp to compute the time between interrupts.
- F7-5(5) The delta time is posted to the RPM task's built-in message queue.
- F7-5(6) When the ISR exits and, if the RPM task is the highest priority task ready to run, then µC/OS-III will context switch to this task. The RPM task extracts the received message from its message queue and computes the RPM, which is given by:

$$\text{AppRPM} = \frac{60}{\text{TimeForOneRevolution}}$$

or,

$$\text{AppRPM} = \frac{60 \times 72,000,000}{\text{delta_ts}}$$

The computation is performed using floating-point math because $60 \times 72,000,000$ exceeds the range of a 32-bit unsigned number.

-
- F7-5(7) The RPM task also keeps track of the number of revolutions that corresponds to the number of times the task was posted. In fact, this also corresponds to the number of times the task has been context switched to, and this is saved in the task's OS_TCB. However, the information in the TCB should not be read by the application code.

7

The average RPM (AppRPM_Avg) is computed by filtering the RPM value by taking 1/16th of the current value and adding 15/16th of the previous value as shown below:

$$\text{AppRPM_Avg} = \frac{\text{AppRPM}}{16} + \frac{15 \times \text{AppRPM_Avg}}{16}$$

The RPM task also detects the maximum RPM (AppRPM_Max) and the minimum RPM (AppRPM_Min).

7-3-1 MEASURING RPM USING AN INPUT CAPTURE

Normally, RPM (or period) measurement is performed using a special timer found on many microcontrollers called an *input capture*. Figure 7-6 shows how this works.

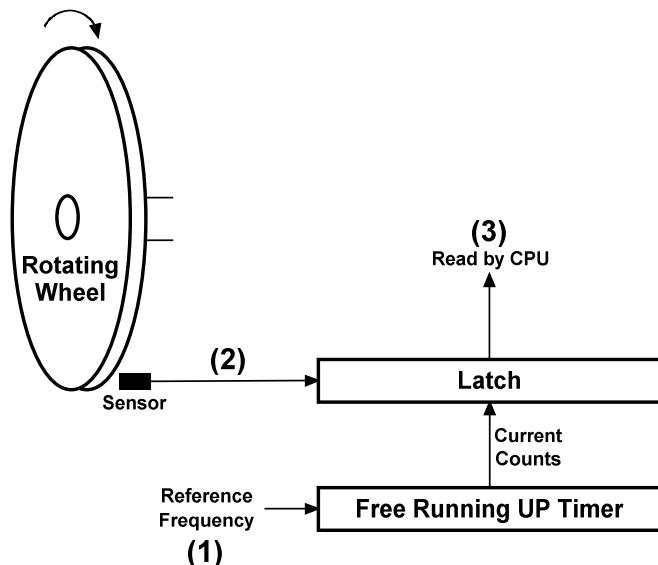


Figure 7-6 Using an Input Capture to measure RPM

- F7-6(1) A reference frequency feeds a free running up counter. Many input captures are only 16-bit, which limits the range of values measured. However, modern microcontrollers offer 32-bit input captures, which offer a wide dynamic range.
- F7-6(2) When the sensor detects one revolution of the wheel, it ‘latches’ (or captures) the current value of the free running timer.
- F7-6(3) The CPU is generally interrupted at the same time and the CPU reads the latched value. The time the wheel took to complete a full revolution is determined by subtracting the current latched value from the previous latched value. The RPM is thus:

$$\text{RPM} = \frac{60 \times \text{ReferenceFrequency}}{\text{CurrentLatched} - \text{PreviousLatched}}$$

7-4 HOW THE CODE WORKS

`main()` and `AppTaskStart()` are identical to the previous examples.

The code for the user interface task is shown in Listing 7-1.

```

static void AppTaskUserIF (void *p_arg)
{
    OS_ERR      err;

    (void)p_arg;
    while (DEF_TRUE) {
        BSP_LED_Toggle(3);
        OSTimeDlyHMSM(0, 0, 0, 100,
                      OS_OPT_TIME_HMSM_STRICT,
                      &err);
        if (AppRPM_Stp > 1000u) {                                (1)
            AppRPM_TmrReload_Cnts = (CPU_INT16U)(60000000uL / AppRPM_Stp);
        } else {
            AppRPM_TmrReload_Cnts = (CPU_INT16U)60000u;
        }
        TIM1->ARR = AppRPM_TmrReload_Cnts;                      (2)
        if (AppStatResetSw != DEF_FALSE) {                        (3)
            OSSStatReset(&err);
            AppStatResetSw = DEF_FALSE;
        }
    }
}

```

Listing 7-1 `AppTaskUserIF()` in `app.c`

- F7-6(4) The RPM setpoint variable is changed by μ C/Probe (the slider). Since a 16-bit timer is used to simulate the RPM, the RPM cannot go lower than 1,000 (16 Hz) based on the 1 MHz reference frequency feeding Timer #1. The reload value is then computed from the setpoint.
- F7-6(5) The reload register of Timer #1 is updated.
- F7-6(6) The μ C/OS-III statistics are reset if the user toggles the switch (See the screenshot of Figure 7-3), which maps to `AppStatResetSw` from μ C/Probe.

Chapter 7

The code for the RPM task is shown in Listing 7-2.

```
static void AppTaskRPM (void *p_arg)
{
    OS_ERR      err;
    CPU_INT32U  cpu_clk_freq_mhz;
    CPU_INT32U  rpm_delta_ic;
    OS_MSG_SIZE msg_size;
    CPU_TS      ts;
    CPU_TS      ts_start;
    CPU_TS      ts_end;

    (void)p_arg;
    AppRPM_PrevTS    = OS_TS_GET();                                (1)
    AppTmrInit(200);                                              (2)
    cpu_clk_freq_mhz = BSP_CPU_ClkFreq() / (CPU_INT32U)1000000;     (3)
    AppRPM_RevCtr    = 0u;
    AppRPM_Max       = (CPU_FP32)0.0;
    AppRPM_Min       = (CPU_FP32)99999999.9;
```

Listing 7-2 AppTaskRPM() in app.c

- L7-2(1) The current timestamp is read to initialize the ‘previous timestamp value’ required when computing the period of a rotation.
- L7-2(2) Timer #1 is initialized.
- L7-2(3) The number of revolutions, as well as the minimum and maximum detectors.

```

while (DEF_ON) {
    rpm_delta_ic = (CPU_INT32U)OSTaskQPend((OS_TICK      )OSCfg_TickRate_Hz,      (4)
                                              (OS_OPT      )OS_OPT_PEND_BLOCKING,
                                              (OS_MSG_SIZE *)&msg_size,
                                              (CPU_TS      *)&ts,
                                              (OS_ERR      *)&err);
    ts_start = OS_TS_GET();                                (5)
    if (err == OS_ERR_TIMEOUT) {                           (6)
        AppRPM = (CPU_FP32)0;
    } else {
        AppRPM_RevCtr++;
        if (rpm_delta_ic > 0u) {                         (7)
            AppRPM = (CPU_FP32)60 * (CPU_FP32)AppCPU_ClkFreq_Hz
            / (CPU_FP32)rpm_delta_ic;
        } else {
            AppRPM = (CPU_FP32)0;
        }
    }
    if (AppRPM > AppRPM_Max) {                           (9)
        AppRPM_Max = AppRPM;
    }
    if (AppRPM < AppRPM_Min) {                           (10)
        AppRPM_Min = AppRPM;
    }
    AppRPM_Avg = (CPU_FP32)0.0625 * AppRPM
                + (CPU_FP32)0.9375 * AppRPM_Avg;
    ts_end = OS_TS_GET();
    AppRPM_TaskExecTime_us = (ts_end - ts_start)
                            / cpu_clk_freq_mhz;           (11)
    BSP_LED_Toggle(1);
}
}

```

- L7-2(4) The task then waits until a message is sent to it. The message is actually the ‘delta timestamp,’ which represents one complete revolution of the simulated wheel.
- L7-2(5) When a message is received, another timestamp is taken, which is used to measure the execution time of this task (See item (11) below).
- L7-2(6) If the pend on the message queue timed out, the RPM is 0 indicating that the wheel is not turning. In our simulation, this should never happen since the minimum frequency is 16 Hz.
- L7-2(7) The revolutions counter is updated.

Chapter 7

- L7-2(8) The RPM is computed based on the time it took between interrupts. Note that you should always have code that checks for divide by zero.
- L7-2(9) The minimum and maximum RPM detectors are updated.
- L7-2(10) The average RPM is computed using a simple filter.
- L7-2(11) Finally, the execution time of the task is determined (it should be approximately seven microseconds).

The code for the timer ISR (that simulates a input capture) is shown in Listing 7-3.

```
static void AppTmrISR_Handler (void)
{
    OS_ERR err;
    CPU_TS ts;
    CPU_TS delta_ts;

    ts          = OS_TS_GET();                                (1)
    delta_ts    = ts - AppRPM_PrevTS;                        (2)
    AppRPM_PrevTS = ts;
    TIM_ClearITPendingBit(TIM1, TIM_IT_Update);              (3)
    OSTaskQPost((OS_TCB *) &AppTaskRPM_TCB,                (4)
                (void *)delta_ts,
                (OS_MSG_SIZE)sizeof(CPU_TS),
                (OS_OPT     )OS_OPT_POST_FIFO,
                (OS_ERR     *)&err);
}
```

Listing 7-3 AppTmrISR_Handler() in app.c

- L7-3(1) The timestamp is read to simulate reading the input capture ‘latch’ register.
- L7-3(2) The time between interrupts (*i.e.* input captures) is computed.
- L7-3(3) The timer interrupt is cleared to avoid re-entering the same interrupt upon exiting the ISR.
- L7-3(4) The delta counts are posted to the RPM task.

7-5 OBSERVATIONS

μ C/OS-III's `OSTaskQPost()` already takes a snapshot of the timestamp when a message is posted. As a result, the ISR and RPM tasks could have been written somewhat differently to make use of this feature. If you are not using an input capture there will be some inaccuracies in the measurement.

Specifically, it is not necessary to read the timestamp in the ISR, compute the delta, and post the delta to the RPM task. Instead, the ISR could have simply done the following:

```
static void AppTmrISR_Handler (void)
{
    OSTaskQPost((OS_TCB      *)&AppTaskRPM_TCB,
                (void        *)0,
                (OS_MSG_SIZE)0,
                (OS_OPT       )OS_OPT_POST_FIFO,
                (OS_ERR       *)&err);
    TIM_ClearITPendingBit(TIM1, TIM_IT_Update);
}
```

The only difference is that the timestamp is read slightly later (because it is read in `OSTaskQPost()`). However, the timestamp is read fairly early in `OSTaskQPost()`.

There is no need to post anything since the timestamp is what we are looking for when `OSTaskQPend()` returns in the RPM task. Because of this, we could have used `OSTaskSemPost()` and `OSTaskSemPend()` and would have obtained the same result.

The RPM task can also compute deltas to reduce ISR processing time. The RPM task would be as follows (only the changes are shown in bold):

```

while (DEF_TRUE) {
    (void)OSTaskQPend((OS_TICK           )OSCfg_TickRate_Hz,
                      (OS_OPT            )OS_OPT_PEND_BLOCKING,
                      (OS_MSG_SIZE * )&msg_size,
                      (CPU_TS          * )&ts,
                      (OS_ERR          * )&err);
    ts_start = OS_TS_GET();
    if (err == OS_ERR_TIMEOUT) {
        AppRPM = (CPU_FP32)0;
    } else {
        AppRPM_RevCtr++;
        rpm_delta_ic  = ts - AppRPM_PrevTS;
        AppRPM_PrevTS = ts;
        if (rpm_delta_ic > 0u) {
            AppRPM = (CPU_FP32)60 * (CPU_FP32)AppCPU_ClkFreq_Hz
                / (CPU_FP32)rpm_delta_ic;
        } else {
            AppRPM = (CPU_FP32)0;
        }
    }
    :
    /* Rest of the code here */
    :
}
}

```

7-6 SUMMARY

This example showed how to measure the RPM of a wheel. The wheel was simulated using a timer. The RPM generated was grossly exaggerated to create a high interrupt rate (up to 10,000 Hz).

μ C/CPU provides the capability to obtain timestamps, which are used to measure execution times and the time between interrupts.

μ C/Probe is a highly useful tool that can display nearly any run-time data from an application. This information is highly useful during debugging since it allows you to "see" things that are not visible on most deeply embedded systems.

Appendix

A

μ C/OS-III port for the Cortex-M3

This appendix describes the adaptation of μ C/OS-III to the Cortex-M3 which is called a *port*.

The port files are found in the following directory:

`\Micrium\Software\uCOS-III\Ports\ARM-Cortex-M3\Generic\IAR`

The port consists of three files:

```
os_cpu.h  
os_cpu_c.c  
os_cpu_a.asm
```

A-1 OS_CPU.H

`os_cpu.h` contains processor- and implementation-specific `#defines` constants, macros, and typedefs. `os_cpu.h` is shown in Listing A-1.

```

#ifndef OS_CPU_H (1)
#define OS_CPU_H
#ifndef OS_CPU_GLOBALS (2)
#define OS_CPU_EXT
#else
#define OS_CPU_EXT extern
#endif
/*
*****
* MACROS
*****
*/
#ifndef NVIC_INT_CTRL
#define NVIC_INT_CTRL      *((CPU_REG32 *)0xE000ED04)
#endif

#ifndef NVIC_PENDSVSET
#define NVIC_PENDSVSET    0x10000000
#endif
#define OS_TASK_SW()        NVIC_INT_CTRL = NVIC_PENDSVSET (3)
#define OSIntCtxSw()        NVIC_INT_CTRL = NVIC_PENDSVSET

#if OS_CFG_TS_EN == 1u
#define OS_TS_GET()        (CPU_TS)CPU_TS_TmrRd() (4)
#else
#define OS_TS_GET()        (CPU_TS)0u
/*
*****
* PROTOTYPES
*****
*/
void OSCtxSw          (void); (5)
void OSIntCtxSw        (void);
void OSSStartHighRdy   (void);
void OS_CPU_PendSVHandler (void); (6)
void OS_CPU_SysTickHandler (void);
void OS_CPU_SysTickInit  (CPU_INT32U cnts); (7)
#endif

```

Listing A-1 `os_cpu.h`

-
- LA-1(1) Typical multiple header file inclusion protection.
 - LA-1(2) `OS_CPU_GLOBALS` and `OS_CPU_EXT` allow us to declare global variables that are specific to this port. However, the port doesn't contain any global variables and thus these statements are just included for completeness and consistency.
 - LA-1(3) The task and ISR level context switch code is performed by triggering the PendSV handler on the Cortex-M3. The PendSV handler is implemented in `os_cpu_a.asm`.
 - LA-1(4) Timestamps are obtained by calling `CPU_TS_TmrRd()`. On the Cortex-M3, `CPU_TS_TmrRd()` reads the `DWT_CYCCNT` register which is a 32-bit free-running up counter.
 - LA-1(5) The prototypes of mandatory μ C/OS-III functions.
 - LA-1(6) The Cortex-M3 processor provides a special interrupt handler specifically designed for use by context switch code. This is called the PendSV Handler and is implemented by `OS_CPU_PendSVHandler()`. The function is found in `os_cpu_a.asm`.
 - LA-1(7) The Cortex-M3 has a timer dedicated for RTOS use called the SysTick. The code to initialize and handle the SysTick interrupt is found in `os_cpu_c.c`. Note that this code is part of the μ C/OS-III port file and not the Board Support Package (`bsp.c`), because the SysTick is available to all Cortex-M3 implementations and is always handled the same by μ C/OS-III.

A-2 OS_CPU_C.C

A μC/OS-III port requires that the following functions be declared:

```
OSIdleTaskHook()
OSInitHook()
OSStatTaskHook()
OSTaskCreateHook()
OSTaskDelHook()
OSTaskReturnHook()
OSTaskStkInit()
OSTaskSwHook()
OSTimeTickHook()
```

The Cortex-M3 port implements two additional functions as described in the previous sections:

```
OS_CPU_SysTickHandler()
OS_CPU_SysTickInit()
```

A-2-1 OS_CPU_C.C – OSIdleTaskHook()

The idle task hook allows the port developer to extend the functionality of the idle task. For example, you can place the processor in low power mode when no other higher-priority tasks are running. This is especially useful in battery-powered applications. Listing A-2 shows the typical code for `OSIdleTaskHook()`.

```
void OSIdleTaskHook (void)
{
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppIdleTaskHookPtr != (OS_APP_HOOK_VOID)0) {           (1)
        (*OS_AppIdleTaskHookPtr)();                                (2)
    }
#endif
}
```

Listing A-2 `os_cpu_c.c – OSIdleTaskHook()`

-
- LA-2(1) Application level hook functions are enabled by `os_CFG_APP_HOOKS_EN`.
 - LA-2(2) If the application developer wants his/her own function to be called on every iteration of the idle task, the developer needs to initialize the value of `OS_AppIdleTaskHookPtr` to point to the desired function to call.

Note that μ C/OS-III initializes `OS_AppIdleTaskHookPtr` to `NULL` when `OSInit()` is called and therefore, the code must set this pointer only after calling `OSInit()`.

The application hook function *must not* make any blocking calls because the idle task must never block. In other words, it cannot call `OSTimeDly()`, `OSTimeDlyHMSM()`, or `OSTaskSuspend()` (to suspend ‘self’), and any of the `OS??Pend()` functions.

Examples of application hooks are found in `os_app_hooks.c`.

- LA-2(3) The application level idle task hook is called without any argument.

A-2-2 OS_CPU_C.C – OSInitHook()

Listing A-3 shows the typical code for `OSInitHook()`.

```
void OSInitHook (void)
{
}
```

Listing A-3 `os_cpu_c.c – OSInitHook()`

`OSInitHook()` does not call any application level hook functions because it can’t and thus, there are no application hook function pointer. The reason for this is that `OSInit()` initializes all the application hook pointers to `NULL` and because of that, it would not be possible to redefine the application init hook pointer before `OSInit()` returns.

A-2-3 OS_CPU_C.C – OSStatTaskHook()

`OSTaskStatHook()` allows you to extend the functionality of the statistic task by allowing him/her to add additional statistics. `OSStatTaskHook()` is called after computing the total CPU usage (see `OS_StatTask()` in `os_stat.c`). Listing A-4 shows the typical code for `OSStatTaskHook()`.

```
void OSStatTaskHook (void)
{
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppStatTaskHookPtr != (OS_APP_HOOK_VOID)0) {           (1)
        (*OS_AppStatTaskHookPtr)();                                (2)
    }
#endif
}
```

Listing A-4 `os_cpu_c.c – OSStatTaskHook()`

- LA-4(1) If you wants your own function to be called by µC/OS-III's statistic task (i.e. `OS_StatTask()`) then the developer needs to initialize the value of `OS_AppStatTaskHookPtr` to point to the desired function to call.

Note that µC/OS-III initializes `OS_AppStatTaskHookPtr` to `NULL` when `OSInit()` is called and therefore, the code must set this pointer only after calling `OSInit()`.

The application hook function *must not* make any blocking calls because it would affect the behavior of the statistic task. Examples of application hooks are found in `os_app_hooks.c`.

- LA-4(2) The application-level statistic task hook is called without any argument.

A-2-4 OS_CPU_C.C – OSTaskCreateHook()

`OSTaskCreateHook()` gives the port developer the opportunity to add code specific to the port when a task is created. `OSTaskCreateHook()` is called once the `OS_TCB` fields are initialized, but prior to making the task ready to run. Listing A-5 shows the typical code for `OSTaskCreateHook()`.

```
void OSTaskCreateHook (OS_TCB *p_tcb)
{
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppTaskCreateHookPtr != (OS_APP_HOOK_TCB)0) {           (1)
        (*OS_AppTaskCreateHookPtr)(p_tcb);                            (2)
    }
#else
    (void)&p_tcb;          /* Prevent compiler warning */
#endif
}
```

Listing A-5 `os_cpu_c.c – OSTaskCreateHook()`

- LA-5(1) If the application developer wants his/her own function to be called when a task is created, the developer needs to initialize the value of `OS_AppTaskCreateHookPtr` to point to the desired function to call.

The application hook function *must not* make any blocking calls and should perform its function as quickly as possible.

Note that μ C/OS-III initializes `OS_AppTaskCreateHookPtr` to `NULL` when `OSInit()` is called. The code must set this pointer only after calling `OSInit()`.

Examples of application hooks are found in `os_app_hooks.c`.

- LA-5(2) The application level task create hook is passed the address of the `OS_TCB` of the task being created.

A-2-5 OS_CPU_C.C – OSTaskDelHook()

`OSTaskDelHook()` gives the port developer the opportunity to add code specific to the port when a task is deleted. `OSTaskDelHook()` is called once the task has been removed from all lists (the ready list, the tick list or a pend list). Listing A-6 shows the typical code for `OSTaskDelHook()`.

```
void OSTaskDelHook (OS_TCB *p_tcb)
{
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppTaskDelHookPtr != (OS_APP_HOOK_TCB)0) {           (1)
        (*OS_AppTaskDelHookPtr)(p_tcb);                            (2)
    }
#else
    (void)&p_tcb;          /* Prevent compiler warning */
#endif
}
```

Listing A-6 os_cpu_c.c – OSTaskDelHook()

- LA-6(1) If the application developer wants his/her own function to be called when a task is deleted, the developer needs to initialize the value of `OS_AppTaskDelHookPtr` to point to the desired function to call.

The application hook function *must not* make any blocking calls, and should perform its function as quickly as possible.

You should note that μC/OS-III initializes `OS_AppTaskDelHookPtr` to `NULL` when `OSInit()` is called and the code must set this pointer only after calling `OSInit()`.

Examples of application hooks are found in `os_app_hooks.c`.

- LA-6(2) The application level task delete hook is passed the address of the `OS_TCB` of the task being created.

A-2-6 OS_CPU_C.C – OSTaskReturnHook()

With μ C/OS-III, a task is never allowed to return. However, if this happens ‘accidentally,’ μ C/OS-III will catch this and delete the offending task. However, `OSTaskDelHook()` will be called before the task is deleted. Listing A-7 shows the typical code for `OSTaskReturnHook()`.

```
void OSTaskReturnHook (OS_TCB *p_tcb)
{
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppTaskReturnHookPtr != (OS_APP_HOOK_TCB)0) {           (1)
        (*OS_AppTaskReturnHookPtr)(p_tcb);                            (2)
    }
#else
    (void)&p_tcb;          /* Prevent compiler warning */
#endif
}
```

Listing A-7 `os_cpu_c.c – OSTaskReturnHook()`

- LA-7(1) If the application developer wants his/her own function to be called when a task returns, the developer needs to initialize the value of `OS_AppTaskReturnHookPtr` to point to the desired function to call.

The application hook function *must not* make any blocking calls and should perform its function as quickly as possible.

Note that μ C/OS-III initializes `OS_AppTaskReturnHookPtr` to `NULL` when `OSInit()` is called and the code must set this pointer only after calling `OSInit()`.

Examples of application hooks are found in `os_app_hooks.c`.

- LA-7(2) The application level task return hook is passed the address of the `OS_TCB` of the task being created.

A-2-7 OS_CPU_C.C – OSTaskStkInit()

This function initializes the stack frame of a task being created. When µC/OS-III creates a task it makes its stack look as if an interrupt just occurred and simulates pushing the context of the task onto the task stack. `OSTaskStkInit()` is called by `OSTaskCreate()`.

Listing A-8 shows the Cortex-M3 code for `OSTaskStkInit()`.

```
CPU_STK *OSTaskStkInit (OS_TASK_PTR p_task,          (1)
                       void      *p_arg,
                       CPU_STK   *p_stk_base,
                       CPU_STK   *p_stk_limit,
                       CPU_STK_SIZE stk_size,
                       OS_OPT     opt)
{
    CPU_STK  *p_stk;

    (void)&opt;
    (void)&p_stk_limit;
    p_stk   = &p_stk_base[stk_size];           (2)
    *--p_stk = (CPU_INT32U)0x01000000L;       (3)
    *--p_stk = (CPU_INT32U)p_task;            (4)
    *--p_stk = (CPU_INT32U)OS_TaskReturn;      (5)
    *--p_stk = (CPU_INT32U)0x12121212L;        (6)
    *--p_stk = (CPU_INT32U)0x03030303L;
    *--p_stk = (CPU_INT32U)0x02020202L;
    *--p_stk = (CPU_INT32U)p_stk_limit;
    *--p_stk = (CPU_INT32U)p_arg;             (7)
    *--p_stk = (CPU_INT32U)0x11111111L;        (8)
    *--p_stk = (CPU_INT32U)0x10101010L;
    *--p_stk = (CPU_INT32U)0x09090909L;
    *--p_stk = (CPU_INT32U)0x08080808L;
    *--p_stk = (CPU_INT32U)0x07070707L;
    *--p_stk = (CPU_INT32U)0x06060606L;
    *--p_stk = (CPU_INT32U)0x05050505L;
    *--p_stk = (CPU_INT32U)0x04040404L;
    return (p_stk);                         (9)
}
```

Listing A-8 `os_cpu_c.c – OSTaskStkInit()`

LA-8(1) `OSTaskStkInit()` is called by `OSTaskCreate()` and is passed six arguments:

1. The task's entry point (i.e. the address of the task).
2. A pointer to an argument that will be passed to the task when the task starts, i.e. `p_arg`.
3. The base address of the storage area in RAM of the stack. Typically a stack is declared as an array of `CPU_STKs` as shown below.

```
CPU_STK MyTaskStk[stk_size];
```

In this case, the base address is simply `&MyTaskStk[0]`.

1. The address of where the stack limit is to point to. This assumes that the CPU supports stack limit checking. If not then this pointer is not used.
2. The size of the stack is also passed to `OSTaskStkInit()`.
3. Finally, the ‘opt’ argument of `OSTaskCreate()` is passed to `OSTaskStkInit()` in case any of these are needed by `OSTaskStkInit()` for special options.

LA-8(2) A local pointer is initialized to the top-of-stack to initialize. In the case of the Cortex-M3, the stack grows from high memory to low memory and therefore, the top-of-stack is at the highest address of the stack storage area.

LA-8(3) The Cortex-M3’s PSR register is initialized. The initial value sets the ‘T’ bit in the PSR, which causes the Cortex-M3 to use Thumb instructions (this should always be the case).

LA-8(4) This register corresponds to R15 which is the program counter. We initialize this register to point to the task entry point.

LA-8(5) This register corresponds to R14 (the link register), which contains the return address of the task. As previously mentioned, a task is not supposed to return. This pointer allows us, therefore, to catch this fault and properly terminate the task. μ C/OS-III provides a function just for that purpose, `OS_TaskReturn()`.

LA-8(6) Registers R12, R3, R2 and R1 are initialized to a value that makes it easy for them to be identified when a debugger performs a memory dump.

LA-8(7) R0 is the register used by the C compiler to pass the first argument to a function. Recall that the prototype for a task looks as shown below.

```
void MyTask (void *p_arg);
```

In this case, ‘p_arg’ is simply passed in R0 so that when the task starts, it will think it was called as with any other function.

LA-8(8) Registers R11, R10, R9 and R8, R7, R6, R5 and R4 are initialized to a value that makes it easy for them to be identified when a debugger performs a memory dump.

LA-8(9) Notice that the stack pointer is not decremented after the last register is placed onto the stack. This is because the Cortex-M3 assumes that the stack pointer points to the last element pushed onto the stack.

`OSTaskStkInit()` returns the new top-of-stack pointer to `OSTaskCreate()`, which will save this value in the task’s `OS_TCB` in the `.StkPtr` field.

The stack frame of the task being created is shown in Figure A-1.

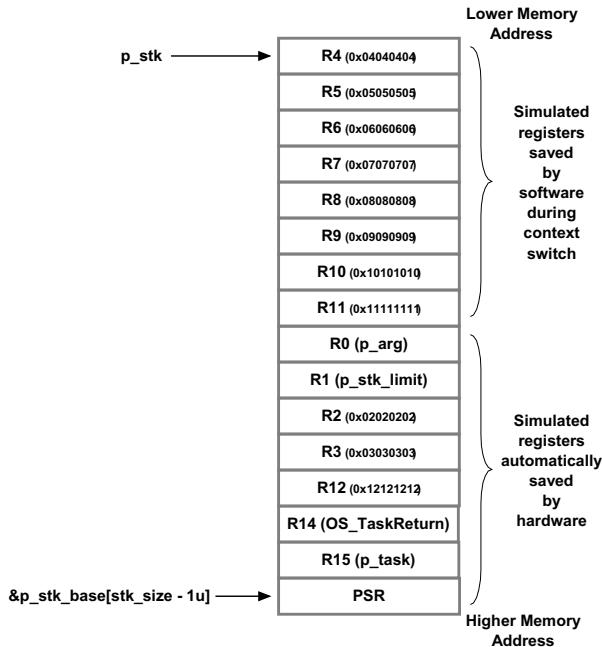


Figure A-1 Stack frame of task being created.

A-2-8 OS_CPU_C.C – OSTaskSwHook()

`OSTaskSwHook()` is called when μ C/OS-III performs a context switch. In fact, `OSTaskSwHook()` is called after saving the context of the task being suspended. Also, `OSTaskSwHook()` is called with interrupts disabled.

Listing A-9 shows the code for `OSTaskSwHook()`. This function is fairly complex and contains a lot of conditional compilation.

Appendix A

```

void OSTaskSwHook (void)
{
#if OS_CFG_TASK_PROFILE_EN > 0u
    CPU_TS      ts;
#endif CPU_CFG_INT_DIS_MEAS_EN
    CPU_TS      int_dis_time;
#endif
#endif
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppTaskSwHookPtr != (OS_APP_HOOK_VOID)0) {           (1)
        (*OS_AppTaskSwHookPtr)();                                (2)
    }
#endif
#if OS_CFG_TASK_PROFILE_EN > 0u
    ts = OS_TS_GET();                                         (3)
    if (OSTCBCurPtr != OSTCBHighRdyPtr) {
        OSTCBCurPtr->CyclesDelta = ts - OSTCBCurPtr->CyclesStart;
        OSTCBCurPtr->CyclesTotal += (OS_CYCLES)OSTCBCurPtr->CyclesDelta;
    }
    OSTCBHighRdyPtr->CyclesStart = ts;                         (4)
#endif CPU_CFG_INT_DIS_MEAS_EN
    int_dis_time = CPU_IntDisMeasMaxCurReset();
    if (int_dis_time > OSTCBCurPtr->IntDisTimeMax) {
        OSTCBCurPtr->IntDisTimeMax = int_dis_time;
    }
#endif OS_CFG_SCHED_LOCK_TIME_MEAS_EN > 0u
    if (OSSchedLockTimeMaxCur > OSTCBCurPtr->SchedLockTimeMax) { (6)
        OSTCBCurPtr->SchedLockTimeMax = OSSchedLockTimeMaxCur;
    }
    OSSchedLockTimeMaxCur = (CPU_TS)0;
#endif
#endif
}

```

Listing A-9 **os_cpu_c.c – OSTaskSwHook()**

- LA-9(1) If the application developer wants his/her own function to be called when a context switch occurs, the developer needs to initialize the value of **OS_AppTaskSwHookPtr** to point to the desired function to call.

The application hook function *must not* make any blocking calls and should perform its function as quickly as possible.

Note that μ C/OS-III initializes `OS_AppTaskSwHookPtr` to `NULL` when `OSInit()` is called and your code must set this pointer only after calling `OSInit()`.

Examples of application hooks are found in `os_app_hooks.c`.

- LA-9(2) The application level task switch hook is not passed any arguments. However, the global μ C/OS-III variables `OSTCBCurPtr` and `OSTCBHighRdyPtr` will point to the `OS_TCB` of the task being switched out and the `OS_TCB` of the task being switched in, respectively.
- LA-9(3) This code measures the execution time of each task. This will be used by the statistic task to compute the relative CPU usage (in percentage) that each task uses.

If task profiling is enabled (i.e. `OS_CFG_TASK_PROFILE_EN` is set to 1) then we obtain the current timestamp. If we are switching to a new task, we simply compute how long the task that is being switched out ran for. We then accumulate this in the `.CyclesTotal` field (64 bits) of the `OS_TCB` for that task.

- LA-9(4) `OSTaskSwHook()` stores the timestamp read as the beginning time of the new task being switched in.

Note is that the execution time of each task also includes the execution time of any interrupt that occurred while the task was executing. It would be possible to exclude this, but it would require more overhead on the CPU.

- LA-9(5) If `CPU_CFG_INT_DIS_MEAS_EN` is set to 1, μ C/CPU measures the interrupt disable time on a per-task basis. The code simply detects the maximum amount of interrupt disable time for each task and stores it in the `.IntDisTimeMax` field of the `OS_TCB` for the task being switched out.
- LA-9(6) If `OS_CFG_SCHED_LOCK_TIME_MEAS_EN` is set to 1, μ C/OS-III keeps track of the maximum amount of time a task will have the scheduler locked for critical sections. This value is saved in the `.SchedLockTimeMax` field of the `OS_TCB` of the task being switched out.

A-2-9 OS_CPU_C.C – OSTimeTickHook()

`OSTimeTickHook()` gives the port developer the opportunity to add code that will be called by `OSTimeTick()`. `OSTimeTickHook()` is called from the tick ISR and must not make any blocking calls (it would be allowed to anyway) and must execute as quickly as possible.

Listing A-10 shows the typical code for `OSTimeTickHook()`.

```
void OSTimeTickHook (void)
{
#if OS_CFG_APP_HOOKS_EN > 0u
    if (OS_AppTimeTickHookPtr != (OS_APP_HOOK_VOID)0) {           (1)
        (*OS_AppTimeTickHookPtr)();
    }
#else
    (void)&p_tcb;          /* Prevent compiler warning */
#endif
}
```

Listing A-10 os_cpu_c.c – OSTimeTickHook()

- LA-10(1) If the application developer wants his/her own function to be called when a tick interrupt occurs, the developer needs to initialize the value of `OS_AppTimeTickHookPtr` to point to the desired function to call.

Note that μC/OS-III initializes `OS_AppTimeTickHookPtr` to `NULL` when `OSInit()` is called and the code must set this pointer only after calling `OSInit()`.

Examples of application hooks are found in `os_app_hooks.c`.

- LA-10(2) The application level time tick hook is not passed any arguments.

A-2-10 OS_CPU_C.C – OS_CPU_SysTickHandler()

`OS_CPU_SysTickHandler()` is automatically invoked by the Cortex-M3 when a SysTick interrupt occurs and interrupts are enabled. For this to happen, however, the address of `OS_CPU_SysTickHandler()` must be placed in the interrupt vector table at the SysTick entry (the 16th entry in the vector table of the Cortex-M3).

Listing A-11 shows the Cortex-M3 code for `OS_CPU_SysTickHandler()`.

```
void  OS_CPU_SysTickHandler (void)          (1)
{
    CPU_SR_ALLOC();

    CPU_CRITICAL_ENTER();                   (2)
    OSIntNestingCtr++;
    CPU_CRITICAL_EXIT();                  (3)
    OSTimeTick();                        (4)
    OSIntExit();
}
```

Listing A-11 os_cpu_c.c – OS_CPU_SysTickHandler()

- LA-11(1) When the Cortex-M3 enters an interrupt, the CPU automatically saves critical registers (R0, R1, R2, R3, R12, PC, LR and XPSR) onto the current task's stack and switches to the Main Stack (MSP) to handle the interrupt.

This means that R4 through R11 are not saved when the interrupt starts and the ARM Architecture Procedure Call Standard (AAPCS) requires that all interrupt handlers preserve the values of the other registers, if they are required during the ISR.

- LA-11(2) The interrupt nesting counter is incremented in a critical section because the `SysTick` interrupt handler could be interrupted by a higher priority interrupt.
- LA-11(3) The μ C/OS-III tick interrupt needs to call `OSTimeTick()`.
- LA-11(4) Every interrupt handler must call `OSIntExit()` at the end of the handler.

A-2-11 OS_CPU_C.C – OS_CPU_SysTickInit()

`OS_CPU_SysTickInit()` is called by your application code to initialize the `SysTick` interrupt.

Listing A-12 shows the Cortex-M3 code for `OS_CPU_SysTickInit()`.

```
void OS_CPU_SysTickInit (CPU_INT32U cnts)          (1)
{
    CPU_REG_NVIC_ST_RELOAD = cnts - 1u;             (1)
    CPU_REG_NVIC_SHPRI3   |= 0xFF000000u;           (2)
    CPU_REG_NVIC_ST_CTRL  |= CPU_REG_NVIC_ST_CTRL_CLKSOURCE
                           | CPU_REG_NVIC_ST_CTRL_ENABLE;
    CPU_REG_NVIC_ST_CTRL  |= CPU_REG_NVIC_ST_CTRL_TICKINT;
}
```

Listing A-12 `os_cpu_c.c – OS_CPU_SysTickInit()`

- LA-12(1) `OS_CPU_SysTickInit()` must be informed about the counts to reload into the `SysTick` timer. The counts to reload depend on the CPU clock frequency and the configured tick rate (i.e. `OS_CFG_TICK_RATE_HZ` in `os_cfg_app.h`).

The reload value is typically computed by the first application task to run as follows:

```
cpu_clk_freq = BSP_CPU_ClkFreq();
cnts         = cpu_clk_freq / (CPU_INT32U)OS_CFG_TICK_RATE_HZ;
```

`BSP_CPU_ClkFreq()` is a `bsp.c` function that returns the CPU clock frequency. We then compute reload counts from the tick rate.

- LA-12(2) The `SysTick` interrupt is set to the lowest priority because ticks are mostly used for coarse time delays and timeouts, and we want application interrupts to be handled first.

A-3 OS_CPU_A.ASM

`os_cpu_a.asm` contains processor-specific code for three functions that must be written in assembly language:

```
OSStartHighRdy()
OSCtxSw()
OSIntCtxSw()
```

In addition, the Cortex-M3 requires the definition of a function to handle the PendSV exception.

```
OS_CPU_PendSVHandler()
```

A-3-1 OS_CPU_A.ASM – OSStartHighRdy()

`OSStartHighRdy()` is called by `OSStart()` to start the process of multitasking. μ C/OS-III will switch to the highest priority task that is ready to run.

Listing A-13 shows the Cortex-M3 code for `OSStartHighRdy()`.

```
OSstartHighRdy
    LDR    R0, =NVIC_SYSPRI14                                (1)
    LDR    R1, =NVIC_PENDSV_PRI
    STRB   R1, [R0]
    MOVS   R0, #0
    MSR    PSP, R0
    LDR    R0, =NVIC_INT_CTRL                                 (2)
    LDR    R1, =NVIC_PENDSVSET
    STR    R1, [R0]
    CPSIE I
OSstartHang
    B      OSstartHang                                     (4)
```

Listing A-13 `os_cpu_a.asm` – `OSStartHighRdy()`

- LA-13(1) `OSStartHighRdy()` starts by setting the priority level of the PendSV handler. The PendSV handler is used to perform all context switches and is always set at the lowest priority so that it executes after the last nested ISR.

- LA-13(2) The PendSV handler is invoked by ‘triggering’ it. However, the PendSV will not execute immediately because it is assumed that interrupts are disabled.
- LA-13(3) Interrupts are enabled and this should cause the Cortex-M3 processor to vector to the PendSV handler (described later).
- LA-13(4) The PendSV handler should pass control to the highest-priority task that was created and the code should never come back to `OSStartHighRdy()`.

A-3-2 OS_CPU_A.ASM – OSCtxSw() and OSIntCtxSw()

`OSCtxSw()` is called by `OSSched()` and `OS_Sched0()` to perform a context switch from a task.

`OSIntCtxSw()` is called by `OSIntExit()` to perform a context switch after an ISR has completed.

Both of these functions simply ‘trigger’ the PendSV exception handler, which does the actual context switching.

Listing A-14 shows the Cortex-M3 code for `OSCtxSw()` and `OSIntCtxSw()`.

```

OSCtxSw
    LDR    R0, =NVIC_INT_CTRL
    LDR    R1, =NVIC_PENDSVSET
    STR    R1, [R0]
    BX    LR

OSIntCtxSw
    LDR    R0, =NVIC_INT_CTRL
    LDR    R1, =NVIC_PENDSVSET
    STR    R1, [R0]
    BX    LR

```

Listing A-14 `os_cpu_a.asm – OSCtxSw() and OSIntCtxSw()`

A-3-3 OS_CPU_A.ASM – OS_CPU_PendSVHandler()

`OS_CPU_PendSVHandler()` is the code that performs a context switch initiated by a task, or at the completion of an ISR. `OS_CPU_PendSVHandler()` is invoked by `osStartHighRdy()`, `OSCtxSw()` and `OSIntCtxSw()`.

Listing A-15 shows the Cortex-M3 code for `OS_CPU_PendSVHandler()`.

```

OS_CPU_PendSVHandler
    CPSID    I                                (1)
    MRS      R0, PSP                           (2)
    CBZ      R0, OS_CPU_PendSVHandler_nosave
    SUBS    R0, R0, #0x20                      (3)
    STM     R0, {R4-R11}
    LDR     R1, =OSTCBCurPtr                  (4)
    LDR     R1, [R1]
    STR     R0, [R1]

OS_CPU_PendSVHandler_nosave
    PUSH    {R14}                            (5)
    LDR     R0, =OSTaskSwHook
    BLX     R0
    POP     {R14}
    LDR     R0, =OSPrioCur                   (6)
    LDR     R1, =OSPrioHighRdy
    LDRB   R2, [R1]
    STRB   R2, [R0]
    LDR     R0, =OSTCBCurPtr                  (7)
    LDR     R1, =OSTCBHighRdyPtr
    LDR     R2, [R1]
    STR     R2, [R0]
    LDR     R0, [R2]                          (8)
    LDM     R0, {R4-R11}                     (9)
    ADDS   R0, R0, #0x20
    MSR     PSP, R0                         (10)
    ORR     LR, LR, #0x04
    CPSIE  I                                (11)
    BX      LR                               (12)

```

Listing A-15 `os_cpu_a.asm – OS_CPU_PendSVHandler()`

- LA-15(1) `OS_CPU_PendSVHandler()` starts by disabling all interrupts because interrupt should not occur during a context switch.
- LA-15(2) This code skips saving the remaining 8 registers if this is the first time the PendSV is called. In other words, when `osStartHighRdy()` triggers the PendSV handler, there is nothing to save from the ‘previous task’ as there is no previous task.
- LA-15(3) If `OS_CPU_PendSVHandler()` is invoked from either `OSCtxSw()` or `OSIntCtxSw()`, the PendSV handler saves the remaining eight CPU registers (R4 through R11) onto the stack of the task switched out.
- LA-15(4) `OS_CPU_PendSVHandler()` saves the stack pointer of the task switched out into that task’s `OS_TCB`. Note that the first field of an `OS_TCB` is `.StkPtr` (the task’s stack pointer), which makes it convenient for assembly language code since there are no offsets to determine.
- LA-15(5) The task switch hook (`OSTaskSwHook()`) is then called.
- LA-15(6) `OS_CPU_PendSVHandler()` copies the priority of the new task into the priority of the current task, i.e.:

```
OSPriorCur = OSPrioHighRdy;
```
- LA-15(7) `OS_CPU_PendSVHandler()` copies the pointer to the new task’s `OS_TCB` into the pointer to the current task’s `OS_TCB`, i.e.:

```
OSTCBCurPtr = OSTCBHighRdyPtr;
```
- LA-15(8) `OS_CPU_PendSVHandler()` retrieves the stack pointer from the new task’s `OS_TCB`.
- LA-15(9) CPU registers R4 through R11 from the new task are loaded into the CPU.
- LA-15(10) The task stack pointer is updated with the new top-of-stack pointer.

-
- LA-15(11) Interrupts are re-enabled since we are finished performing the critical portion of the context switch. If another interrupt occurs before we return from the PendSV handler, the Cortex-M3 knows that there are eight registers still saved on the stack, and there would be no need for it to save them. This is called Tail Chaining and it makes servicing back-to-back interrupts quite efficient on the Cortex-M3.
 - LA-15(12) By performing a return from the PendSV handler, the Cortex-M3 processors knows that it is returning from interrupt and will thus restore the remaining registers.

Appendix

B

μ C/CPU port for the Cortex-M3

μ C/CPU consists of files that encapsulate common CPU-specific functionality and CPU compiler-specific data types. Appendix B describes the adaptation of μ C/CPU to the Cortex-M3 as it relates to μ C/OS-III.

Notice how each variable, function, `#define` constant, or macro is prefixed with `CPU_`. This makes it easier to identify them as belonging to the μ C/CPU module when invoked by other modules, or application code.

The μ C/CPU files are found in the following three directories:

```
\Micrium\Software\uC-CPU\cpu_core.c
\Micrium\Software\uC-CPU\cpu_core.h
\Micrium\Software\uC-CPU\cpu_def.h
\Micrium\Software\uC-CPU\Cfg\Template\cpu_cfg.h
\Micrium\Software\uC-CPU\ARM-Cortex-M3\IAR\cpu.h
\Micrium\Software\uC-CPU\ARM-Cortex-M3\IAR\cpu_a.asm
\Micrium\Software\uC-CPU\ARM-Cortex-M3\IAR\cpu_c.c
```

B-1 CPU_CORE.C

`cpu_core.c` contains C code that is common to all CPU architectures and this file must not be changed. Specifically, `cpu_core.c` contains functions to allow μ C/OS-III and your application to obtain time stamps, measure the interrupt disable time of the `CPU_CRITICAL_ENTER()` and `CPU_CRITICAL_EXIT()` macros, a function that emulates a count leading zeros instruction (if the processor does not have that instruction built-in), and a few other functions.

The application code must call `CPU_Init()` before it calls any other μ C/CPU function. This call can be placed in `main()` before calling μ C/OS-III's `osInit()`.

B-2 CPU_CORE.H

`cpu_core.h` contains function prototypes for the functions provided in `cpu_core.c` and allocation of the variables used by the module to measure interrupt disable time. This file must not be modified.

B-3 CPU_DEF.H

`cpu_def.h` contains miscellaneous `#define` constants used by the µC/CPU module. This file must not be modified.

B-4 CPU_CFG.H

`cpu_cfg.h` contains a template to configure µC/CPU for an actual project. `cpu_cfg.h` determines whether to enable measurement of the interrupt disable time, whether the CPU implements a count leading zeros instruction in assembly language, or whether it will be emulated in C, and more.

You should copy `cpu_cfg.h` to the application directory for a project and modify this file as necessary. This obviously assumes that you have access to the source code. The source code is provided to µC/OS-III licensees.

Listing B-1 shows the recommended values for the Cortex-M3.

<code>#define CPU_CFG_NAME_EN</code>	<code>DEF_ENABLED</code>	(1)
<code>#define CPU_CFG_NAME_SIZE</code>	<code>16u</code>	(2)
<code>#define CPU_CFG_TS_EN</code>	<code>DEF_ENABLED</code>	(3)
<code>#define CPU_CFG_INT_DIS_MEAS_EN</code>	<code>DEF_ENABLED</code>	(4)
<code>#define CPU_CFG_INT_DIS_MEAS_OVRHD_NBR</code>	<code>1u</code>	(5)
<code>#define CPU_CFG_LEAD_ZEROS_ASM_PRESENT</code>	<code>DEF_ENABLED</code>	(6)

Listing B-1 `cpu_cfg.h` recommended values

- LB-1(1) Assign an ASCII name to the CPU by calling `CPU_NameSet()`. This is useful for debugging purposes.

-
- LB-1(2) The name of the CPU should be limited to 15 characters plus a NUL, unless this value is changed.
 - LB-1(3) This **#define** enables the code to measure timestamps. It is a feature required by μC/OS-III, and should always be set to **DEF_ENABLED**.
 - LB-1(4) This **#define** determines whether to measure interrupt disable time. This is a useful feature during development but it may be turned off when deploying a system, as measuring interrupt disable time adds measurement artifacts (i.e. overhead).
 - LB-1(5) This **#define** determines how many iterations will be performed when determining the overhead involved in measuring interrupt disable time. For the Cortex-M3, the recommended value is 1.
 - LB-1(6) The ARMv7 instruction set of the Cortex-M3 contains a Count Leading Zeros (CLZ) instruction, which significantly improves the performance of the μC/OS-III scheduler and, therefore, this option always needs to be enabled.

B-5 μC/CPU FUNCTIONS IN BSP.C

μC/CPU also requires two Board Support Package (bsp.c) specific functions:

```
CPU_TS_TmrInit()  
CPU_TS_TmrRd()
```

These functions are typically implemented in **bsp.c** of the evaluation or target board.

The Cortex-M3's Debug Watch Trace (DWT) contains a 32-bit CPU cycle counter (CYCCNT) that is used by μC/CPU for time stamping. The 32-bit counter is incremented at the CPU clock rate which provides excellent time measurement accuracy. The CYCCNT will overflow and reset from 0 after counting 4,294,967,296 CPU clock cycles. This is not a problem since μC/CPU maintains a 64-bit timestamp using two 32-bit values. The overflows are therefore accounted for. However, for μC/OS-III, we only need the lower 32 bits because that offers sufficient resolution for what μC/OS-III needs to do with it.

A 64-bit timestamp is unlikely to ever overflow for the life of a product. For example, if the Cortex-M3 is clocked at 1 GHz (this is not possible at this time), the 64-bit timestamp would overflow after approximately 585 years!

B-5-1 μC/CPU FUNCTIONS IN BSP.C, CPU_TS_TMRINIT()

Listing B-2 shows how to initialize the DWT's cycle counter.

```
#if (CPU_CFG_TS_TMR_EN == DEF_ENABLED)
CPU_INT16U CPU_TS_TmrInit (void)
{
    DEM_CR     |= (CPU_INT32U)DEM_CR_TRCENA;                      (1)
    DWT_CYCCNT = (CPU_INT32U)0;
    DWT_CR     |= (CPU_INT32U)0x00000001;                      (2)
    return ((CPU_INT16U)0);                                         (3)
}
#endif
```

Listing B-2 bsp.c, CPU_TS_TmrInit()

LB-2(1) We need to enable the trace module.

LB-2(2) To initialize the DWT's CYCCNT set bit 0 in the DWT's Control Register (DWT_CR). A read-modify-write avoids altering the other bits in the DWT_CR.

LB-2(3) CPU_TS_TmrInit() requires that the function returns the number of left shifts needed to make CPU_TS_TmrRd() (described below) return a 32-bit value. Since CYCCNT is already a 32-bit counter, no shifts are needed, and this value is 0.

B-5-2 μC/CPU FUNCTIONS IN BSP.C, CPU_TS_TMRRD()

The DWT's CYCCNT register is read by calling CPU_TS_TmrRd(). This function is implemented as shown in Listing B-3.

```
#if (CPU_CFG_TS_TMR_EN == DEF_ENABLED)
CPU_TS CPU_TS_TmrRd (void)
{
    return ((CPU_TS)DWT_CYCCNT);
}
#endif
```

Listing B-3 bsp.c, CPU_TS_TmrRd()

B-6 CPU.H

cpu.h contains processor- and implementation-specific **#defines** constants, macros and typedefs.

B-6-1 CPU.H - #DEFINES

cpu.h declares a number of processor specific **#define** constants and macros. The most important ones related to μC/OS-III are shown in Listing B-4.

```

#define CPU_CFG_STK_GROWTH          CPU_STK_GROWTH_HI_TO_LO           (1)
#define CPU_CFG_LEAD_ZEROS_ASM_PRESENT    (2)
#define CPU_SR_ALLOC()                CPU_SR  cpu_sr = (CPU_SR)0;        (3)
#define CPU_CRITICAL_ENTER()          { cpu_sr = CPU_SR_Save(); }       (4)
#define CPU_CRITICAL_EXIT()          { CPU_SR_Restore(cpu_sr); }      (5)

```

Listing B-4 cpu.h, #defines

- LB-4(1) This **#define** specifies that the Cortex-M3 stack grows from high memory to lower-memory addresses.
- LB-4(2) This **#define** indicates that the Cortex-M3 has an assembly language instruction that counts leading zeros in a data word. This feature significantly speeds up μC/OS-III's scheduling algorithm.
- LB-4(3) The macro is used to allocate a local variable in a function that needs to protect a critical section by disabling interrupts. μC/OS-III uses **CPU_SR_ALLOC()** as follows:

```

void OSFunction (void)
{
    CPU_SR_ALLOC();

    CPU_CRITICAL_ENTER();
    /* Code protected by critical section */
    CPU_CRITICAL_EXIT();
    :
}

```

The macro might not appear necessary if we are only declaring a single variable, but the actual code in `cpu.h` is slightly more complex. Therefore the macro hides this complexity from the user.

- LB-4(4) `CPU_CRITICAL_ENTER()` is invoked by μC/OS-III to disable interrupts. As shown, the macro calls `CPU_SR_Save()`, which is declared in `cpu_a.asm` (described later). `CPU_SR_Save()` saves the current state of the Cortex-M3's PSR and then disables interrupts. The saved value of the PSR is returned to the function that invokes `CPU_CRITICAL_ENTER()`. The PSR is saved in the local variable allocated by `CPU_SR_ALLOC()`. `CPU_SR_Save()` is implemented in assembly language because C cannot access CPU registers.
- LB-4(5) `CPU_CRITICAL_EXIT()` calls the function `CPU_SR_Restore()` (See `cpu_a.asm`) to restore the previously saved state of the PSR. The reason the PSR was saved in the first place is because interrupts might already be disabled before invoking `CPU_CRITICAL_ENTER()` and we want to keep them disabled when we exit the critical section. If interrupts were enabled before calling `CPU_CRITICAL_ENTER()`, they will be re-enabled by `CPU_CRITICAL_EXIT()`.

B-6-2 CPU.H - DATA TYPES

Micrium does not make use of the standard C data types. Instead, data types are declared that are highly portable and intuitive. In addition, all data types are always declared in upper case, which follows Micrium's coding standard.

Listing B-5 shows the data types used by Micrium specific to the Cortex-M3 (assuming the IAR C compiler).

```
typedef      void      CPU_VOID;
typedef      char      CPU_CHAR;           /* 8-bit character      */ (1)
typedef unsigned char   CPU_BOOLEAN;       /* 8-bit boolean or logical */ (2)
typedef unsigned char   CPU_INT08U;         /* 8-bit unsigned integer */ (3)
typedef signed  char    CPU_INT08S;
typedef unsigned short  CPU_INT16U;
typedef signed  short   CPU_INT16S;
typedef unsigned int    CPU_INT32U;
typedef signed  int     CPU_INT32S;
typedef unsigned long   CPU_INT64U;         /* 64-bit unsigned integer */ (4)
typedef signed  long   CPU_INT64S;          /* 64-bit signed integer */
typedef float     CPU_FP32;              /* 32-bit floating point */ (5)
typedef double    CPU_FP64;              /* 64-bit floating point */
typedef volatile CPU_INT08U CPU_REG08;
typedef volatile CPU_INT16U CPU_REG16;
typedef volatile CPU_INT32U CPU_REG32;
typedef volatile CPU_INT64U CPU_REG64;
typedef void      (*CPU_FNCT_VOID)(void);
typedef void      (*CPU_FNCT_PTR )(void *);
```

Listing B-5 cpu.h, Data Types

- LB-5(1) Characters are assumed to be 8-bit quantities on the Cortex-M3.
- LB-5(2) It is often convenient to declare Boolean variables. However, even though a Boolean represents either 1 or 0, a whole byte is used. This is done because ANSI C does not define single bit variables.
- LB-5(3) The signed and unsigned integer data types are declared for 8, 16 and 32-bit quantities.
- LB-5(4) μC/OS-III requires that the compiler defines 64-bit data types. These are used when computing CPU usage on a per-task basis. The 64-bit data types are used when declaring `OS_CYCLES` in `os_type.h`.
- LB-5(5) Most of Micrium's software components do not use floating-point values. These data types are declared for consistency and to provide portable data types to the application developer.

Appendix B

```

#define CPU_CFG_ADDR_SIZE      CPU_WORD_SIZE_32          (6)
#define CPU_CFG_DATA_SIZE      CPU_WORD_SIZE_32
#if     (CPU_CFG_ADDR_SIZE == CPU_WORD_SIZE_32)
typedef CPU_INT32U           CPU_ADDR;
#elif   (CPU_CFG_ADDR_SIZE == CPU_WORD_SIZE_16)
typedef CPU_INT16U           CPU_ADDR;
#else
typedef CPU_INT08U           CPU_ADDR;
#endif
#if     (CPU_CFG_DATA_SIZE == CPU_WORD_SIZE_32)
typedef CPU_INT32U           CPU_DATA;
#elif   (CPU_CFG_DATA_SIZE == CPU_WORD_SIZE_16)
typedef CPU_INT16U           CPU_DATA;
#else
typedef CPU_INT08U           CPU_DATA;
#endif
typedef CPU_DATA              CPU_ALIGN;
typedef CPU_ADDR              CPU_SIZE_T;
typedef CPU_INT16U            CPU_ERR;
typedef CPU_INT32U            CPU_STK;
typedef CPU_ADDR              CPU_STK_SIZE;
typedef CPU_INT32U            CPU_SR;                  (7)

```

(8)

Listing B-6 **cpu.h, Data Type (Continued)**

- LB-6(1) Miscellaneous types are declared.
- LB-6(2) **CPU_STK** declares the width of a CPU stack entry and they are 32-bits wide on the Cortex-M3. All μC/OS-III stacks must be declared using **CPU_STK**.
- LB-6(3) μC/CPU provides code to protect critical sections by disabling interrupts. This is implemented by **CPU_CRITICAL_ENTER()** and **CPU_CRITICAL_EXIT()**. When **CPU_CRITICAL_ENTER()** is invoked, the current state of the Cortex-M3's Program Status Register (PSR) is saved in a local variable so that it can be restored when **CPU_CRITICAL_EXIT()** is invoked. The local variable that holds the saved PSR is declared as a **CPU_SR**.

B-6-3 CPU.H – FUNCTION PROTOTYPES

`cpu.h` also contains a number of data types. The most significant prototypes related to `μC/OS-III` are shown in Listing B-7.

```
CPU_SR     CPU_SR_Save      (void);
void       CPU_SR_Restore   (CPU_SR      cpu_sr);
CPU_DATA   CPU_CntLeadZeros (CPU_DATA    val);
```

Listing B-7 `cpu.h`, Data Type

B-7 CPU_A.ASM

`cpu_a.asm` contains assembly language functions provided by `μC/CPU`. Three functions of particular importance to `μC/OS-III` are shown in Listing B-8.

`CPU_SR_Save()` obtains the current value of the Cortex-M3 PSR and then disables all CPU interrupts. The value of the saved PSR is returned to the caller.

`CPU_SR_Restore()` reverses the process and restores the PSR to the value passed to `CPU_SR_Restored()` as an argument.

`CPU_CntLeadZeros()` counts the number of zero bits starting from the most significant bit position. This function is implemented in assembly language because the ARMv7 instruction incorporates this functionality.

In all of the functions below, R0 contains the value passed to the function, as well as the returned value.

Appendix B

```
CPU_SR_Save
    MRS      R0, PRIMASK
    CPSID   I
    BX      LR

CPU_SR_Restore
    MSR      PRIMASK, R0
    BX      LR

CPU_CntLeadZeros
    CLZ      R0, R0
    BX      LR
```

Listing B-8 **cpu_a.asm**

Appendix

C

IAR Systems IAR Embedded Workbench for ARM

IAR Embedded Workbench is a set of highly sophisticated and easy-to-use development tools for embedded applications. It integrates the IAR C/C++ Compiler™, assembler, linker, librarian, text editor, project manager and C-SPY® Debugger in an integrated development environment (IDE).

With its built-in chip-specific code optimizer, IAR Embedded Workbench generates very efficient and reliable FLASH/ROMable code for ARM devices. In addition to this solid technology, the IAR Systems also provides professional world-wide technical support.

The KickStart™ edition of IAR Embedded Workbench is free of charge and you may use it for as long as you want. KickStart tools are ideal for creating small applications, or for getting started fast on a new project. The only requirement is that you register to obtain a license key.

The KickStart edition is code-size limited, but a fully functional integrated development environment that includes a project manager, editor, compiler, assembler, linker, librarian, and debugger tools. A complete set of user guides is included in PDF format.

The KickStart edition corresponds to the latest release of the full edition of IAR Embedded Workbench, with the following exceptions:

- It has a code size limitation (32 Kbytes).
- It does not include source code for runtime libraries.
- It does not include support for MISRA C.
- There is limited technical support.

The KickStart edition of IAR Embedded Workbench allows you to run all of the examples provided in this book.

C-1 IAR EMBEDDED WORKBENCH FOR ARM – HIGHLIGHTS

The full version of the IAR Embedded Workbench for ARM offers the following features.

- Support for:
 - ARM7™
 - ARM9™
 - ARM9E™
 - ARM10™
 - ARM11
 - SecurCore
 - Cortex-M0
 - Cortex-M1
 - Cortex-M
 - Cortex-R4
 - Intel® XScale™
- Most compact and efficient code
- ARM Embedded Application Binary Interface (EABI)
- Extensive support for hardware and RTOS-aware debugging
- Total solutions for ARM
- New Cortex-M3 debug features
- Function profiler
- Interrupt graph window
- Data log window
- MISRA C:2004 support
- Extensive device support
- Over 1400 example projects
- µC/OS-II Kernel Awareness built-into the C-Spy debugger

Figure C-1 shows a block diagram of the major EWARM components.

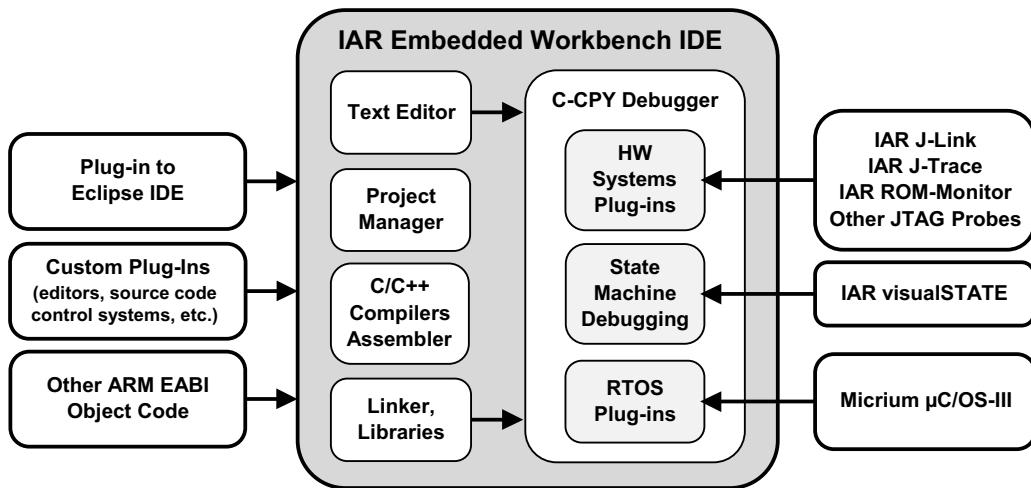


Figure C-1 IAR Embedded Workbench

C-2 MODULAR AND EXTENSIBLE IDE

- A seamlessly Integrated Development Environment (IDE) for building and debugging embedded applications
- Powerful project management allowing multiple projects in one workspace
- Build integration with IAR visualSTATE
- Hierarchical project representation
- Dockable and floating windows management
- Smart source browser
- Tool options configurable on global, group of source files, or individual source files level

- Multi-file compilation support for even better code optimization
- Flexible project building via batch build, pre/post-build or custom build with access to external tools in the build process.
- Integration with source code control systems

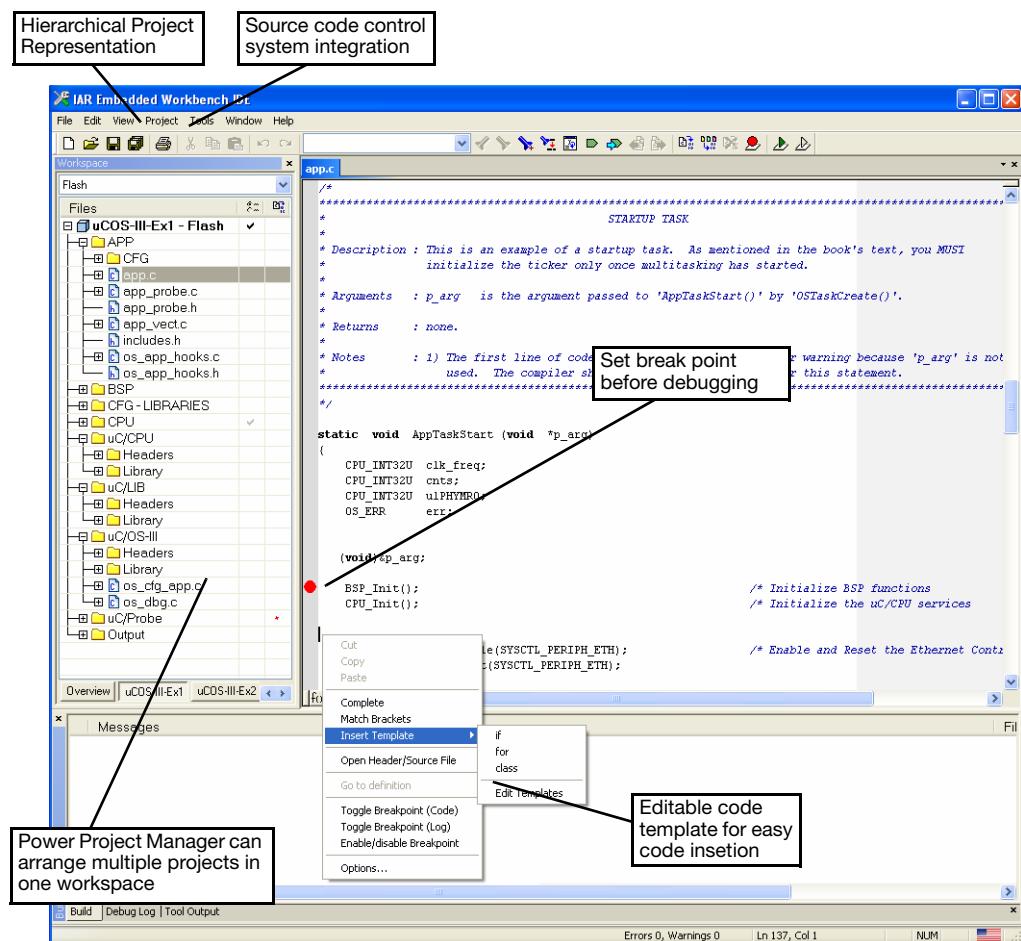


Figure C-2 IAR Embedded Workbench IDE

C-3 HIGHLY OPTIMIZING C/C++ COMPILER

- Support for C, EC++ and extended EC++ including templates, namespace, standard template library (STL) etc.
- ARM Embedded Application Binary Interface (EABI) and ARM Cortex Microcontroller Software Interface Standard (CMSIS) compliant
- Interoperability and binary compatibility with other EABI compliant tools
- Automatic checking of MISRA C rules
- Support for ARM, Thumb1 and Thumb2 processor modes
- Support for 4 Gbyte applications in all processor modes
- Support for 64-bit long
- Reentrant code
- 32- and 64-bit floating-point types in standard IEEE format
- Multiple levels of optimizations on code size and execution speed allowing different transformations enabled, such as function inlining, loop unrolling etc.
- Advanced global and target-specific optimizer generating the most compact and stable code
- Compressed initializers
- Support for ARM7, ARM7E, ARM9, ARM9E, ARM10E, ARM11, Cortex-M0, Cortex-M1, Cortex-M3, Cortex-R4 and Intel XScale
- Support for ARM, Thumb1 and Thumb2 processor modes
- Generates code for ARM VFP series of floating-point coprocessors
- Little/big endian mode

C-4 DEVICE SUPPORT

- Device support on four levels:
- Core support - instruction set, debugger interface (for all supported devices)
- Header/DDF files - peripheral register names in C/asm source and debugger (for all supported devices)
- Flash loader for on-chip flash or off-chip EVB flash (for most of our supported devices)
- Project examples - varies from simple to fairly complex applications (for most of our supported devices)
- Detailed device support list at www.iar.com/ewarm

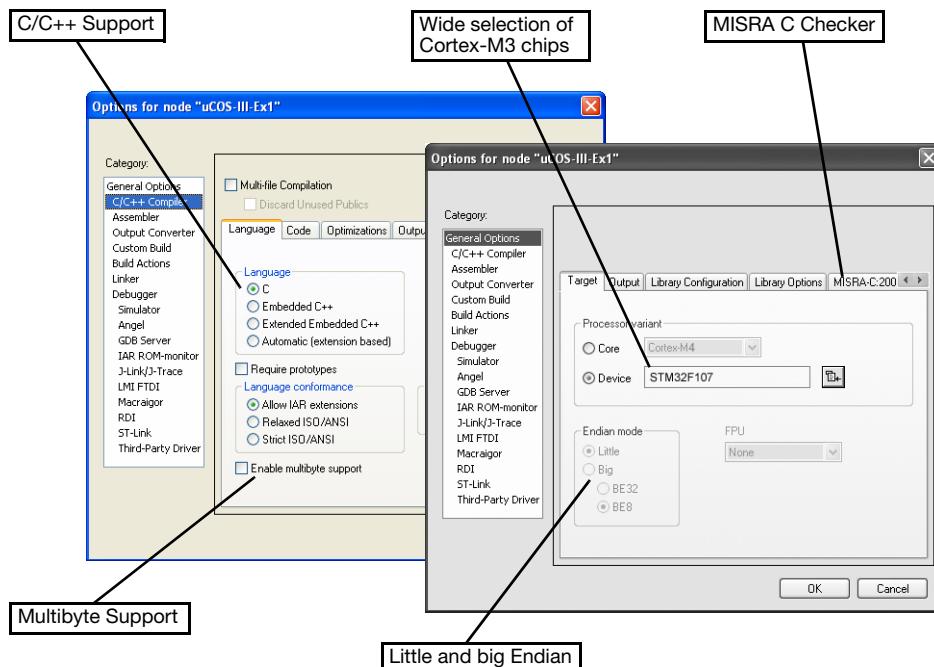


Figure C-3 Device Support

C-5 STATE-OF-THE-ART C-SPY® DEBUGGER

- Cortex-M3 SWV/SWO debugger support
- Complex code and data breakpoints
- User selectable breakpoint types (hardware/software)
- Unlimited number of breakpoints in flash via optional license for J-Link
- Runtime stack analysis - stack window to monitor the memory consumption and integrity of the stack
- Complete support for stack unwinding even at high optimization levels
- Profiling and code coverage performance analysis tools
- Trace utility with expressions, such as variables and register values, to examine execution history
- Versatile monitoring of registers, structures, call chain, locals, global variables and peripheral registers
- Smart STL container display in Watch window
- Symbolic memory window and static watch window
- I/O and interrupt simulation
- True editing-while-debugging
- Drag and drop model
- Target access to host file system via file I/O
- Built-in µC/OS-II Kernel Awareness

C-6 C-SPY DEBUGGER AND TARGET SYSTEM SUPPORT

The C-SPY Debugger for the ARM core is available with drivers for the following systems:

- Simulator
- Emulator (JTAG/SWD)
 - IAR J-Link probe, JTAG and SWD support, connection via USB or TCP/IP server
 - RDI (Remote Debug Interface), such as Abatron BDI1000 & BDI2000, EPI Majic, Ashling Opella, Aiji OpenICE, Signum JTAGjet, ARM Multi-ICE
 - Macraigor JTAG interfaces: Macraigor Raven, Wiggler, mpDemon, usbDemon, usb2Demon and usb2Sprite
 - ST ST-LINK JTAG debug probe

C-7 IAR ASSEMBLER

- A powerful relocating macro assembler with a versatile set of directives and operators
- Built-in C language preprocessor, accepting all C macro definitions

C-8 IAR J-LINK LINKER

- Complete linking, relocation and format generation to produce FLASH/PROMable code
- Flexible commands allowing detailed control of code and data placement
- Optimized linking removing unused code and data
- Direct linking of raw binary images, for instance multimedia files
- Comprehensive cross-reference and dependency memory maps
- Link compatibility with object files and libraries generated by other EABI compliant tools

C-9 IAR LIBRARY AND LIBRARY TOOLS

- All required ISO/ANSI C and C++ libraries and source included
- All low-level routines such as writechar() and readchar() provided in full source code
- Lightweight runtime library, user-configurable to match the needs of the application; full source included
- Library tools for creating and maintaining library projects, libraries and library modules
- Listings of entry points and symbolic information

C-10 COMPREHENSIVE DOCUMENTATION

- Efficient coding hints for embedded application
- Extensive step-by-step tutorials
- Context sensitive help and hypertext versions of the user documentation available online

C-11 FIRST CLASS TECHNICAL SUPPORT

IAR Systems has a global organization with local presence through branch offices and a worldwide distributor network. Extended, customized technical services are available.

Appendix

D

Micrium's µC/Probe

µC/Probe is an award-winning Microsoft Windows™-based application that allows a user to display or change the value (at run time) of virtually any variable or memory location on a connected embedded target. The user simply populates µC/Probe's graphical environment with gauges, numeric indicators, tables, graphs, virtual LEDs, bar graphs, sliders, switches, push buttons, and other components, and associates each of these to a variable or memory location.

With µC/Probe, it is not necessary to instrument the target code in order to display or change variables at run time. In fact, there is no need to add `printf()` statements, hardware such as Light Emitting Diodes (LEDs), Liquid Crystal Displays (LCDs), or use any other means to get visibility inside an embedded target at run time.

Two versions of µC/Probe are available from Micrium (See section 3-2 “Downloading µC/Probe” on page 763).

µC/OS-III licensees will receive one free license of the full version of µC/Probe. This full version supports J-Link, RS-232C, TCP/IP, USB, and other interfaces, and allows you to display or change an unlimited number of variables. The trial version only allows you to display or change up to 8 application variables. However, it allows you to monitor any µC/OS-III variables since µC/Probe is µC/OS-III aware.

The examples provided with this book assume that you have downloaded and installed one of these two versions of µC/Probe.

This appendix provides a brief introduction to µC/Probe.

Figure D-1 shows a block diagram of a typical development environment with the addition of µC/Probe as used with the µC/Eval-STM32F107, available with this book.

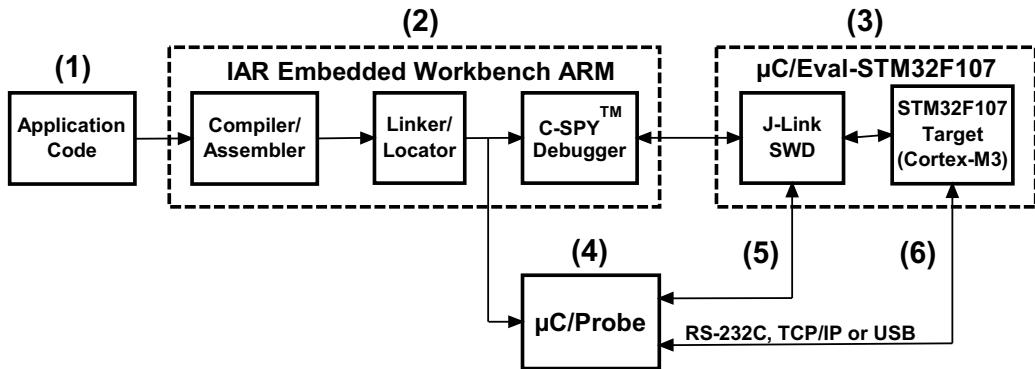


Figure D-1 Development environment using the µC/Eval-STM32F107

- FD-1(1) This is the application code you are developing. It is assumed that you are using µC/OS-III provided with this book. However, µC/Probe does not require an RTOS, and can work with or without an RTOS.
- FD-1(2) The examples provided with this book assumes the IAR Embedded Workbench for ARM, but µC/Probe works with any toolchain as long as the linker/locator is able to produce an .ELF or .IEEE695 output file.
- FD-1(3) The µC/Eval-STM32F107 evaluation board available with this book contains an onboard Segger J-Link SWD. The J-Link allows the C-SPY™ debugger to download Flash code onto the on-board STM32F107 Cortex-M3-based Micro Controller Unit (MCU). C-SPY also allows you to debug application code.
- FD-1(4) µC/Probe reads the exact same .ELF or .IEEE695 output file produced by the linker/locator. From this file, µC/Probe is able to extract names, data types and addresses of all the global variables of the application code. This information allows µC/Probe to display any of the values of the variables using the display objects available in µC/Probe (gauges, meters, virtual LEDs, bar graphs, numeric indicators, graphs, and more).

-
- FD-1(5) µC/Probe is able to interface to the Cortex-M3 processor via the SWD interface of the J-Link. In fact, both the C-SPY debugger and µC/Probe can access the target through the J-Link at the same time. This allows µC/Probe to monitor or change any target variable while you are stepping through the code using the C-SPY debugger. Interfacing through the J-Link also has the advantage of not requiring any target resident code to interface to µC/Probe.
- FD-1(6) µC/Probe can also interface to the µC/Eval-STM32F107 board using RS-232C, Ethernet (using TCP/IP) or USB.

Target resident code must be added when using RS-232C. This code is however provided by Micrium, and the user needs only to add it to the application code as part of the build. Also, unlike when using the J-Link, target data can only be displayed or changed by µC/Probe when the target is running. However, the RS-232C interface allows data to be collected faster than through the onboard J-Link.

Target resident code is also required if using the Ethernet port on the µC/Eval-STM32F107 board. In fact, you'll need a full TCP/IP stack such as Micrium's µC/TCP-IP. Again, data can only be displayed and changed when the target is running. However, the Ethernet interface provides the best throughput and data update rates for µC/Probe.

Finally, µC/Probe also works over the onboard USB On-The-Go (OTG) connector. In this case, the USB controller uses the device interface and requires a USB-Device Human Interface Device (HID) stack such as Micrium's µC/USB-Device with HID option. As with the RS-232C and TCP/IP, data can only be displayed or changed when the target is running when using this interface.

D-1 µC/PROBE IS A WINDOWS™-BASED APPLICATION

As previously mentioned, µC/Probe is a Microsoft Windows-based application. When opening µC/Probe you will see the environment shown in Figure D-2.

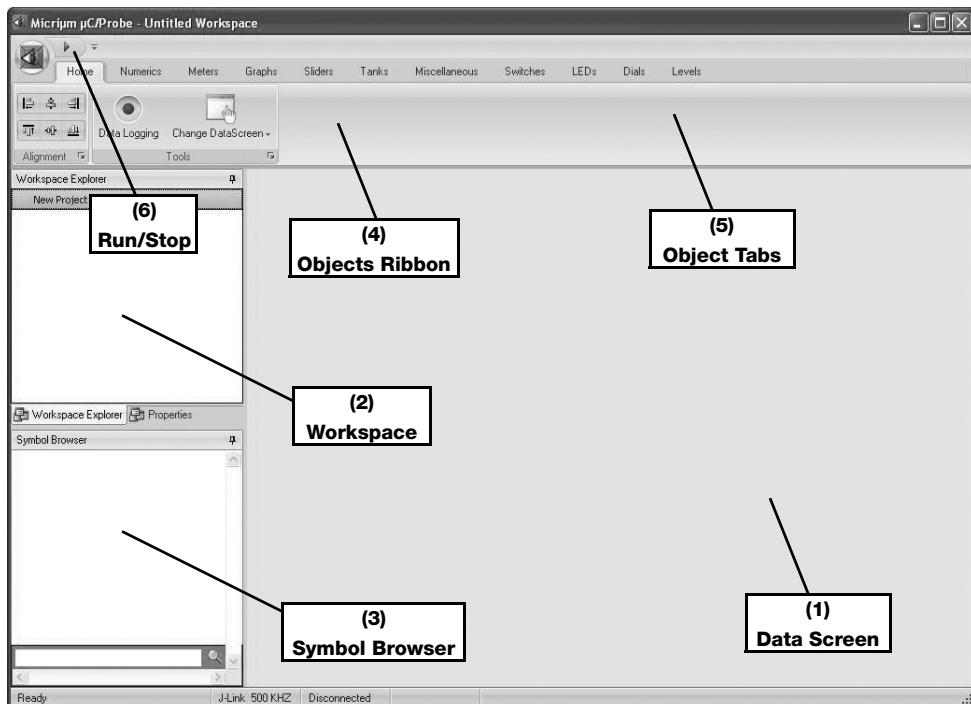


Figure D-2 Empty µC/Probe project

- FD-2(1) µC/Probe's main focus is the *Data Screen*. This is where you drag and drop such *Objects* as gauges, meters, graphs, virtual LEDs, sliders, switches, and more, which are used to display or change the value of target variables at run time. µC/Probe allows you to define any number of Data Screens and each Data Screen can be assigned a name. Each data screen is selected by using a *Tab* at the top of the data screen area.
- FD-2(2) When data screens are created, their names also appear in the *Workspace* area. The *Workspace* defines the structure of the µC/Probe project. Data screens can be imported from other projects, and can be exported.

- FD-2(3) The *Symbol Browser* contains a list of all the variables that can be displayed or changed in the target by µC/Probe. The variables are organized alphabetically by compile modules (i.e., source files). You can expand each of those files and view all the variables defined in that module, and search symbols by using the search box.
- FD-2(4) The *Object Ribbon* is where to find the objects (gauges, meters, numeric indicators, sliders, graphs, etc.) to drag and drop onto the data screen.
- FD-2(5) Similar objects are grouped together. Each group is selected by clicking on the appropriate tab. Drag and drop any object onto a data screen of your choice, and associate a variable to the instantiated object. Some objects even allow you to associate multiple variables.
- FD-2(6) The Run/Stop icon is found in the upper left corner. Run mode in µC/Probe has nothing to do with running the target application. In µC/Probe, Run means to start communicating with the target and collect data to display.

Figure D-3 shows a group of *Meter* objects and Figure D-4 shows a group of *Level* objects.



Figure D-3 µC/Probe meter objects



Figure D-4 µC/Probe level objects

Figure D-5 shows a group of Slider objects, which can be used to modify target variables.



Figure D-5 µC/Probe slider objects

D-2 ASSIGNING A VARIABLE TO AN OBJECT

Assigning a variable to an object is quite simple as illustrated in Figure D-6. It is assumed that the code has been downloaded to the target and the target is running.

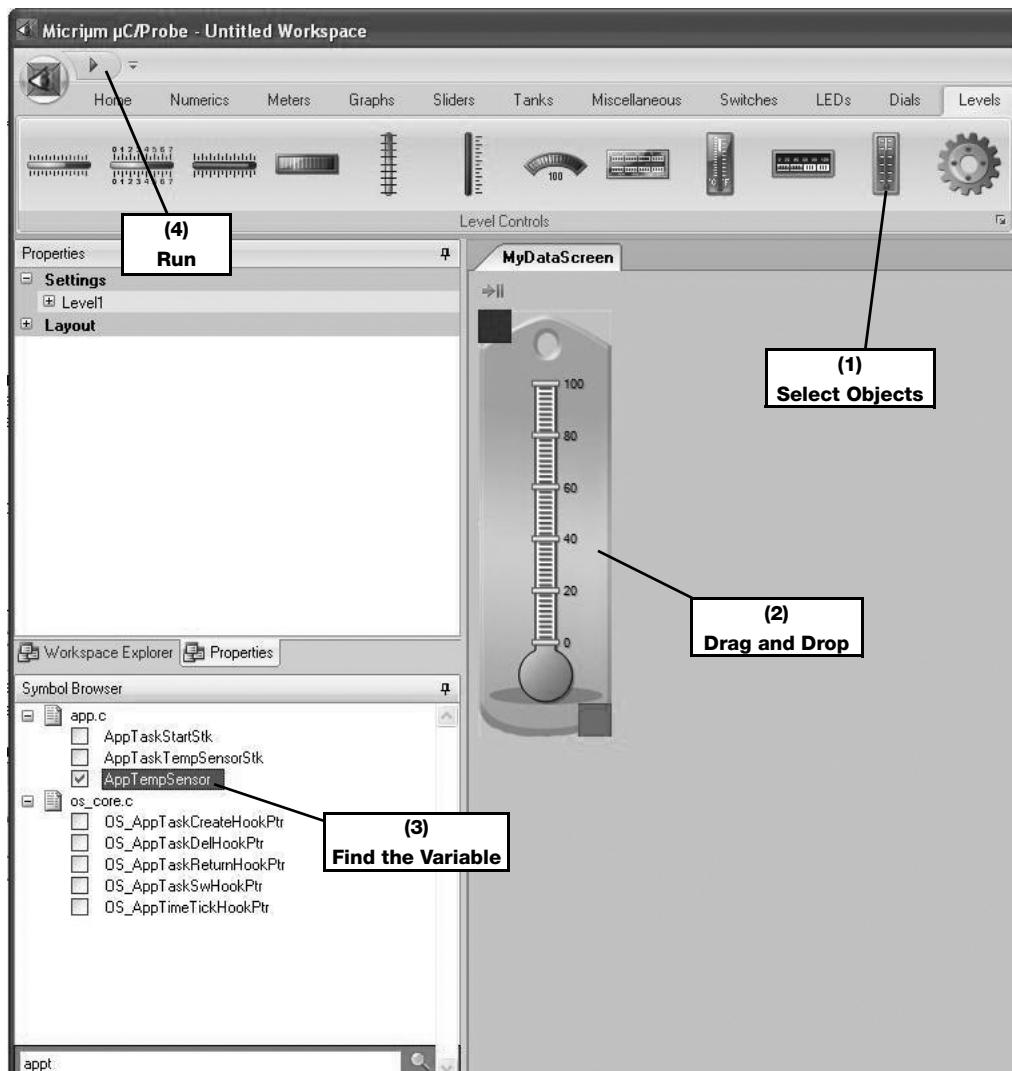


Figure D-6 Assigning a variable to an object

- FD-6(1) Select the object that will allow you to better visualize the variable (a meter, a thermometer, an LED, etc.).
- FD-6(2) Drag and drop the object onto the data screen.
- FD-6(3) Find the variable in the symbol browser. Simply type the first few letters of the variable and µC/Probe will narrow down the search. Click on the small box to the left of the variable.
- FD-6(4) When you want to see the value of the variable, simply click on the 'Run' button on the upper left corner.

Add as many objects as you want to each data screen and use as many data screens as you want. However, remember that the trial-version of µC/Probe only allows you to have a total of five application variables, but enables the display of any µC/OS-III variable.

Appendix



μC/Eval-STM32F107 User's Guide

The μC/Eval-STM32F107 evaluation board is designed as a complete development platform for STMicroelectronic's ARM Cortex-M3 core-based microcontroller with full speed USB OTG, Ethernet MAC, two channels of CAN2.0A/B compliant interface, two channels I2S, two channels I2C, five USARTs with smartcard support, three SPIs, internal 64KB SRAM and 256KB Flash, JTAG and SWD debugging support.

The full range of hardware features on the board helps you to evaluate all peripherals (USB OTG FS, Ethernet, CAN, SD/MMC card, USART, Temperature sensor, etc.) and develop your own applications. Extension pin headers and wire wrapping area make it possible to easily add your own components/interface on the board for a specific application.

Figure E-1 shows a picture of the μC/Eval-STM32F107.

Appendix E

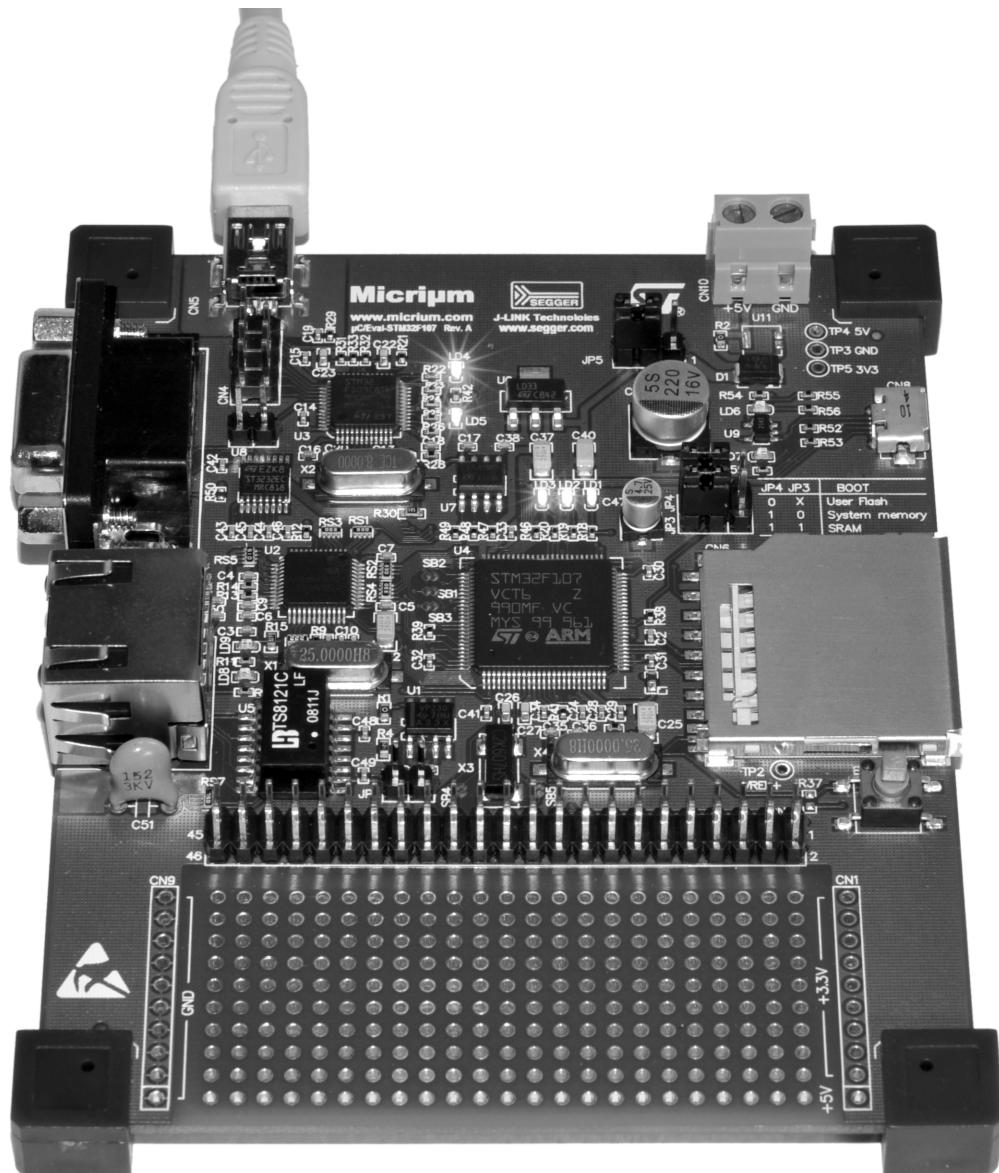


Figure E-1 μC/Eval-STM32F107 Evaluation Board

E-1 FEATURES

The μC/Eval-STM32F107 provides the following features:

- 72 MHz STM32F107 Cortex-M3-based microcontroller with:
 - 256 Kbytes of Flash
 - 64 Kbytes of SRAM
- 10/100 Ethernet connector
- USB-OTG Full Speed connector
- RS-232C connector
- CAN interface connected to pin headers
- SD/MMC socket
- STLM75 temperature sensor
- 3 User LEDs (Red, Yellow and Green)
- Reset button
- Free IO ports connector (pin headers)
- Prototyping area
- On-Board J-Link SWD for debugging
- Powered by J-Link USB connector or 5V external power supply on screw terminal
- RoHS compliant

E-2 HARDWARE LAYOUT AND CONFIGURATION

The µC/Eval-STM32F107 evaluation board is designed around the STM32F107VCT in a 100-pin TQFP package.

The hardware block diagram of Figure E-2 illustrates the connection between the STM32F107VCT and peripherals (USB OTG, Ethernet, SD/MMC, RS232, CAN Temperature sensor). Figure E-3 will help you locate these features on the actual evaluation board.

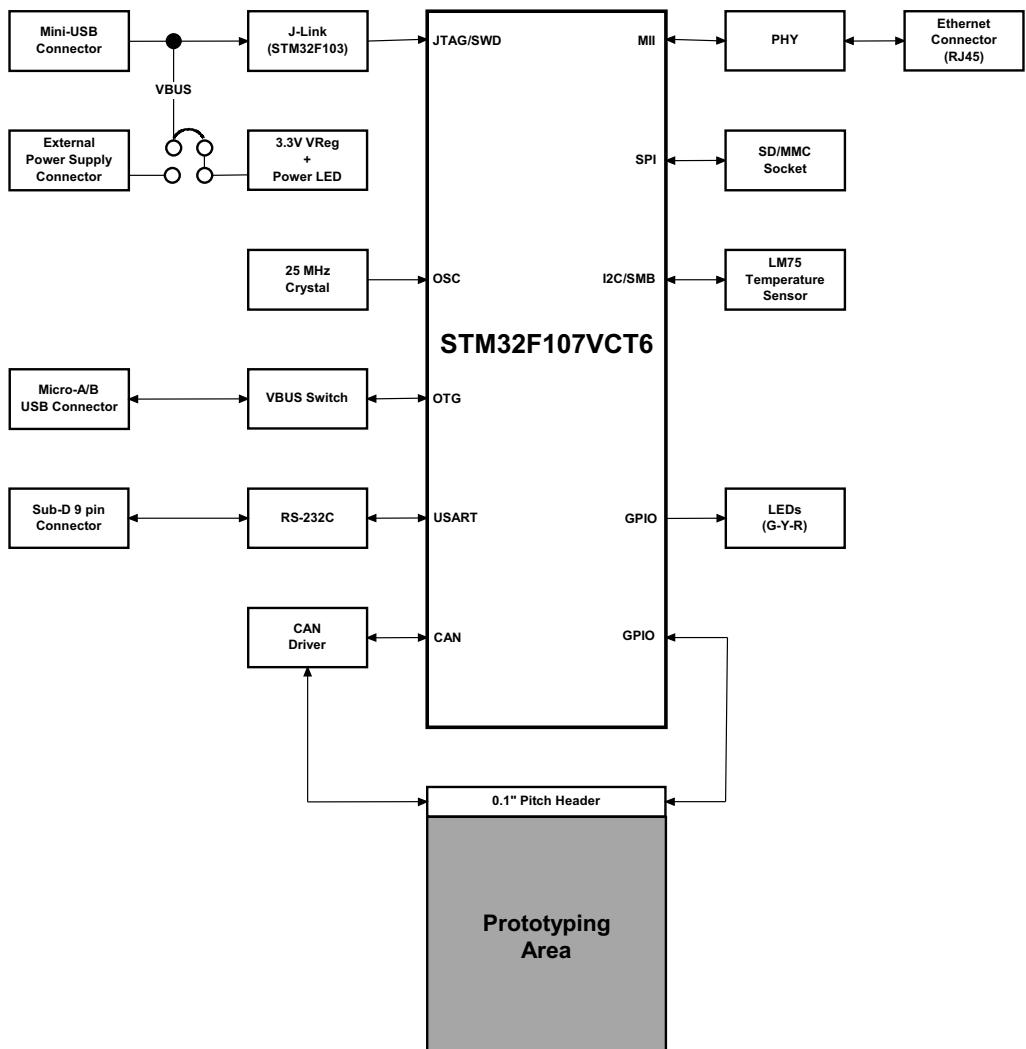


Figure E-2 µC/Eval-STM32F107 Hardware Block Diagram

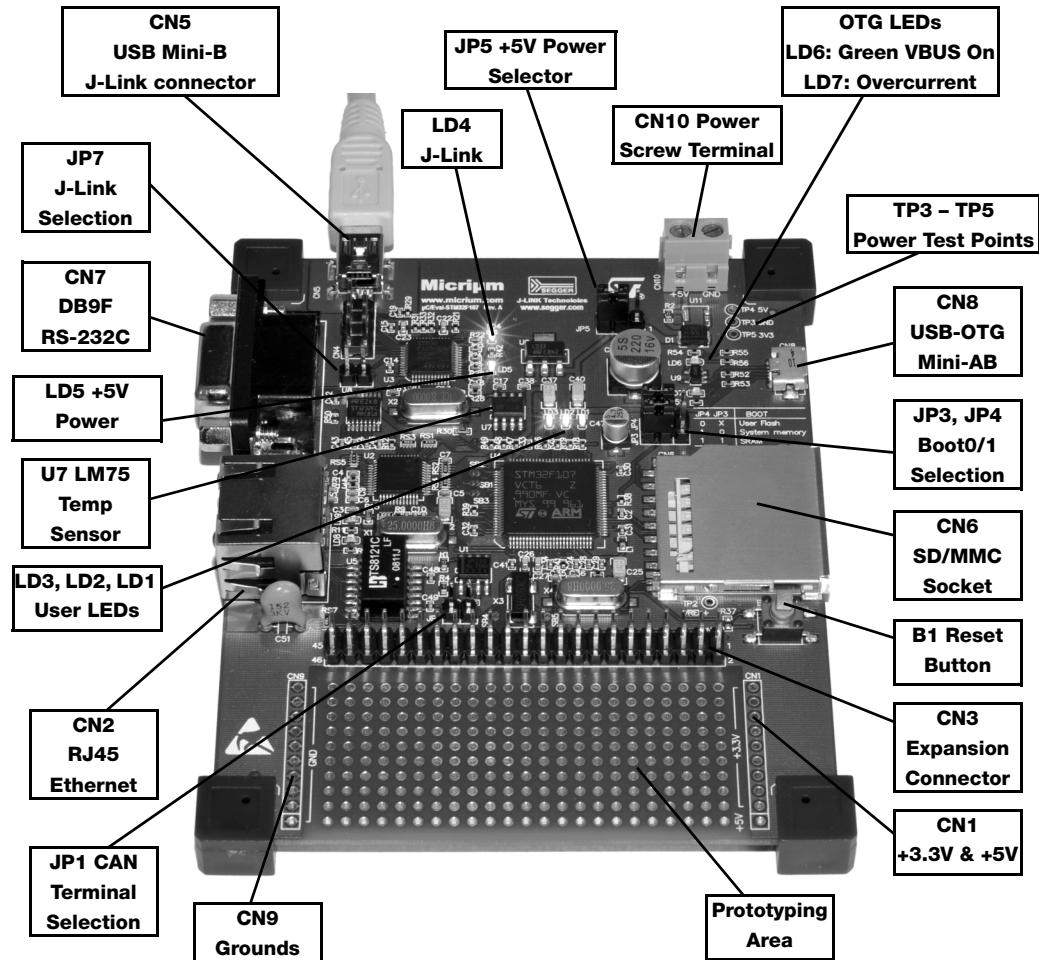


Figure E-3 μ C/Eval-STM32F107 Board Layout

Appendix E

E-3 POWER SUPPLY

The µC-Eval-STM32F107 evaluation board is powered by a 5V DC power supply. It is possible to configure the board to use following two sources for the power supply:

- 5V DC power adapter connected to CN10, the power screw terminal on the board.
- 5V VBUS power with 500mA limitation from CN5, the mini USB type B of the embedded J-LINK.

The power supply is configured by setting the related jumpers JP5 as described in Table E-1.

Jumper	Description	
JP5	The board is powered by VBUS of the embedded J-LINK input CN5 when JP5 is set as shown on the right: (Default setting)	
	The board is powered by 5V DC input CN10 when JP5 is set as shown on the right:	

Table E-1 µC/Eval-STM32F107 Power Supply Jumpers

Notes:

- 1 The board cannot be powered by the VBUS available on CN8 when the USB OTG is used as a USB device.
- 2 The LED LD5 is lit when the µC-EVAL board is correctly powered by the 5V.
- 3 Three test points TP4 (5V), TP3 (GND), and TP2 (3.3V) are available on the top right of the board to check power supply levels.

E-4 BOOT OPTIONS

The μC/Eval-STM32F107 evaluation board is able to boot from:

- Embedded User Flash
- System memory
- Embedded SRAM for debugging

The boot option is configured by setting switch JP3 (BOOT1) and JP4 (BOOT0).

Jumper	Boot from	Switch configuration
JP3 & JP4	μC-EVAL boot from User Flash when JP4 is set as shown to the right. JP3 is don't care in this configuration. (Default setting)	0<_>1 
	μC-EVAL boot from Embedded SRAM when JP3 and JP4 are set as shown to the right.	0<_>1 
	μC-EVAL boot from System Memory when JP3 and JP4 are set as shown to the right.	0<_>1 

Table E-2 μC/Eval-STM32F107 Boot Options Jumpers

E-5 RESET SOURCES

The reset signal of μC-EVAL evaluation board is active low. The reset sources may come from:

- Reset button B1 in bottom right of the board
- Embedded J-LINK
- Extension connector CN3 pin 45 (pin header)

E-6 CAN (CONTROLLER AREA NETWORK)

The µC/Eval-STM32F107 evaluation board supports one channel of CAN2.0A/B-compliant CAN bus communication based on a 3.3V CAN transceiver. The CAN transceiver (U1) is configured for high-speed mode. The CAN bus is available on extension connector CN3 pin 28 (CAN_L) and pin 30 (CAN_H). The CAN interface is connected to CAN1 remapped (PD0, PD1) of the STM32F107VCT. The CAN terminal (120 ohm), available on the board, can be connected on the bus by the jumper JP1.

Jumper	Description
JP1	CAN terminal resistor is enabled when JP1 is fitted. Default setting: Not fitted

Table E-3 µC/Eval-STM32F107 CAN related Jumper

E-7 RS-232C

The RS232 communication with hardware flow control is supported by D-type 9-pins RS232 connector CN7 and the transceiver U8, which is connected to USART2 remapped on PD3 to PD6 of STM32F107VCT on µC/Eval-STM32F107 evaluation board.

E-8 SD/MMC CARD

An SD/MMC card (Secure Digital/Multi-Media Card) connector (CN6) is available on the board, but the memory card is not provided by default with the product. The SD/MMC card is connected to SPI1 of STM32F107VCT (PA5 to PA7 without remap) with chip select on PA8 and card detection on PE6.

E-9 USB-OTG (USB ON-THE-GO)

The µC/Eval-STM32F107 evaluation board supports USB-OTG full-speed (12 Mbps) communication via a USB Micro-AB connector (CN8) and USB power switch (U9) connected to VBUS. The evaluation board cannot be powered by this USB connector.

The green LED LD6 will be turned on when the power switch (U9) is ON, which corresponds to USB-host mode. In such case, the 5V VBUS is provided by the board to a USB device connected on CN8. The red LED LD7 will be turned on when an over-current condition is detected.

E-10 LM75 TEMPERATURE SENSOR

A 10-bit temperature sensor, STLM75M2E (U7), is connected to I2C1 bus of the STM32F107VCT without remap (PB5 to PB7)

E-11 DEBUG INTERFACE

An embedded J-LINK (JTAG/SWD development tool from IAR) is available on the

μC/Eval-STM32F107 as the default debugger/programmer interface. The Mini-B USB connector CN5 is used to interface the embedded J-LINK (U3) using the IAR Embedded Workbench for ARM toolchain. The SWD port of the embedded J-LINK is directly connected to the STM32F107VCT debug port and optionally, through solder bridges, to all other JTAG signals, as mentioned in Table E-5.

Other debugger/programmer hardware can be supported thanks to the JTAG/SWD signals available on extension connector CN3. The debug tool used can be selected by the jumper JP2, as mentioned in Table E-4.

Jumper	Description
JP2	The embedded J-LINK is selected as debugger/programmer tool when JP2 is open. (Default setting)
	An external debugger/programmer tool connected on CN3 is used when JP2 is closed.

Table E-4 μC/Eval-STM32F107 J-Link related Jumper

Appendix E

Jumper	Description
SB1	<p>J-LINK TDO/SWO is not connected to the TDO of the STM32F107VCT when SB1 is open. J-LINK supports SWD communication only.</p> <p>J-LINK TDO/SWO is connected to the TDO of the STM32F107VCT when SB1 is closed. J-LINK supports JTAG and SWD communication. (Default setting)</p>
SB2	<p>J-LINK TDI is not connected to the TDI of the STM32F107VCT when SB2 is open. J-LINK supports SWD communication only.</p> <p>J-LINK TDI is connected to the TDI of the STM32F107VCT when SB2 is closed. J-LINK supports JTAG and SWD communication. (Default setting)</p>
SB3	<p>J-LINK TRST is not connected to the TRST of the STM32F107VCT when SB3 is open. J-LINK supports SWD communication only.</p> <p>J-LINK TRST is connected to the TRST of the STM32F107VCT when SB3 is closed. J-LINK supports JTAG and SWD communication. (Default setting)</p>

Table E-5 **µC/Eval-STM32F107 J-TAG solder bridges**

E-12 ETHERNET

The µC/Eval-STM32F107 evaluation board supports a 10/100 Ethernet communication interface with a ‘PHY’ (DP83848CVV, U2) and integrated RJ45 connector (CN2). MII interface mode is also supported.

The 25 MHz Ethernet clock is provided by crystal X1 connected to the PHY.

Note: Test point TP1 can be used to check the PHY clock frequency.

E-13 CLOCK SOURCES

E

Two clock sources are available on the µC/Eval-STM32F107 for the STM32F107VCT, and also include an embedded RTC:

- X3, 32.768KHz Crystal for embedded RTC connected to PC14, PC15
- X2, 25MHz Crystal for the STM32F107VCT Microcontroller.

The PC14 and PC15 are available on extension connector CN3 depending on SB4 and SB5 configuration as mentioned in Table E-6.

Jumper	Description
SB4	PC14 is connected to 32KHz crystal when SB4 is open. (Default setting)
	P14 is connected to extension connector CN3 when SB4 is closed.
SB5	PC15 is connected to 32KHz crystal when SB5 is open. (Default setting)
	P15 is connected to extension connector CN3 when SB4 is closed.

Table E-6 **µC/Eval-STM32F107 32 KHz Crystal X3 solder bridges**

E-14 CONNECTORS

E-14-1 EXTENSION CONNECTOR (CN3)

Description	Pin name	Pin number of CN3	Pin number of CN3	Pin name	Description
IO port	PA4	1	2	PE3	IO port
IO port	PB0	3	4	PE4	IO port
IO port	PB1	5	6	PB3	IO port or TDO (SB1)
IO port	PB9	7	8	PB4	IO port or TRST (SB3)
IO port	PB14	9	10	PE7	IO port
IO port	PB15	11	12	PE8	IO port
IO port	PC0	13	14	PE9	IO port
IO port	PC4	15	16	PE10	IO port
IO port	PC5	17	18	PE11	IO port
IO port	PC6	19	20	P12	IO port
IO port	PC7	21	22	PE13	IO port
IO port	PC8	23	24	PE14	IO port
IO port	PC9	25	26	PE15	IO port
IO port	PC10	27	28	CAN_L	CAN bus L
IO port	PC11	29	30	CAN_H	CAN bus H
IO port	PC12	31	32	PD6	IO port
IO port	PC13	33	34	PD5	IO port
IO port (SB4)	PC14	35	36	PD4	IO port
IO port (SB5)	PC15	37	38	PD3	IO port
IO port	PD2	39	40	PA15	IO port or TDI (SB2)
IO port	PD7	41	42	PE2	IO port
IO port	PE0	43	44	PA13	IO port or TMS
Board RESET	RESET	45	46	PA14	IO port or TCK

Table E-7 µC/Eval-STM32F107 extension connector CN3 pinout

Note: (SBx) means that a corresponding solder bridge must be set to enable the signal on the connector.

E-14-2 POWER CONNECTORS (CN1 & CN9)

The nine pins of connector CN9 on left side of the wrapping area are connected to the board's ground.

The eight higher pins of connector CN8 are connected to the 3.3V power, and the lower pin is connected to the 5V power of the board.

E-14-3 RS-232C CONNECTORS (CN7)




Figure E-4 **μC/Eval-STM32F107 DB-9F RS-232C connector CN6 with ISP support (front view)**

Pin number	Description	Pin number	Description
1	NC	6	NC
2	RS232_TXD (PD5)	7	RS232_CTS (PD3)
3	RS232_RXD (PD6)	8	RS232_RTS (PD4)
4	NC	9	NC
5	GND		

Table E-8 **μC/Eval-STM32F107 RS-232C connector CN6 with ISP support**

E-15 I/O ASSIGNMENTS

Pin No.	Pin Name	μC/Eval-STM32F107 processor I/O Assignments
1	PE2	IO PORT PE2
2	PE3	IO PORT PE3
3	PE4	IO PORT PE4
4	PE5	MII_INT
5	PE6	SDCard_Detection
6	VBAT	
7	PC13-ANTI_TAMP	IO PORT PC13
8	PC14-OSC32_IN	OSC32K or IO PORT PC14
9	PC15-OSC32_OUT	OSC32K or IO PORT PC15
10	VSS_5	
11	VDD_5	
12	OSC_IN	
13	OSC_OUT	
14	NRST	RESET
15	PC0	IO PORT PC0
16	PC1	ETHER_MDC
17	PC2	ETHER_TXD2
18	PC3	ETHER_TX_CLK
19	VSSA	
20	VREF-	
21	VREF+	
22	VDDA	
23	PA0-WKUP	ETHER_CRS

Pin No.	Pin Name	μC/Eval-STM32F107 processor I/O Assignments
24	PA1	ETHER_RX_CLK
25	PA2	ETHER_MDIO
26	PA3	ETHER_COL
27	VSS_4	
28	VDD_4	
29	PA4	IO PORT PA4
30	PA5	SPI_SCK_MMC
31	PA6	SPI_MISO_MMC
32	PA7	SPI_MOSI_MMC
33	PC4	IO PORT PC4
34	PC5	IO PORT PC5
35	PB0	IO PORT PB0
36	PB1	IO PORT PB1
37	PB2	BOOT1
38	PE7	IO PORT PE7
39	PE8	IO PORT PE8
40	PE9	IO PORT PE9
41	PE10	IO PORT PE10
42	PE11	IO PORT PE11
43	PE12	IO PORT PE12
44	PE13	IO PORT PE13
45	PE14	IO PORT PE14
46	PE15	IO PORT PE15
47	PB10	ETHER_RX_ER

Appendix E

Pin No.	Pin Name	µC/Eval-STM32F107 processor I/O Assignments
48	PB11	ETHER_TX_EN
49	VSS_1	
50	VDD_1	
51	PB12	ETHER_RXD0
52	PB13	ETHER_RXD1
53	PB14	IO PORT PB14
54	PB15	IO PORT PB15
55	PD8	ETHER_RX_DV
56	PD9	ETHER_RXD0
57	PD10	ETHER_RXD1
58	PD11	ETHER_RXD2
59	PD12	ETHER_RXD3
60	PD13	LED0
61	PD14	LED1
62	PD15	LED2
63	PC6	IO PORT PC6
64	PC7	IO PORT PC7
65	PC8	IO PORT PC8
66	PC9	IO PORT PC9
67	PA8	SPI_CS_MMC
68	PA9	VBUS
69	PA10	ID
70	PA11	DM
71	PA12	DP


Pin No.	Pin Name	μC/Eval-STM32F107 processor I/O Assignments
72	PA13	Debug TMS
73	NC	
74	VSS_2	
75	VDD_2	
76	PA14	Debug TCK
77	PA15	Debug TDI
78	PC10	IO PORT PC10
79	PC11	IO PORT PC11
80	PC12	IO PORT PC12
81	PD0	CAN_RX
82	PD1	CAN_TX
83	PD2	IO PORT PD2
84	PD3	USART_CTS
85	PD4	USART_RTS
86	PD5	USART_TX
87	PD6	USART_RX
88	PD7	IO PORT PD7
89	PB3	Debug TDO
90	PB4	Debug TRST
91	PB5	INT_Temperature
92	PB6	I2C_SCL_Temperature
93	PB7	I2C_SDA_Temperature
94	BOOT0	BOOT0
95	PB8	ETHER_TXD3


Appendix E


Pin No.	Pin Name	µC/Eval-STM32F107 processor I/O Assignments
96	PB9	IO PORT PB9
97	PE0	IO PORT PE0
98	PE1	USB_PowerSwitchOn
99	VSS_3	
100	VDD_3	

E-16 SCHEMATICS

Schematics for the uc/Eval-STM32F107 board are shown in the next 11 pages.

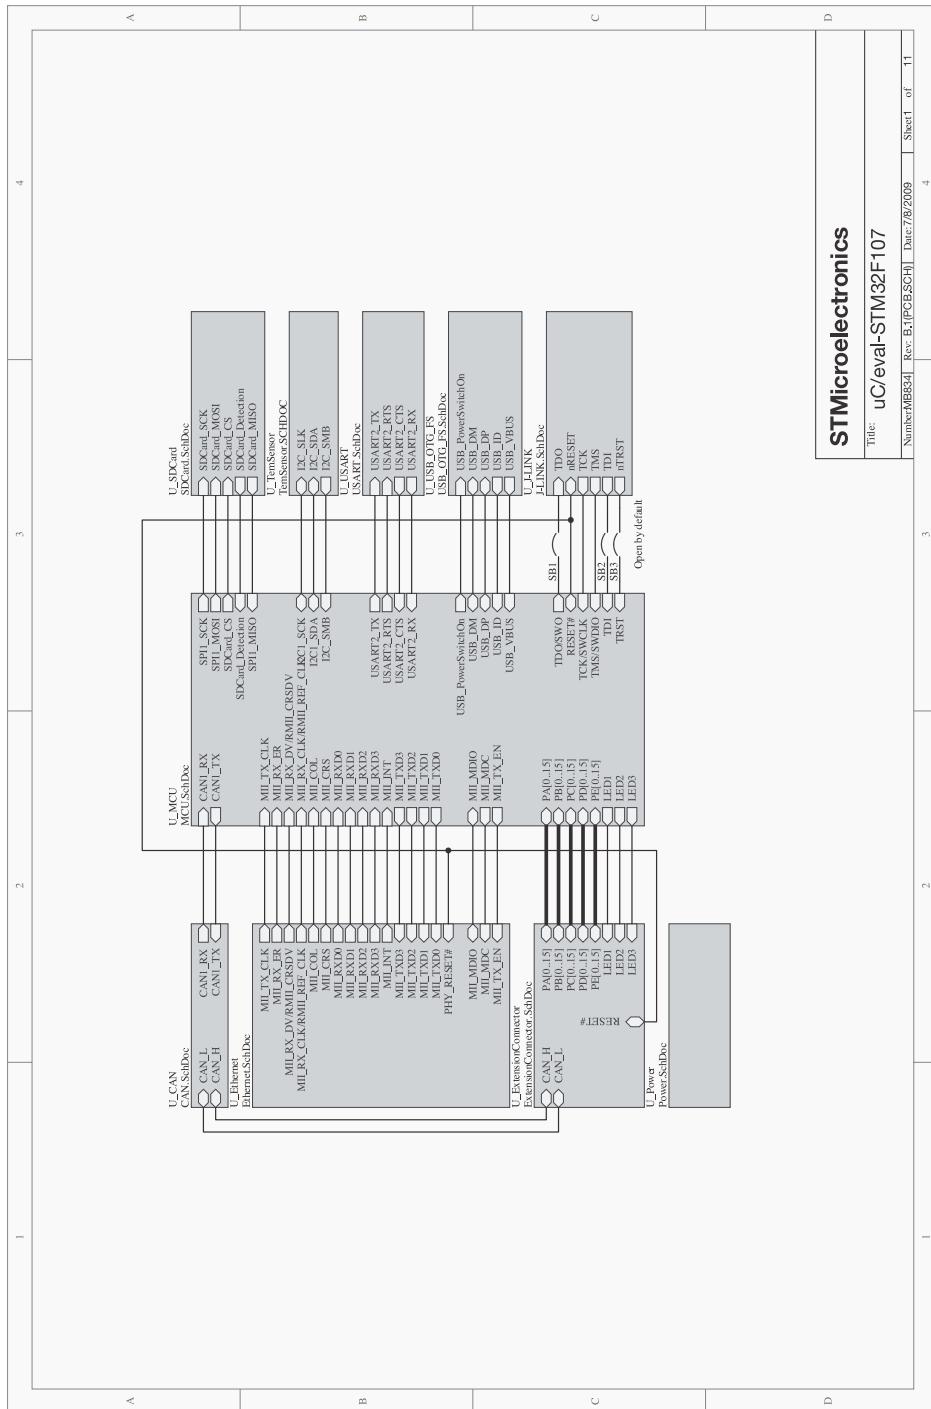

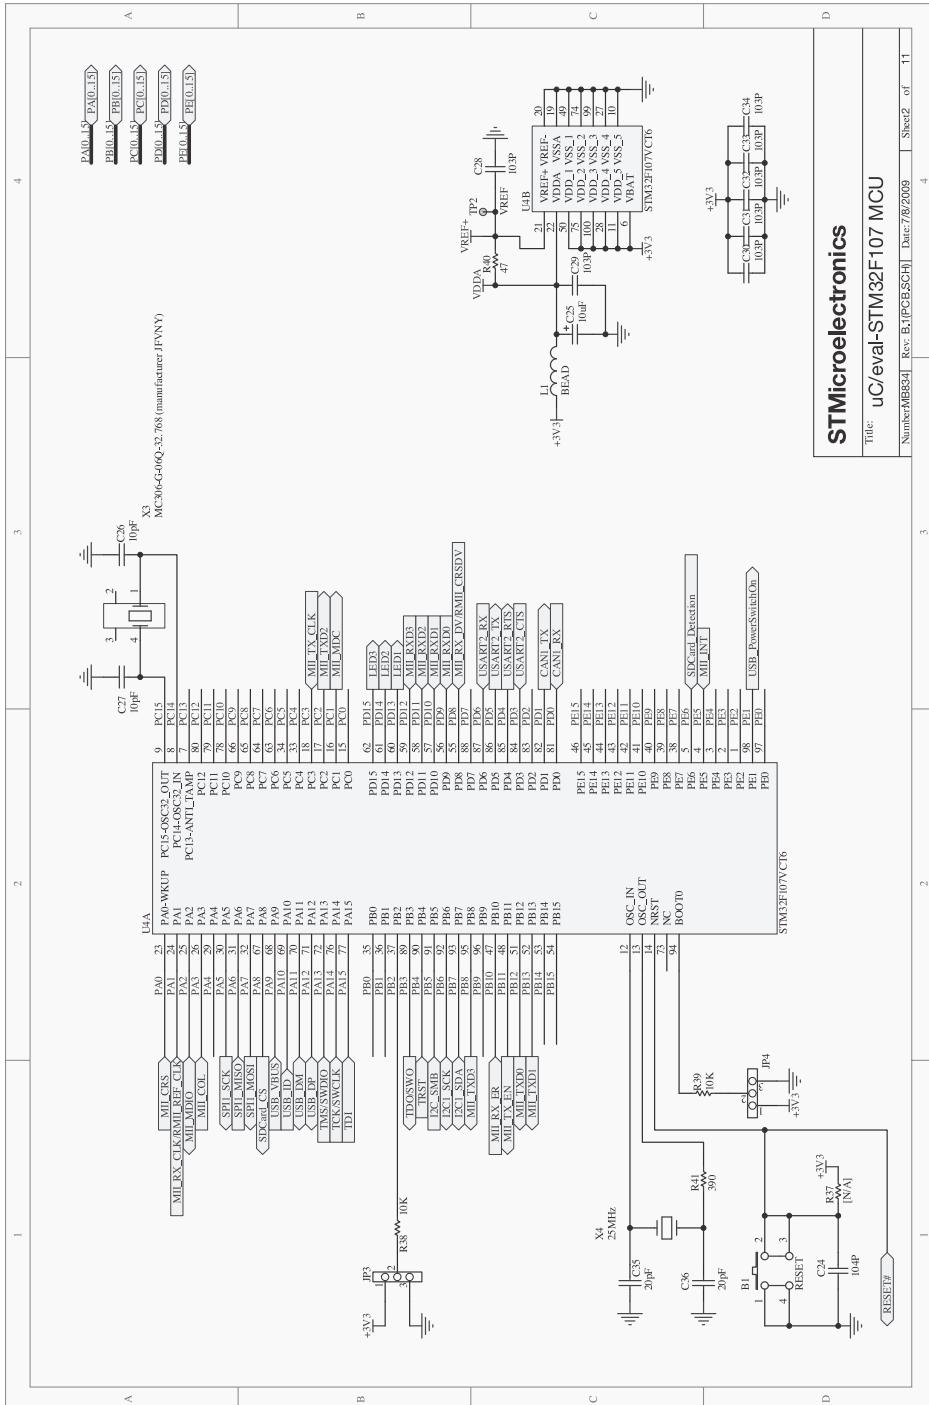

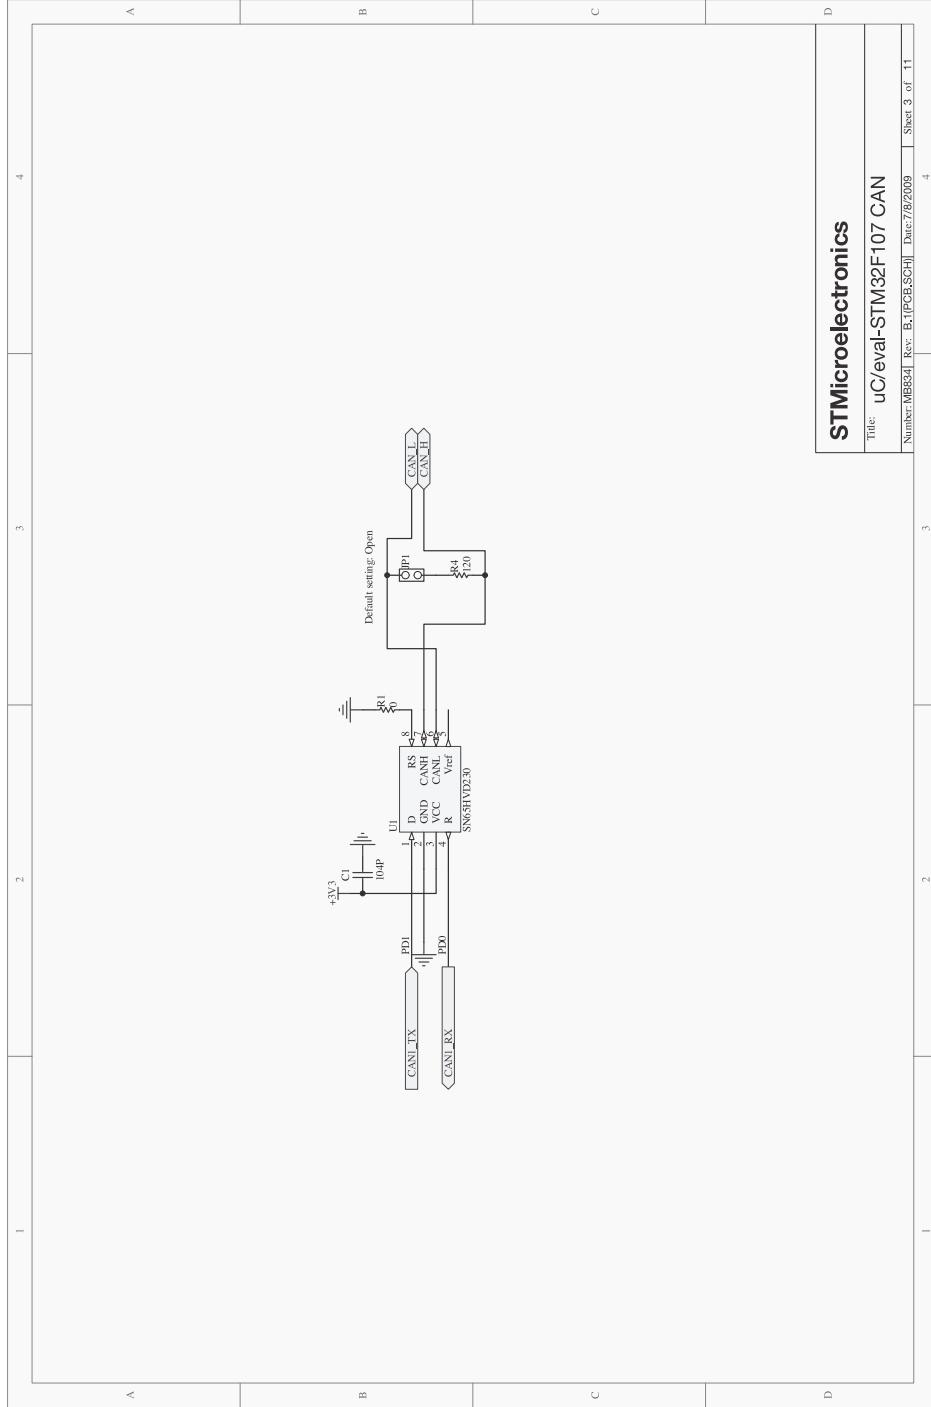

D

STMicroelectronics

Title: uC/eval-STM32F107 CAN


Number: MB8341 Rev: B.11 Date: 7/8/2009 Sheet 3 of 11


4

3


2


1

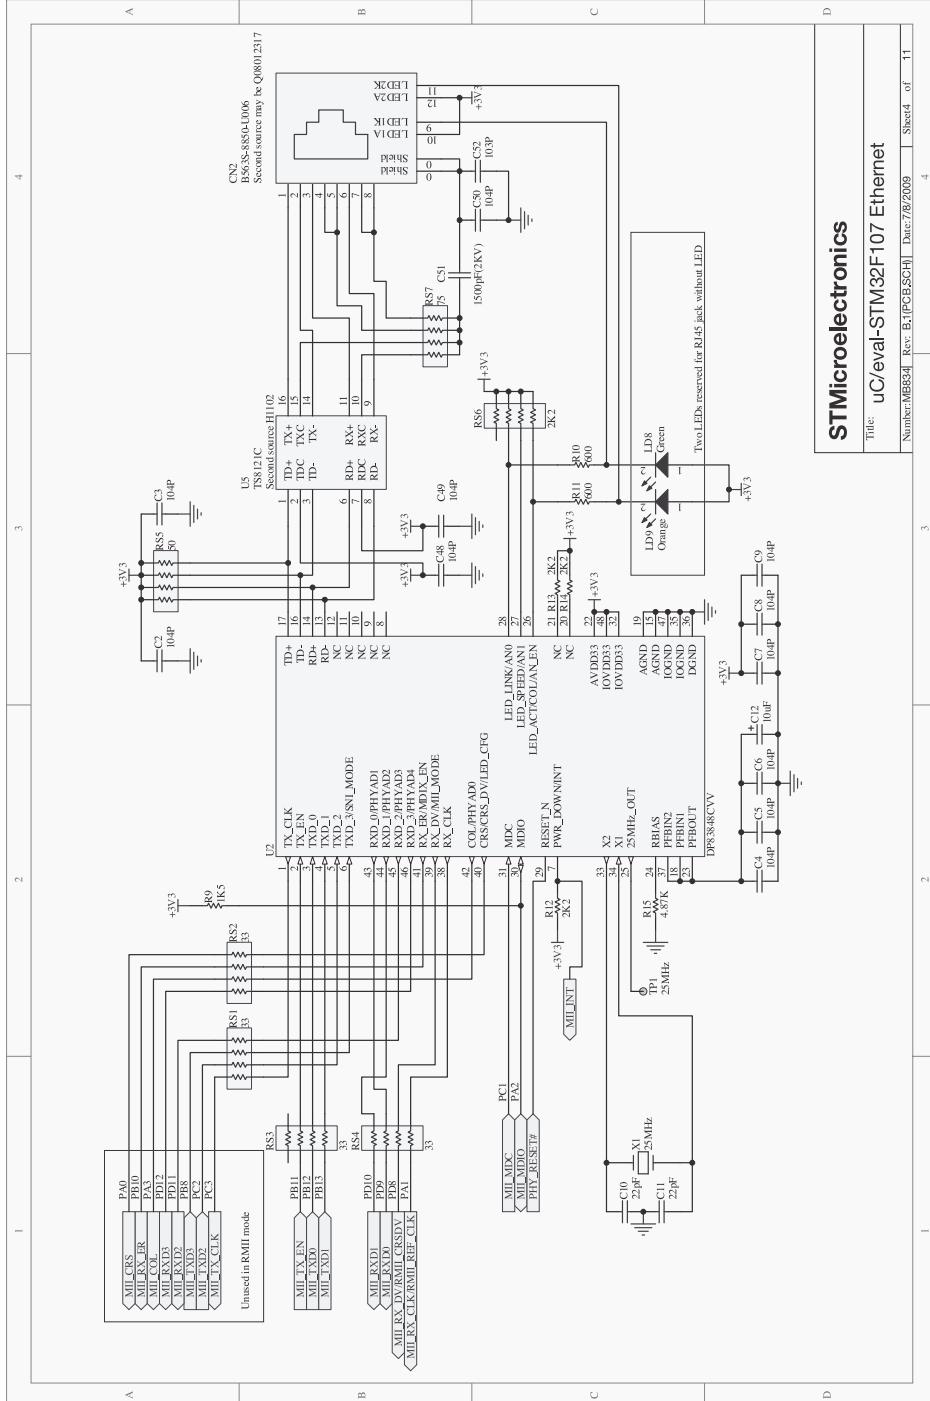

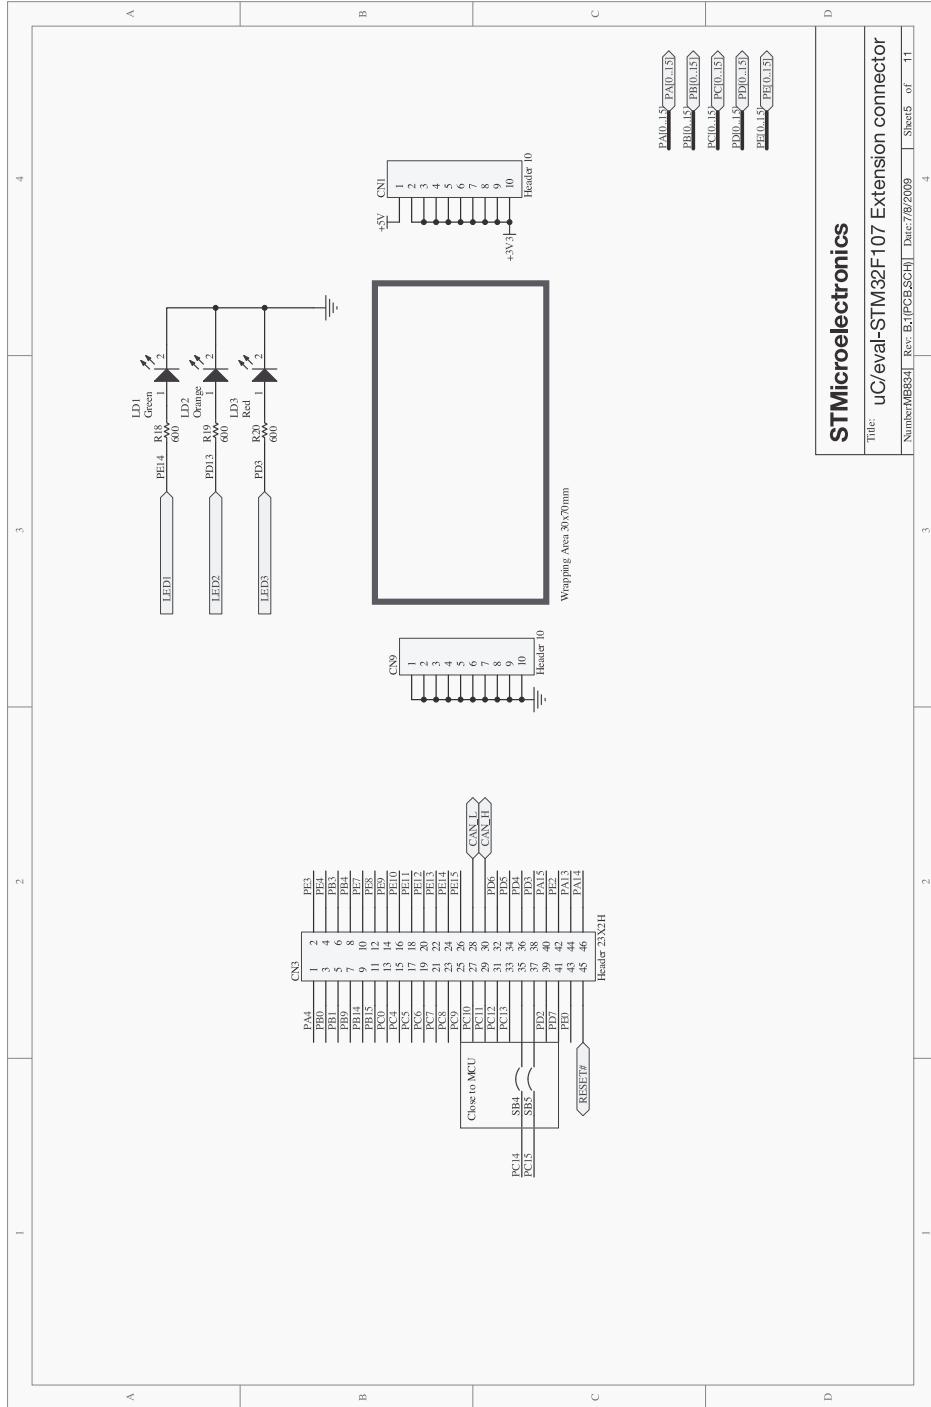

Appendix E

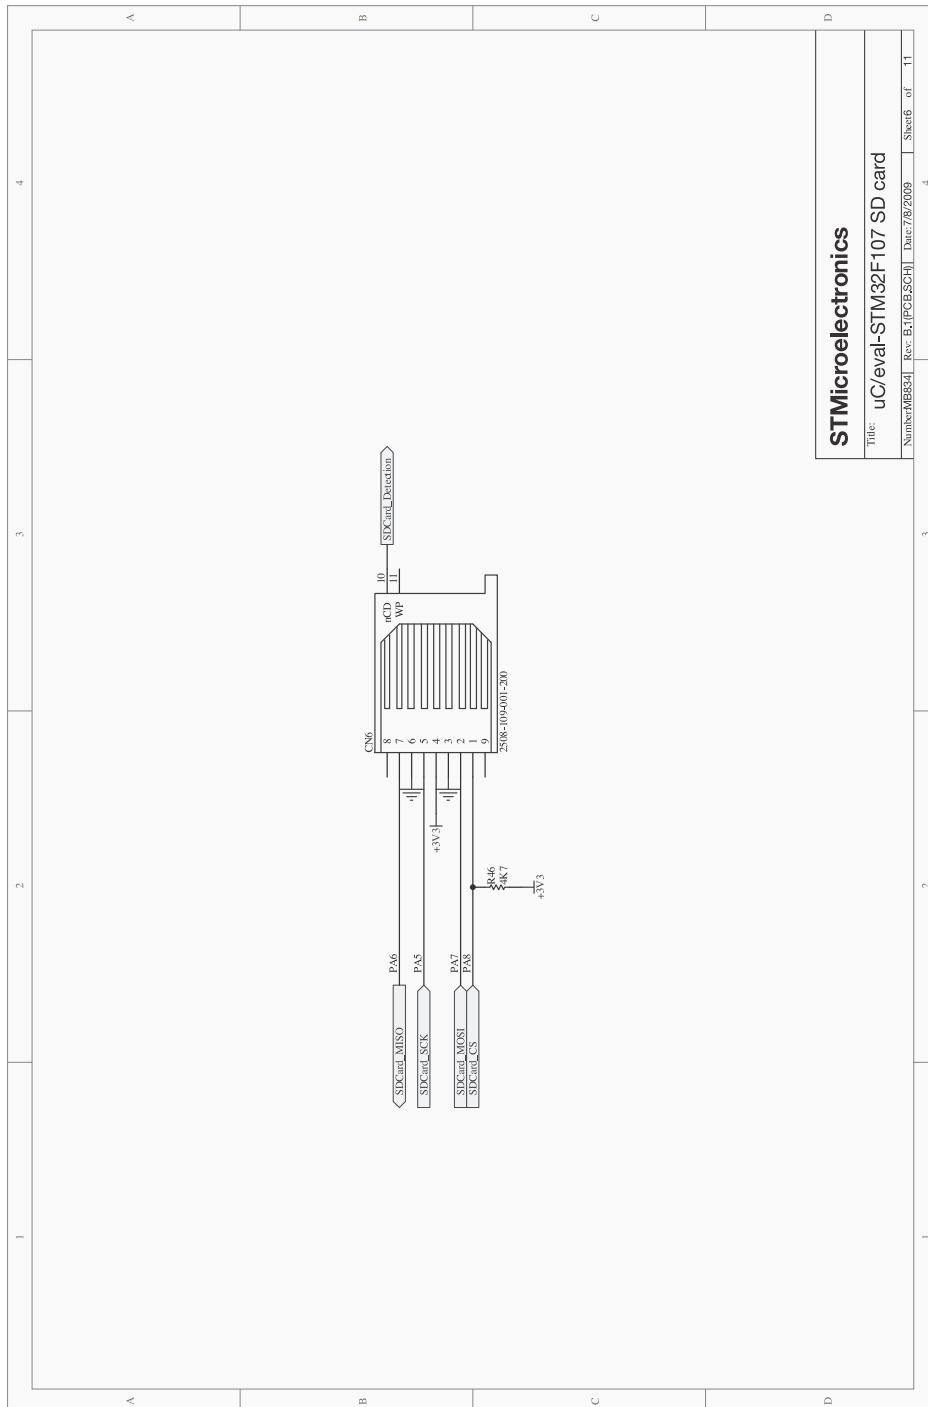

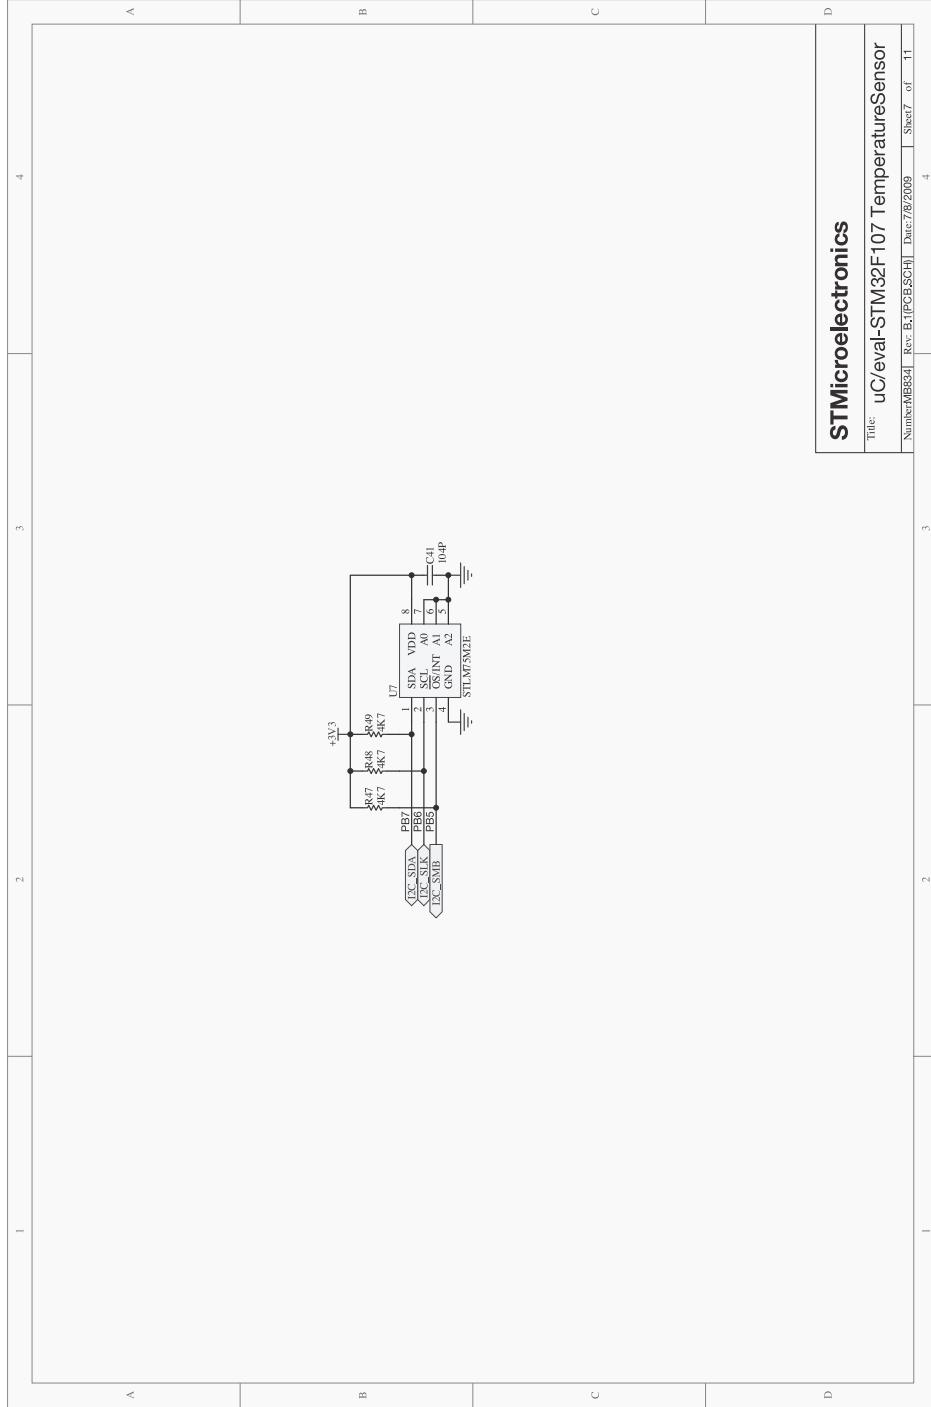



D

STMicroelectronics


Title: uC/eval-STM32F107 TemperatureSensor
Number:MB8341 Rev. B10/PBSC/H Date:7/8/2009 Sheet 7 of 11


Appendix E

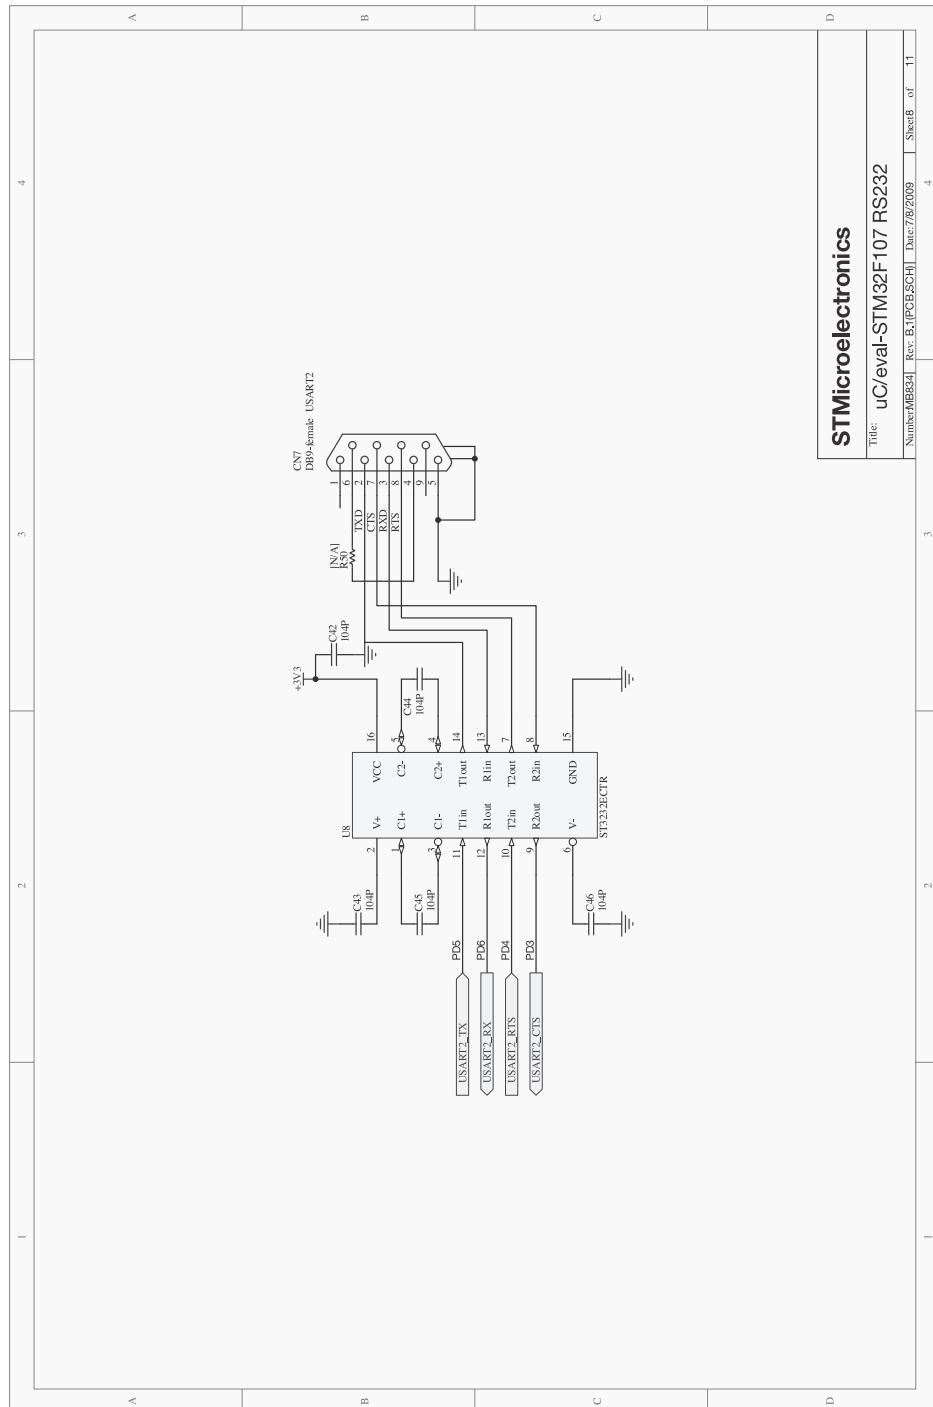

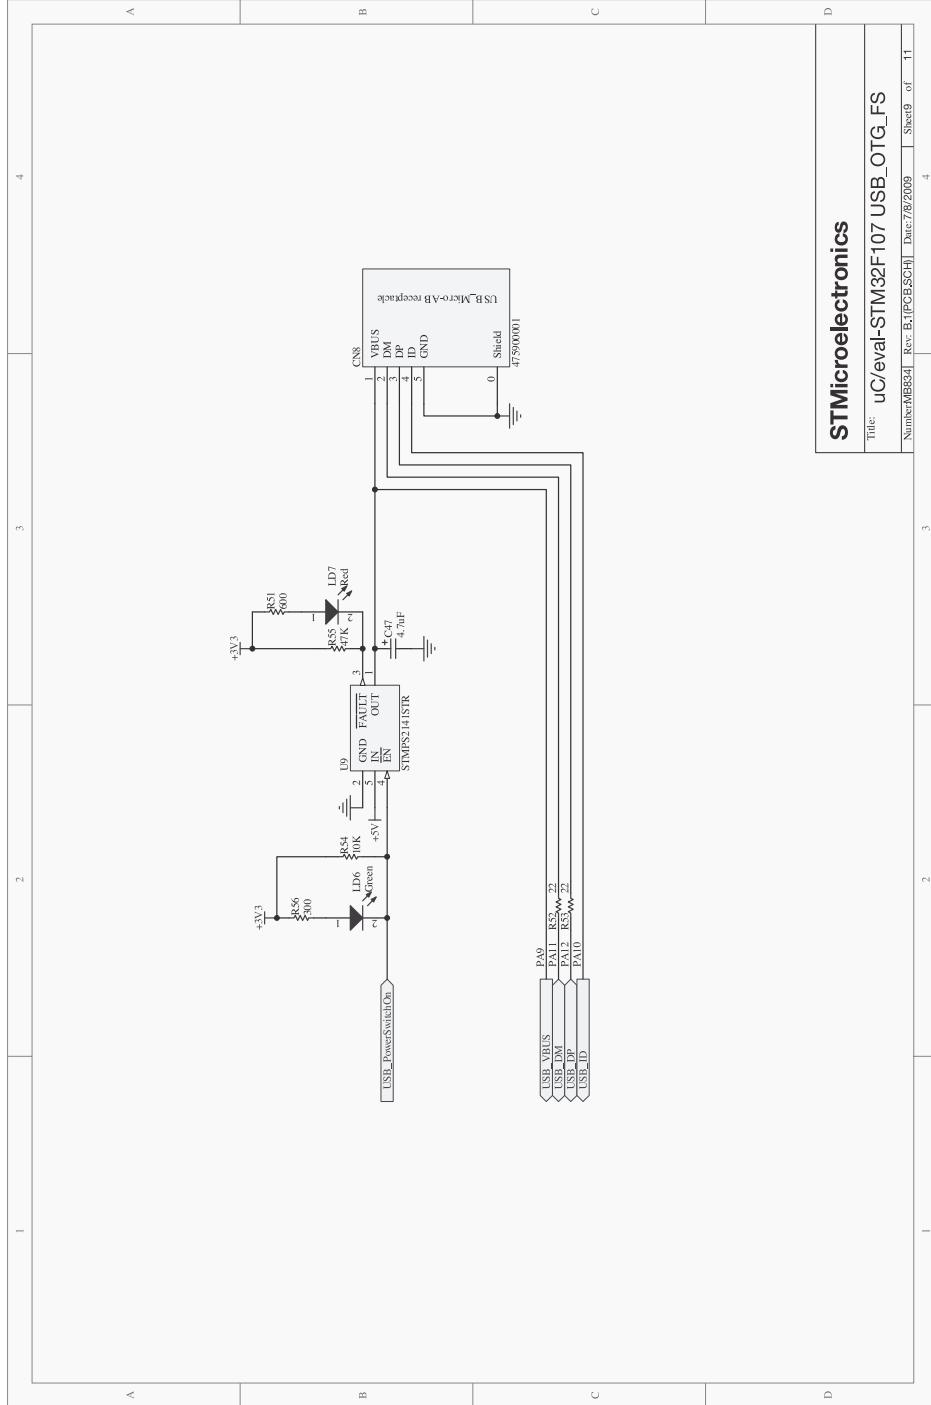

Appendix E

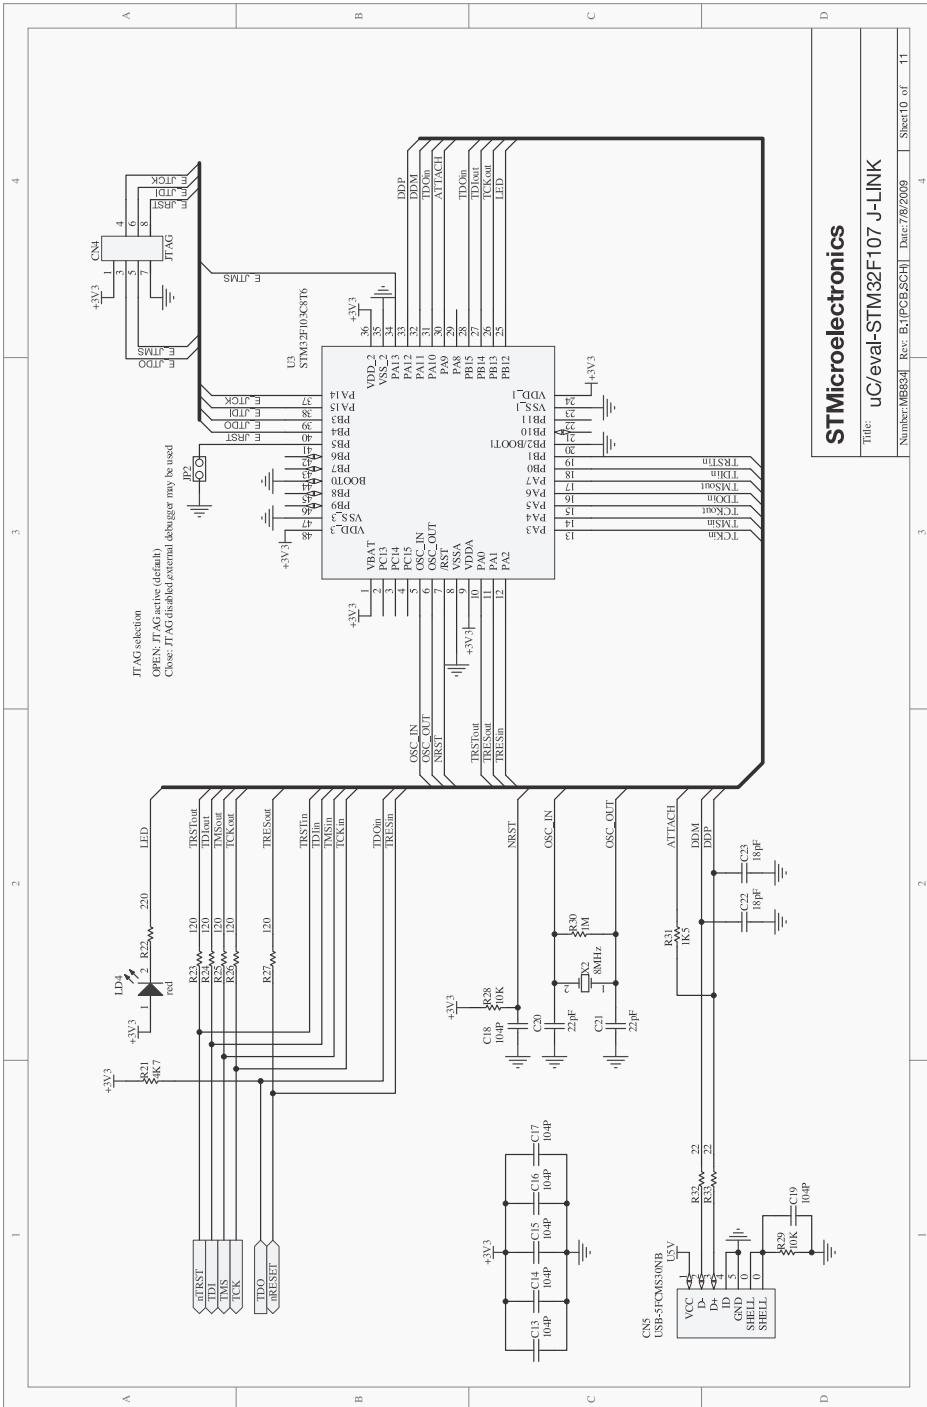

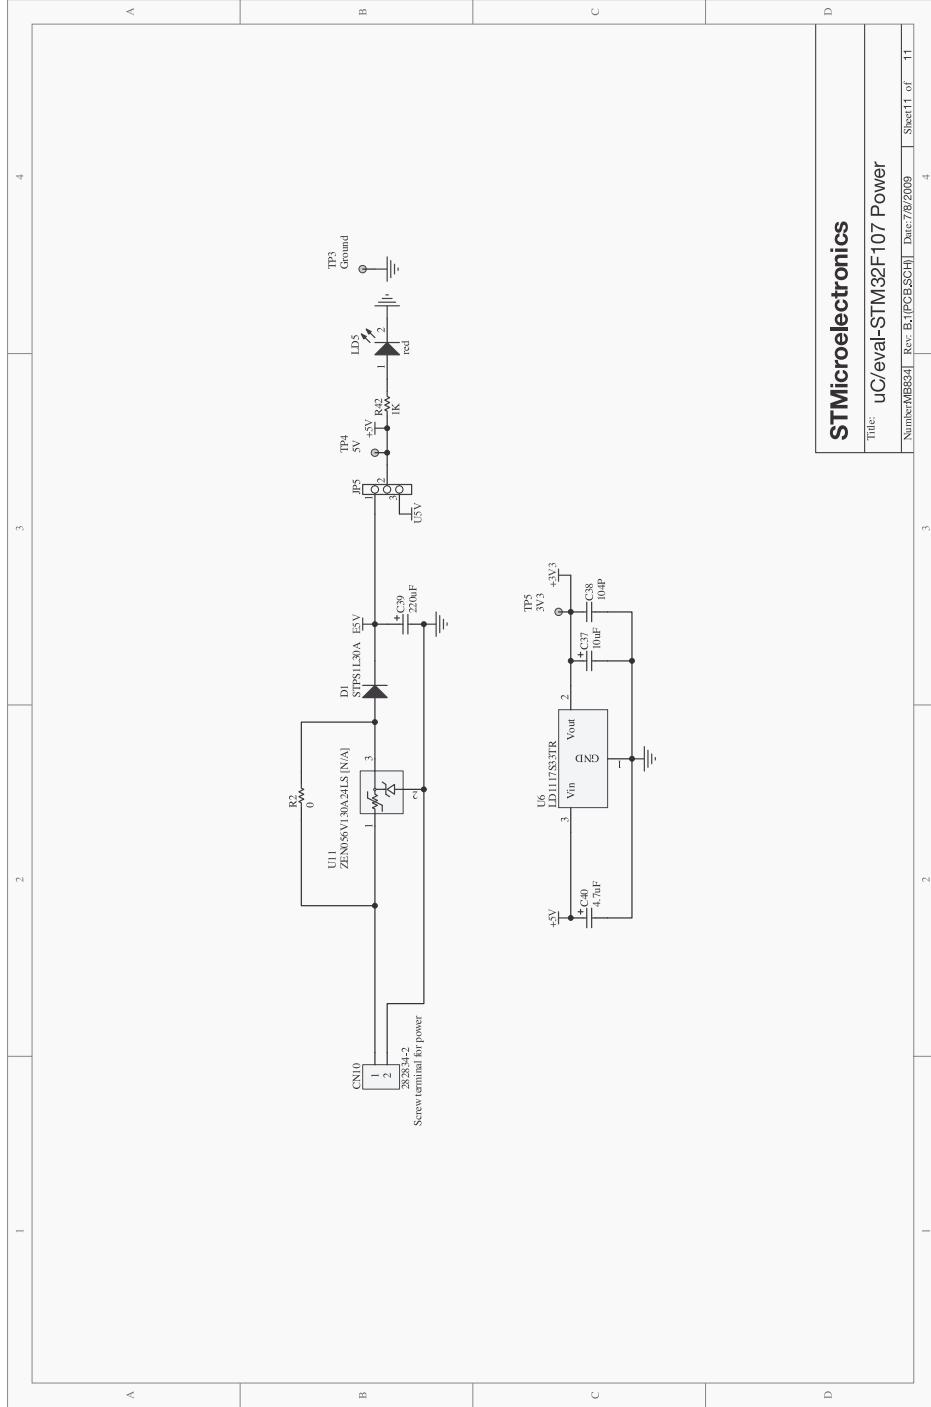

Appendix

F

Bibliography

ARM Ltd, **ARM Cortex-M3 Technical Reference Manual**, 110 Fulbourn Road, Cambridge, CB1 9NJ, England, http://www.arm.com/documentation/ARMProcessor_Cores/

Hitex (UK) Ltd., **The Insider's Guide to the STM32 ARM Based Microcontroller**, Sir William Lloyd Road, University of Warwick Science Park, Coventry, CV4 7EZ, United Kingdom, www.hitex.com

©2009 STMicroelectronics, **RM0008 Reference Manual STM32F101xx**, STM32F102xx, STM32F103xx, STM32F105xx and STM32F107xx advanced ARM-based 32-bit MCUs.

©2009 STMicroelectronics, **STM32F105xx - STM32F107xx datasheet**.

©2009 STMicroelectronics, **STM32F105xx and STM32F107xx Errata Sheet**.

©2009 STMicroelectronics, **PM0042 Programming Manual**.

©2009 STMicroelectronics, **STM32F10xx Flash programming**.

Appendix F

F

Appendix

G

Licensing Policy

This book contains µC/OS-III in source form for FREE short-term evaluation, for educational use or for peaceful research. If you plan or intend to use µC/OS-III in a commercial application/product then, you need to contact Micrium to properly license µC/OS-III for its use in your application/product.

We provide ALL the source code for your convenience and to help you experience µC/OS-III. The fact that the source is provided does NOT mean that you can use it commercially without paying a licensing fee. Knowledge of the source code may NOT be used to develop a similar product.

The user may use µC/OS-III with the µC/Eval-STM32F107 and it is not necessary to purchase anything else as long as the initial purchase is used for educational purposes. Once the code is used to create a commercial project/product for profit, however, it is necessary to purchase a license.

It is necessary to purchase this license when the decision to use µC/OS-III in a design is made, not when the design is ready to go to production.

If you are unsure about whether you need to obtain a license for your application, please contact Micrium and discuss the intended use with a sales representative.

CONTACT MICRIUM

1290 Weston Road, Suite 306
Weston, FL 33326
USA
+1 954 217 2036
+1 954 217 2037 (FAX)
E-mail: sales@micrium.com
Web: www.micrium.com

Appendix G

G

Index

A

adding tasks to the ready list	149
ANSI C	35, 51, 343, 355, 725
API	36, 689
API changes	702
app_cfg.h	68
application code	52
application programming interface	36, 689
AppTaskStart() 72–74, 81, 135–137, 773–774, 788–789, 801, 817	
ARM10	858
ARM11	858
ARM7	743–744, 751, 753, 759, 858
ARM9	743–744, 751, 753, 858
ARM9E	858
assigning a variable to an object	872

B

background	32, 35
bilateral rendezvous	292, 313–314
binary semaphores	239
bit banding	743, 751
board support package 51, 54, 68, 358, 391–392, 411, 724, 760, 768, 825, 849	
boot options	881
bounded	255–256
broadcast	281, 307, 311, 331
on post calls	89, 193
to a semaphore	306
BSP	759–760, 850
BSP group	768
bsp.c	392, 849–850
bsp.h	68, 392
BSP_Init()	68, 74, 80, 136, 392
bsp_int.c	394
bsp_int.h	394
BSP_LED_Off()	392
BSP_LED_On()	68, 75, 392
BSP_LED_Toggle()	392
BSP_PB_Rd()	393

C

callback function	137, 213, 215–216, 228–229
CAN (controller area network)	882
clock sources	885
clock tick	193
CLZ	39, 142, 145, 694, 751, 849
CN3	886
CN7	887
CN9	887
compile-time, configurable	41, 97, 690
configurable	696
compile-time	41, 97, 690
message queue	311
OS_StatTask()	134, 680
OS_TickTask()	127
OS_TmrTask()	137, 221
run-time	37, 41, 690
conjunctive	294
connectors	886
consumer	314–315
context switch	39, 46, 86, 88, 96, 104, 115, 122, 127, 165, 167, 169, 171, 173, 236, 239, 416, 419, 435
conventions	43
CoreSight	752
Cortex CPU	744
Cortex-M0	858
Cortex-M1	858
Cortex-M3	858
Cortex-R4	858
count leading zeros	751, 847–849
countdown	38, 137, 214–217
counting semaphores	246
CPU usage	775, 781, 807, 812, 828, 837, 853
cpu.h	61, 69, 358, 360, 364, 367, 773, 851–854
#define	851
data types	852
function prototypes	855
cpu_a.asm	62, 358, 360, 363–364, 367–368, 852, 855–856
cpu_bsp.c	360
cpu_bsp.h	361
cpu_c.c	62, 360, 364, 367–368
cpu_cfg.h	61, 86, 90, 124, 360–361, 419, 848
CPU_CFG_ADDR_SIZE	366

CPU_CFG_CRITICAL_METHOD	367	
CPU_CFG_DATA_SIZE	366	
CPU_CFG_ENDIAN_TYPE	366	
CPU_CFG_INT_DIS_MEAS_EN	362, 837	
CPU_CFG_INT_DIS_MEAS_OVRHD_NBR	362	
CPU_CFG_LEAD_ZEROS_ASM_PRESENT	362	
CPU_CFG_NAME_EN	361	
CPU_CFG_NAME_SIZE	361	
CPU_CFG_STK_GROWTH	367	
CPU_CFG_TRAIL_ZEROS_ASM_PRESENT	362	
CPU_CFG_TS_32_EN	361	
CPU_CFG_TS_64_EN	362	
CPU_CFG_TS_TMR_SIZE	362	
CPU_CntLeadZeros	363	
CPU_CntLeadZeros()	855	
cpu_core.c	61, 358, 360, 363–364, 847–848	
cpu_core.h	61, 69, 360, 364, 848	
CPU_CRITICAL_ENTER()	61, 86, 88, 234–236, 366, 368, 618, 702, 847, 852, 854	
CPU_CRITICAL_EXIT()	61, 86, 88, 234–236, 366, 368, 702, 847, 852, 854	
CPU_DATA	142–145, 365	
CPU_DATA_SIZE_MAX	367	
cpu_def.h	61, 360–361, 848	
CPU_Init()	74, 80, 363	
CPU_SR_Restore()	368	
CPU_SR_Save()	368	
CPU_STK	69, 773, 833, 854	
CPU_TS_Get32	363	
CPU_TS_TmrFreqSet	363	
CPU_TS_TmrInit()	393, 849–850 μC/CPU functions	850
CPU_TS_TmrRd()	393, 825, 849–850 μC/CPU functions	850
creating a memory partition	344	
credit tracking	279, 308	
critical region	85, 425, 438	
C-SPY Debugger	864	
D		
DAP	752	
data screen	783, 805, 870–871, 873	
data types (<code>os_type.h</code>)	683	
data watch trace	752	
deadlock	39–40, 252, 267–270, 690 prevention	39–40, 690
deadly embrace	267	
debug access port	752	
debug interface	883	
debugging features	752	
deferred post	152–153, 161, 186, 189, 191–195	
device support	862	
direct post	152, 186–188, 190, 192–193, 195	
direct vs. deferred post method	192	
E		
ELF/DWARF	43	
embedded systems	19, 31, 37, 91, 93, 102, 184, 350, 354, 725, 731	
error checking	38	
Ethernet	34, 43, 49, 55, 94, 176, 289, 310, 312, 884	
ETM	752	
event flags	40, 46–47, 89, 193, 197, 273, 281, 294–296, 298–300, 305–308, 423–424, 448, 690, 703 internals	300
synchronization	448	
using	296	
example project	772	
exception vector table	748	
extension connector (CN3)	886	
F		
features	877	
features of μC/OS, μC/OS-II and μC/OS-III	40	
FIFO	81, 311, 318, 322, 326, 451–452	
fixed-size memory partitions	455	
floating-point	814, 853	
flow control	314	
footprint	40, 438–439, 441, 690	
foreground	32, 35	
foreground/background systems	32	
FPU	102, 178	
fragmentation	98, 343–344, 354	
free()	343, 354	
G		
gauges	867–868, 870–871	
general statistics – run-time	414	
getting a memory block from a partition	348	
granularity	213, 685	
graphs	867–868, 870–871	
GUI	35	
H		
hardware layout and configuration	878	
HID	869	
hooks and port	723	
human interface device	738, 869	

I/O assignments	888
IAR assembler	864
IAR Embedded Workbench for AR	858
IAR J-LINK Linker	864
IAR Library	865
idle task (OS_IdleTask())	125
infinite loop	71, 75, 91, 93, 97, 125, 139, 417–418, 724
input capture	814, 816, 820–821
instruction set	751
internal tasks	125
interrupt	85–87, 89–90, 138, 160, 175–181, 183–187, 189–193, 195, 233–236, 271, 273, 309, 394, 676, 684, 702 <ul style="list-style-type: none"> controller disable enable disable time 61, 87, 90, 138, 175, 187–188, 191–192, 233, 271, 413–414, 419 enable time, measuring enable/disable handler task latency management periodic recovery response vector to a common location
interrupt service routine	273, 350
intuitive	36, 44, 100
ISR	273, 350 <ul style="list-style-type: none"> epilogue handler task prologue typical μC/OS-III ISR
J	
J-Link	883
JTAG	752, 864, 875, 883–884
K	
kernel awareness debuggers	39
kernel object	422
kernel objects	793, 801
L	
LED	42, 51, 75, 392
lib_ascii.c	63
lib_ascii.h	63
lib_cfg.h	64
lib_def.h	63, 69
lib_mem.c	63
lib_mem.h	63
lib_mem_a.asm	64
lib_str.c	63
lib_str.h	63
licensing	43, 47, 733, 742, 907
LIFO	311, 451–452
LM75 temperature sensor	883
lock/unlock	236
locking	36, 87–90, 138, 156, 233, 236, 271, 309, 416
locking the scheduler	87
low power	126, 195
M	
malloc()	69, 98, 343, 345–347, 349, 354
MCU	51–52, 54, 358
measuring RPM using an input capture	816
memory management	707
memory management unit	103
memory map	750
memory partitions	317, 344, 346, 350, 354, 415, 424, 455, 676 <ul style="list-style-type: none"> using
memory protection unit	103
message mailboxes	705
message passing	47, 309, 451–452
message queue	47, 198, 309–317, 319, 321, 323–325, 331, 333, 341, 705, 710–711, 717 <ul style="list-style-type: none"> configurable internals message passing task using
messages	310
meters	812, 868, 870–871
migrating	47, 689
miscellaneous	721
MISRA-C	
2004, Rule 14.7 (Required)	728
2004, Rule 15.2 (Required)	729
2004, Rule 17.4 (Required)	730
2004, Rule 8.12 (Required)	727
2004, Rule 8.5 (Required)	726
MMU	62, 103
modular and extensible IDE	859
MPU	103
MSD	738–739
multiple tasks	
application with kernel objects	76
waiting on a semaphore	281
multitasking	33, 36, 40, 91, 96, 139, 690
mutual exclusion semaphore	256, 260–264, 271, 422–423, 677, 708–709 <ul style="list-style-type: none"> internals resource management
N	
nested task suspension	38
nested vector interrupt controller	743, 747
numeric indicators	867–868, 871
NVIC	743, 747–748

O

object names 39
 object ribbon 871
 objects 870–873
 one-shot timers 215
 os.h 69
 os_app_hooks.c 827–831, 837–838
 OS_AppdleTaskHookPtr 827
 OS_AppStatTaskHookPtr 828
 OS_AppTaskDelHookPtr 830
 OS_AppTaskReturnHookPtr 831
 OS_AppTaskSwHookPtr 836–837
 OS_AppTimeTickHookPtr 838
 os_cfg.h 69, 124, 419, 671–672
 os_cfg_app.c 438, 769, 775
 os_cfg_app.h 671, 683, 769, 840
 OS_CFG_APP_HOOKS_EN 672, 827
 OS_CFG_ARG_CHK_EN 674
 OS_CFG_CALLED_FROM_ISR_CHK_EN 674
 OS_CFG_DBG_EN 675
 OS_CFG_FLAG_DEL_EN 675
 OS_CFG_FLAG_EN 675
 OS_CFG_FLAG_MODE_CLR_EN 675
 OS_CFG_FLAG_PEND_ABORT_EN 675
 OS_CFG_IDLE_TASK_STK_SIZE 684
 OS_CFG_INT_Q_SIZE 684
 OS_CFG_INT_Q_TASK_STK_SIZE 684
 OS_CFG_ISR_POST_DEFERRED_EN 676, 773
 OS_CFG_ISR_STK_SIZE 684
 OS_CFG_MEM_EN 676
 OS_CFG_MSG_POOL_SIZE 684
 OS_CFG_MUTEX_DEL_EN 677
 OS_CFG_MUTEX_EN 677
 OS_CFG_MUTEX_PEND_ABORT_EN 677
 OS_CFG_OBJ_TYPE_CHK_EN 677
 OS_CFG_PEND_MULTI_EN 677
 OS_CFG_PRIO_MAX 677
 OS_CFG_Q_DEL_EN 678
 OS_CFG_Q_EN 678
 OS_CFG_Q_FLUSH_EN 679
 OS_CFG_Q_PEND_ABORT_EN 679
 OS_CFG_SCHED_LOCK_TIME_MEAS_EN 679, 837
 OS_CFG_SCHED_ROUND_ROBIN_EN 679
 OS_CFG_SEM_DEL_EN 679
 OS_CFG_SEM_EN 679
 OS_CFG_SEM_PEND_ABORT_EN 679
 OS_CFG_SEM_SET_EN 679
 OS_CFG_STAT_TASK_EN 680, 788
 OS_CFG_STAT_TASK_PRIO 685
 OS_CFG_STAT_TASK_RATE_HZ 685
 OS_CFG_STAT_TASK_STK_CHK_EN 680
 OS_CFG_STAT_TASK_STK_SIZE 685
 OS_CFG_STK_SIZE_MIN 680

OS_CFG_TASK_CHANGE_PRIO_EN 681
 OS_CFG_TASK_DEL_EN 681
 OS_CFG_TASK_PROFILE_EN 681, 837
 OS_CFG_TASK_Q_EN 681
 OS_CFG_TASK_Q_PEND_ABORT_EN 681
 OS_CFG_TASK_REG_TBL_SIZE 681
 OS_CFG_TASK_SEM_PEND_ABORT_EN 682
 OS_CFG_TASK_STK_LIMIT_PCT_EMPTY 683
 OS_CFG_TASK_SUSPEND_EN 682
 OS_CFG_TICK_RATE_HZ 685, 775, 840
 OS_CFG_TICK_TASK_PRIO 685
 OS_CFG_TICK_TASK_STK_SIZE 685
 OS_CFG_TICK_WHEEL_SIZE 686
 OS_CFG_TIME_DLY_HMSM_EN 682
 OS_CFG_TIME_DLY_RESUME_EN 682
 OS_CFG_TMR_DEL_EN 682
 OS_CFG_TMR_EN 682
 OS_CFG_TMR_TASK_PRIO 686
 OS_CFG_TMR_TASK_RATE_HZ 687
 OS_CFG_TMR_TASK_STK_SIZE 687
 OS_CFG_TMR_WHEEL_SIZE 687
 os_cpu.h 60, 69, 371, 824
 os_cpu_a.asm 60, 381, 825, 841
 OS_CPU_PendSVHandler() 843
 OSCtxSw() 842
 OSIntCtxSw() 842
 OSStartHighRdy() 841
 os_cpu_a.inc 388
 os_cpu_c.c 60, 372, 826
 OS_CPU_SysTickHandler() 839
 OS_CPU_SysTickInit() 840
 OSInitHook() 827
 OSStatTaskHook() 828
 OSTaskDelHook() 830
 OSTaskReturnHook() 831
 OSTaskStkInit() 832
 OSTaskSwHook() 835–836
 OSTimeTickHook() 838
 OS_CPU_PendSVHandler() 843
 OS_CPU_SysTickHandler() 826, 839
 OS_CPU_SysTickInit() 774, 826, 840
 OS_CTX_RESTORE 389
 OS_CTX_SAVE 388
 OSCtxSw() 168, 371, 382, 456, 825, 841–844
 os_dbg.c 425
 OSFlagCreate() 458
 OSFlagDel() 460
 OSFlagPend() 93, 462
 OSFlagPendAbort() 466
 OSFlagPendGetFlagsRdy() 469
 OSFlagPost() 471
 OSIdleTaskHook() 372, 474, 826
 OSIdleTaskHook() 826
 OSInit() 147, 476
 OSInitHook() 373, 479, 826–827
 OSIntCtxSw() 170, 371, 384, 480, 841–844
 OSIntEnter() 482

OSIntExit()	160, 484
OS_IntQTask()	138
OS_ISR_ENTER	390
OS_ISR_EXIT	391
OSMemCreate()	485
OSMemGet()	488
OSMemPut()	246, 490
OSMutexCreate()	492
OSMutexDel()	494
OSMutexPend()	93, 259–260, 496
OSMutexPendAbort()	500
OSMutexPost()	503
OSPendMulti()	93, 506
OSQCreate()	511
OSQDel()	514
OSQFlush()	516
OSQPend()	93, 519
OSQPendAbort()	523
OSQPost()	526
OSSafetyCriticalStart()	530
OSSched()	159, 531
OSSchedLock()	533
OS_SchedRoundRobin()	161
OSSchedRoundRobinCfg()	535
OSSchedRoundRobinYield()	537
OSSchedUnlock()	539
OSSemCreate()	541
OSSemDel()	544
OSSemPend()	93, 547
OSSemPendAbort()	551
OSSemPost()	554
OSSemSet()	557
OSStart()	559
OSStartHighRdy()	371, 381, 561, 841–844
os_stat.c	828
OSStatReset()	563
OS_StatTask()	680 configurable
OSStatTaskCPUUsageInit()	565
OSStatTaskHook()	373, 567, 826, 828
OSTaskChangePrio()	569
OSTaskCreate()	149, 571
OSTaskCreateHook()	96, 374, 581, 826, 829
OSTaskDel()	93, 583
OSTaskDelHook()	374, 586, 830
OSTaskQPend()	93, 588
OSTaskQPendAbort()	593
OSTaskQPost()	595
OSTaskRegGet()	598
OSTaskRegSet()	601
OSTaskResume()	606
OSTaskReturnHook()	374–375, 604, 826, 831
OSTaskSemPend()	93, 608
OSTaskSemPendAbort()	611
OSTaskSemPost()	613
OSTaskSemSet()	615
OSTaskStatHook()	617
OSTaskStkChk()	619
OSTaskStkInit()	376, 622, 826, 832–834
OSTaskSuspend()	93, 627
OS_TASK_SW()	371
OSTaskSwHook()	379, 629, 826, 835–837, 844
OSTaskTimeQuantaSet()	632
OSTasrDelHook()	826
OSTickISR()	385, 634
OSTimeDly()	93, 132, 204–205, 207, 636
OSTimeDlyHMSM()	93, 209, 639
OSTimeDlyResume()	211, 642
OSTimeGet()	644
OSTimeSet()	646
OSTimeSet() and OSTimeGet()	212
OSTimeTick()	128, 212, 648
OSTimeTickHook()	380, 649, 826, 838
OSTmrCreate()	226, 651
OSTmrDel()	656
OSTmrRemainGet()	658
OSTmrStart()	660
OSTmrStateGet()	662
OSTmrStop()	664
OS_TmrTask(), configurable	137, 221
OS_TS_GET()	68, 82, 122, 188, 191, 242, 253, 266, 283, 290, 302, 324, 371, 803
os_type.h	69, 671, 683, 853
OSVersion()	667
P	
partition	316–317, 343–354, 424
partition memory manager	676
pend	
lists	46, 138, 197, 202
on a task semaphore	290
on multiple objects	38, 41, 89, 193, 333, 430, 453, 691
performance measurements	793, 795, 799, 801, 806, 808
periodic (no initial delay)	216
periodic (with initial delay)	217
periodic interrupt	203
peripherals	31, 51, 99, 358
per-task statistics - run-time	419
polling	175
porting	47, 165, 355, 358
posting (i.e. signaling) a task semaphore	291
power connectors (CN1 & CN9)	887
power supply	880
preemption lock	85
preemptive scheduling	100, 152–153
priorities	
task	100

priority ... 81, 83, 89, 100–101, 139, 155–156, 161, 163, 168, 173, 175–176, 185, 193, 221, 273, 279, 281, 306, 420, 422, 677–678, 690

 inheritance 37, 233, 257, 271
 inversion 248, 254–255
 level 37, 142, 145–146, 149–150
 OS_IdleTask() 125
 OS_StatTask() 134, 680
 OS_TmrTask() 137, 221
 pend list 197
 priority ready bitmap 158
 round-robin scheduling 36

Processors with Multiple Interrupt Priorities 181

producer 314–315

program status register 746, 854

protocol mechanism 237, 274

R

ready list 46, 109, 138, 141, 146–150, 197
 adding tasks 149

real-time kernels 33

real-time operating system 19–20, 35, 127

reentrant 92–93, 260, 355

rendezvous 276, 292, 306–307, 313–314

reset sources 881

resource sharing 233

response time 32, 38, 175, 299

retriggering 216

returning a memory block to a partition 349

revolutions per minute 809

RMS 100–101

ROMable 21, 35, 37, 40, 690

rotating wheel data 811

round-robin scheduling 156

RPM 741, 809, 811–822

 measurement simulation implementation 813
 setpoint 812, 817

RS-232C 882, 887

running the project 770, 786, 794, 810

run-time configurable 37, 41, 690

S

scalable 21, 35–36, 40, 690

scheduling algorithm 194–195

scheduling internals 158

scheduling points 154, 163

schematics 892

SD/MMC card 882

SecurCore 858

semaphore .. 77, 96, 119, 123, 200, 233, 237–256, 260–264, 267, 269, 271, 274–292, 294, 306–309, 315–316, 333, 337, 339, 352–353, 420–423, 558, 677, 679, 690, 708–709, 712–713, 717

 internals (for resource sharing) 249
 internals (for synchronization) 282

 synchronization 449

servers 327

short interrupt service routine 180

single task application 68

sliders 867, 870–871

software timers 37–38, 40, 46, 58, 690

source files 692

stack 94–96, 98–99, 102–106, 110, 115, 117–118, 123–124, 134, 137, 139, 165–167, 178–179, 199, 202, 356, 360, 369–370, 421, 671, 680–681, 683–685, 687, 693, 695, 718, 724

 pointer 165, 167, 369

 size 102

stack overflows 102–103, 105–106

stacking and interrupts 746

statistic task (OS_StatTask()) 134

statistics 44, 47, 134–135, 137, 139, 413–414, 419, 680, 694

status 114

STmicroelectronics STM32 753

superloops 32

SWD 739, 779, 783, 864, 868–869, 875, 877, 883–884

switched in 104, 109

symbol browser 870–871, 873

synchronization 294

synchronizing multiple tasks 306

system tick 127, 193, 195

SysTick 743, 748–749, 825, 839–840

SYSTICK (System Tick) 749

T

tail chaining 743, 747, 845

task

 adding to the readylist 149

 latency 176, 188, 190–191, 420, 679

 management 444, 714

 message 38

 message queue 312, 452

 priorities, assigning 100

 registers 38, 41, 121, 691

 semaphore 289–292, 308, 315–316

 semaphores, synchronization 450

 signals 38, 44, 151, 154, 287, 291, 341

 stack overflows 103

 states 108

task control block 69, 94, 113, 330

task management

 internals 108

 services 107

temperature sensor

 monitoring 790

test code 801

thread 33, 91

thread mode 744, 746

tick task (OS_TickTask()) 127

tick wheel 47, 116, 131, 414, 440, 671, 683

time management 37, 42, 46, 203, 446, 718–719

time slicing 120, 156

time stamps 41, 74, 691

timeouts 39, 127, 194–195, 203, 212, 685

timer management	719
internals	217
internals - OS_TMR	219
internals - Timer List	223
internals - Timer Task	221
internals - Timers States	217
timer task (OS_TmrTask())	137
timer wheel	224, 226, 440, 671, 683, 686
timers	137, 195, 213, 215–217, 223–224, 229, 454
timestamp ...87–88, 194, 200, 242, 250–251, 253, 262, 264, 266, 283, 290, 299, 302–303, 310, 324, 328, 337, 352, 393, 422–424, 706, 711, 713	
transient events	299–300

U

UARTs	49
unbounded priority inversion ...37, 233, 254–256, 262, 267, 271	
unilateral rendezvous	276, 292
universal asynchronous receiver/transmitters	49
unlock	236
unlocking	138, 233, 271
USB	43
USB-OTG	882
user definable hooks	39
using event flags	296
using memory partitions	350

V

variable name changes	701
variables	
monitoring	776
vector	92, 176–177, 183, 185, 195
vector address	176, 183

W

wait lists	42, 46, 138, 197
walks the stack	105
watermark	72, 95, 115
what is μC/OS-III?	21
why a new μC/OS version?	21
workspace 759, 768–769, 779, 786, 790, 793, 795, 810–811, 870	

X

XScale	858
--------------	-----

Y

yielding	156
----------------	-----

Micrium

μC/CPU ...741, 752, 761, 769, 774–775, 803, 822, 837, 847–850, 854–855	
μC/CPU functions	
in bsp.c	849–850
in CPU_TS_TmrInit()	850
in CPU_TS_TmrRd()	850
μC/Eval-STM32F107 737–739, 741–742, 753, 755–757, 760, 767–768, 770, 774–775, 780, 785–786, 791, 793–794, 803, 810, 814, 868–869, 875–888	
μC/FS	35, 739
μC/GUI	35
μC/LIB	51, 62–64, 761, 769
portable library functions	62
μC/OS-III	35
features	40
features (os_cfg.h)	672
features with longer critical sections	89
porting	369
stacks, pools and other (os_cfg_app.h)	683
μC/OS-III convention changes	695
μC/Probe 39, 42–44, 57, 120, 123, 220, 240, 249, 261, 263, 283–284, 301, 303, 413, 426, 441, 795, 805, 811, 817, 868	
using	795
μC/TCP-IP	35, 738, 869
μC/USB	35, 738, 869

Index



Benefit from our award- winning Cortex™ tool concept

Hitex offers the complete Cortex know-how!

- Evaluation and start-up tools
- High-end JTAG debugger
- Serial Wire Viewer support
- Training & consulting
- Documentation & application know-how
- First class development & test services
- Other cores supported as well for easy migration

www.hitex.com/cortex
Webshop: www.ehitex.de

Award-winning tools for your Cortex start

Hitex makes your start into the Cortex architecture easy.
A wide range of evaluation tools helps you.

Our award-winning STM32 USB stick concept is the basis for the great number of evaluation sticks and corresponding extension boards. All tools are available at the Hitex webshop:

- **STM32-PerformanceSticks**
- **STM32-comStick**
- **STM32-IO-Board**
- **STM32-LCD-Board**
- **STM32-Prototyping-Board**



Complete Development Suite for Cortex: Cortino

The new Hitex Cortino is a complete development platform – in a nice and functional package.

Cortino comes with GNU Compiler, HiTOP IDE and JTAG interface for Cortex-M3.



Tantino for Cortex

The proven Tantino completes the tool offer: an USB-to-JTAG debug interface for Cortex microcontrollers supports all run-control debug facilities like breakpoints, data watchpoints, single-step, register and memory view and of course SWD and SWV.

Hitex services for Cortex

Hitex has accompanied the introduction of the Cortex architecture from the beginning with tool support and comprehensive know-how based on more than 30 years of experience in the embedded world.

Professional world-wide services around your Cortex project help to save time and costs. Get informed at our website or contact us.

- Training & consulting for Cortex
- Insider's Guides & application know-how
- Development and test services

hitex 
DEVELOPMENT TOOLS

Your project deserves world-class embedded development tools!


We are the world's leading supplier of software tools for embedded systems that enable companies to develop premium products based on 8-, 16-, and 32-bit microcontrollers. You find our customers mainly in the areas of industrial automation, medical devices, consumer electronics and automotive products. We have an extensive network of partners and cooperate with the world's leading semiconductor vendors.

Your project deserves our tools.

Read more at www.iar.com.


Optimize Your Application with IAR Embedded Workbench!

IAR Embedded Workbench is a set of development tools for building and debugging embedded applications using assembler, C and C++. It provides a completely integrated development environment including a project manager, editor, build tools and debugger. In a continuous workflow, you can create source files and projects, build applications and debug them in a simulator or on hardware.

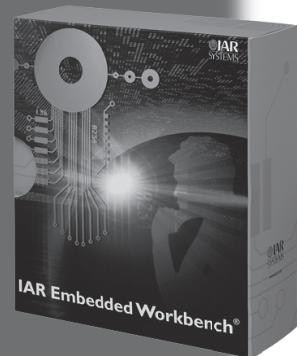

Design Your Project with IAR visualSTATE!

IAR visualSTATE is a set of highly sophisticated and easy-to-use development tools for designing, testing and implementing embedded applications based on state machines. It provides advanced verification and validation utilities and generates very compact C/C++ code that is 100% consistent with your system design.

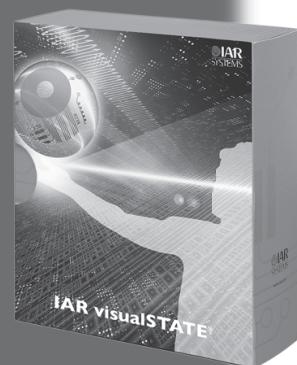

KickStart Your Application with IAR KickStart Kit!

Development kits from IAR Systems provide you with all the tools you need to develop embedded applications right out of the box.

Get access to our world-class support!

We have local presence through branch offices and a worldwide distributor network. We also offer extended, customized technical services.





Development Tools

J-Link – JTAG-Emulator

- Very easy to use
- #1 emulator for ARM cores
- High-Speed download
- Direct support by major IDEs
- Easy installation on host



- Supports JTAG/SWD/SWO
- Optimized flash algorithms*
- Unlimited Flash breakpoints*
- Connects via USB or Ethernet**
- Integration into Micrium's µC/Probe
- JTAG-isolation-Adapter available

J-Trace

- For use with ETM
- Instruction tracing
- ARM7, ARM9 & Cortex-M3



* Add-on: not included in all models


** Not available for all models

Production Tools by



Flash programming software – J-Flash

- Fast and easy to use
- Sample projects
- External flash auto-detection
- Support for internal flash of MCUs



Flasher – Stand-Alone Flash-Programmer



- High speed programming
- ASCII command interface
- Batch mode for PC software



- Remote control possible for automated testers
- Option: optical isolation**

Find out more at www.segger.com



Benefit from our award- winning Cortex™ tool concept

Hitex offers the complete Cortex know-how!

- Evaluation and start-up tools
- High-end JTAG debugger
- Serial Wire Viewer support
- Training & consulting
- Documentation & application know-how
- First class development & test services
- Other cores supported as well for easy migration

www.hitex.com/cortex
Webshop: www.ehitex.de

Award-winning tools for your Cortex start

Hitex makes your start into the Cortex architecture easy.
A wide range of evaluation tools helps you.

Our award-winning STM32 USB stick concept is the basis for the great number of evaluation sticks and corresponding extension boards. All tools are available at the Hitex webshop:

- **STM32-PerformanceSticks**
- **STM32-comStick**
- **STM32-IO-Board**
- **STM32-LCD-Board**
- **STM32-Prototyping-Board**



Complete Development Suite for Cortex: Cortino

The new Hitex Cortino is a complete development platform – in a nice and functional package.

Cortino comes with GNU Compiler, HiTOP IDE and JTAG interface for Cortex-M3.



Tantino for Cortex

The proven Tantino completes the tool offer: an USB-to-JTAG debug interface for Cortex microcontrollers supports all run-control debug facilities like breakpoints, data watchpoints, single-step, register and memory view and of course SWD and SWV.

Hitex services for Cortex

Hitex has accompanied the introduction of the Cortex architecture from the beginning with tool support and comprehensive know-how based on more than 30 years of experience in the embedded world.

Professional world-wide services around your Cortex project help to save time and costs. Get informed at our website or contact us.

- Training & consulting for Cortex
- Insider's Guides & application know-how
- Development and test services

hitex 
DEVELOPMENT TOOLS

Your project deserves world-class embedded development tools!


We are the world's leading supplier of software tools for embedded systems that enable companies to develop premium products based on 8-, 16-, and 32-bit microcontrollers. You find our customers mainly in the areas of industrial automation, medical devices, consumer electronics and automotive products. We have an extensive network of partners and cooperate with the world's leading semiconductor vendors.

Your project deserves our tools.

Read more at www.iar.com.

Optimize Your Application with IAR Embedded Workbench!

IAR Embedded Workbench is a set of development tools for building and debugging embedded applications using assembler, C and C++. It provides a completely integrated development environment including a project manager, editor, build tools and debugger. In a continuous workflow, you can create source files and projects, build applications and debug them in a simulator or on hardware.

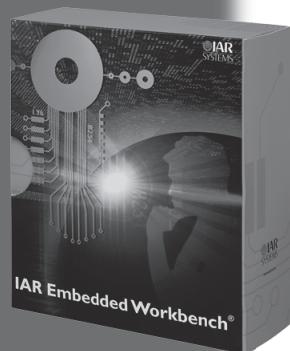

Design Your Project with IAR visualSTATE!

IAR visualSTATE is a set of highly sophisticated and easy-to-use development tools for designing, testing and implementing embedded applications based on state machines. It provides advanced verification and validation utilities and generates very compact C/C++ code that is 100% consistent with your system design.



KickStart Your Application with IAR KickStart Kit!

Development kits from IAR Systems provide you with all the tools you need to develop embedded applications right out of the box.

Get access to our world-class support!

We have local presence through branch offices and a worldwide distributor network. We also offer extended, customized technical services.





Development Tools

J-Link – JTAG-Emulator

- Very easy to use
- #1 emulator for ARM cores
- High-Speed download
- Direct support by major IDEs
- Easy installation on host



- Supports JTAG/SWD/SWO
- Optimized flash algorithms*
- Unlimited Flash breakpoints*
- Connects via USB or Ethernet**
- Integration into Micrium's µC/Probe
- JTAG-isolation-Adapter available

J-Trace

- For use with ETM
- Instruction tracing
- ARM7, ARM9 & Cortex-M3



* Add-on: not included in all models


** Not available for all models

Production Tools by



Flash programming software – J-Flash

- Fast and easy to use
- Sample projects
- External flash auto-detection
- Support for internal flash of MCUs



Flasher – Stand-Alone Flash-Programmer



- High speed programming
- ASCII command interface
- Batch mode for PC software



- Remote control possible for automated testers
- Option: optical isolation**

Find out more at www.segger.com

