


HOLD - PROVISIONAL DESIGN CANDIDATE - NOT RELEASED


BRMC Consumer v1.0 enclosure base - six mounting bosses

All dimensions in mm | Do not scale drawing

TOP VIEW - candidate datum scheme

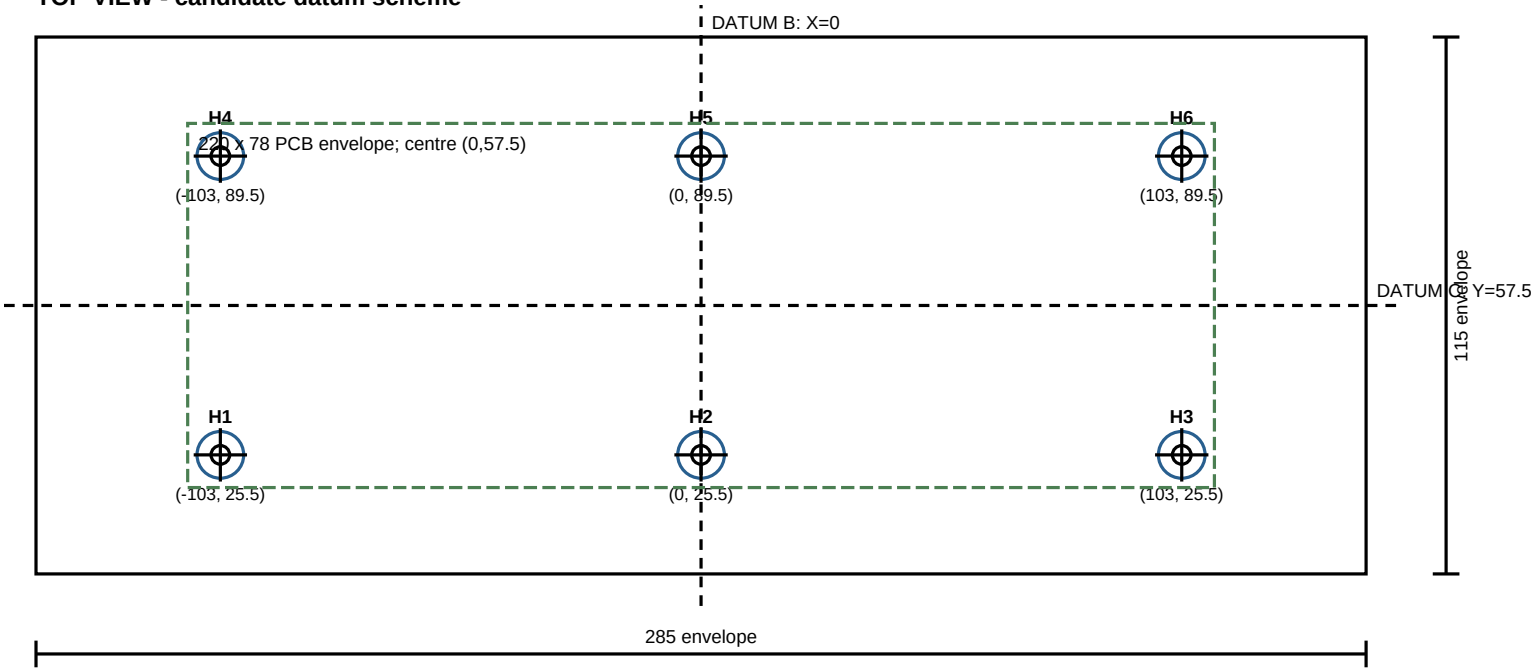

SECTION A-A - candidate boss

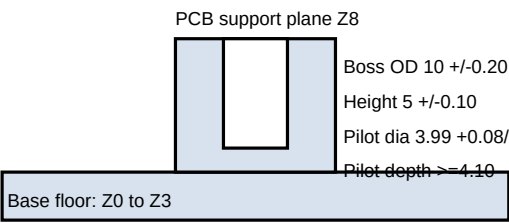

MATERIAL / PROCESS / INSERT INSTALLATION: HOLD

BOSS / HOLE SCHEDULE - enclosure coordinates

REF	X	Y	TOP Z	BOSS OD	HEIGHT	PILOT	PCB HOLE
H1	-103	25.5	8.00	10.00	5.00	3.99	3.20 NPTH
H2	0	25.5	8.00	10.00	5.00	3.99	3.20 NPTH
H3	103	25.5	8.00	10.00	5.00	3.99	3.20 NPTH
H4	-103	89.5	8.00	10.00	5.00	3.99	3.20 NPTH
H5	0	89.5	8.00	10.00	5.00	3.99	3.20 NPTH
H6	103	89.5	8.00	10.00	5.00	3.99	3.20 NPTH

CONTROL NOTES

- STATUS: HOLD. This drawing is not fabrication authority.
- Candidate axis true position: diameter 0.30 relative to A-B-C. Datum A is inner floor top Z3; B is X0; C is Y57.5.
- Candidate insert: SPIROL 29M3-3.56 item 151032, M3x0.5. Selection requires material/process and fabricator approval.
- Nominal boss envelopes do not penetrate supplied assembly solids. PCB/component/harness/thermal solids are incomplete; final interference review is OPEN.
- Source assembly SHA-256: 1e1f78229c2624be0a0ecc7766795e55c19090104cca487c9a2ebd9da287a810.
- General tolerance proposal only: ISO 2768-mK. Critical dimensions shown above take precedence.

BRMC Consumer v1.0 enclosure base - six bosses	REV: A
Document: BRMC-MECH-EVT-010	DATE: 2026-09-03
Status: HOLD - PROVISIONAL	SHEET: 1 / 1