6.0 mm×3.5 mm Light Touch Switches

Type: **EVQPE**



- Features
- External dimensions: 6.0 mm×3.5 mm, Height 4.3 mm, 5.0 mm
- Wave soldering available

■ Recommended Applications

Operating switches for other electronic equipment

■ Explanation of Part Numbers

1	2	3	4	5	6	7	8	9
E	V	Q	Р	E				
Pro	oduct Coc	de	Ту	ре	Operating Force	He	eight	Push Plate Color


■ Product Chart

Type Operating Force	Bulk Type	Height		
1.0 N±0.5 N	EVQPE4	H=4.3 mm H=5.0 mm		
1.6 N±0.5 N	EVQPE5			
2.4 N±0.6 N	EVQPE6	11-0.0 11111		

■ Specifications

Туре	-	Snap action/Push-on type SPST			
	Circuit Diagram	A 0 0 B			
Electrical	Rating	10 μA 2 Vdc to 50 mA 12 Vdc (Resistive load)			
2.00000.	Contact Resistance	100 mΩ max.			
	Insulation Resistance	100 M Ω min. (at 100 Vdc)			
	Dielectric Withstanding Voltage	250 Vac for 1 minute			
	Bouncing	10 ms max. (ON, OFF)			
Mechanical	Operating Force	1.0 N±0.5N (Low force type) 1.6 N±0.5 N (Standard)	2.4 N±0.6 N		
	Travel	0.25 mm ^{+0.20} _{-0.10} mm			
Endurance	Operating Life	50000 cycles min.	30000 cycles min.		
Operating Tempe	erature	−30 °C to +85 °C			
Storage Tempera	ture	-40 °C to +85 °C (Bulk)			
Minimum Quantit	y/Packing Unit	1000 pcs. Polyethylene Bag (Bulk)			
Quantity/Carton		10000 pcs.			

■ Dimensions in mm (not to scale)

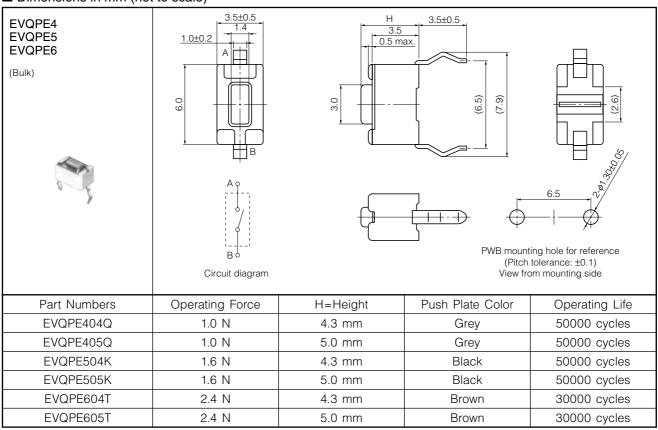

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

EVQ-PE405Q EVQ-PE504K EVQ-PE404Q EVQ-PE604T