


Partially Fabricated Standard Route Maker

All come from from SHS 2024: https://mutcd.fhwa.dot.gov/kno-shs_2024-release-status/index.htm unless otherwise noted.

See annotated *MDOT Support* *Hole Placement Detail #21*

05/10/05

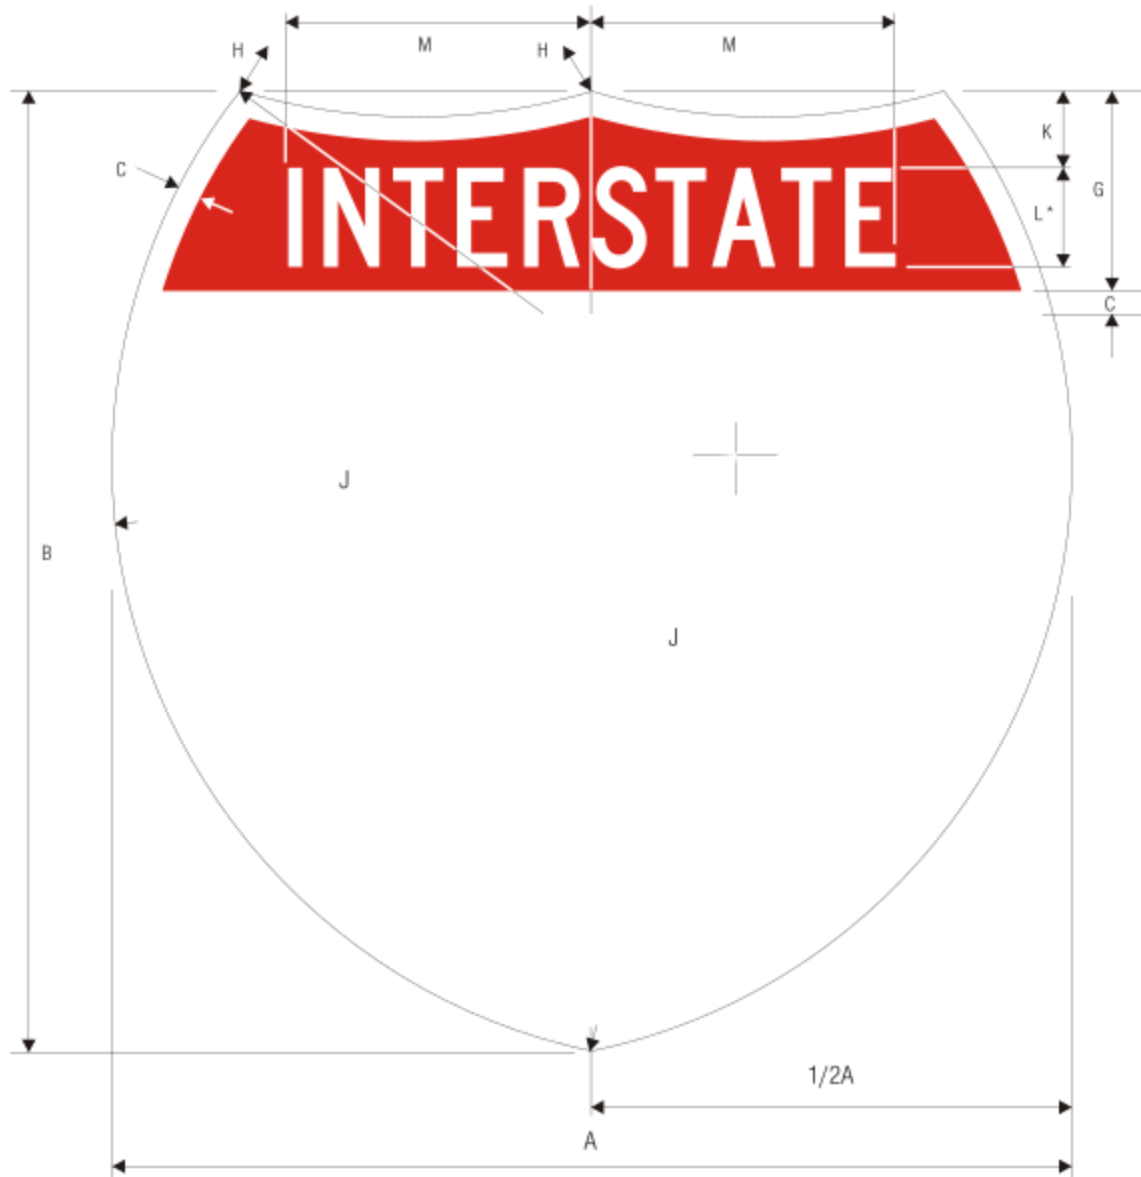

M1-1
INTERSTATE ROUTE
RCOC MODIFIED

*Series 2000 Standard Alphabets.
**Optically space numerals about vertical centerline.


SIGN	A	B	C	D	E	F	G	H	J	K	L	M
1,2 digits	24	24	.5	7.625	10 D	6.375	5	15	15	2	2.5 C	7.658
1,2 digits	36	36	.75	11.5	15 D	9.5	7.5	22.5	22.5	2.75	4 C	12.246
1,2 digits	48	48	1	15.375	20 D	11	10	30	30	4	5 C	15.307
3 digits	30	24	.5	7.625	10 C	6.375	5	24	17	2	2.5 E	10.911
3 digits	45	36	.75	11.5	15 C	9.5	7.5	36	25.5	2.75	4 E	17.455
3 digits	60	48	1	15.375	20 C	11	10	48	34	4	5 E	21.818

COLORS: LEGEND — WHITE (RETROREFLECTIVE)
TOP — RED (RETROREFLECTIVE)
BOTTOM — BLUE (RETROREFLECTIVE)

RCOC STOCK NUMBERS:
2003565 (24x24)
2006915 (36x36)
2004919 (30x24)

Partially Fabricated Standard Warning

All come from from SHS 2024: https://mutcd.fhwa.dot.gov/kno-shs_2024-release-status/index.htm unless otherwise noted.

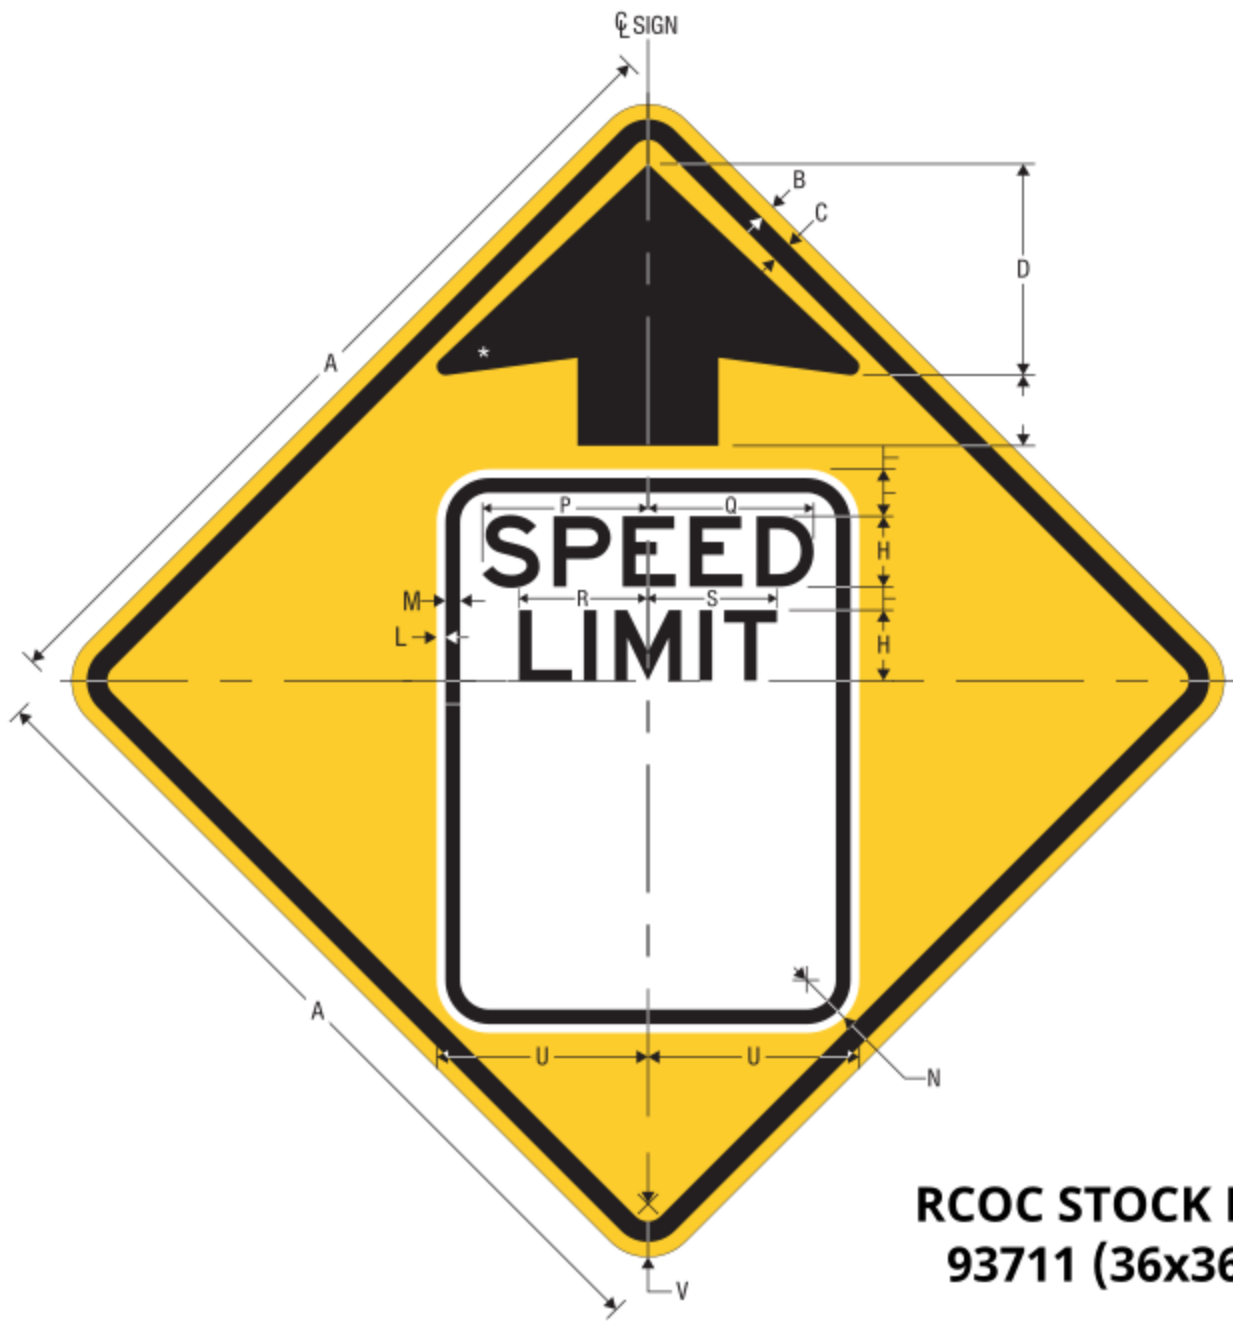

**RCOC STOCK NUMBER:
93711 (36x36) Yellow**

- * See page 7-6 for arrow design.
- ** Optically space numerals about centerline.

W3-5
REDUCED SPEED LIMIT AHEAD
RCOC MODIFIED

A	B	C	D	E	F	G	H	J	K
30	0.5	0.75	10	2.5	0.5	1.625	2.5 E	0.875	10 C
36	0.625	0.875	12	3	1	2	3 E	1	12 C
48	0.75	1.25	16	4	1.5	2.25	4 E	1.25	15 C

L	M	N	P	Q	R	S	T	U	V
0.313	0.5	1.875	5.877	5.877	4.576	4.575	VAR**	7.5	1.875
0.375	0.625	2.25	7.053	7.052	5.491	5.491	VAR**	9	2.25
0.375	0.625	3	9.403	9.403	7.321	7.321	VAR**	12	3

- WARNING SIGN

COLORS: LEGEND, ARROW, BORDER — BLACK

INNER PANEL BACKGROUND — WHITE (RETROREFLECTIVE)

BACKGROUND — YELLOW (RETROREFLECTIVE)
- TTC SIGN

COLORS: LEGEND, ARROW, BORDER — BLACK


INNER PANEL BACKGROUND — WHITE (RETROREFLECTIVE)

BACKGROUND — ORANGE (RETROREFLECTIVE)

Partially Fabricated Standard Regulatory

All come from from SHS 2024: https://mutcd.fhwa.dot.gov/kno-shs_2024-release-status/index.htm unless otherwise noted.

All Roads

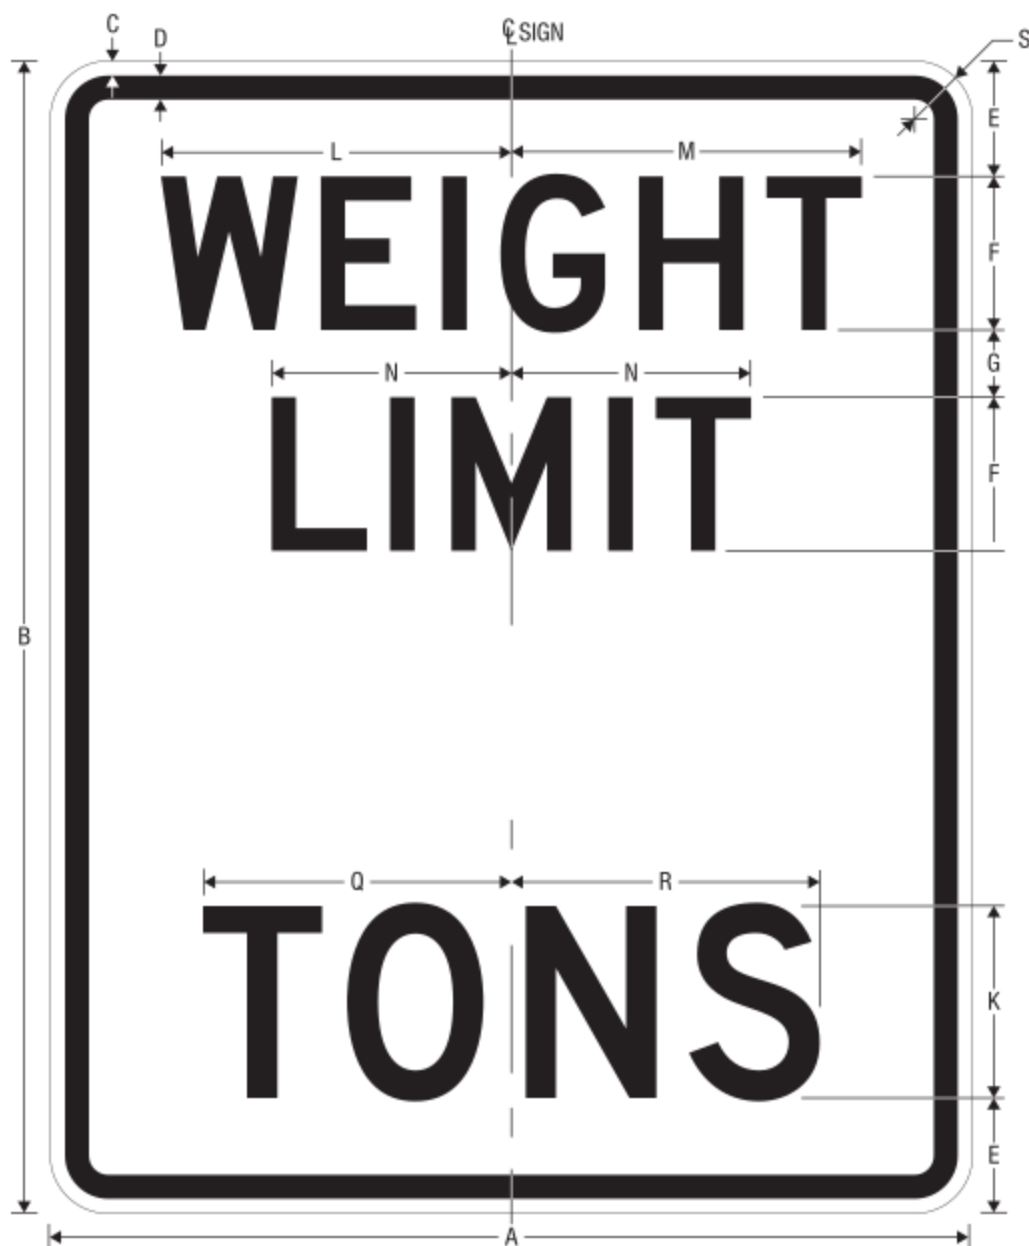

R12-1

WEIGHT LIMIT

RCOC MODIFIED

RCOC STOCK NUMBER:
(24x30)


A	B	C	D	E	F	G	H	J
24	30	0.375	0.625	3	4 D	1.75	2.125	5 E
36	48	0.625	0.875	4.75	6 D	3	3.75	8 E

K	L	M	N	P	Q	R	S
5 D	9.125	9.125	6.242	VAR	8.031	8.030	1.5
8 D	13.688	13.687	9.363	VAR	12.849	12.849	2.25

COLORS: LEGEND, BORDER — BLACK
BACKGROUND — WHITE (RETROREFLECTIVE)

2-375


All Roads

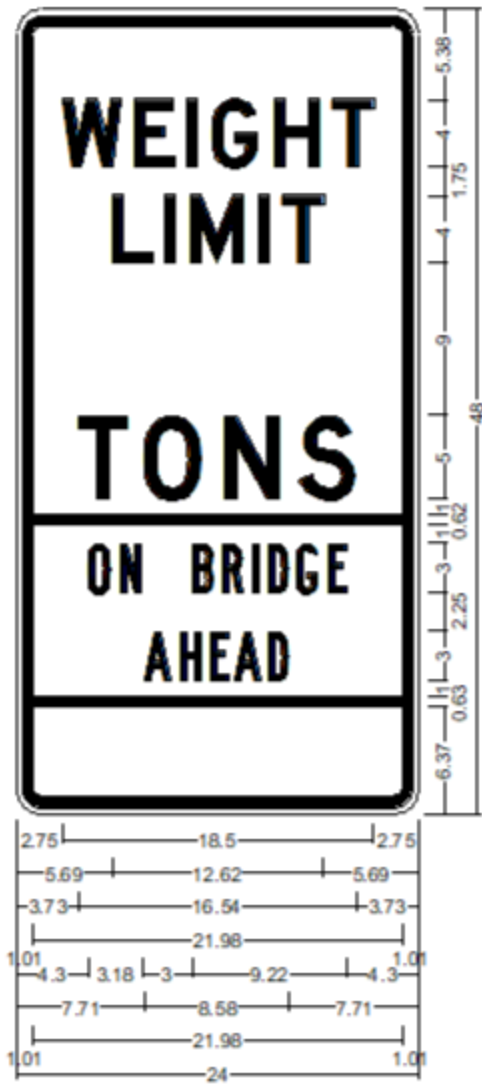

1.50" Radius, 0.63" Border, 0.38" Indent, Black on White;
 "WEIGHT", D; "LIMIT", D 101% spacing;
 " ", E; "TONS", D 99% spacing;
 "ON BRIDGE", B 99% spacing;
 "AHEAD", B 99% spacing;

RCOC STOCK NUMBER:
(24x48 or 54???)

Sublocal use only

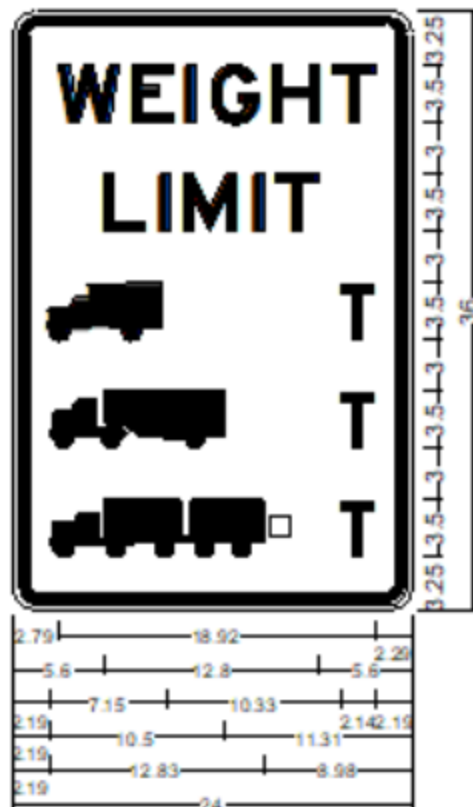

Weight Limit Assembly,

R12-S 24" X 36",

1.50" Radius, 0.63" Border, 0.38" Indent, Black on White,


"WEIGHT", E 99% spacing,

"LIMIT", E 99% spacing, Symbol RG190,

"T", D, "T", D,


r12-05 SYMBOL ONLY3, "T", D,

RCOC STOCK NUMBER:
(24x36)

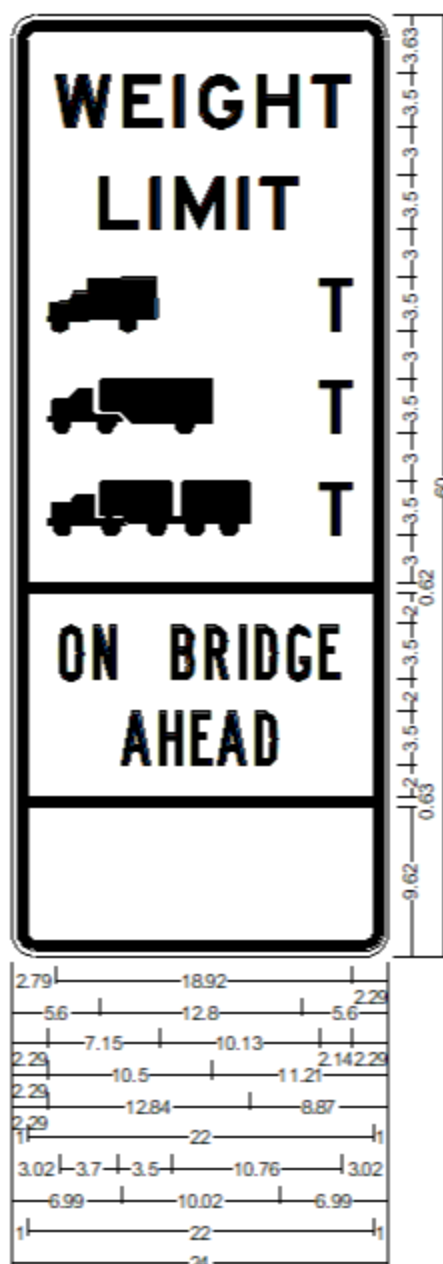
Sublocal use only

R12-5 24" X 36";
1.50" Radius, 0.63" Border, 0.38" Indent, Black on White;
"WEIGHT", E 99% spacing;
"LIMIT", E 99% spacing; Symbol RG190;
"T", D; "T", D; r12-05 SYMBOL ONLY3;
"T", D; "ON BRIDGE", B 99% spacing;
"AHEAD", B 99% spacing;

RCOC STOCK NUMBER:
(24x60)

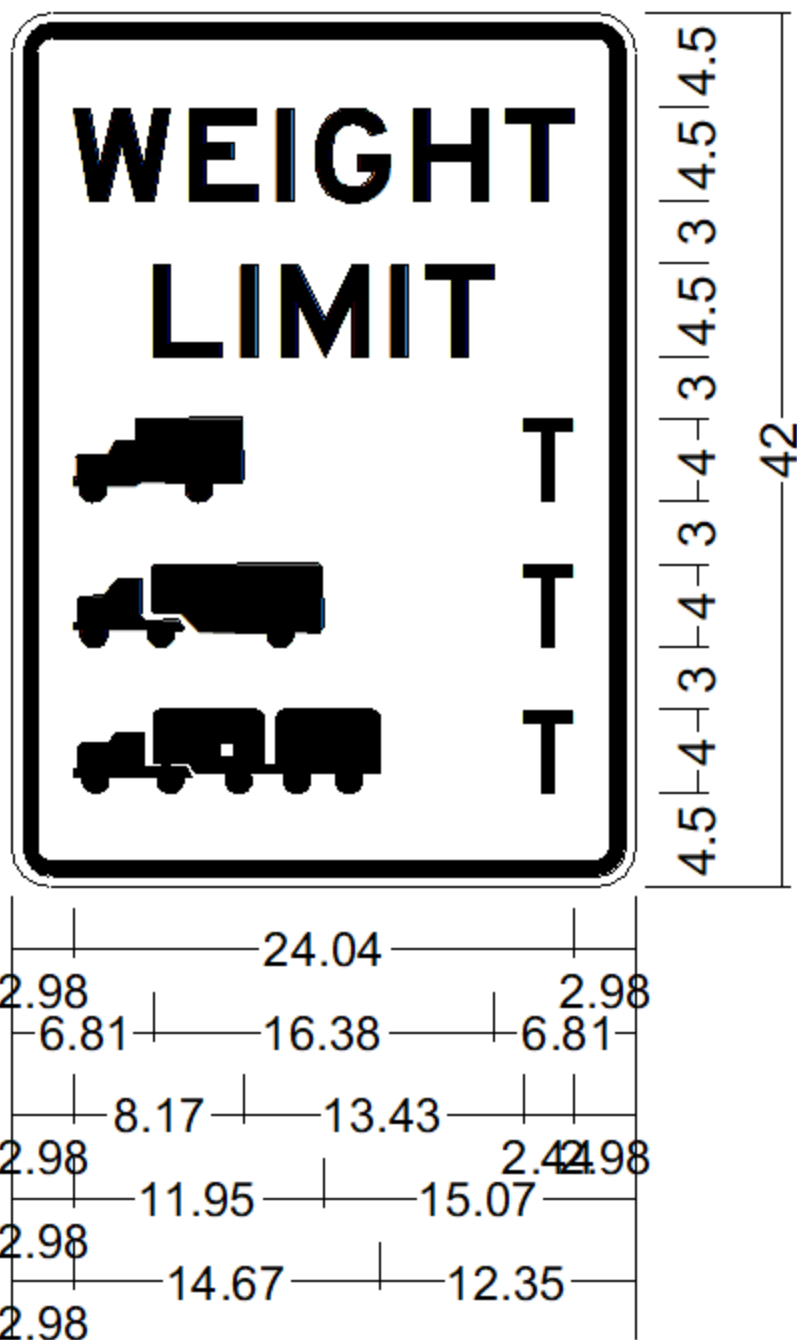

**RCOC STOCK NUMBER:
2006 204(30x42)**

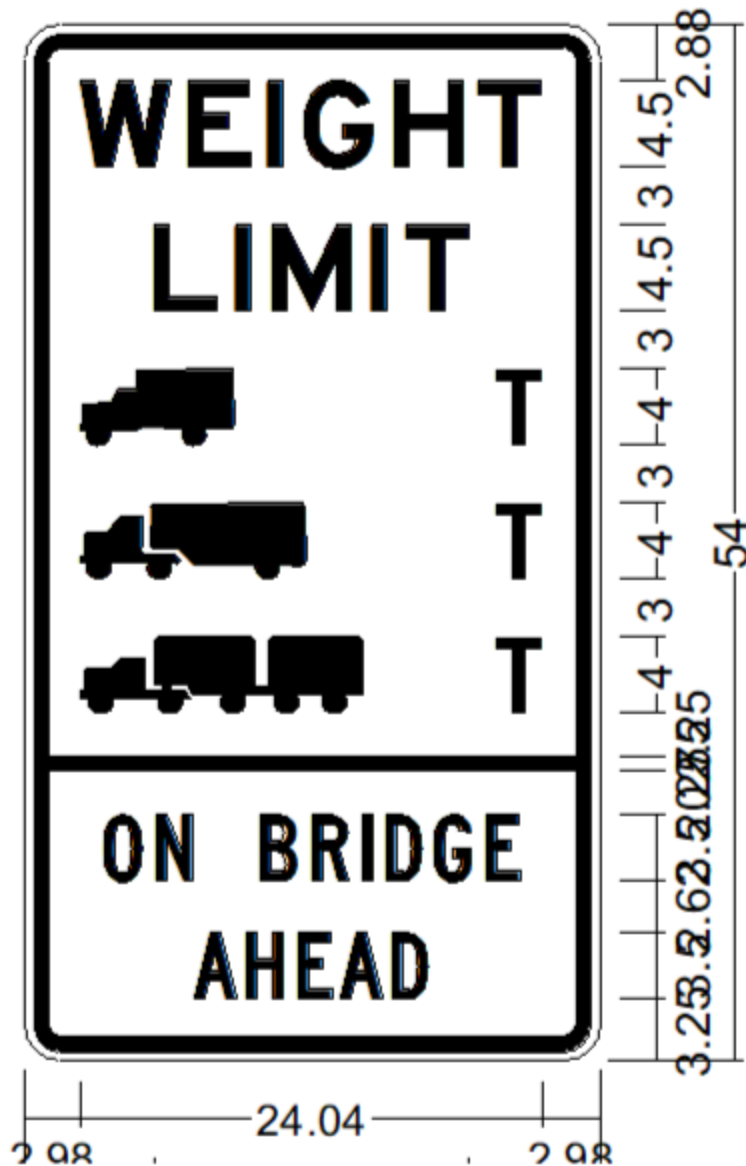


RCOC STOCK NUMBER
2006 262: (30x54)

Partially Fabricated Standard School

All come from from SHS 2024: https://mutcd.fhwa.dot.gov/kno-shs_2024-release-status/index.htm unless otherwise noted.

See annotated MDOT Support
Hole Placement Detail #14

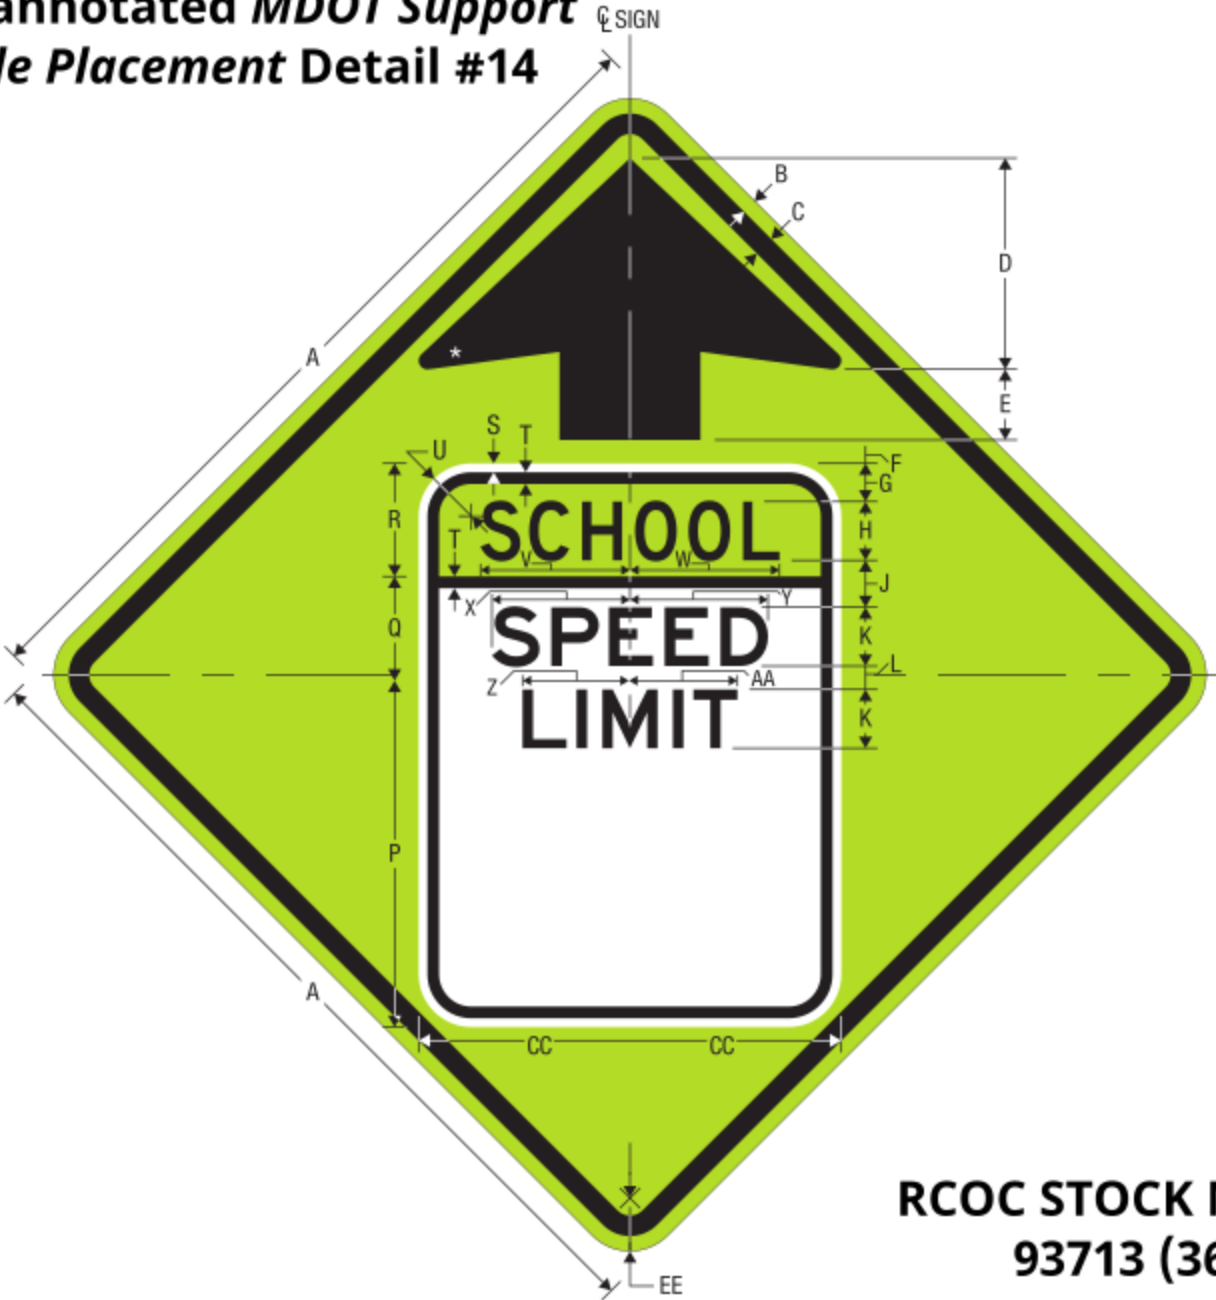

**RCOC STOCK NUMBER:
93713 (36x36)**

S4-5
REDUCED SCHOOL SPEED LIMIT AHEAD
RCOC MODIFIED

* See page 7-6 for arrow design.
** Optically space numerals
about centerline.

A	B	C	D	E	F	G	H	J	K	L	M	N	P
30	0.5	0.75	7.5	2.5	0.5	1.375	2 D	1.875	2 E	0.875	7.5 D**	1.5	12.5
36	0.625	0.875	9	3	1	1.625	2.5 D	2	2.5 E	1	9 D**	1.875	15
48	0.75	1.25	12	4	1.5	1.875	3 D	2.375	3 E	1.25	12 D**	2.25	18.5

Q	R	S	T	U	V	W	X	Y	Z	AA	BB	CC	DD
3.375	4.125	0.313	0.375	1.875	5.094	5.093	4.702	4.701	3.661	3.660	VAR**	7.5	1.875
4.125	4.875	0.375	0.5	2.25	6.367	6.367	5.877	5.877	4.576	4.575	VAR**	9	2.25
5.75	5.75	0.375	0.625	3	7.641	7.640	7.053	7.052	5.491	5.491	VAR**	12	3

COLORS: LEGEND, ARROW, BORDER — BLACK
INNER PANEL BACKGROUND — WHITE (RETROREFLECTIVE)
BACKGROUND — FLUORESCENT YELLOW GREEN (RETROREFLECTIVE)