

4

3

2

1

NOTES:

1. APPLICABLE STANDARDS/SPECIFICATIONS:

A. ASME Y14.100-2004

B. ASME Y14.5M-1994

C. IPC-2221 AND IPC-2222

2. UNLESS OTHERWISE SPECIFIED:

TOLERANCE ON IMPLIED 90 DEGREE ANGLES TO BE +/- 2 DEGREES

3

COPPER CLAD LAMINATES AND PREPREG MATERIALS SHALL BE FR4 PER IPC-41401E. TOTAL THICKNESS AND LAYER ARRANGEMENT SHALL BE IN ACCORDANCE WITH THE STACKUP LEGEND

4

COPPER CLAD LAMINATES AND PREPREG MATERIALS SHALL CONFORM TO IPC-4101E REQUIREMENTS, RESPECTIVELY, CLASS C - BOW AND TWIST, GRADE A - PITS AND DENTS

5

FINISHED COPPER SHALL MAINTAIN 1 OUNCE PER SQUARE FOOT OUNCE PER SQUARE FOOT IN ACCORDANCE WITH SECTION A-A. COPPER FOIL SHALL BE PER IPC-4562.

6. FABRICATION AND INSPECTION OF THE BOARD SHALL BE IN ACCORDANCE WITH MIL-PRF-31032/1, TYPE 3. PROCESSING ALLOWANCES ARE SPECIFIED AS FOLLOWS:

MINIMUM ANNULAR RING - VIA = IPC-6012, CLASS 2.

7. PLATING SHALL BE ENIG PER IPC-4552

8. FOR REFERENCE ARTWORK MASTER USER GERBER FILE 19200-XXXxxXXX

9

ITEM IDENTIFICATION: MARK THE FOLLOWING PER MIL-STD-130, METHOD OPTIONAL LOCATION SHOWN IS SUGGESTED: OTHER AREAS PERMISSIBLE AS SPACE PERMITS

19200-MFR -

10. FINISH: COAT BOTH SIDES OF BOARD USING MATERIAL PER IPC-SM-840, CLASS H, GREEN. APPLY SOLDER MASK OVER BARE COPPER.

11. MARK PRINTED CIRCUIT BOARD USING CONTRASTING COLORING. MARKING METHOD OPTIONAL.

12. TEST COUPON IS TO BE SUPPLIED BY PWB MANUFACTURER AND SHALL BE IN ACCORDANCE WITH IPC-2221.

13

CONTROLLED IMPEDANCE:

DIELECTRIC THICKNESS AND COPPER WEIGHTS INDICATED ARE CALCULATED TO: MAINTAIN 100 OHM +/- 10% DIFFERENTIAL IMPEDANCE FOR .0059 WIDTH TRACE AND .005 SPACE PAIRS ON LAYER 1, 8 WITH REFERENCE TO LAYER 2,7 RESPECTIVELY.

REV STATUS

REV

SH

X.1

X.1

INITIAL RELEASE

1900-01-01

XXX

X.0

1

X.2

X.2

FILL IN DESCRIPTION

TBD

XXX

X.0

2

X.2

X.3

FILL IN DESCRIPTION

TBD

XXX

Layer

Thickness

Gerber

Weight

Type

F.Silks

GTO

Legend

F.Mask

0.00040in

GTS

Solder Mask

F.Cu

0.00140in

GTL

1oz

Signal

0.01260in

Dielectric

In1.Cu

0.00140in

G1

1oz

Signal

0.01260in

Dielectric

In2.Cu

0.00140in

G2

1oz

Signal

0.01260in

Dielectric

B.Cu

0.00140in

GBL

1oz

Signal

B.Mask

0.00040in

GBS

Solder Mask

B.Silks

GBO

Legend

Total thickness: 0.04420in

SECTION A-A

THIS DRAWING IS CAD MAINTAINED.
CHANGES SHALL BE INCORPORATED BY THE DESIGN
ACTIVITY

PART NO.

PB-F-0209

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

THE UNITED STATES GOVERNMENT HAS UNLIMITED RIGHTS IN THE TECHNICAL DATA IN THIS DOCUMENT. ANY COPY OR MODIFICATION OF THIS DOCUMENT, OR ANY DERIVATIVE WORK CREATED THEREFROM, IN WHOLE OR IN PART, MUST INCLUDE THIS LEDGEND. ANY CLAIM BY ANOTHER TO THE RIGHTS OF THE UNITED STATES GOVERNMENT IN THIS DATA IS A VIOLATION OF FEDERAL LAWS AND REGULATIONS.

12345678

12345678

=CCA_Drawing_Number

NEXT ASSY

USED ON

APPLICATION

DO NOT SCALE DRAWING
UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES ON ANGLES ±
2 PLACE DECIMAL ±
3 PLACE DECIMAL ±

THIRD ANGLE PROJECTION

MATL ENGR

MODELED BY

ABC

ABC

CONTRACT NUMBER

CONTRACTOR

DRAWN BY

ABC

DATE (YEAR-MO-DA)

1900-01-01

CHECKER

ABC

ENGINEER

ABC

QUALITY ENGINEER

ABC

DRAWING APPROVAL

ABC

1900-01-01

DESIGN APPROVAL

ABC

1900-01-01

DESIGN ACTIVITY

US ARMY
COMBAT CAPABILITIES DEVELOPMENT COMMAND ARMAMENTS
CENTER

Fusion
Payload

SIZE

C

CAGE CODE

19200

DWG. NO.

PB-F-0209

SCALE:

1:1

UNIT WT.

SHEET

1 OF 3

4

3

2

1

D

C

B

A

DWG NO

PB-F-0209


SH

1

A

REVISIONS				
MODEL REV	DRAWING REV	DESCRIPTION	DATE(YEAR-MO-DA)	APPROVED
X.1	X.1	INITIAL RELEASE	1900-01-01	XXX
X.2	X.2	FILL IN DESCRIPTION	TBD	XXX
X.2	X.3	FILL IN DESCRIPTION	TBD	XXX

Drill Drawing View (Scale 8:1)

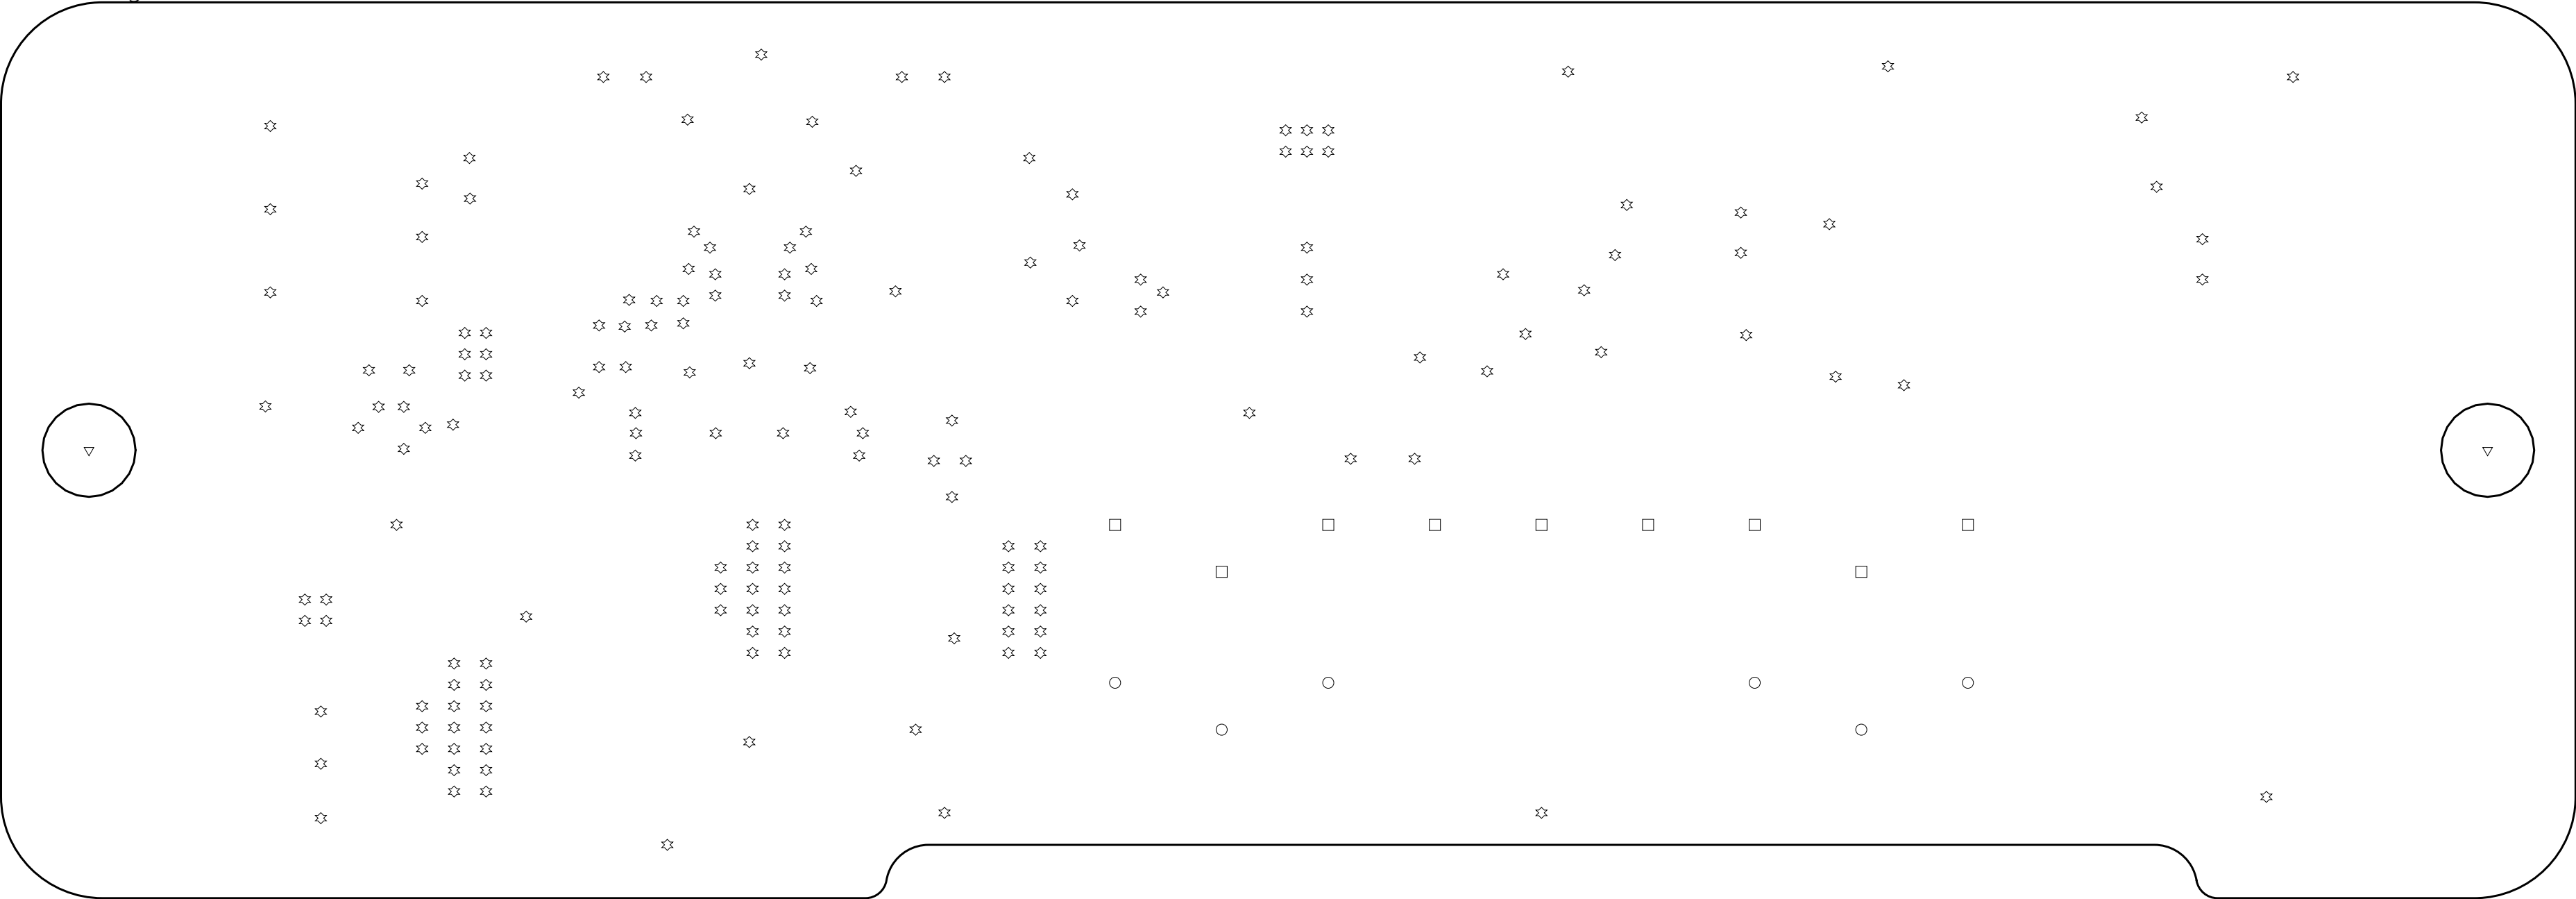


SIZE	QTY	SYM	PLATED	TOL	FEATURE CONTROL
0.006in	172	☆	Plated		
0.032in	9	□	Plated		
0.057in	6	○	Plated		
0.087in	2	▽	Plated		
	189 Total				

PART NO. PB-F-0209


DESIGN ACTIVITY		US ARMY	
COMBAT CAPABILITIES DEVELOPMENT COMMAND ARMAMENTS CENTER			
Fusion Payload			
SIZE C	CAGE CODE 19200	DWG. NO. PB-F-0209	
SCALE: 1:1		UNIT WT.	SHEET 2 OF 3

REVISIONS				
MODEL REV	DRAWING REV	DESCRIPTION	DATE(YEAR-MO-DA)	APPROVED
X.1	X.1	INITIAL RELEASE	1900-01-01	XXX
X.2	X.2	FILL IN DESCRIPTION	TBD	XXX
X.2	X.3	FILL IN DESCRIPTION	TBD	XXX


F.Cu (Scale 4:1)

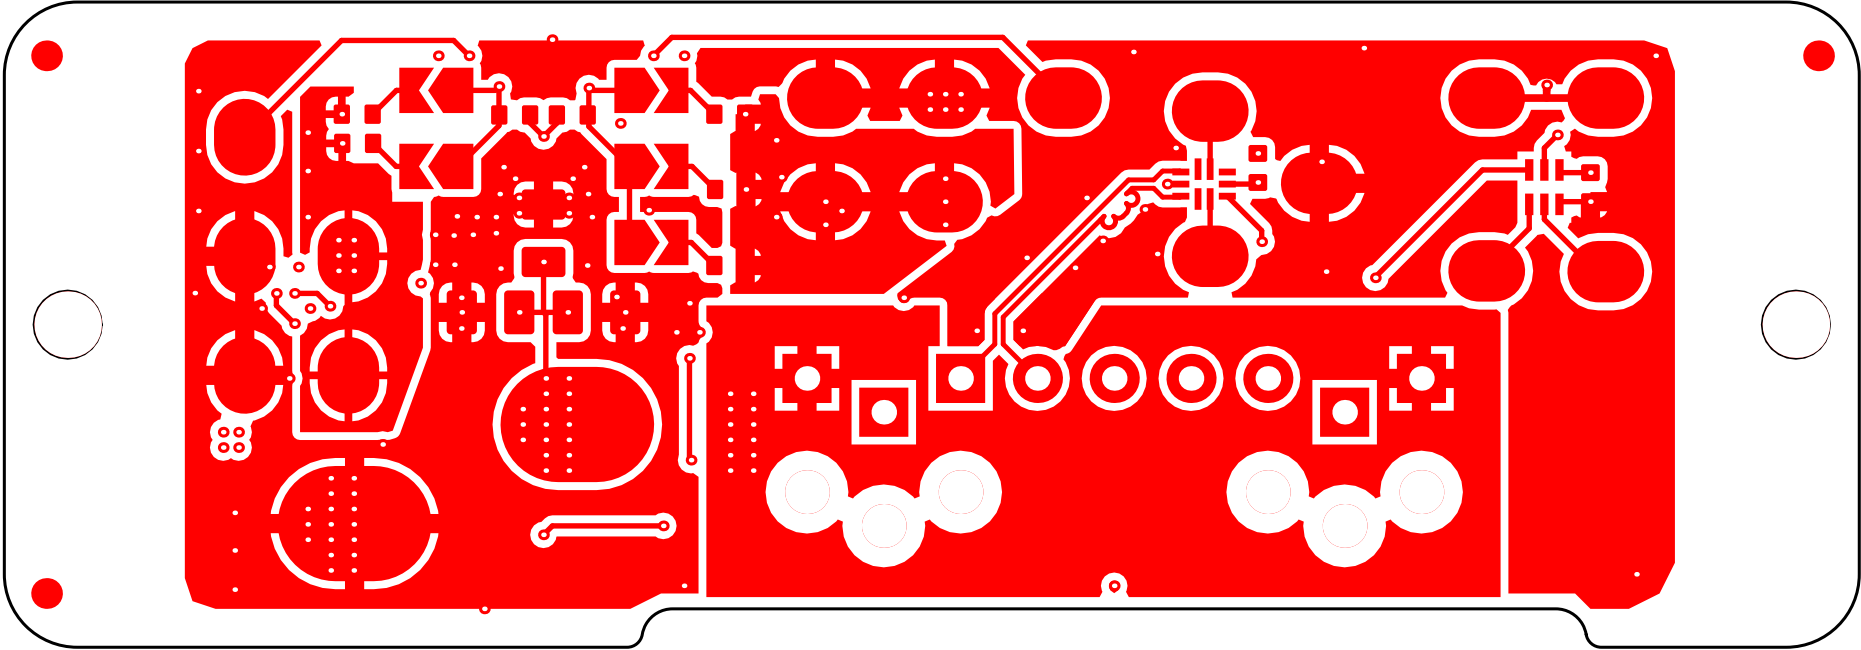


In2.Cu (Scale 4:1)

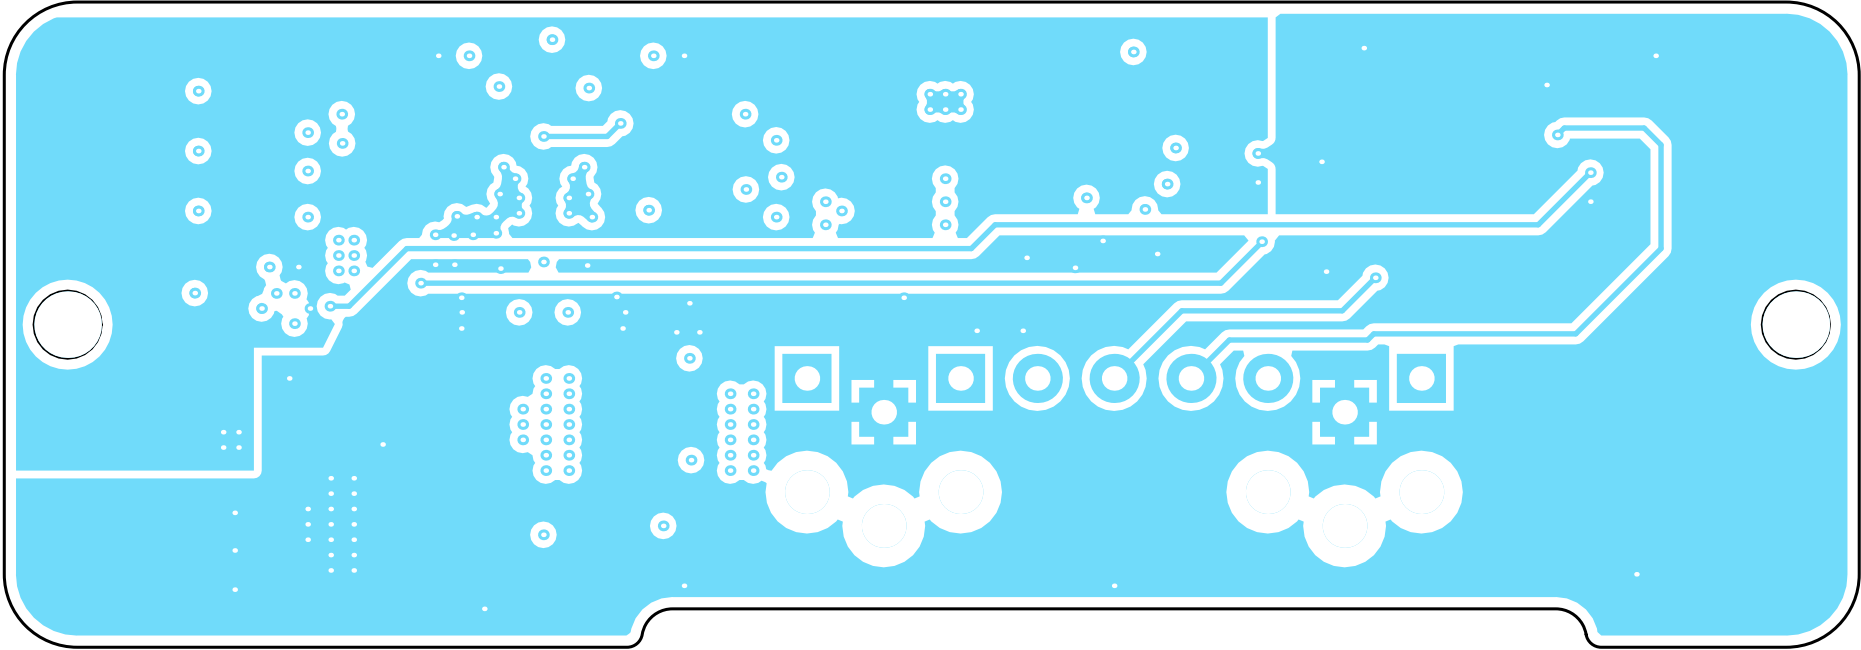

In1.Cu (Scale 4:1)

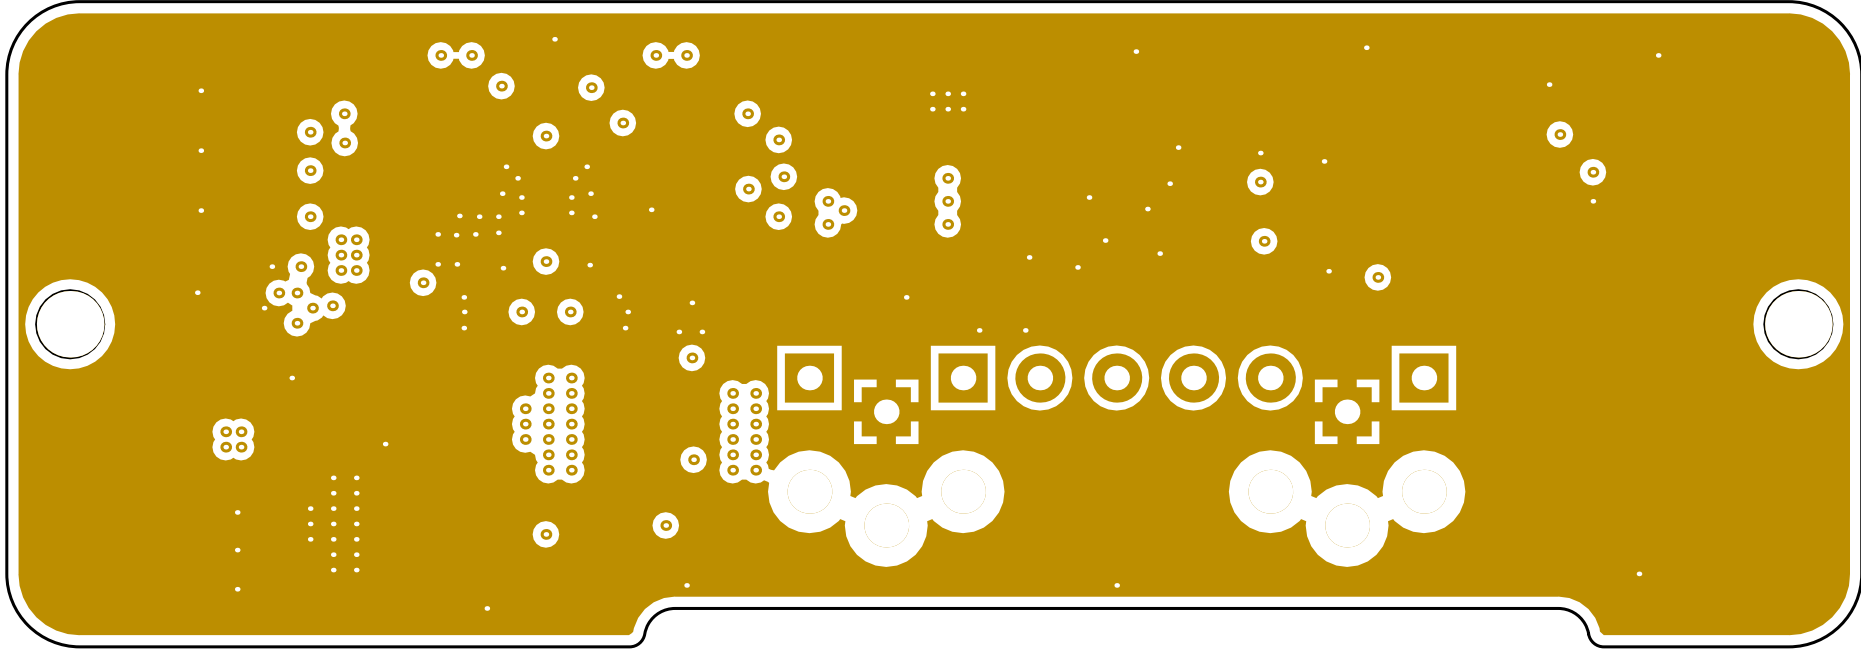

B.Cu (Scale 4:1)

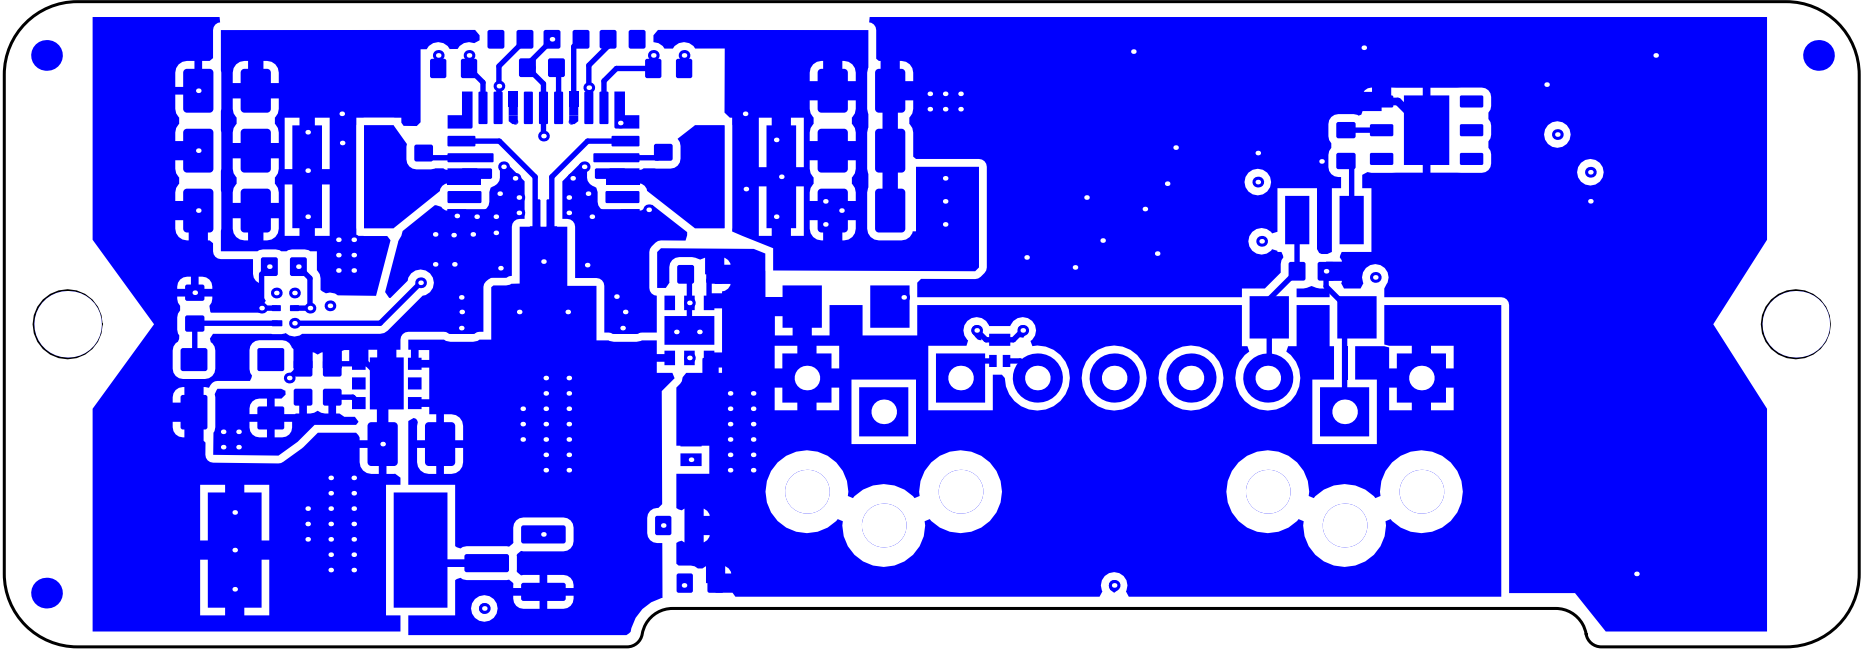

PART NO. PB-F-0209

DESIGN ACTIVITY		US ARMY	
COMBAT CAPABILITIES DEVELOPMENT COMMAND ARMAMENTS CENTER			
Fusion Payload			
SIZE C	CAGE CODE 19200	DWG. NO. PB-F-0209	
SCALE: 1:1		UNIT WT.	SHEET 3 OF 3