



Company name: Created by: Phone:

**Date:** 09/07/2024

## 97924726 MAGNA3 32-120 F N

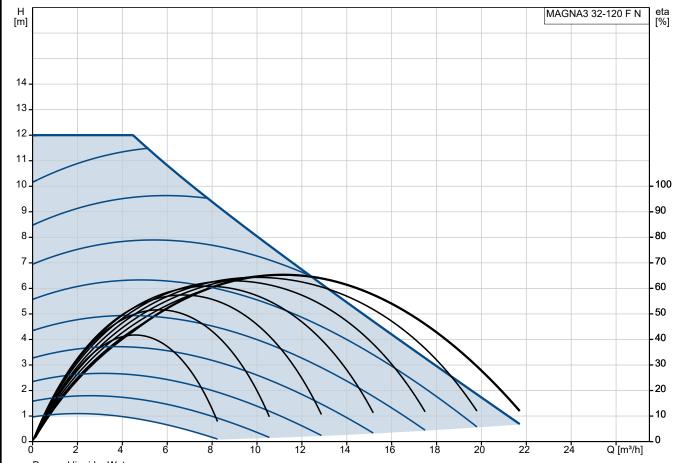

Pumped liquid = Water Liquid temperature during operation = 60 °C Density = 983.2 kg/m³

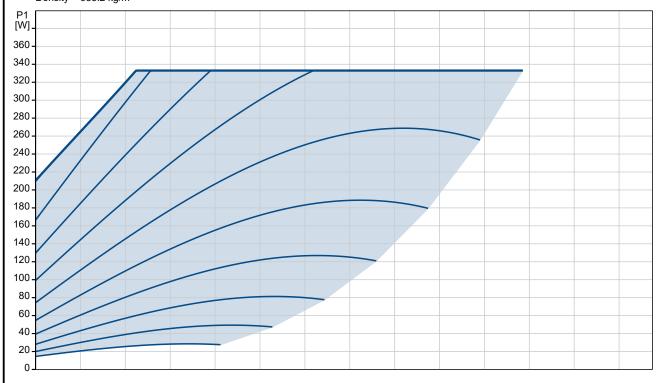




Company name: Created by: Phone:

**Date:** 09/07/2024

Description	Value
General information:	
Product name:	MAGNA3 32-120 F N
Product No:	97924726
EAN number:	5710626498055
Price:	€ 3931.02
Technical:	
Rated flow:	11.22 m³/h
Rated head:	7.239 m
Maximum head:	120 dm
TF class:	110
Approvals:	CE,VDE
Approvals for drinking water:	WRAS, ACS, UBA
Model:	E
Materials:	
Pump housing:	Stainless steel
Pump housing:	EN 1.4308
Pump housing:	ASTM A351-CF8
Impeller:	Composite
Installation:	
Range of ambient temperature:	0 40 °C
Maximum operating pressure:	10 bar
Type of connection:	DIN
Size of connection:	DN 32
Pressure rating for connection:	PN 6/10
Port-to-port length:	220 mm
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-10 110 °C
Selected liquid temperature:	60 °C
Density:	983.2 kg/m³
Electrical data:	
Maximum power input - P1:	333 W
P1 min ·	15 W
Mains frequency:	50 / 60 Hz
Rated voltage:	1 x 230 V
Minimum current consumption:	0.18 A
Maximum current consumption:	1.55 A
Enclosure class (IEC 34-5):	X4D
Insulation class (IEC 85):	F
Others:	
	0.18
Energy (EEI): Net weight:	
_	15.5 kg
Gross weight:	17.4 kg
Shipping volume:	0.039 m³
Sales region:	D
Country of origin:	DE
Custom tariff no.:	84137030
Environmental approvals:	WEEE

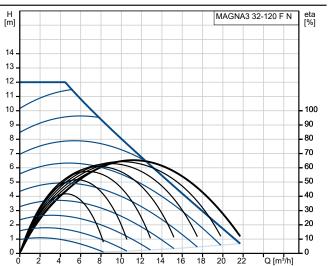

Pumped liquid = Water Liquid temperature during operation = 60  $^{\circ}$ C Density = 983.2 kg/m³

