Dataplane Test

Candela TECHNOLOGIES

Tue Jun 08 09:58:31 PDT 2021

Test Setup Information				
Device Under Test	Name	basic-01		
	Software Version	ecw5410-1.1.0.tar.gz	Hardware Version	ecw5410
	Model Number	ecw5410	Serial Number	3c2c99f44e77
	SSIDs	ssid_wpa2_5g [] [] ssid_wpa3_mixed_eap_2g ssid_wpa2_eap_2g ssid_wpa3_eap_2g		
	Passwords	something [] [] mixed 2 3		
	BSSIDs	3c:2c:99:f4:4e:79 [] [] 3c:2c:99:f4:4e:78 3a:2c:99:f4:4e:78 3e:2c:99:f4:4e:78		
	Notes	[BLANK]		

Objective

The Candela WiFi data plane test is designed to conduct an automatic testing of all combinations of station types, MIMO types, Channel Bandwidths, Traffic types, Traffic direction, Frame sizes etc… It will run a quick throughput test at every combination of these test variables and plot all the results in a set of charts to compare performance. The user is allowed to define an intended load as a percentage of the max theoretical PHY rate for every test combination. The expected behavior is that for every test combination the achieved throughput should be at least 70% of the theoretical max PHY rate under ideal test conditions. This test provides a way to go through hundreds of combinations in a fully automated fashion and very easily find patterns and problem areas which can be further debugged using more specific testing.
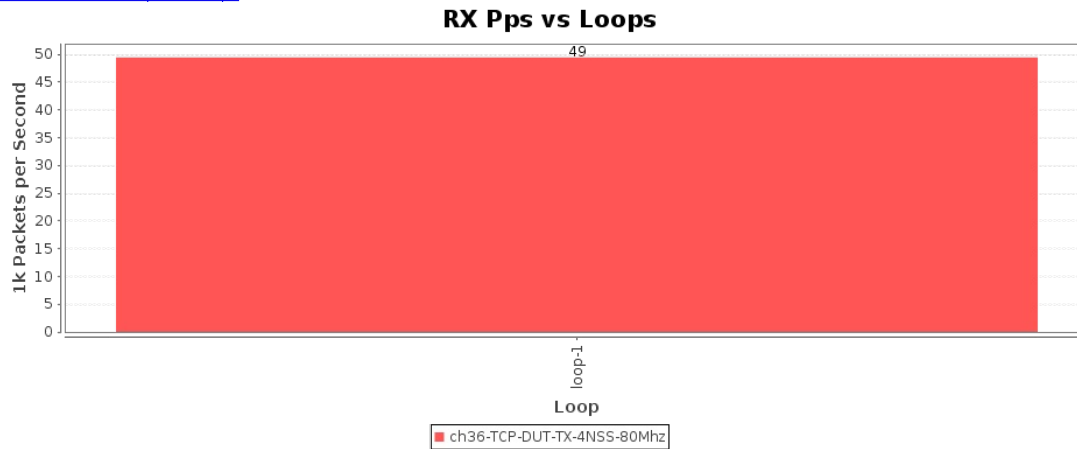
Throughput for each different traffic type. Datasets with names ending in '-LL' will include the IP, TCP, UDP and Ethernet header bytes in their calculation. For Armageddon traffic only, low-level throughput includes the Ethernet FCS and preamble. Other datasets report 'goodput' for the protocol.

CSV Data for Throughput vs Loops
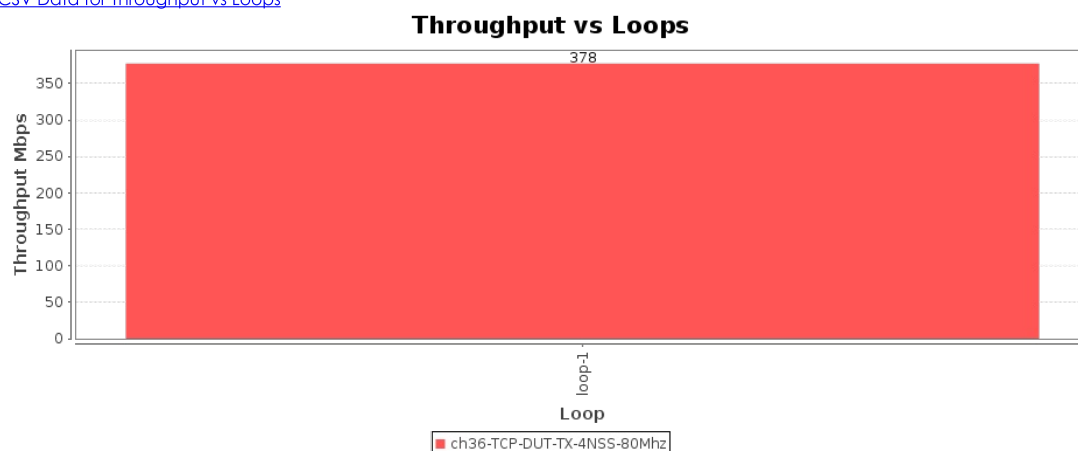
Pps throughput for each different traffic type. The values are estimated packets-per-second over the DUT, but some protocols such as TCP make this difficult to know for certain, so the value is extrapolated.

RX Pps vs Loops

Latency for each different traffic type. If opposite-direction traffic is non-zero, then round-trip time will be reported. Otherwise, one-way latency will be reported.

Latency vs Loops
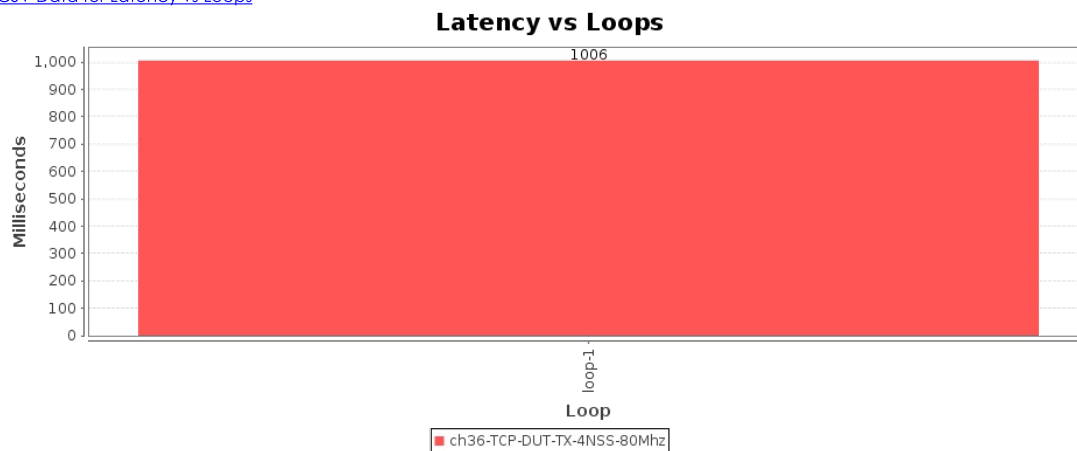
Realtime Graph shows summary download and upload RX Goodput rate of connections created by this test. Goodput does not include Ethernet, IP, UDP/TCP header overhead.

Realtime Throughput
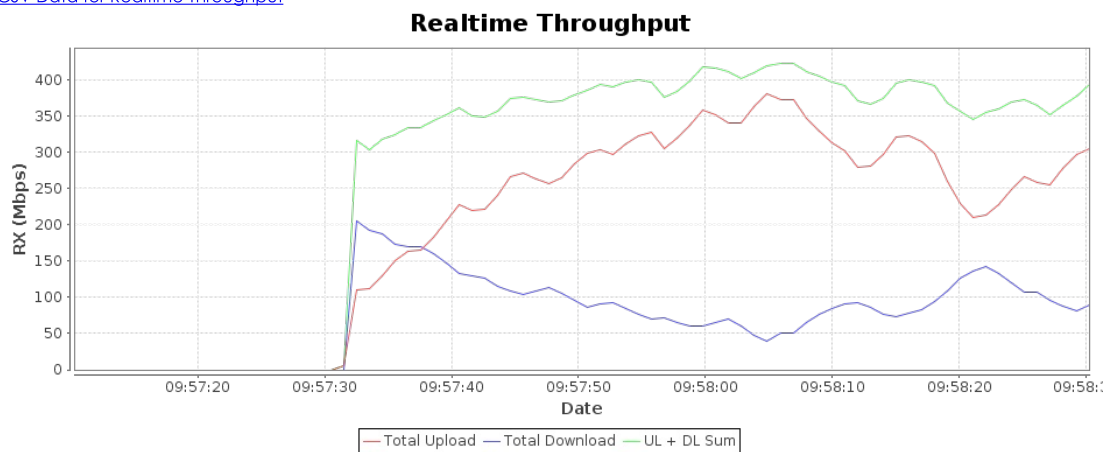
Test Information

Message
Starting dataplane test with: 1 iterations.

| Channel | Frequency | Security | NSS | Cfg-Mode | Bandwidth | Pkt | Traffic-Type | Direction | Atten | Rotation | Duration | Offered-1m | Rx-Bps | Rx-Bps-1m | Rx-Bps-LL | Rx-Bps-3s | RSSI | Tx-Failed | Tx-Failed% | Tx-Rate | Rx-Rate | Rpt-Mode | Rpt-Mode-Brief |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 36 | 5180 | WPA2 | 4 | AUTO | 80 | 1024 | TCP | DUT-TX | NA | NA | 60 | 377.531 Mbps | 376.954 Mbps | 377.53 Mbps | 398.892 Mbps | 391.054 Mbps | -55 | 0 / 1232660 | 0 | 1300 Mbps | 1.3 Gbps | 802.11an-AC | 802.11ac |

Brief csv report, may be imported into third-party tools.

Step Index	Position [Deg]	Attenuation [dB]	Throughput [Mbps]	Beacon RSSI [dBm]	Data RSSI [dBm]
0	NA	0	376.95	-54	-55

Packet Loss Percentage graph shows the percentage of lost packets as detected by the receiving endpoint due to packet gaps. If there is full packet loss, then this will not report any loss since there will be no gap to detect.
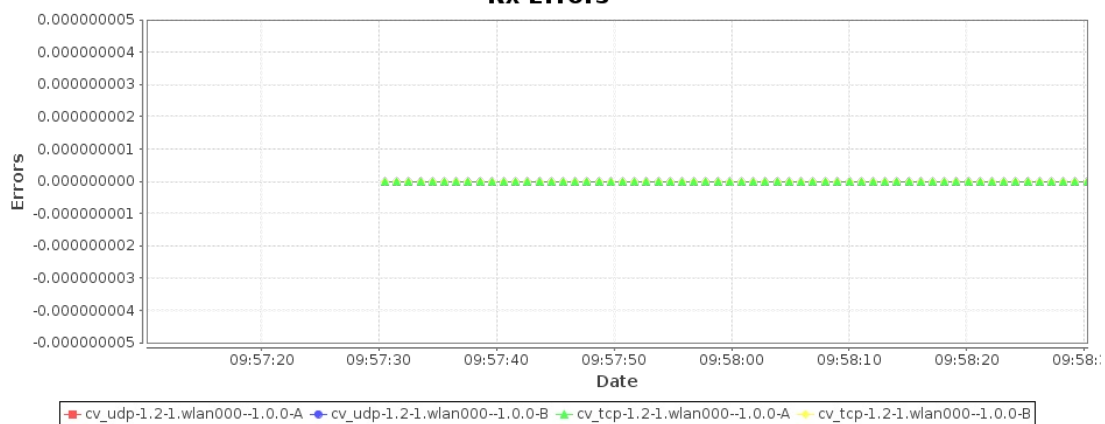
CSV Data for Endpoint RX Packet Loss Percentage
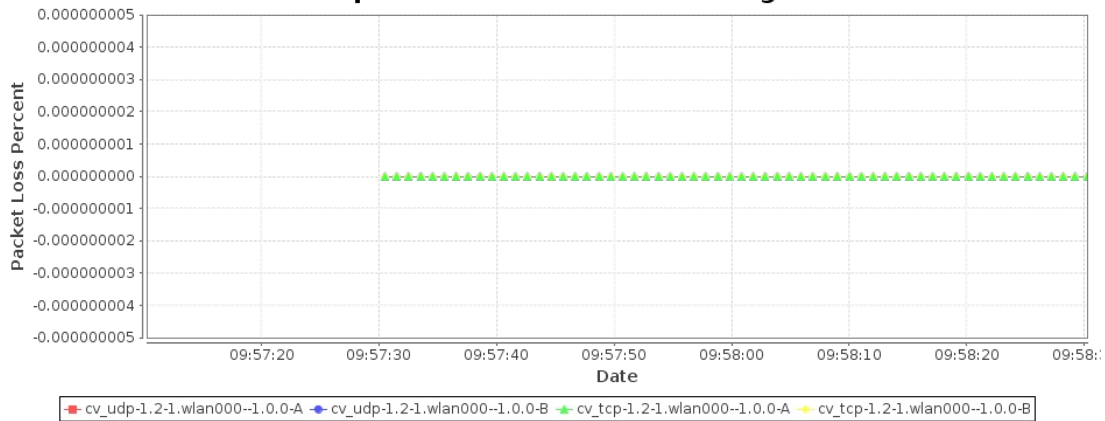
Error Graph shows occurances of packet errors.

CSV Data for Rx Errors

Test configuration and LANforge software version	
Path Loss	10
Requested Speed	85%
Requested Opposite Speed	85%
Multi-Conn	1
Armageddon Multi-Pkt	1000
ToS	0
Duration:	1 min (1 m)
Settle Time:	1 sec (1 s)

Send Buffer Size:	OS Default
Receive Buffer Size:	OS Default
Channels	AUTO
Spatial Streams	AUTO
Bandwidth	AUTO
Attenuator-1	0
Attenuation-1	0..+50..950
Attenuator-2	0
Attenuation-2	0..+50..950
Turntable Chamber	0
Turntable Angles	0..+45..359
Modes	Auto
Packet Size	1024
Security	AUTO
Traffic Type	TCP
Direction	DUT Transmit
Upstream Port	1.1.eth2 Firmware: 0x80000aef, 1.1876.0 Resource: ct523c-0b67
WiFi Port	1.1.wlan000 Firmware: 10.4b-ct-9984-xtH-13-774502ee5 Resource: ct523c-0b67
Outer Loop is Attenuation	false
Show Events	true
Auto Save Report	true
Build Date	Fri 28 May 2021 09:54:57 AM PDT
Build Version	5.4.3
Git Version	e6a6e20f12a47cefe6de9acbad2570cea4adf844

[Key Performance Indicators CSV](#)

Candela
TECHNOLOGIES