1 Welcome to the openOMSI Editor

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33

With the openOMSI Editor, you can create and edit your map - from the layout of roads and placement of objects to the paths used by AI traffic. You can also use the editor while playing. This lets you make changes directly at the place you are visiting. When you reload the map afterwards, your current bus position and an active duty are retained, allowing you to continue your journey from the same location. This guide explains the main tools and how to use them step by step. You will learn what the individual buttons do, how to make changes and how to save your work. The AI path tools help you adjust existing paths and create additional connections. Read the guide in order, or use the contents to go straight to the topic you need. Back up your map before making major changes. Save your edits and then reload the map so that changes to the AI path network take effect in the game. Enjoy building, experimenting and developing your map!


Guide scope
This operating guide covers Editor 0.8.8-pre based on openOMSI 0.3.33. Some older screenshots show earlier version numbers. The instructions describe this release.

2 Contents

01	Welcome to the openOMSI editor	1
02	Contents	2
03	Start directly in the editor	3
04	Maps and camera position	4
05	Open the editor during play	5
06	Interface and objects	6
07	Adding map tiles	7
08	Editing the terrain	8
09	Painting terrain textures	9
10	The asset catalogue	10
11	Splines in the catalogue	11
12	Select and shape splines together	12
13	Spline dimensions: preview and editing	13
14	Fit road and terrain	14
15	Bridge / tunnel / underground	15
16	Building bridges and tunnels	16
17	Junction builder	17
18	Adjusting junction textures	18
19	Roundabout: 1 Circle	19
20	Roundabout: 2 Approaches	20
21	Roundabout: 3 Islands	21
22	Roundabout: 4 Finish	22
23	Rotation, height and tilt	23
24	Connect roads and follow changes	24
25	Checking spline connections	25
26	Using AI path tools	26
27	Create AI driving paths	27
28	AI paths along a road	28
29	Shape AI paths with the mouse	29
30	Select and edit AI paths	30
31	Edit existing paths	31
32	Connections and opposing traffic	32
33	Additional AI connection	33
34	Additional AI connection: free drawing	34
35	AI paths: help and diagnostics	35
36	Save and test with traffic	36
37	Version, startup and updates	37
38	Check and install updates	38
39	Marking to road: complete chains	39

3 Start directly in the editor

In the launcher, choose Editor below Sessions and above Mods.

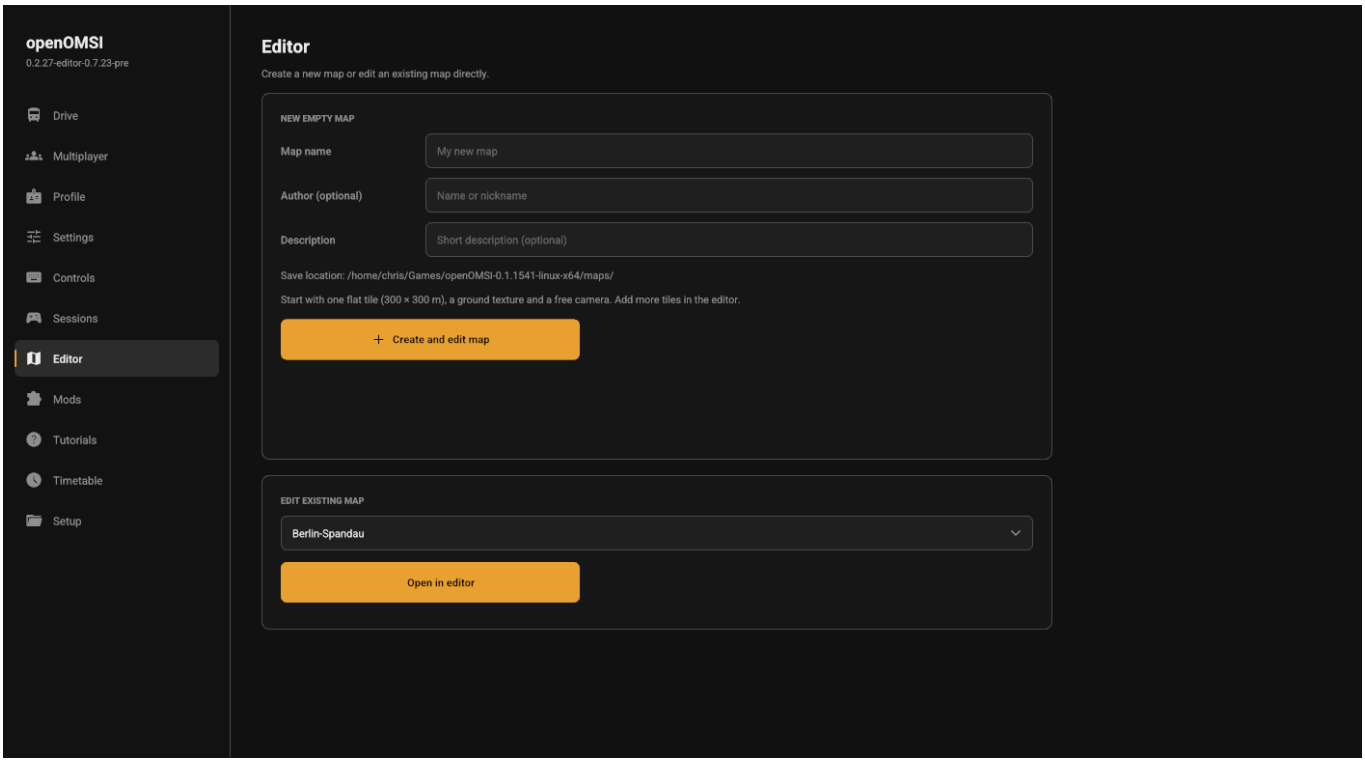

Create a new blank map

Map name: required; it also determines the folder name. Existing names are rejected. **Author (optional)** and **Description:** saved in the map description.

Save location: maps are created in the active content folder's maps directory, outside the original OMSI 2 installation. The folder shown in the screenshot is an example, not an installation requirement.

Create and edit map: creates one flat 300 × 300 m tile with a base texture and opens the editor. No bus or driving duty is needed. Use **Edit existing map** to choose an existing map, then **Open in editor**.

4 Maps and camera position

Open an existing map

Choose a map under **Edit existing map**, then click **Open in editor**. End any running session first. The map opens with a free camera and the editor already active.

Start above the terrain

Without a saved editor position, the default is 35 m above the terrain at the start location, looking 30° downward. If the initial location is outside existing tiles, the nearest tile is used.

Return to the last editor location

Position, direction and zoom are remembered per map when you save, switch off the editor or end the session normally. The next direct editor start restores that location. Height is raised to at least 35 m above the current terrain when needed; higher saved positions are retained.

Save and reopen

Fly to a recognisable location, make an edit and press Ctrl+S. Close the session and reopen the same map through Editor. Check the edit and camera position. Other maps retain their own positions.

What the camera bookmark saves

Camera data is stored locally under ~/.openomsi/editor-views, not in the map. It does not save unsaved map edits. A crash may lose a location not yet recorded. Normal driving starts are unchanged.

Language and available tools

The tools described here support German and English. Select English in the game settings for the interface shown in this guide. Other translations remain incomplete. Junction and roundabout builders are included; see pages 17 28


5 Open the editor during play

Edit the currently loaded map directly during gameplay.


Press **F4** to switch to camera mode. Press **Esc** to open the pause menu.

Choose **World options → Tools → Object editor → Open**. This opens the Object Editor. Press **T** to switch to the Spline Editor for roads (page 12). Direct editor startup and blank maps are explained on pages 3-4.


PAUSE MENU

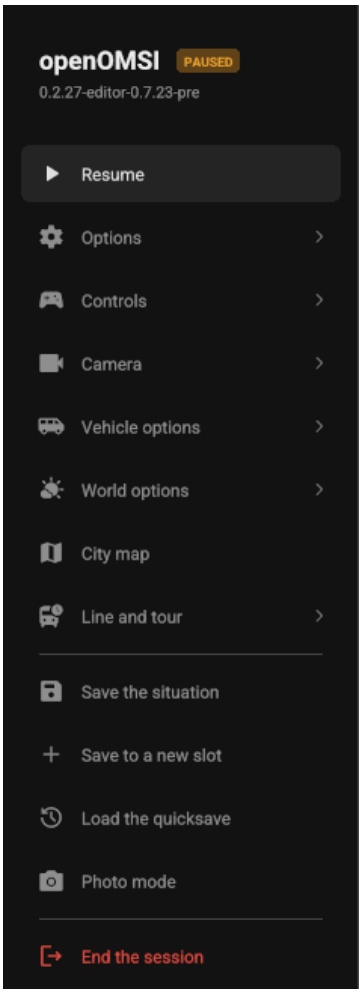

WORLD OPTIONS

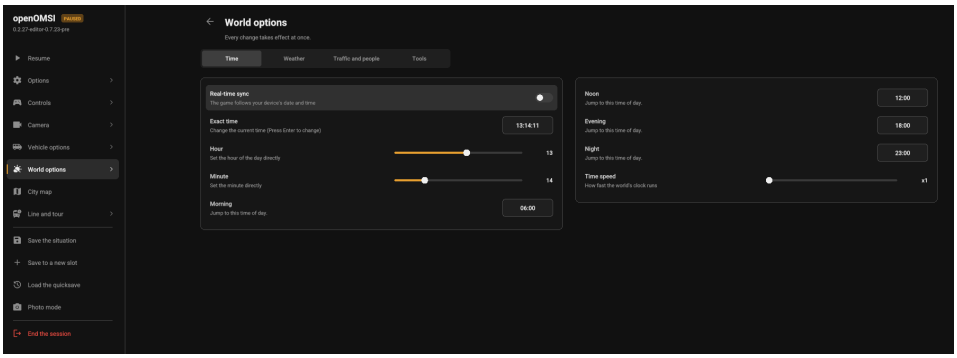


TOOLS: OPEN THE OBJECT EDITOR

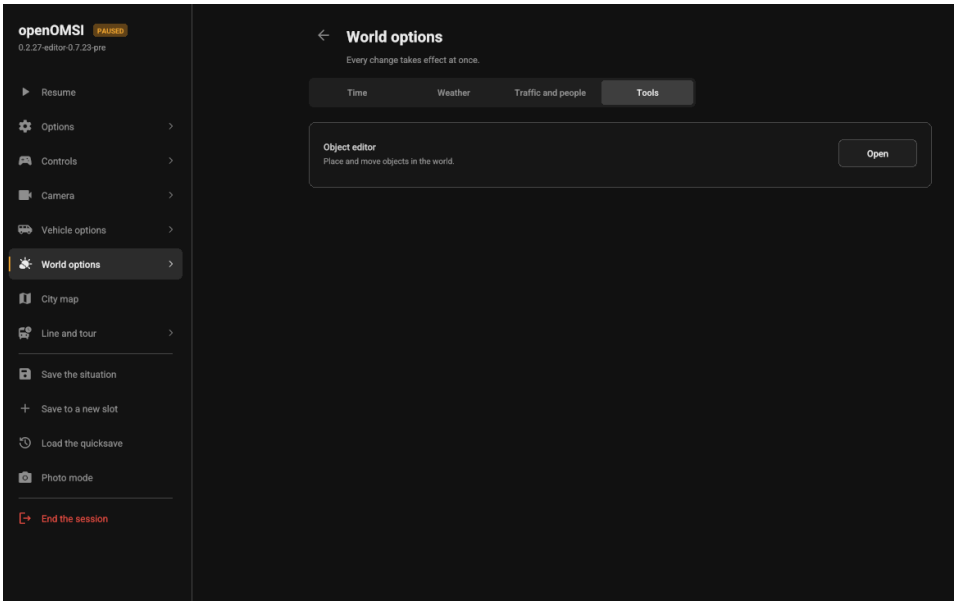

6 Interface and objects

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33

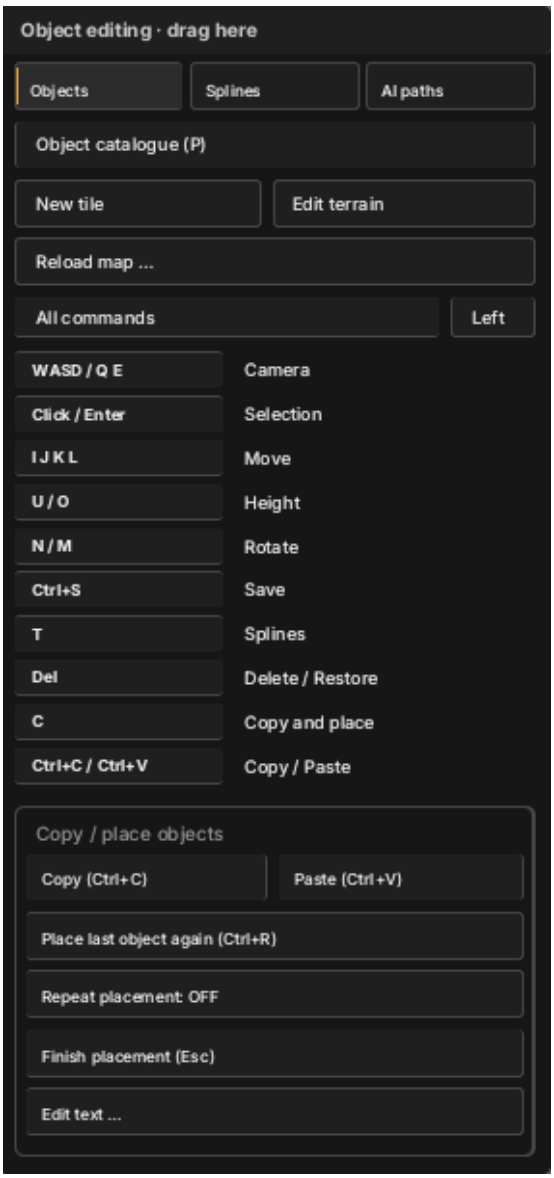

Switch workspace
Click Objects, Splines or AI paths at the top. The current toolbox is replaced by the selected editing workspace. T switches between object and spline mode.

General tools
Object catalogue (P) opens the object browser. New tile expands the map. Edit terrain opens height and texture tools. Reload map loads saved changes.


Selection and camera
Click / Enter selects; Tab cycles through hits. WASD / Q E moves the camera. I J K L moves an object, U / O changes height and N / M rotates it.

Copy and edit text
Ctrl+C copies and Ctrl+V starts placement. Ctrl+R places the last object again. Repeat placement allows more copies; Esc finishes. Edit text opens the object text fields.

Windows and saving
Drag the title bar with the left mouse button held. Left returns the toolbox to the left side. Ctrl+S saves the map.

7 Adding map tiles

New tile opens the map expansion window. Each tile measures 300 × 300 m.

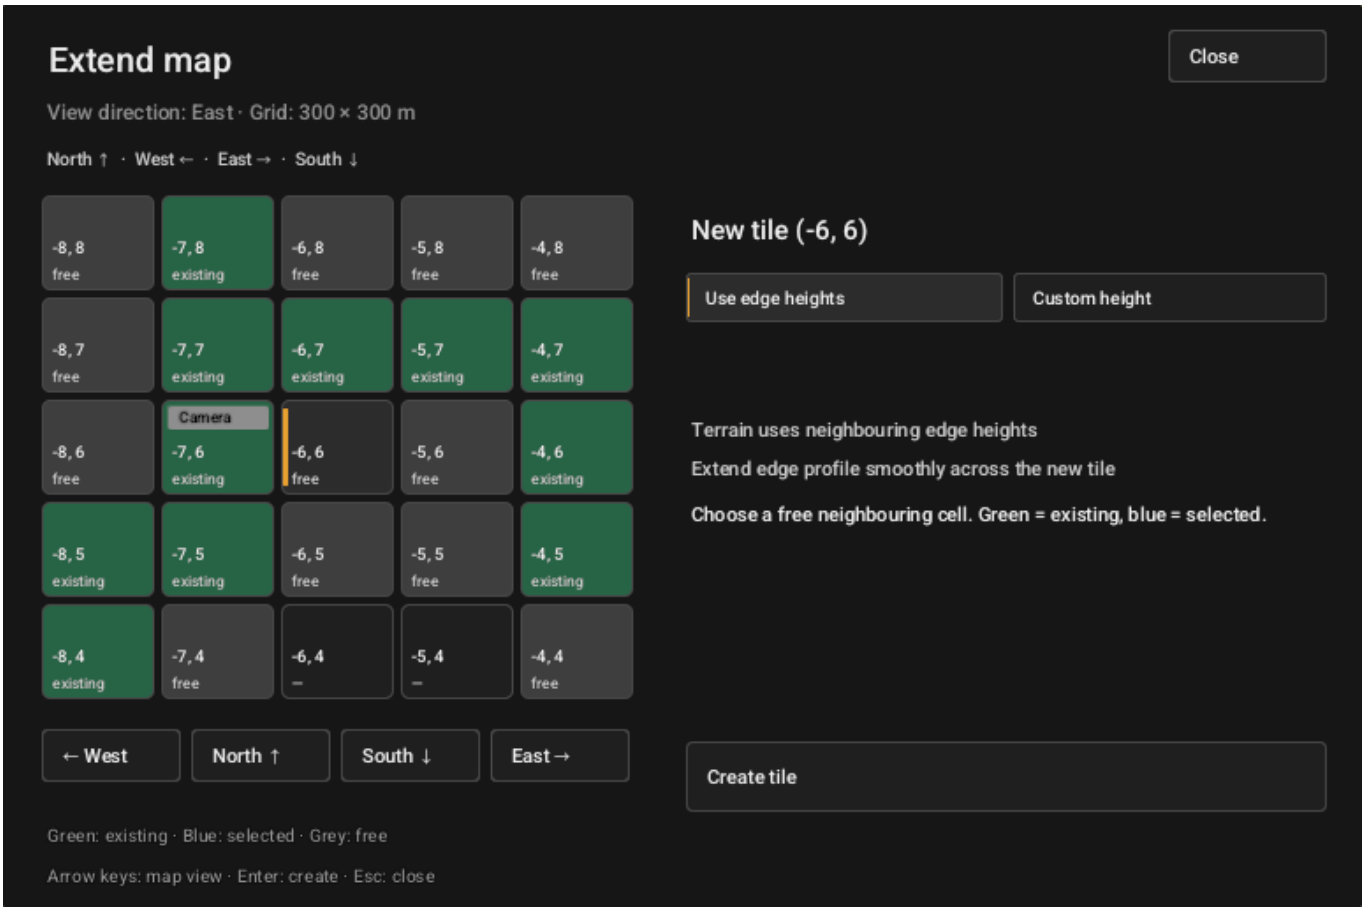

Choose a free neighbouring tile

Green marks existing tiles; **free** marks unused positions. The selection is dark grey with an orange side marker; the legend still calls it blue. Each cell shows coordinates. Use the direction buttons or arrow keys to move the map view.

Set the terrain height

Use edge heights: take neighbouring edge heights and smoothly extend their profiles across the new tile. **Custom height:** specify a height yourself.

Create the tile

Click **Create tile** or press Enter. **Close** or Esc closes the window. Choose a free neighbouring position to add a connected area for building.

8 Editing the terrain

Use Edit terrain to change the ground shape or switch between Heights and Textures.



English interface

Height tools

Raise hill, **Lower hollow**, **Level** and **Smooth** shape the ground. **Paint height** uses the target height; **Fine smoothing** provides gentler smoothing.

Brush settings

Radius (m): affected area. **Strength / sec.:** amount per second. **Soft edge (%):** edge falloff. **Target height (m):** height for applicable tools. **Tile step (m):** step size for whole tiles.

Pick a height or tile

Sample height picks an existing ground height. **Select tile** selects a map tile; its coordinates appear below.

Edit entire tiles

Lower tile and **Raise tile** change the whole tile. **Set entire tile to target height** uses the target value. **Blend with neighbours** controls the transition width.


Paint and save

Hold the left mouse button to sculpt; hold Shift for finer adjustments. The mouse wheel changes brush size. **Undo / Redo** revises changes. **Save (Ctrl+S)** saves the map.

Back to building returns to building tools. **New tile**, **Reload map …** and **Check spline connections …** open the related map tools.

9 Painting terrain textures

Open Edit terrain, then select Textures.

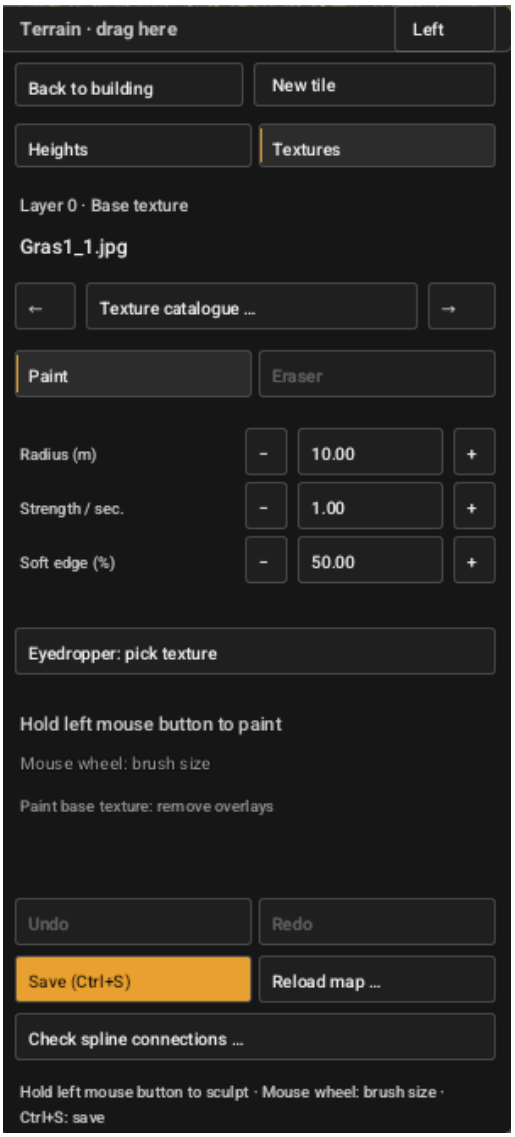

English interface

Choose a texture and layer

The arrows switch terrain texture layers. **Texture catalogue …** opens texture selection. The current layer and texture name appear above these controls.

Paint or erase

Select **Paint** and hold the left mouse button over the terrain. **Eraser** removes the selected overlay layer. It is disabled on layer 0: painting the base texture removes overlaid paint instead.

Brush settings

Radius (m) sets brush size; the mouse wheel also changes it. **Strength / sec.** controls how quickly paint is applied or erased. **Soft edge (%)** controls the transition at the edge.

Pick an existing texture

Click **Eyedropper: pick texture**, then click the terrain. The editor selects the sampled terrain texture layer.


Undo and save

Use **Undo** / **Redo** to revise brush strokes. **Save (Ctrl+S)** saves; **Back to building** returns to the building tools.

Begin with a small brush and low strength. Terrain textures change the ground; they do not select the asphalt texture of a spline or junction.

10 The asset catalogue

Open Catalogue (P) in the tool panel, or press P.

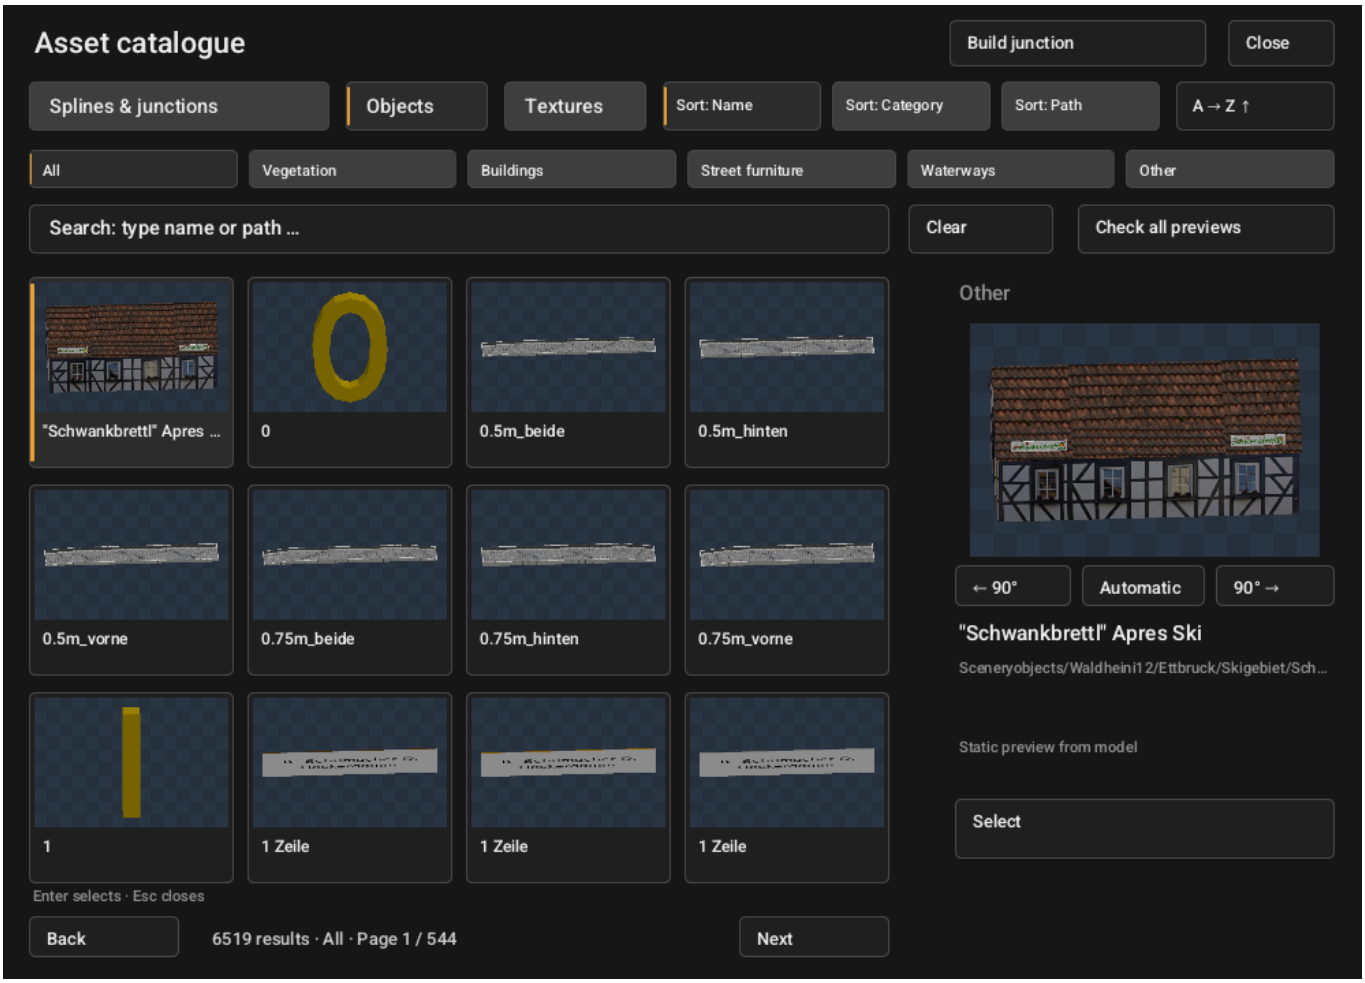

Search and filter

The top tabs select **Splines & junctions**, **Objects** or **Textures**. Categories narrow results. Search by name or file path; **Clear** clears the search. Sorting by name, category or path changes the order.

Preview and selection


Results appear as thumbnails on the left. Click an item for a larger preview, its name and file path on the right. The buttons below the preview rotate it.

Select and browse

Click **Select** or press Enter to use the highlighted item. **Back / Next** changes result pages; Esc closes the catalogue. **Build junction** opens the builder. **Check all previews** checks catalogue previews.

11 Splines in the catalogue

Splines & junctions contains road profiles, junction components and related path assets.

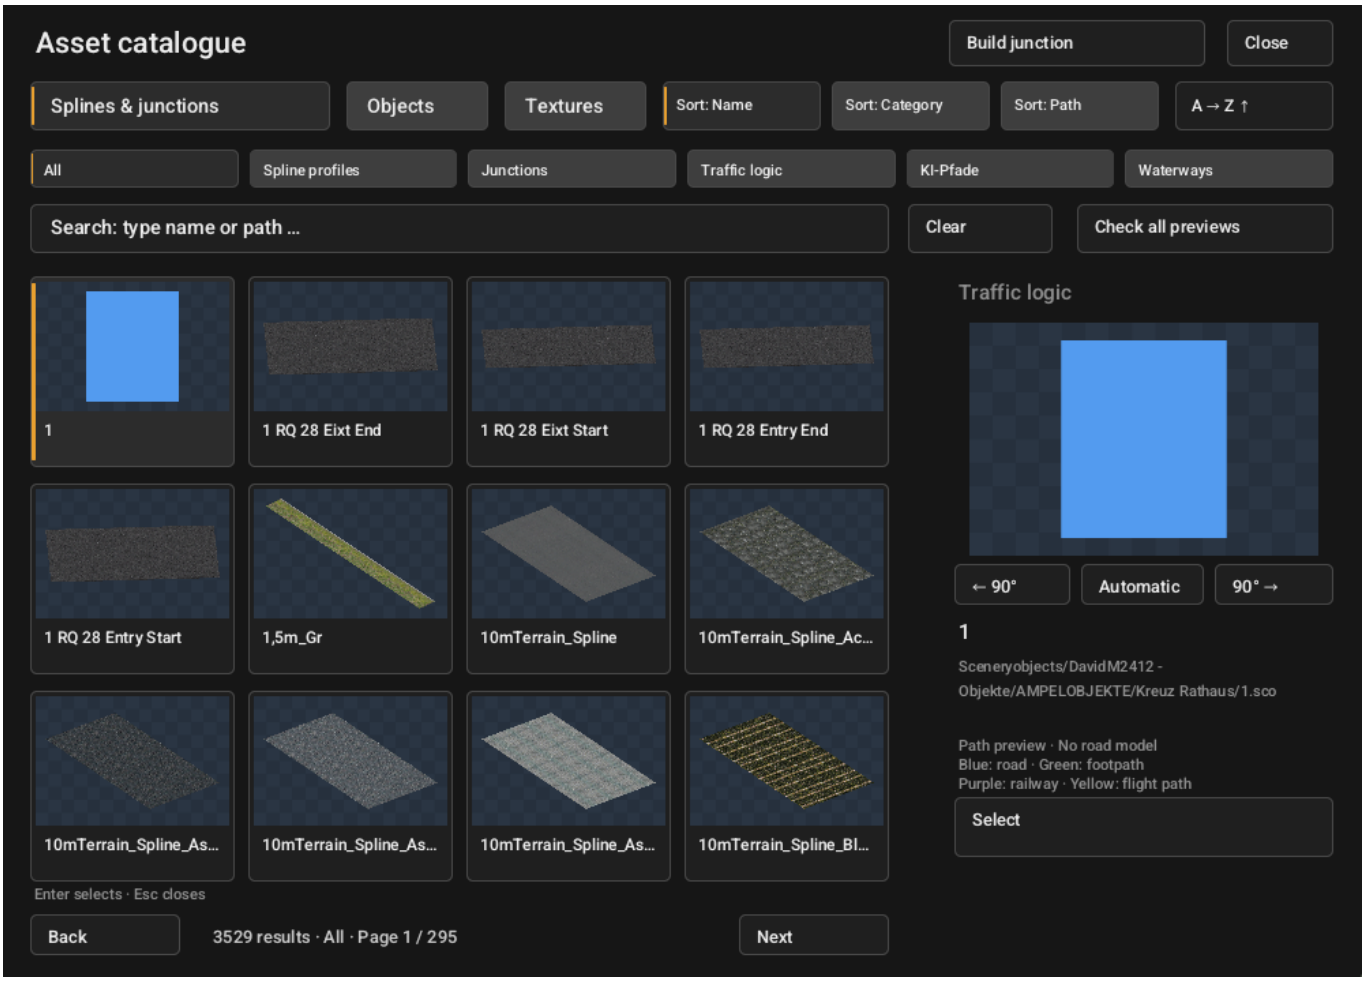

Filter and search

Choose **Spline profiles**, **Junctions**, **Traffic logic** or another category. The AI-path category is still labelled **KI-Pfade** in this original screenshot. Search by a profile name or part of its file path.

Preview the profile

The right panel shows the highlighted asset and its path. Spline previews show the road cross-section and available paths. **Blue:** road. **Green:** footpath. **Purple:** railway. **Yellow:** flight path. A traffic-logic object can show paths without a road model.

Select and continue

Click **Select** or press Enter, then use the selected asset in the editor. **Back / Next** browses results. Asset names and file paths retain their original language; they identify installed content.

12 Select and shape splines together

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33



Selection

Click to select one spline. Ctrl+click adds or removes a spline. Ctrl+Tab adds an overlapping hit. Click empty space to clear the selection. Check names and IDs in the information bar.

Asphalt and markings

Select both matching layers. + / - changes length, comma / period changes curvature, Home / End changes gradient. C extends the selected layers together.

Group editing

I J K L moves, U / O changes height, N / M rotates. The information bar shows length, radius, gradient and height of the active spline. Selection does not create a permanent link between layers.

Marking to road

Fit an existing marking to selected asphalt. For a whole curve, select every asphalt section and exactly one marking. Full instructions: page 38.

Terrain tools

F6: Road to terrain. Shift+F6: Terrain to road. F8 / Shift+F8: Smooth shoulder / Smooth wider. Ctrl+Z undoes; Ctrl+S saves.

Spline dimensions

Open the new window with Spline dimensions in this tab. Numeric editing, preview and placement: page 13.

13 Spline dimensions: preview and editing

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33



Open the window
Click Spline dimensions in the Splines tab. Drag the title to move the small window. The updated spline panel is shown on page 12.

Dimensions
Length and radius use metres, curve angle uses degrees and gradient uses percent. Radius 0 means straight. Start height is absolute, not an offset above the terrain.

Edit an existing spline
Select the spline and use Read selected spline. Change values and inspect the preview; Apply to selected spline explicitly applies them. Afterwards the ordinary editing shortcuts remain available.

Place new splines
Enable New spline dimensions. The preview follows the mouse and updates when dimensions change. N / M turns it; a click places the spline. Camera movement remains available outside a text input.

Close and check
Close dismisses the window. Splines spanning tile boundaries remain editable. Check connections, save with Ctrl+S and verify after reloading.

14 Fit road and terrain

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33

1. Select the actual asphalt
A road may consist of several splines. Ctrl+click to select all required asphalt sections. A separate marking alone does not describe the full road surface.

2. Road to terrain - F6
Fits the road to ground height. Select matching asphalt and marking layers together if both should follow. The operation may divide the road into short sections. Check the connections afterwards.

3. Terrain to road - Shift+F6
Keeps the road unchanged and fits terrain to its actual surface, including width, curves, gradient and banking. A small clearance keeps terrain below the asphalt.


4. Support at the edges
Terrain triangles extend beyond the asphalt boundary. Nearby outside grid vertices are therefore adjusted too, within one grid diagonal. This supports the triangles below the road edges instead of letting them fall towards unchanged lower vertices. The visible transition depends on grid resolution.

5. Smooth the shoulder
F8 and Shift+F8 remain separate tools for a side transition or a wider smoothed shoulder.

6. Check and save
Inspect both road edges from a low angle. Ctrl+Z undoes the operation. Apply again if needed, save with Ctrl+S and reload the map. Do not rely on the old undo history after reloading.

15 Bridge / tunnel / underground

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33

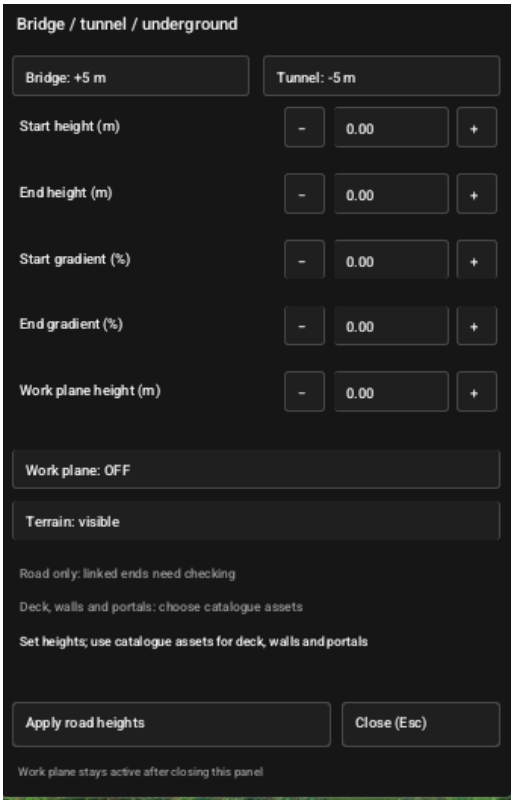

1 Select the road
In spline mode, click the actual road surface and check its ID. Open Bridge / tunnel / underground (Bridge / tunnel / underground). A marking may be a separate spline.

2 Set heights and gradients
Start height and End height are absolute map heights in metres. Set the gradient at each end separately in percent. Click a number, type a value and press Enter; a decimal comma is accepted.

3 Check and apply the preset
Bridge: +5 m and Tunnel: -5 m suggest heights relative to the terrain at both road ends. Apply road heights applies the change. Gradients above 20% within a ramp are rejected.

4 Check connections
Neighbouring roads are not automatically moved to matching heights. Check transitions and ramps. The road retains its profile, textures and AI paths; terrain-height adaptation is disabled.

Important
The tool changes road height. It does not create a terrain opening or a complete bridge or tunnel tube.

Screenshot: English interface.

16 Building bridges and tunnels

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33

Work plane
Set Work plane height and enable Work plane: ON. Placement of new objects and splines, and dragging, use this plane even below ground. It stays active after closing the window. Disable it in the same window to resume normal terrain-based placement.

See below ground
Terrain: visible toggles terrain visibility in the editor. Hiding terrain does not change saved ground or collisions. Terrain becomes visible again when leaving the editor or opening the game menu.

Build a bridge
Raise the road and connect suitable ramps. Choose and place a deck, railings and supports from the catalogue. The +5 m preset is a starting point; check clearance and connections.


Build a tunnel
Lower the road and connect entrance ramps. Place a suitable tube, walls and portals from the catalogue. A portal alone does not cut an opening in the ground. An opening requires suitable terrainhole-enabled assets or an open approach shaped with the terrain tools. Lowering the ground does not create an enclosed tube.

Road surface or marking?
A surface invisible from below may be rendered on one side only. If the road seems transparent, also check whether only a marking spline was selected. Verify its name, profile and ID.

Back up and test
Copy the map before extensive terrain edits. Ctrl+Z undoes road-height changes; Ctrl+S saves. Reload and check the approach, collisions, road height and AI connections. Work-plane settings and hidden terrain are not saved map changes.

17 Junction builder

Design a junction, save it and place it on the map.

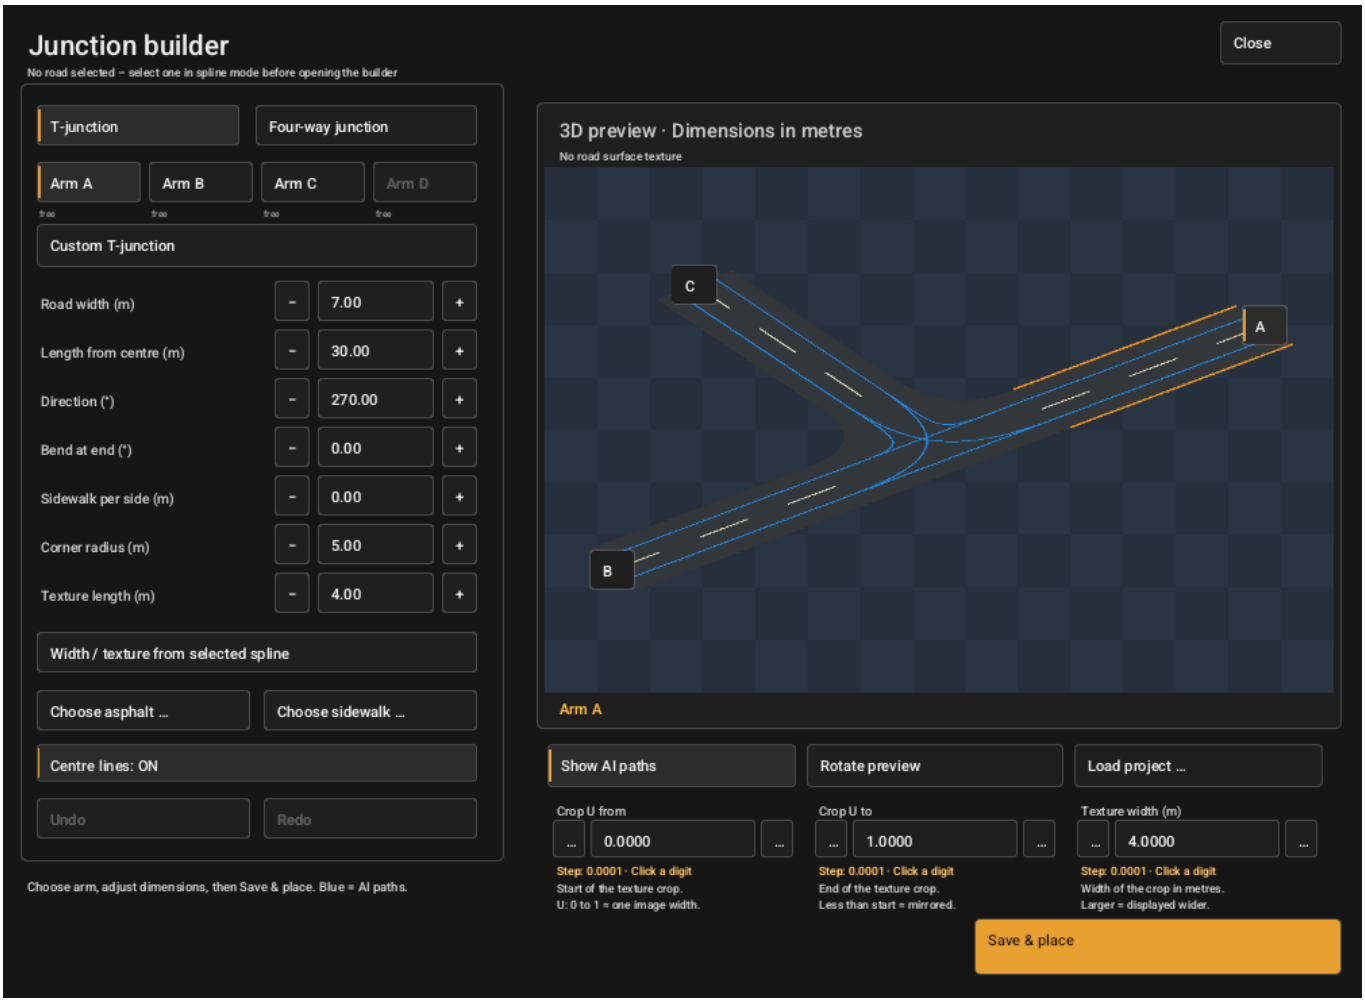

Shape and arms

Choose **T-junction** or **Four-way junction**. Select **Arm A/B/C/D**; D is disabled for a T-junction. Set road width, length, direction, bend, sidewalk width and corner radius. Labels identify the arms; **Arm A** is selected in this screenshot.

Textures and preview


Choose asphalt … / Choose sidewalk … select textures. **Width / texture from selected spline** copies a previously selected road's width and texture. **Show AI paths** toggles blue paths; **Centre lines** toggles markings. **Rotate preview** changes the view.

Save and continue editing

Load project … opens a saved project. **Undo / Redo** correct changes. **Save & place** prepares placement; then save the map with Ctrl+S. Texture crop: page 16 Road connections: page 20 AI connections: page 32

18 Adjusting junction textures

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33

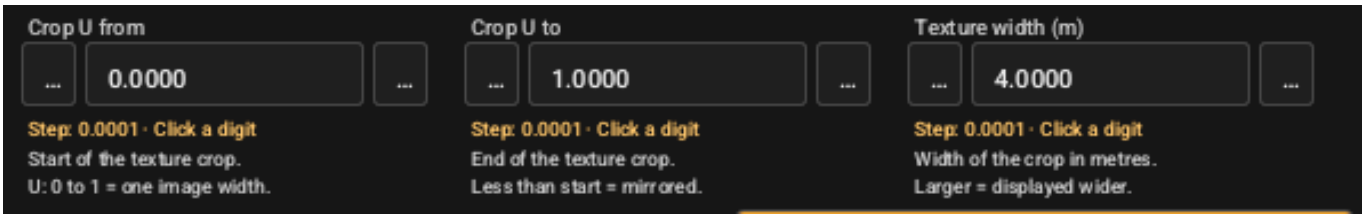

Choose the step size

Click a value and type a number; comma and decimal point are accepted. Enter applies it. Plus/minus also applies a valid entry before changing it. Typed decimal places set the step: 6.5 → 0.1; 6.52 → 0.01; 6 → 1. Up to four decimal places are supported.

Click a digit to select its place. In 6.52, clicking 6 selects steps of 1, clicking 5 selects 0.1 and clicking 2 selects 0.01. The digit is underlined; use + / - to change the value. Each field remembers its own step. The screenshot shows a step of 0.0001.

Crop U from

Start of the horizontal texture crop. U = 0 is the left edge; U = 1 is one full image width.

Crop U to

End of the crop. Example: 0.25 to 0.75 uses the middle half. A smaller end than start mirrors the crop; values outside 0 to 1 repeat the texture.


Texture width (m)

Width covered by one repetition of the selected crop. Larger values stretch it wider; smaller values repeat it more often. The road width stays unchanged.

Limits: U from/to -16 to 16; values must differ by at least 0.0001. Texture width: 0.25 to 100 m. Undo/Redo covers these changes. Esc cancels pending text input; use Undo for applied +/- changes. Inspect the preview, then save or update the placed junction.

19 Roundabout: 1 Circle

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33

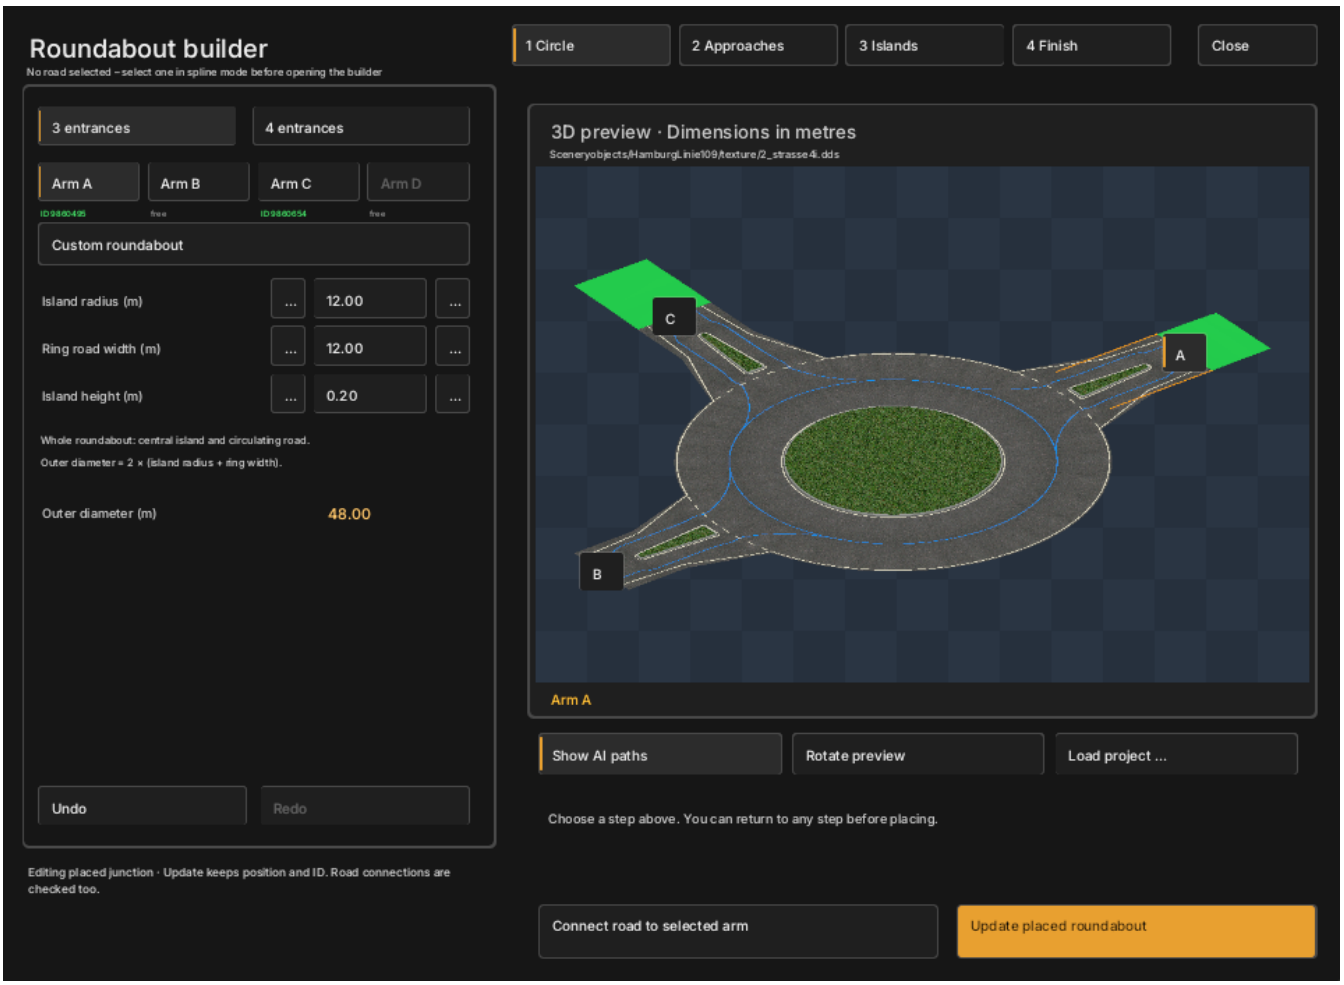


Four steps, one preview
Switch between Circle, Approaches, Islands and Finish at the top. The preview stays visible. Valid edits are applied when switching steps; correct invalid input first.

Define the whole roundabout
Choose 3 or 4 entrances. Island radius, ring road width and island height apply to the whole roundabout. Outer diameter = 2 × (island radius + ring width), here 48 m. The central island includes a concrete kerb.

Continue
Approaches: page 20. Splitter islands: page 21. Surfaces and markings: page 22. This screenshot shows an existing roundabout with connected roads. Its dimensions illustrate the controls, not a road-design standard.

20 Roundabout: 2 Approaches

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33

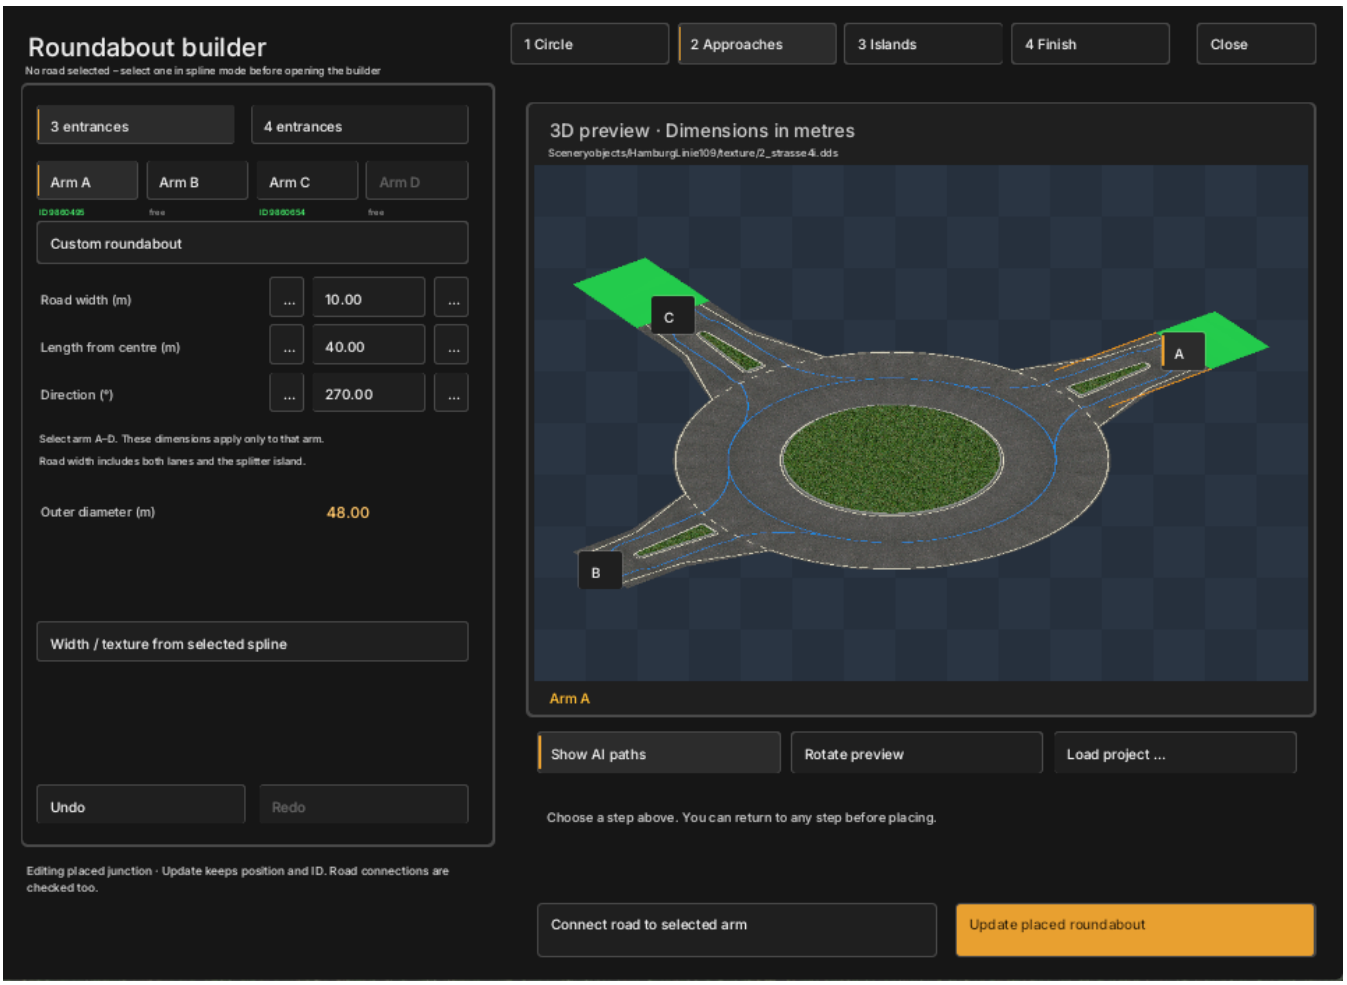

Select arm A-D first

Road width, length from centre and direction affect only the selected arm. Width includes both directions and any splitter island. Length is measured from the centre of the roundabout.

Use an existing profile


Select a road in spline mode before opening the builder. Width / texture from selected spline imports its profile. Otherwise enter the dimensions manually.

Preview and connections

Orange highlights the selected arm; blue shows AI paths. Green areas and IDs in this example indicate connected roads. Select other arms to edit them. Islands: page 21. Connecting existing roads: page 24.

21 Roundabout: 3 Islands

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33

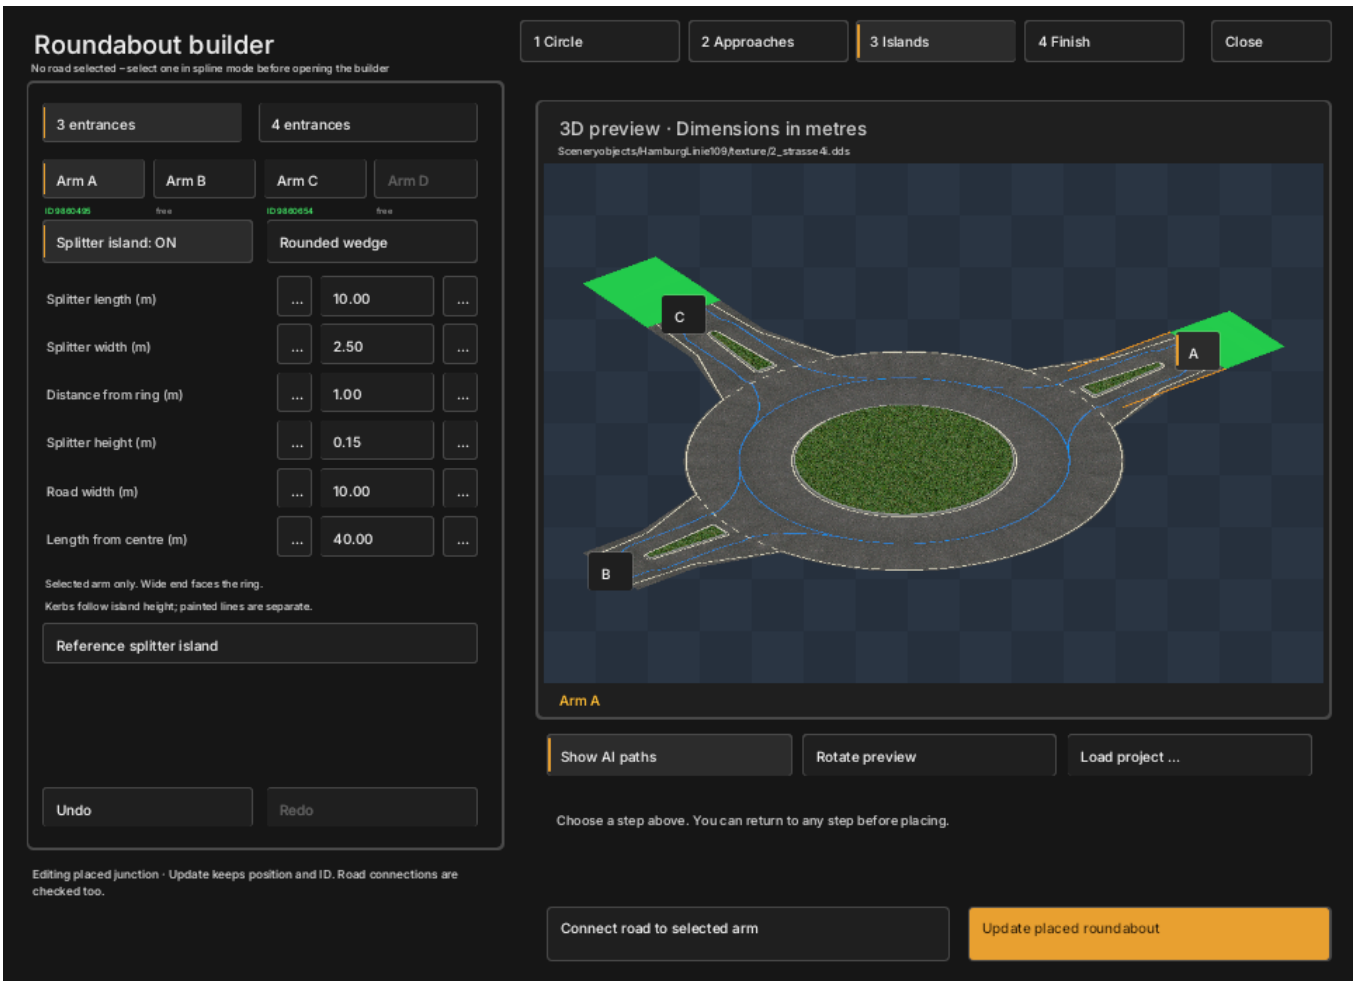

Enable each splitter separately

Select arm A-D and turn Splitter island ON. This example already has it enabled. Set length, width, distance from ring and height. Widen or lengthen the approach if the island needs more space.

Shape and kerbs


The shape button cycles through Rounded, Teardrop and Rounded wedge. Reference splitter island enables a wedge with preset dimensions. Its broad end faces the ring. Concrete kerbs follow the island height; painted edge lines are controlled separately.

Check every arm

Settings affect the selected arm only. Inspect AI paths and clearances. This version does not generate pedestrian crossings, cycle crossings or traffic lights. Continue with Finish on page 22.

22 Roundabout: 4 Finish

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33

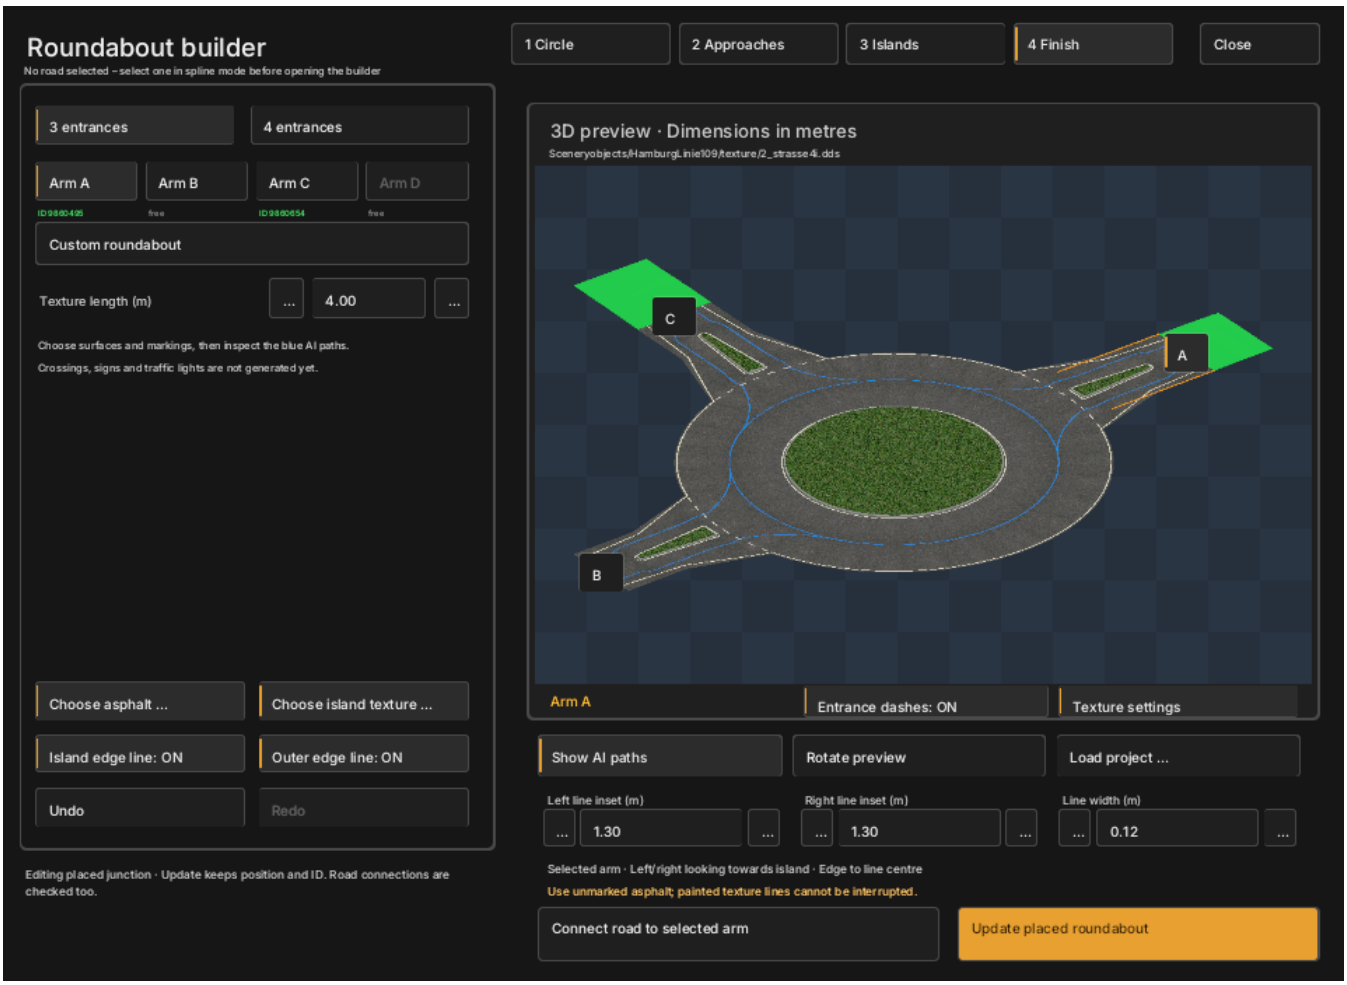

Surfaces and markings

Choose asphalt and island textures. Toggle Island edge line, Outer edge line and Entrance dashes independently. Use unmarked asphalt: these controls cannot erase lines already painted into a texture.

Line insets and textures

Left and right are viewed towards the island. Inset is measured from the road edge to the line centre and applies per arm; line width is shared. Texture settings opens crop U and texture width; Match edge lines returns to line controls.

Finish and save

Inspect the preview and AI paths. Use Save & place for a new object, or Update placed roundabout as shown here for an existing one. Save the map and reload for AI. Road connections: page 24. Signs, crossings and traffic lights are not generated yet.

23 Rotation, height and tilt

Select a placed object in **object mode**. Tilt controls support builder junctions and roundabouts. Keep the companion **junction.junction.json** beside the object.

Keys	Action	Normal / Shift
N / M	Rotate	5° / 0.5°
U / O	Lower / Raise	0.5 m / 0.05 m
Home / End	Pitch + / -	0.5° / 0.05°
Page Up / Down	Bank + / -	0.5° / 0.05°
I / J / K / L	Move	0.5 m / 0.05 m
Delete	Delete / Restore	
Ctrl+S	Save map	

Check the angles

The information bar shows pitch and bank. Axes follow the object, not the camera. Copying and placement preserve the angles. Each angle is limited to -89°…+89°; road connections may reach geometric limits earlier.

Backspace and saving

For connected builder objects, Backspace restores the combined pose and road edits. Without connected approaches it first resets changed tilt. Restore deleted objects with Delete first. Save and reload the map to refresh traffic paths.

Spline mode: comma/period still adjust curvature and Home/End adjust gradient. Keyboard rotation in object mode uses N/M only.

24 Connect roads and follow changes

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33

1. Select the approach road
In spline mode select the correct asphalt. Check the name and ID when layers overlap. Then select the placed object in object mode and open its builder.

2. Choose an arm
Choose arm A-D and connect the road to the selected arm. Check the preview, direction and width. Updating the placed object commits the prepared connection.


3. Matching markings follow
Co-located narrow marking profiles can connect together with the asphalt. Asphalt determines the geometry; the marking is not independently stretched to the full arm width.

Different subdivisions
Different section lengths or occupied endpoints can prevent fitting. First fit the marking to the complete asphalt chain (page 38), then check the connection again. Visual contact alone is not a saved connection.

Check the result
Misaligned directions may need a curved transition. Align the road and object rather than forcing a connection. Save and reload the map for AI traffic.

25 Checking spline connections

Find open ends and suspicious connections across the whole map.

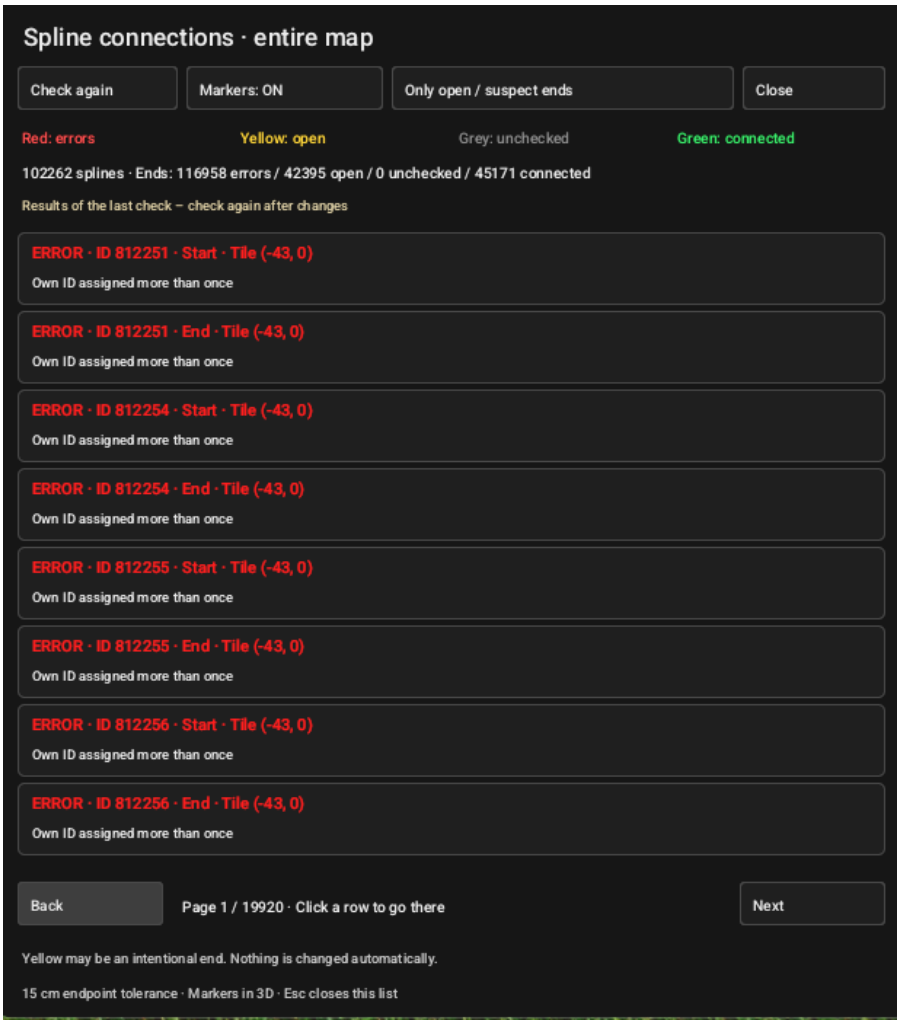

Red: errors, such as duplicate IDs. **Yellow:** open ends, which may be intentional. **Grey:** unchecked. **Green:** recognised as connected. The screenshot shows results from this map, not a requirement for every map.


Each entry lists the spline ID, start or end, tile coordinates and the finding. Click a row to go there. **Back / Next** changes result pages.

Check again refreshes results after edits. **Markers: ON/OFF** toggles markers in 3D. **Only open / suspect ends** filters results.

Endpoint tolerance: 15 cm. Nothing is changed automatically. Close or Esc closes the list.

26 Using AI path tools

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33

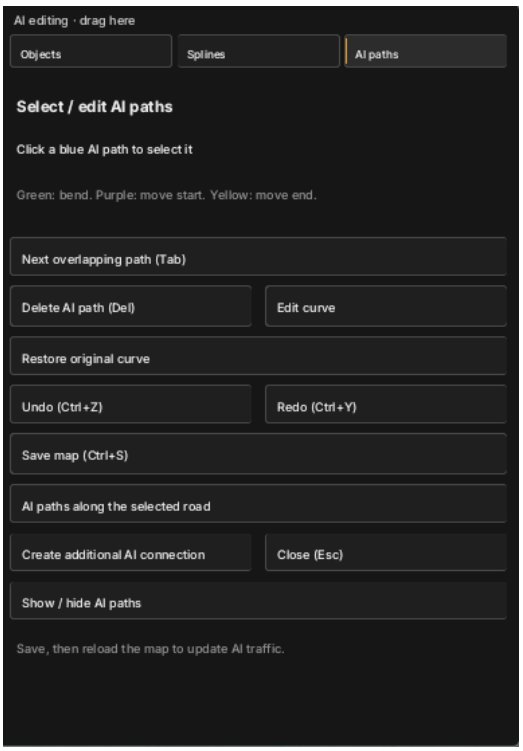

Open AI editing
Select AI paths at the top or press F9. Objects and Splines return to the other work areas.

Existing paths
Click a visible AI path. You do not need to select a road first; junction object paths are also selectable. Editing: pages 30-31.

Along a road
First select the road in the Splines tab. AI paths along the selected road opens generation. Check range, lanes and direction; pages 27-29.

Additional connections
Create additional AI connection opens the preview. Connect existing endpoints (page 33) or draw a new chain of sections freely (page 34).

Verify
Blue: all vehicles. Orange: buses only. Arrows indicate travel direction. Add the preview, save the map and reload.

27 Create AI driving paths

First select the actual road, not an island, kerb or sidewalk.



English interface

Scope

Scope: selected spline edits one section. **Scope: connected spline chain** follows connected reference splines; junctions or gaps may limit the chain.

Lane count and direction

Cycle between **Two opposing lanes**, **One lane / one-way road** and **Two lanes in the same direction**. Arrows show travel direction. Separately created one-way splines are edited individually.

Vehicles

Choose **All vehicles** or **Buses only** per lane. Bus schedules are separate; this permission does not create a bus service.

Width, offset and height

Lane width and lateral offset define the starting layout. Height above spline lifts the path relative to the road reference. Check that it follows the lane centre. This does not reshape the visible road.

Add or replace

Mode: add missing AI paths keeps existing paths. **Mode: replace existing AI paths** updates editor-generated paths. Do not add another path when you intend to correct one.

About this screenshot

Two opposing lanes are selected. **Select lane 2** switches the edited lane. The status shows **0 new sections, 6 already with paths and 0 open endpoints**. These values depend on the selection.

28 AI paths along a road

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33



English interface

Scope, lanes and direction

Scope: switch between a selected spline and its connected chain. The lane-mode button cycles through **Two opposing lanes**, **One lane / one-way road** and **Two lanes in the same direction**. **Direction:** choose the reference direction or its opposite.

Lane 1 / Lane 2: choose **All vehicles** or **Buses only** per lane. Blue means all vehicles; orange means buses only. Arrows show travel direction.

Placement and freeform points

Lane width: set the width of a lane. **Lateral offset:** move the layout sideways. **Height above spline:** set its vertical offset. Use + / - to change values.

Edit freeform points: toggle point editing. **Select lane:** switch the edited lane. Click and drag a point. **Reset point:** remove its individual offset. **Lower point / Raise point:** lower / raise it by 0.1 m.

Apply the preview

Mode: add missing AI paths: add missing paths and retain existing ones. Switch to “replace existing AI paths” to replace existing paths in the selected scope; inspect the preview before applying.

AI paths: visible - hide: toggle the overlay. **Create AI paths (Enter):** apply the preview. **Refresh preview:** recalculate it. The status line reports new sections and open endpoints.

The bottom buttons open additional connections or direct path selection. **Close (Esc)** closes the tool. Save afterwards, then reload the map.

This tool generates paths from a road. Use direct path selection to move an original individual path.

A bus-only path does not create a timetable. Scheduled buses need a route and timetable. A connection does not force every ordinary car to turn.

29 Shape AI paths with the mouse

Freeform editing works on one selected section at a time.

1. Open the existing path

Select the road or generated AI spline and open **AI paths along the road**. Choose replacement mode when correcting an existing path.

2. Enable freeform editing

Click **Edit freeform points**. The tool switches to the selected section. Each lane starts with nine green points, including its start and end.

3. Choose the lane

With two lanes, use **Select lane 1 / Select lane 2**. The button names the lane you can switch to. Dragging does not move the other lane.

4. Drag points

Hold the left mouse button on a green point and drag. The selected point turns yellow: this means selected, not connected. Intermediate points shape a smooth curve. Keep the path in the centre of its lane.

5. Adjust height or reset a point

Dragging moves points horizontally. **Raise point / Lower point** changes height in 0.1 m steps. **Reset point** resets the point’s displacement. Displacement is limited to 50 m in each local direction.

6. Apply, save and reload


Apply with **Create AI paths / Replace AI paths** or Enter. Ctrl+Z undoes the applied change. Save with Ctrl+S and reload the map for running traffic. Close or Esc discards the unapplied preview.

Longer routes and smooth dragging

Edit connected sections individually and join their endpoints. Chain mode does not overwrite individual freeform shapes as one uniform layout. Mouse movements are combined per frame; release uses the latest position.

30 Select and edit AI paths

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33

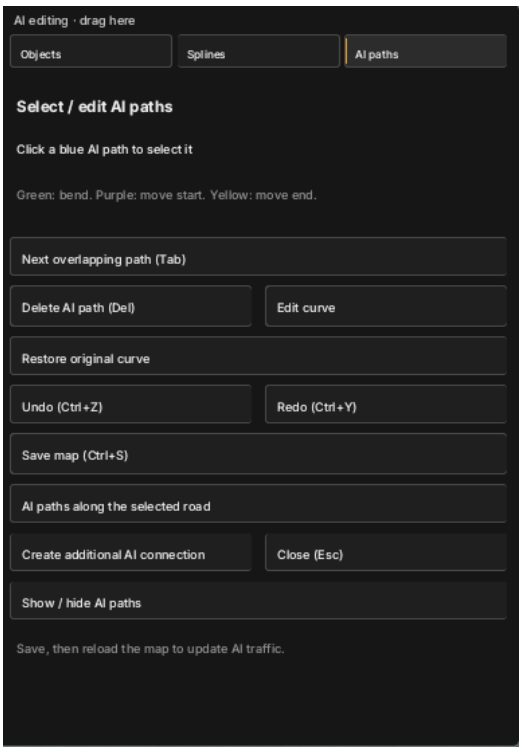

Select
Click a visible path. Next overlapping path (Tab) cycles through paths at the same position.

Curve and endpoints
Enable Edit curve. Green handles shape the curve; purple moves its start and yellow moves its end. Drag with the left mouse button. Check direction, height and connections.

Delete and reset
Delete AI path (Del) removes the selected path, not the road. Restore original curve resets its shape, endpoint offsets and height correction.

Undo and save
Ctrl+Z undoes changes; Ctrl+Y redoes them. Ctrl+S saves. Reloading starts a new editing session without the previous undo history.

Roundabouts
Saved deletions and shape edits apply to the complete selected driving curve. From freeai2, its short internal segments no longer reappear after reloading. Check traffic afterwards.

31 Edit existing paths

3. Select a path and reshape it

1. Open F9. Click a blue or orange path and check its purple highlight. The panel identifies road/object, instance ID, path number and direction.

2. Use Tab or “Next overlapping path” when paths overlap. After cycling, enable “Edit curve” if necessary.

3. Hold a green handle with the left mouse button and drag. A top-down or oblique view makes lateral placement easier to judge. Short paths with only two original samples can also be edited.

4. Dragging captures height from loaded road surfaces when the entire interior lies above a road. Otherwise, the geometric road-profile correction is used. A curve outside the road is not automatically moved back onto it.

4. Extend a path

Drag the **yellow end handle** to the desired position. The **purple start handle** moves the start. Adjust the green handles afterwards to keep the route within the intended lane.

Releasing an endpoint near a unique compatible connection may snap it to that position. Moving an endpoint clears its previous explicit link on that side. Check direction and continuity afterwards: identical endpoint coordinates alone do not guarantee a suitable AI route.

5. Delete, reset and undo

Delete / “Delete AI path”: removes only the selected path direction on that instance. The junction object and other routes remain. Removing an entire junction arm may require deleting several paths individually.

Ctrl+Z: undo. **Ctrl+Y:** redo. “Restore AI path” restores the currently selected deleted route. “Restore original curve” resets shape, endpoint offsets and saved height correction.

Reloading starts a new editing session; the previous undo history is not carried over. Saving and reloading are explained on page 36

32 Connections and opposing traffic

Paths touching visually are not yet an explicitly selected connection.

Connect endpoints explicitly

In freeform mode, select the green start or end point. Matching opposite endpoints within 50 m appear purple. A path end connects to another path start, and vice versa. Drag the selected point onto the desired purple target and release; it snaps within 1.5 m.

Check the result

The panel counts fixed connections and open ends. Check the assignment and arrow direction, then apply and save. Moving that endpoint freely again removes its fixed assignment. Nearly overlapping targets may be ambiguous.

Separate straight and right-turn lanes

Connect the straight-ahead lane to the crossing's appropriate straight path and the turning lane to its right-turn path. Merely straightening the visible line does not select the connection. Use two same-direction lanes for adjacent lanes travelling the same way.

Route around a central island

Keep each direction in the centre of its own lane. With right-hand traffic, pass to the right of the island in the direction of travel. Edit opposing lanes separately. With two separate one-way splines, the opposite direction is lane 1 of its own spline.

Arm labels A/B/C/D in the preview

The junction and roundabout builders label their arms in the preview. Match the label to the selected approach. This assists the road connections in chapter 19; AI endpoints are connected in the AI-path tool.


Limits and compatibility

Original paths in standard spline profiles or crossing objects are not overwritten. Custom paths can connect to suitable original endpoints. Free bridges across a crossing do not create traffic-light control or priority rules. Freeform points and fixed connections require this modified openOMSI runtime; an unmodified upstream version does not interpret these extensions.

New in 0.8.8-pre: create an additional AI connection - step-by-step guide on page 33

33 Additional AI connection

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33

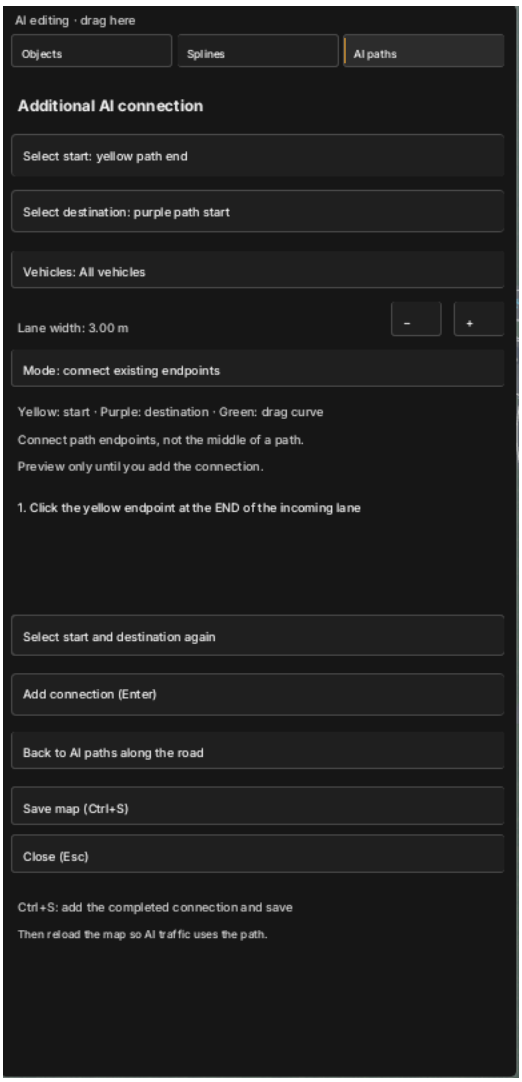

1. Mode and endpoints
Choose Mode: connect existing endpoints. Select the yellow end of the incoming lane as the start, then the purple start of the onward lane as the destination. Connect endpoints, not the middle of a path.

2. Shape the preview
Drag the three green form handles. Check alignment and height on the loaded road surface. Set Vehicles and Lane width using the controls.


3. Add the connection
Add connection (Enter) commits a valid preview. Other existing paths remain. Select start and destination again resets the preview.

4. Save and test
Ctrl+S adds a completed valid connection and saves. Check the save message, then reload the map and observe AI traffic.

Another mode
For new paths without two existing endpoints, switch to free drawing (page 34). Switching modes discards the uncommitted preview.

34 Additional AI connection: free drawing

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33

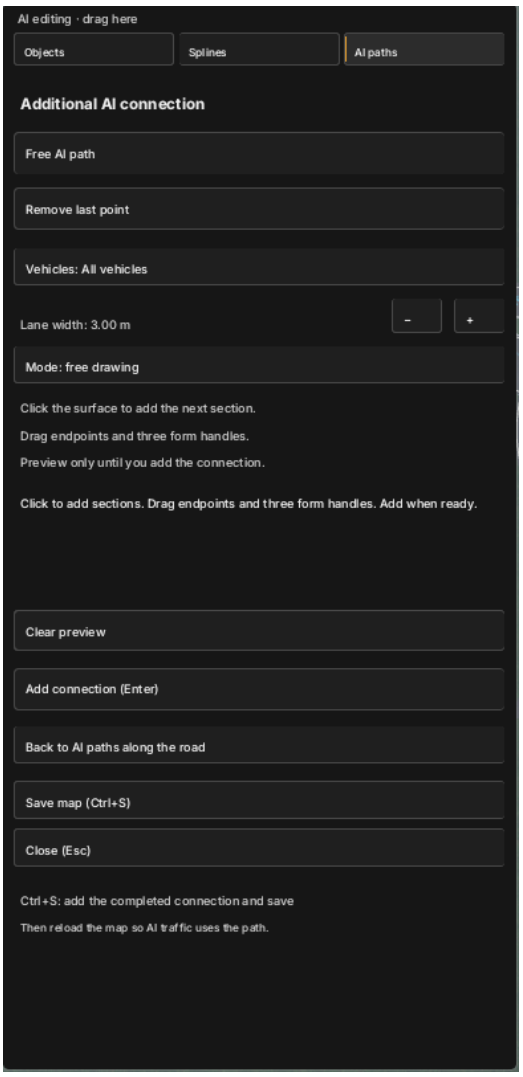

1. Choose free drawing
Open Create additional AI connection and switch Mode to free drawing. Two existing AI endpoints are not required.

2. Place sections
Click the loaded surface: first click = start; second click = end of the first section. Each further click adds another section.

3. Adjust the shape
Each section has three movable form handles in addition to its start and end. Adjacent sections share endpoints. The preview updates as you drag.

4. Correct the preview
Remove last point removes the last section. Clear preview starts again. Set Vehicles and Lane width before adding.

5. Add and save
Enter commits the preview. Ctrl+S commits a completed valid preview and saves. Then reload the map. Adjacent sections connect to each other; connections to other paths require matching position, height and travel direction.

Limits per section
At least 1 m between points; at most 200 m straight-line distance and 20 m height difference. Add sections for longer paths. The preview follows the road or terrain on loaded tiles.

35 AI paths: help and diagnostics

Check the selection and preview before applying and saving.

No paths or control points visible

Show AI paths. Enable freeform mode to see green control points. Background loading may take a moment after enabling the display. Check the information bar: did you select the road or the traffic island? An error can prevent a valid preview.

Cannot select lane 2

One lane / one-way road has only one editable lane, although the second button may still be visible. If the opposite direction belongs to another AI spline, select it separately. Avoid creating a duplicate path over an existing one.

Curve too tight for this lane offset

A section does not fit the configured lateral offset. In chain mode, another section may be responsible. Select the correct road individually and check width, offset and curvature; do not use the narrow island edge as the reference.

Yellow point will not snap

Yellow means selected. Hold the left mouse button and drag the endpoint onto the matching purple target, then release. Check direction, distance and the 50 m displacement limit. Interior control points are not connection endpoints.

Another prolonged freeze?

Launch with start-editor-diagnose.sh. Note the time and action: dragging, releasing, applying or moving the camera. Save game.log before the next launch. EDITOR-DIAG reports slow operations; 0.7.20 also reports excessive waiting of combined mouse movements.

What has been observed

Normal dragging without freezes was confirmed on Linux with 0.7.20. The path display builds in the background. A brief map-update delay can still occur; diagnostics do not prove smooth operation on every map under all conditions.

Finish safely

Apply the preview, save with Ctrl+S, then reload the map for AI traffic. After troubleshooting, return to normal startup with start-editor.sh. Diagnostics stop; the improvements stay active.

36 Save and test with traffic

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33

Reloading during a duty - local development build
Single-player map reload retains the bus position, duty, technical bus state, passengers in the player bus and selected camera view, provided the same bus can be restored. An ongoing ticket sale is retained. Waiting people are retained at still-loaded stops moved by up to 30 m; deleted stops or larger moves are excluded. Other pedestrians and AI-bus passengers are regenerated. Move waiting-point objects and shelters as well when permanently relocating a stop. This continuation applies to map reload within the current session, not loading a saved situation or LAN.

While editing
Terrain painting updates the ground display without rebuilding simulation tiles. Expensive updates while moving objects and splines are deferred until the key or mouse button is released. Allow the update to finish after releasing it.

Save and reload
Ctrl+S saves edits. Use Reload map after changing AI connections. Wait for reload to finish, then continue driving. Reloading a map does not save a driving situation.

Move bus stops
Keep the stop marker, waiting points and shelter aligned. Deleted stops, moves over 30 m and unloaded areas cannot retain all waiting passengers.

Check AI traffic
Moving only the camera does not move the traffic area around the player bus. Drive to the edited location to test it. Check endpoints, directions and heights; a visible path alone does not prove a usable connection.

Camera and backup
Press F1 if the interior camera appears offset after reload. Back up the map before major edits. Normal game saving rules apply when leaving the session.

37 Version, startup and updates

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33

Version
Editor 0.8.8-pre uses openOMSI 0.3.33. The normal game and editor package update separately. Updating the game does not replace the bundled editor engine.

Windows
Extract the complete Windows x64 ZIP into a new writable folder. Run start-editor.cmd and configure your original OMSI 2 content. The launcher requires Microsoft Edge WebView2 Runtime.


Linux
Extract the Linux x64 package. From its folder run:
bash start-editor.sh "/path/to/content"
No --launcher argument is needed. The Linux package requires glibc 2.39 or newer.

Updating
End your drive, back up maps and close the program first. Extract the new package separately and reuse your existing content folder. Point your shortcut at the new package.

Checksums
The SHA-256 file verifies the download. A program backup and a map backup serve different purposes. Automatic update checking does not mean automatic installation.

38 Check and install updates

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33

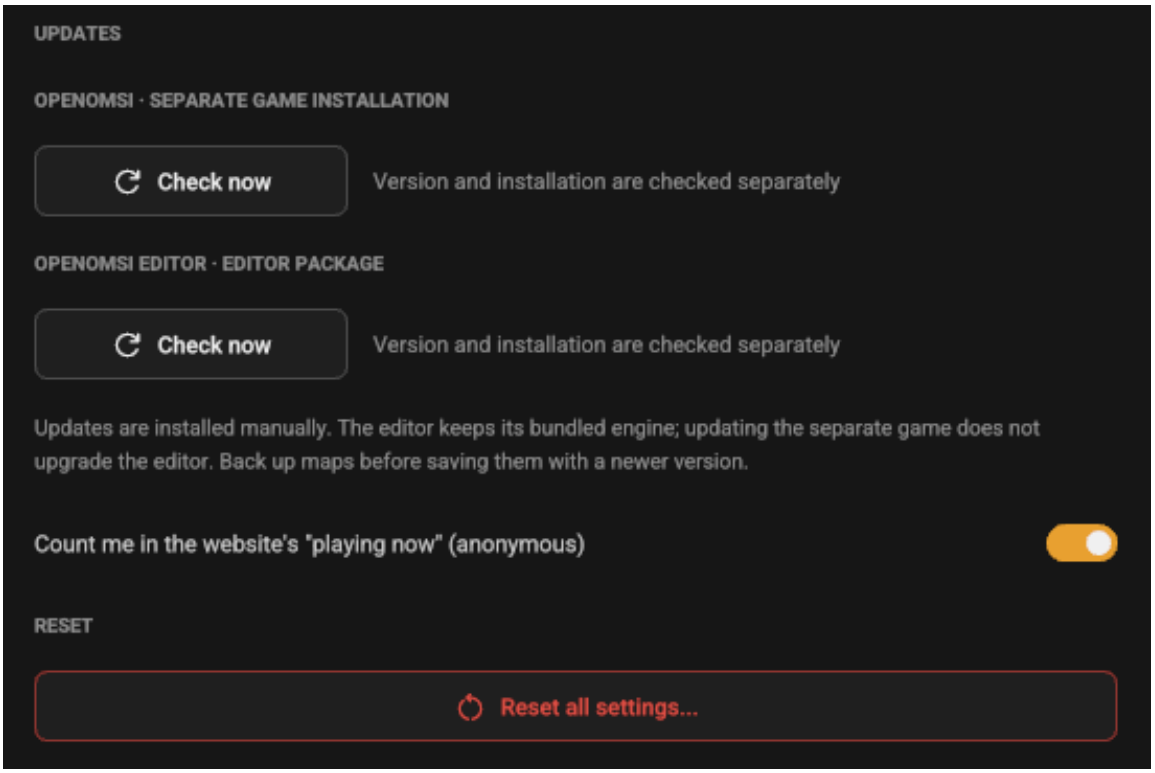

1 Open the update section
Open Settings → General → Updates. The two buttons check different programs.

2 Choose the correct check
openOMSI · separate game installation checks the normal game in the selected content folder. openOMSI Editor · editor package checks the editor, including prereleases. Check now does not install anything.

3 Review the offer
If a newer version is found, check the release notes, version and target folder. End the driving session and back up maps before installation. Download and install starts installation.

4 After updating
An editor update restarts the editor. A game update does not replace the bundled editor engine. Both programs can use the same maps and mods. Backup and compatibility details: page 36.

State shown in the screenshot
The image shows the buttons before a check. Download and installation controls appear only when an update is available. Reset all settings affects settings and is not an update tool.

39 Marking to road: complete chains

Editor 0.8.8-pre | Windows / Linux | openOMSI 0.3.33

One road section
Select asphalt and a separate marking together, then click Marking to road. The marking inherits length, curvature, height, gradient, banking and connection transitions. Compatible cross-sections keep the paint 5 mm above the surface.

A whole curve
Ctrl+click every connected asphalt section in the required chain. Add exactly one marking; Ctrl+Tab helps with overlapping hits. Apply Marking to road. Click order does not matter, but the asphalt chain must be connected without gaps.

The result
The selected marking is fitted across the complete selected asphalt chain and divided into connected pieces as needed. Texture progression continues across the pieces. Incompatible cross-sections are reported.

Why an old piece may disappear
The selected marking is reused, not copied at its old location. Include the asphalt beneath that location if a marking should remain there. Example: a 39 m straight, a 4.93 m curve and one marking means three selected splines.

Undo and continue
One Ctrl+Z undoes the entire operation. Afterwards the final asphalt/marking pair is selected, ready to extend with C. Select both matching layers for other shared edits.

Finish
Inspect the entire chain and both ends, save, then reload. Undo is not a backup across a restart.